

Temperature increase of main components: 主要部品温度上昇

Model: KRE-20A

1. Conditions

- (1) Input :DC 10 ~ 60 [V]
- (2) Output :Rated output
- (3) Mounting method :Shown as Fig.1.1

2. Result

No.	Parts name	Symbol No.	Increase (ΔT)					Rated temp. [°C]	Reference
			[deg]						
			20A						
1	Rectified Diode(Output)	SS101	49.8				150	Junction Temp.	
2	Output Capacitor	C211	21.9				105		
3	Transistor	TR101	51.4				150	Junction Temp.	
4	Microcomputer	IC101	36.8				150	Junction Temp.	
5	Printed circuit board	15K011	30.1				130		
6									
7									
8									
9									
10									
11									
12									
13									
14									
15									
16									
17									
18									
19									
20									

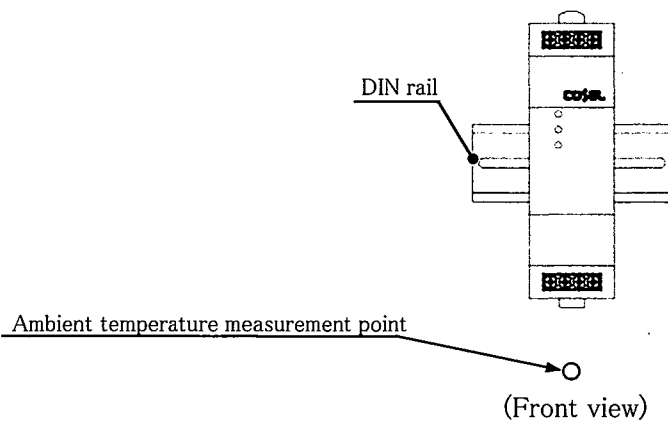


Fig.1.1 Mounting method (Normal position)

*All information presented herein are not guaranteed.
 *本資料は参考資料であり、その内容を保証するものではありません。