



# TEST DATA OF SFS30481R8

Regulated DC Power Supply  
Dec.8.2003

Approved by : Isao Yasuda  
Isao Yasuda Design Manager

Prepared by : Kazuhiro Horii  
Kazuhiro Horii Design Engineer

COSEL CO.,LTD.

# CONTENTS

1.Input Current (by Input Voltage) . . . . .	1
2.Input Current (by Load Current) . . . . .	2
3.Input Power (by Load Current) . . . . .	3
4.Efficiency (by Input Voltage) . . . . .	4
5.Efficiency (by Load Current) . . . . .	5
6.Line Regulation . . . . .	6
7.Load Regulation . . . . .	7
8.Dynamic Load Response . . . . .	8
9.Ripple Voltage (by Load Current) . . . . .	9
10.Ripple-Noise . . . . .	10
11.Ripple Voltage (by Ambient Temperature) . . . . .	11
12.Ambient Temperature Drift . . . . .	12
13.Output Voltage Accuracy . . . . .	13
14.Time Lapse Drift . . . . .	14
15.Rise and Fall Time . . . . .	15
16.Minimum Input Voltage for Regulated Output Voltage . . . . .	16
17.Overcurrent Protection . . . . .	17
18.Overvoltage Protection . . . . .	18
19.Figure of Testing Circuitry . . . . .	19

(Final Page 19)

# COSEL

Model

SFS30481R8

Item

Input Current (by Input Voltage)

Object

1.Graph

—△—

Load 100%

---□---

Load 50%

---○---

Load 0%

Input Current [A]

1.0

0.8

0.6

0.4

0.2

0.0

0

20

40

60

80

Input Voltage [V]

Note: Slanted line shows the range of the rated input voltage.


2.Values

Input Voltage [V]	Input Current [A]		
	Load 0%	Load 50%	Load 100%
0	0.000	0.000	0.000
8	0.001	0.001	0.001
16	0.001	0.001	0.001
24	0.002	0.002	0.002
33	0.002	0.002	0.002
34	0.016	0.263	0.526
36	0.015	0.251	0.502
40	0.013	0.227	0.454
48	0.013	0.191	0.377
60	0.013	0.155	0.302
70	0.013	0.135	0.260
76	0.013	0.126	0.240
80	0.013	0.120	0.229
--	-	-	-
--	-	-	-
--	-	-	-

1

BC-3529

# COSEL

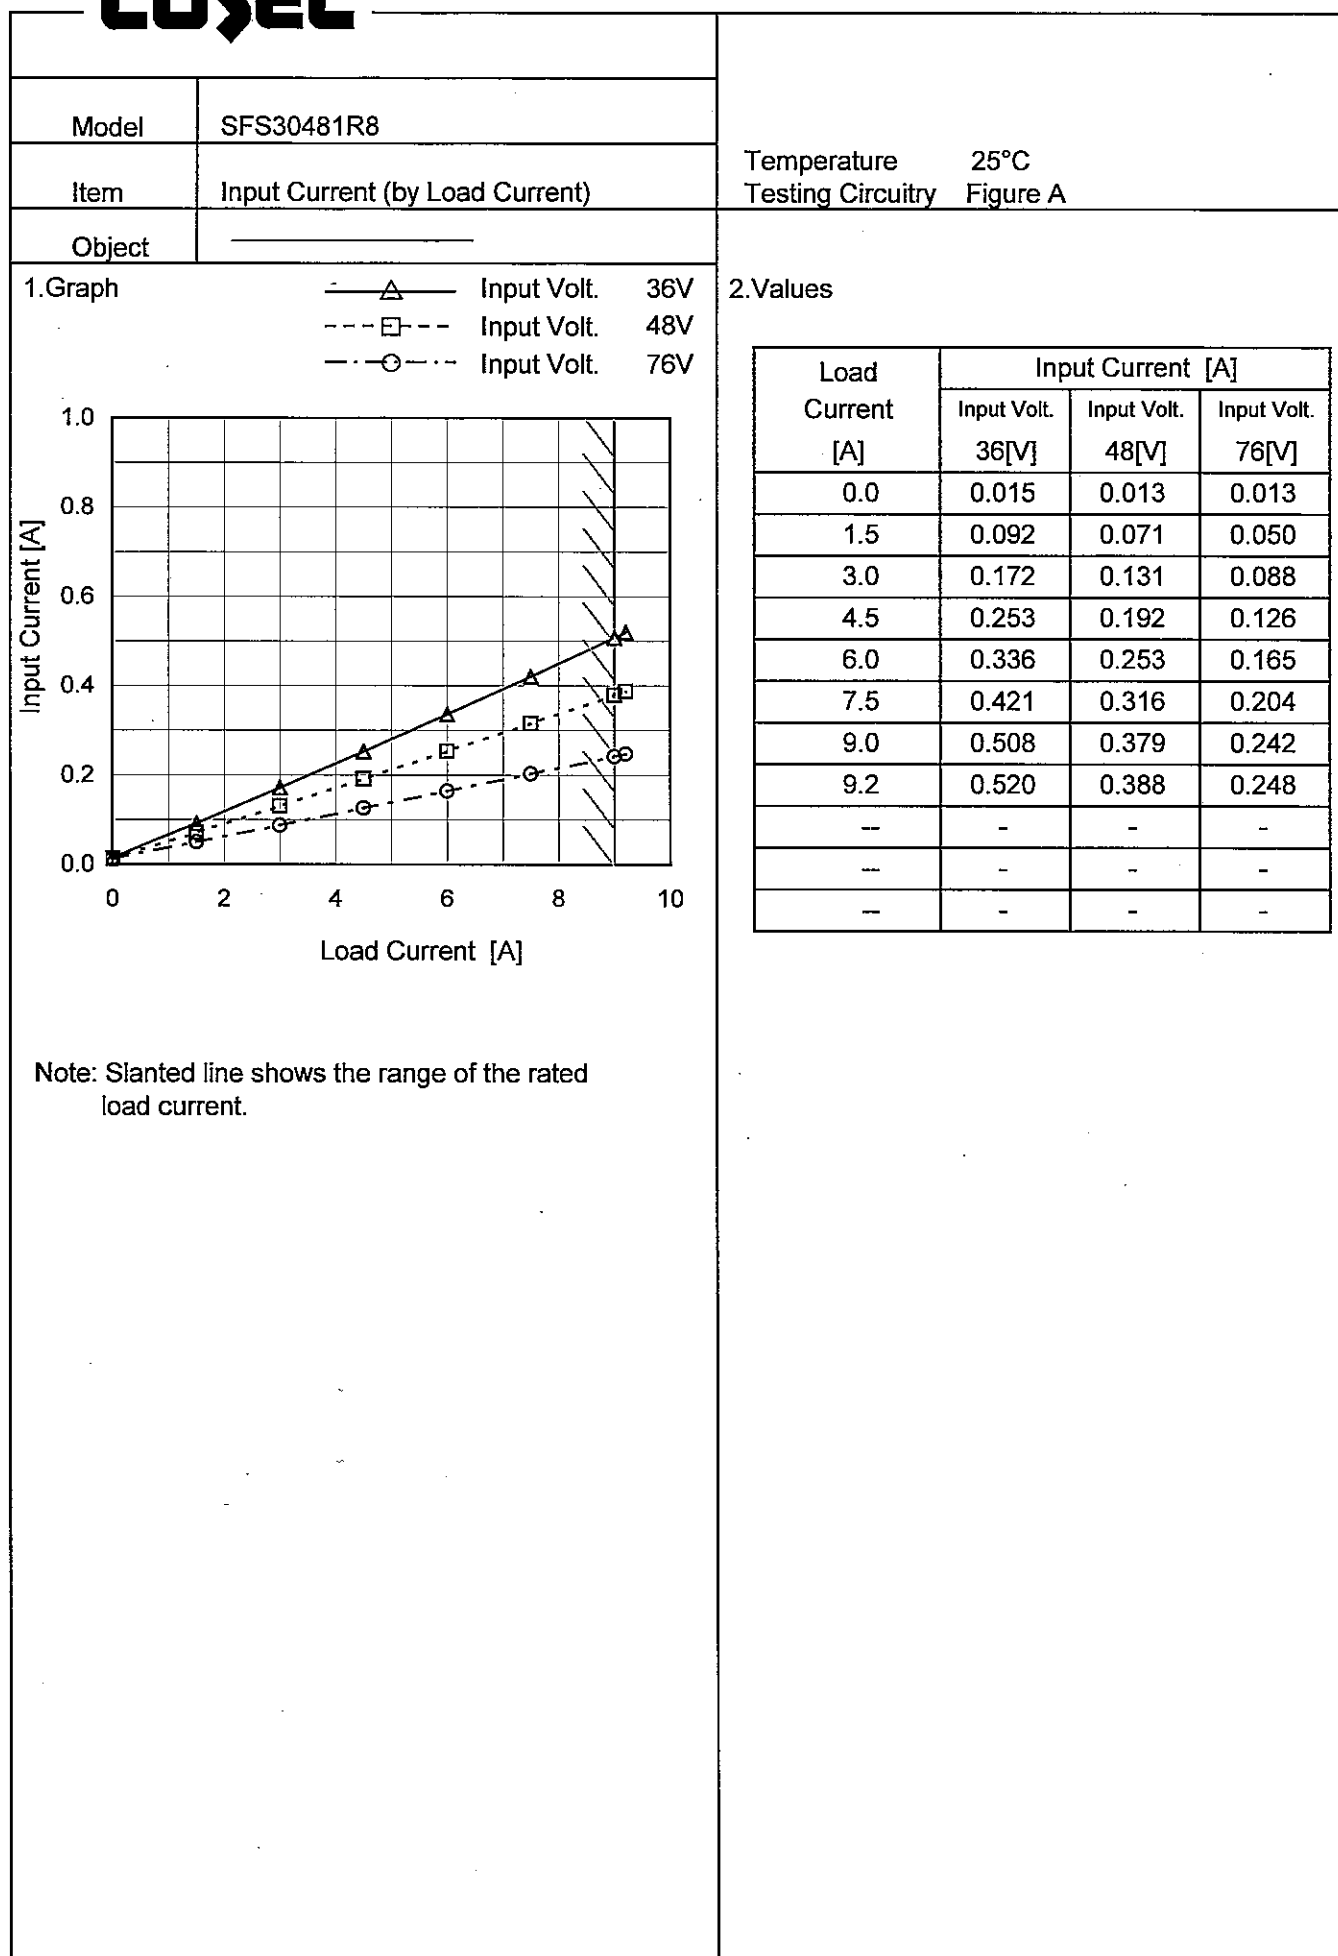

# COSEL

Model		SFS30481R8		Temperature		25°C																																																		
Item		Input Power (by Load Current)		Testing Circuitry		Figure A																																																		
Object																																																								
1.Graph		<div><div><div>—△—</div><div>---□---</div><div>---○---</div></div><div><div>Input Volt.</div><div>Input Volt.</div><div>Input Volt.</div></div><div><div>36V</div><div>48V</div><div>76V</div></div></div>		2.Values																																																				
<div><div><div>Input Power [W]</div><div>50</div><div>40</div><div>30</div><div>20</div><div>10</div><div>0</div></div><div><div>0</div><div>2</div><div>4</div><div>6</div><div>8</div><div>10</div></div><div><div>Load Current [A]</div></div></div>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Power [W]</th></tr><tr><th>Input Volt. 36[V]</th><th>Input Volt. 48[V]</th><th>Input Volt. 76[V]</th></tr><tr><td>0.0</td><td>0.55</td><td>0.60</td><td>1.00</td></tr><tr><td>1.5</td><td>3.32</td><td>3.43</td><td>3.83</td></tr><tr><td>3.0</td><td>6.17</td><td>6.28</td><td>6.69</td></tr><tr><td>4.5</td><td>9.08</td><td>9.19</td><td>9.59</td></tr><tr><td>6.0</td><td>12.06</td><td>12.14</td><td>12.51</td></tr><tr><td>7.5</td><td>15.08</td><td>15.13</td><td>15.47</td></tr><tr><td>9.0</td><td>18.19</td><td>18.14</td><td>18.42</td></tr><tr><td>9.2</td><td>18.62</td><td>18.55</td><td>18.83</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>				Load Current [A]	Input Power [W]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	0.55	0.60	1.00	1.5	3.32	3.43	3.83	3.0	6.17	6.28	6.69	4.5	9.08	9.19	9.59	6.0	12.06	12.14	12.51	7.5	15.08	15.13	15.47	9.0	18.19	18.14	18.42	9.2	18.62	18.55	18.83	--	-	-	-	--	-	-	-	--	-	-	-
		Load Current [A]	Input Power [W]																																																					
			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																			
		0.0	0.55	0.60	1.00																																																			
		1.5	3.32	3.43	3.83																																																			
		3.0	6.17	6.28	6.69																																																			
		4.5	9.08	9.19	9.59																																																			
		6.0	12.06	12.14	12.51																																																			
		7.5	15.08	15.13	15.47																																																			
		9.0	18.19	18.14	18.42																																																			
		9.2	18.62	18.55	18.83																																																			
		--	-	-	-																																																			
		--	-	-	-																																																			
--	-	-	-																																																					
Note: Slanted line shows the range of the rated load current.																																																								

# COSEL


Model SFS30481R8

Item Efficiency (by Input Voltage)

Object

Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

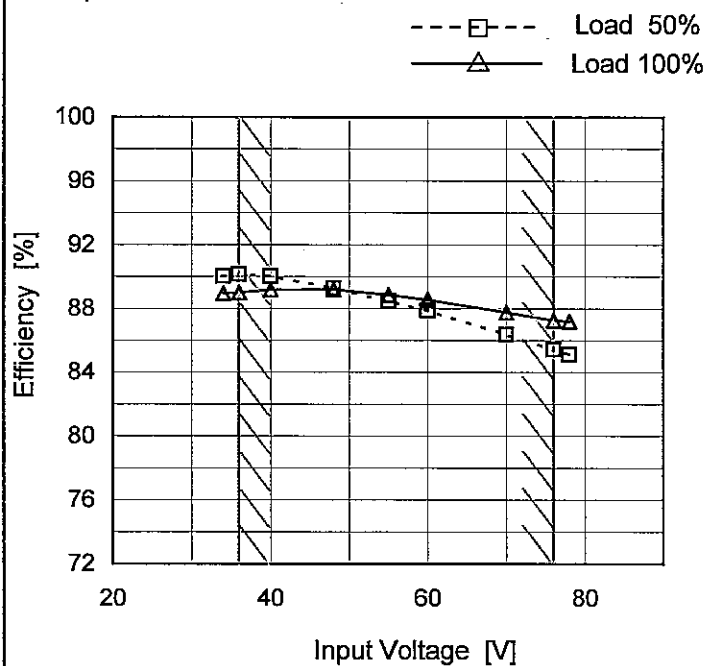

Note: Slanted line shows the range of the rated input voltage.

## 2. Values

Input Voltage [V]	Efficiency [%]	
	Load 50%	Load 100%
34	90.1	89.0
36	90.2	89.0
40	90.0	89.2
48	89.3	89.2
55	88.5	88.9
60	87.9	88.6
70	86.4	87.8
76	85.5	87.3
78	85.1	87.2

# COSEL

Model		SFS30481R8		Temperature		25°C																																																																																																		
Item		Efficiency (by Load Current)		Testing Circuitry		Figure A																																																																																																		
Object																																																																																																								
1.Graph		<div><div><div>—△—</div><div>Input Volt.</div><div>36V</div></div><div><div>- - □ - -</div><div>Input Volt.</div><div>48V</div></div><div><div>- - ○ - -</div><div>Input Volt.</div><div>76V</div></div></div>		2.Values																																																																																																				
<div><div><div>Efficiency [%]</div><div>100</div><div>92</div><div>84</div><div>76</div><div>68</div><div>60</div><div>52</div><div>44</div></div><div><table><thead><tr><th>Load Current [A]</th><th>Input Volt. 36[V]</th><th>Input Volt. 48[V]</th><th>Input Volt. 76[V]</th></tr></thead><tbody><tr><td>0.0</td><td>-</td><td>-</td><td>-</td></tr><tr><td>1.5</td><td>82.4</td><td>80.2</td><td>71.8</td></tr><tr><td>3.0</td><td>88.8</td><td>87.5</td><td>82.0</td></tr><tr><td>4.5</td><td>90.2</td><td>89.3</td><td>85.4</td></tr><tr><td>6.0</td><td>90.3</td><td>89.8</td><td>86.9</td></tr><tr><td>7.5</td><td>89.9</td><td>89.6</td><td>87.4</td></tr><tr><td>9.0</td><td>89.0</td><td>89.2</td><td>87.4</td></tr><tr><td>9.2</td><td>88.8</td><td>89.1</td><td>87.3</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></tbody></table></div><div><div>0</div><div>2</div><div>4</div><div>6</div><div>8</div><div>10</div></div><div><div>Load Current [A]</div></div></div>		Load Current [A]	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	-	-	-	1.5	82.4	80.2	71.8	3.0	88.8	87.5	82.0	4.5	90.2	89.3	85.4	6.0	90.3	89.8	86.9	7.5	89.9	89.6	87.4	9.0	89.0	89.2	87.4	9.2	88.8	89.1	87.3	--	-	-	-	--	-	-	-	--	-	-	-	<table><thead><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Efficiency [%]</th></tr><tr><th>Input Volt. 36[V]</th><th>Input Volt. 48[V]</th><th>Input Volt. 76[V]</th></tr></thead><tbody><tr><td>0.0</td><td>-</td><td>-</td><td>-</td></tr><tr><td>1.5</td><td>82.4</td><td>80.2</td><td>71.8</td></tr><tr><td>3.0</td><td>88.8</td><td>87.5</td><td>82.0</td></tr><tr><td>4.5</td><td>90.2</td><td>89.3</td><td>85.4</td></tr><tr><td>6.0</td><td>90.3</td><td>89.8</td><td>86.9</td></tr><tr><td>7.5</td><td>89.9</td><td>89.6</td><td>87.4</td></tr><tr><td>9.0</td><td>89.0</td><td>89.2</td><td>87.4</td></tr><tr><td>9.2</td><td>88.8</td><td>89.1</td><td>87.3</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></tbody></table>				Load Current [A]	Efficiency [%]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	-	-	-	1.5	82.4	80.2	71.8	3.0	88.8	87.5	82.0	4.5	90.2	89.3	85.4	6.0	90.3	89.8	86.9	7.5	89.9	89.6	87.4	9.0	89.0	89.2	87.4	9.2	88.8	89.1	87.3	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																																																																					
0.0	-	-	-																																																																																																					
1.5	82.4	80.2	71.8																																																																																																					
3.0	88.8	87.5	82.0																																																																																																					
4.5	90.2	89.3	85.4																																																																																																					
6.0	90.3	89.8	86.9																																																																																																					
7.5	89.9	89.6	87.4																																																																																																					
9.0	89.0	89.2	87.4																																																																																																					
9.2	88.8	89.1	87.3																																																																																																					
--	-	-	-																																																																																																					
--	-	-	-																																																																																																					
--	-	-	-																																																																																																					
Load Current [A]	Efficiency [%]																																																																																																							
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																																																																					
0.0	-	-	-																																																																																																					
1.5	82.4	80.2	71.8																																																																																																					
3.0	88.8	87.5	82.0																																																																																																					
4.5	90.2	89.3	85.4																																																																																																					
6.0	90.3	89.8	86.9																																																																																																					
7.5	89.9	89.6	87.4																																																																																																					
9.0	89.0	89.2	87.4																																																																																																					
9.2	88.8	89.1	87.3																																																																																																					
--	-	-	-																																																																																																					
--	-	-	-																																																																																																					
--	-	-	-																																																																																																					
Note: Slanted line shows the range of the rated load current.																																																																																																								

**COSEL**

Model	SFS30481R8																																		
Item	Line Regulation	Temperature	25°C																																
Object	+1.8V9A	Testing Circuitry	Figure A																																
1.Graph		2.Values																																	
<div><div><div>---□---</div><div>△---</div></div><div>Load 50%</div><div>Load 100%</div></div> <p>Output Voltage [V]</p> <p>Input Voltage [V]</p>		<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Output Voltage [V]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>34</td><td>1.828</td><td>1.799</td></tr><tr><td>36</td><td>1.831</td><td>1.801</td></tr><tr><td>40</td><td>1.835</td><td>1.801</td></tr><tr><td>48</td><td>1.835</td><td>1.799</td></tr><tr><td>55</td><td>1.834</td><td>1.797</td></tr><tr><td>60</td><td>1.833</td><td>1.795</td></tr><tr><td>70</td><td>1.831</td><td>1.792</td></tr><tr><td>76</td><td>1.829</td><td>1.791</td></tr><tr><td>78</td><td>1.829</td><td>1.791</td></tr></table>		Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	34	1.828	1.799	36	1.831	1.801	40	1.835	1.801	48	1.835	1.799	55	1.834	1.797	60	1.833	1.795	70	1.831	1.792	76	1.829	1.791	78	1.829	1.791
Input Voltage [V]	Output Voltage [V]																																		
	Load 50%	Load 100%																																	
34	1.828	1.799																																	
36	1.831	1.801																																	
40	1.835	1.801																																	
48	1.835	1.799																																	
55	1.834	1.797																																	
60	1.833	1.795																																	
70	1.831	1.792																																	
76	1.829	1.791																																	
78	1.829	1.791																																	
Note: Slanted line shows the range of the rated input voltage.																																			

- 6 -

BC-3529



# COSEL

Model		SFS30481R8		Temperature		25°C																																																				
Item		Load Regulation		Testing Circuitry		Figure A																																																				
Object		+1.8V9A																																																								
1.Graph				2.Values																																																						
<div><div><div>—△—</div><div>Input Volt.</div><div>36V</div></div><div><div>---□---</div><div>Input Volt.</div><div>48V</div></div><div><div>---○---</div><div>Input Volt.</div><div>76V</div></div></div> <p>Output Voltage [V]</p> <p>Load Current [A]</p>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 36[V]</th><th>Input Volt. 48[V]</th><th>Input Volt. 76[V]</th></tr><tr><td>0.0</td><td>1.852</td><td>1.857</td><td>1.860</td></tr><tr><td>1.5</td><td>1.842</td><td>1.850</td><td>1.849</td></tr><tr><td>3.0</td><td>1.839</td><td>1.845</td><td>1.840</td></tr><tr><td>4.5</td><td>1.831</td><td>1.835</td><td>1.829</td></tr><tr><td>6.0</td><td>1.821</td><td>1.823</td><td>1.818</td></tr><tr><td>7.5</td><td>1.810</td><td>1.811</td><td>1.805</td></tr><tr><td>9.0</td><td>1.800</td><td>1.799</td><td>1.792</td></tr><tr><td>9.2</td><td>1.799</td><td>1.798</td><td>1.790</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>				Load Current [A]	Output Voltage [V]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	1.852	1.857	1.860	1.5	1.842	1.850	1.849	3.0	1.839	1.845	1.840	4.5	1.831	1.835	1.829	6.0	1.821	1.823	1.818	7.5	1.810	1.811	1.805	9.0	1.800	1.799	1.792	9.2	1.799	1.798	1.790	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																									
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																							
0.0	1.852	1.857	1.860																																																							
1.5	1.842	1.850	1.849																																																							
3.0	1.839	1.845	1.840																																																							
4.5	1.831	1.835	1.829																																																							
6.0	1.821	1.823	1.818																																																							
7.5	1.810	1.811	1.805																																																							
9.0	1.800	1.799	1.792																																																							
9.2	1.799	1.798	1.790																																																							
--	-	-	-																																																							
--	-	-	-																																																							
--	-	-	-																																																							
Note: Slanted line shows the range of the rated load current.																																																										




Model	SFS30481R8	Temperature 25°C Testing Circuitry Figure A
Item	Dynamic Load Response	
Object	+1.8V9A	

Input Volt. 48 V  
Cycle 1000 mS


Load Current 9A / 200  $\mu$ s

Min. Load (0A)  $\longleftrightarrow$   
Load 100% (9A)

200mV/div

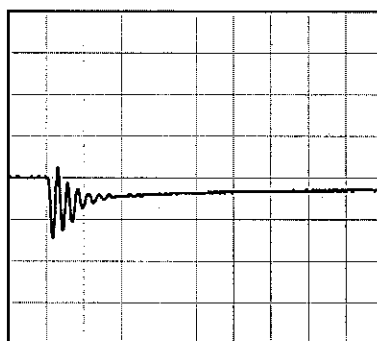


200  $\mu$ s/div

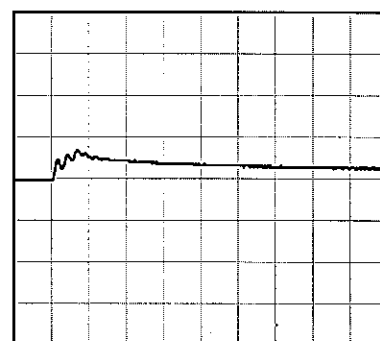


200  $\mu$ s/div

Min. Load (0A)  $\longleftrightarrow$   
Load 50% (4.5A)

200mV/div

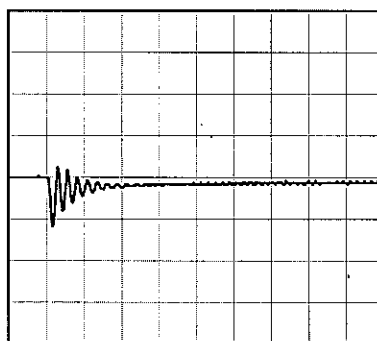


200  $\mu$ s/div

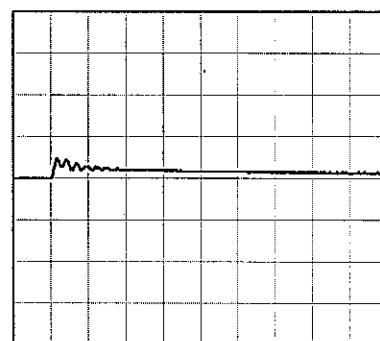


200  $\mu$ s/div

Load 50% (4.5A)  $\longleftrightarrow$   
Load 100% (9A)

200mV/div

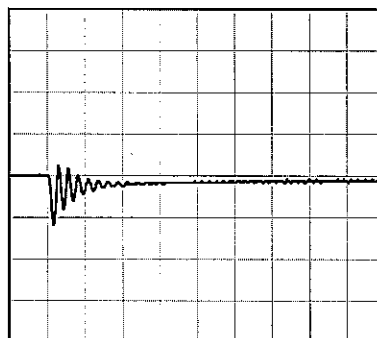

200  $\mu$ s/div

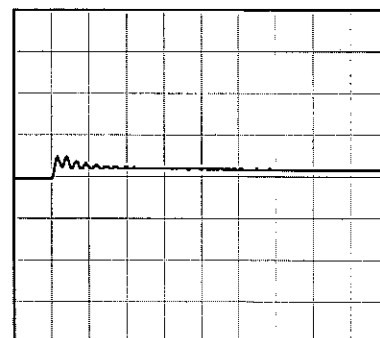

200  $\mu$ s/div

# COSEL

Model	SFS30481R8																																								
Item	Ripple Voltage (by Load Current)	Temperature	25°C																																						
Object	+1.8V9A	Testing Circuitry	Figure C																																						
1.Graph		2.Values																																							
<div><div><div>—△—</div><div>Input Volt.</div><div>36V</div></div><div><div>---○---</div><div>Input Volt.</div><div>76V</div></div></div> <p>Ripple Voltage [mV]</p> <p>Load Current [A]</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="2">Ripple Voltage [mV]</th></tr><tr><th>Input Volt. 36 [V]</th><th>Input Volt. 76 [V]</th></tr><tr><td>0.0</td><td>5</td><td>6</td></tr><tr><td>1.8</td><td>5</td><td>6</td></tr><tr><td>3.6</td><td>5</td><td>6</td></tr><tr><td>5.4</td><td>5</td><td>6</td></tr><tr><td>7.2</td><td>5</td><td>6</td></tr><tr><td>9.0</td><td>5</td><td>6</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Ripple Voltage [mV]		Input Volt. 36 [V]	Input Volt. 76 [V]	0.0	5	6	1.8	5	6	3.6	5	6	5.4	5	6	7.2	5	6	9.0	5	6	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple Voltage [mV]																																								
	Input Volt. 36 [V]	Input Volt. 76 [V]																																							
0.0	5	6																																							
1.8	5	6																																							
3.6	5	6																																							
5.4	5	6																																							
7.2	5	6																																							
9.0	5	6																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
<p>Measured by 100MHz Ossilloscope.</p> <p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p>																																									
<p>Ripple [mVp-p]</p> <p>Fig.Complex Ripple Wave Form</p>																																									

# COSEL

Model	SFS30481R8	Temperature	25°C																																						
Item	Ripple-Noise	Testing Circuitry	Figure C																																						
Object	+1.8V9A																																								
1.Graph		2.Values																																							
<div><div><div>—△—</div><div>Input Volt.</div><div>36V</div></div><div><div>---○---</div><div>Input Volt.</div><div>76V</div></div></div> <p>Measured by 100MHz Ossilloscope. Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="2">Ripple-Noise [mV]</th></tr><tr><th>Input Volt. 36 [V]</th><th>Input Volt. 76 [V]</th></tr><tr><td>0.0</td><td>7</td><td>8</td></tr><tr><td>1.8</td><td>7</td><td>9</td></tr><tr><td>3.6</td><td>7</td><td>10</td></tr><tr><td>5.4</td><td>7</td><td>10</td></tr><tr><td>7.2</td><td>8</td><td>11</td></tr><tr><td>9.0</td><td>9</td><td>11</td></tr><tr><td>—</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>—</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>—</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Ripple-Noise [mV]		Input Volt. 36 [V]	Input Volt. 76 [V]	0.0	7	8	1.8	7	9	3.6	7	10	5.4	7	10	7.2	8	11	9.0	9	11	—	-	-	--	-	-	—	-	-	--	-	-	—	-	-
Load Current [A]	Ripple-Noise [mV]																																								
	Input Volt. 36 [V]	Input Volt. 76 [V]																																							
0.0	7	8																																							
1.8	7	9																																							
3.6	7	10																																							
5.4	7	10																																							
7.2	8	11																																							
9.0	9	11																																							
—	-	-																																							
--	-	-																																							
—	-	-																																							
--	-	-																																							
—	-	-																																							
<p>Fig.Complex Ripple Noise Wave Form</p>																																									

# COSEL

		Testing Circuitry    Figure C																																				
Model	SFS30481R8																																					
Item	Ripple Voltage (by Ambient Temp.)																																					
Object	+1.8V9A																																					
1.Graph		2.Values																																				
<div><div><div>---□---</div><div>Load 50%</div></div><div><div>---△---</div><div>Load 100%</div></div></div> <table><thead><tr><th>Ambient Temperature [°C]</th><th>Load 50%</th><th>Load 100%</th></tr></thead><tbody><tr><td>-45</td><td>14</td><td>14</td></tr><tr><td>-40</td><td>13</td><td>13</td></tr><tr><td>0</td><td>6</td><td>6</td></tr><tr><td>25</td><td>5</td><td>6</td></tr><tr><td>85</td><td>5</td><td>6</td></tr><tr><td>90</td><td>5</td><td>6</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></tbody></table> <p>Input Volt.    48V</p>		Ambient Temperature [°C]	Load 50%	Load 100%	-45	14	14	-40	13	13	0	6	6	25	5	6	85	5	6	90	5	6	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-	
Ambient Temperature [°C]	Load 50%	Load 100%																																				
-45	14	14																																				
-40	13	13																																				
0	6	6																																				
25	5	6																																				
85	5	6																																				
90	5	6																																				
--	-	-																																				
--	-	-																																				
--	-	-																																				
--	-	-																																				
--	-	-																																				
Measured by 100MHz Ossilloscope. Note: Slanted line shows the range of the rated ambient temperature.																																						

# COSEL


Model SFS30481R8

Item Ambient Temperature Drift

Object +1.8V9A

Testing Circuitry Figure A

## 1. Graph

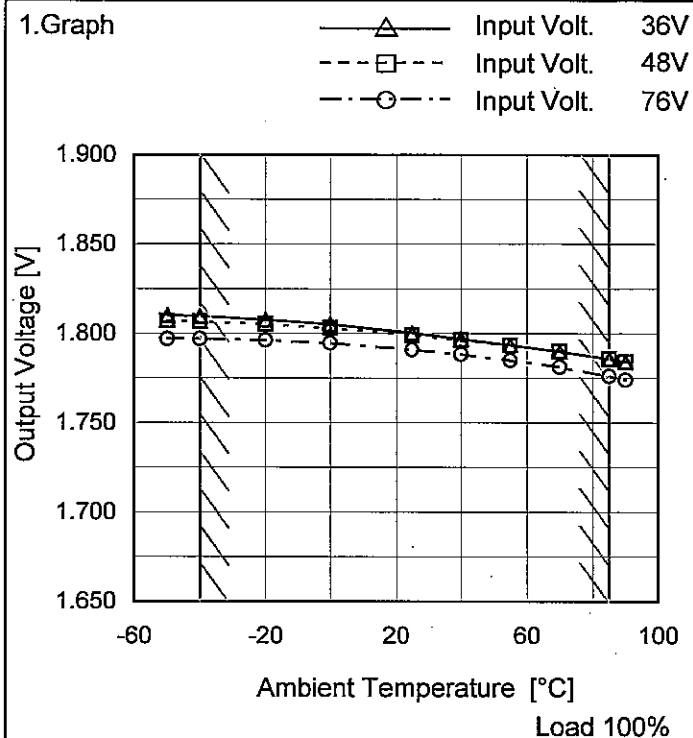

Note: Slanted line shows the range of the rated ambient temperature.

## 2. Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]
-50	1.810	1.807	1.797
-40	1.810	1.807	1.797
-20	1.808	1.805	1.796
0	1.805	1.803	1.795
25	1.800	1.799	1.791
40	1.797	1.796	1.788
55	1.794	1.794	1.785
70	1.790	1.790	1.781
85	1.786	1.786	1.776
90	1.784	1.784	1.774
--	-	-	-

**COSEL**

		Testing Circuitry Figure A
Model	SFS30481R8	
Item	Output Voltage Accuracy	
Object	+1.8V9A	

### 1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 85°C

Input Voltage : 36 - 76V

Load Current : 0 - 9A


\* Output Voltage Accuracy =  $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

\* Output Voltage Accuracy (Ratio) =  $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

### 2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ratio [%]
Maximum Voltage	85	36	0	1.863	±44	±2.4
Minimum Voltage	85	76	9	1.776		

# COSEL

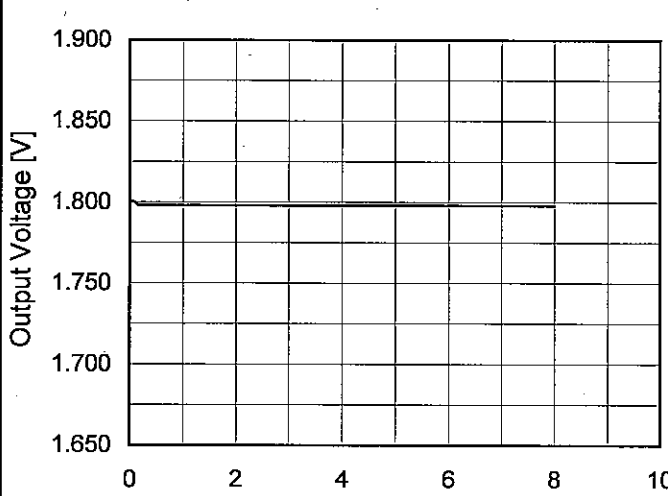Model	SFS30481R8																								
Item	Time Lapse Drift	Temperature	25°C																						
		Testing Circuitry	Figure A																						
Object	+1.8V9A																								
1.Graph		2.Values																							
<div><p>Output Voltage [V]</p><p>Time [H]</p><p>Input Volt. 48V</p><p>Load 100%</p></div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>1.801</td></tr><tr><td>0.5</td><td>1.798</td></tr><tr><td>1.0</td><td>1.798</td></tr><tr><td>2.0</td><td>1.798</td></tr><tr><td>3.0</td><td>1.798</td></tr><tr><td>4.0</td><td>1.798</td></tr><tr><td>5.0</td><td>1.798</td></tr><tr><td>6.0</td><td>1.798</td></tr><tr><td>7.0</td><td>1.798</td></tr><tr><td>8.0</td><td>1.798</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	1.801	0.5	1.798	1.0	1.798	2.0	1.798	3.0	1.798	4.0	1.798	5.0	1.798	6.0	1.798	7.0	1.798	8.0	1.798
Time since start [H]	Output Voltage [V]																								
0.0	1.801																								
0.5	1.798																								
1.0	1.798																								
2.0	1.798																								
3.0	1.798																								
4.0	1.798																								
5.0	1.798																								
6.0	1.798																								
7.0	1.798																								
8.0	1.798																								




# COSEL

Model	SFS30481R8	Temperature	25°C
Item	Rise and Fall Time	Testing Circuitry	Figure A
Object	+1.8V9A		


## 1. Graph

Input Volt. 36 V

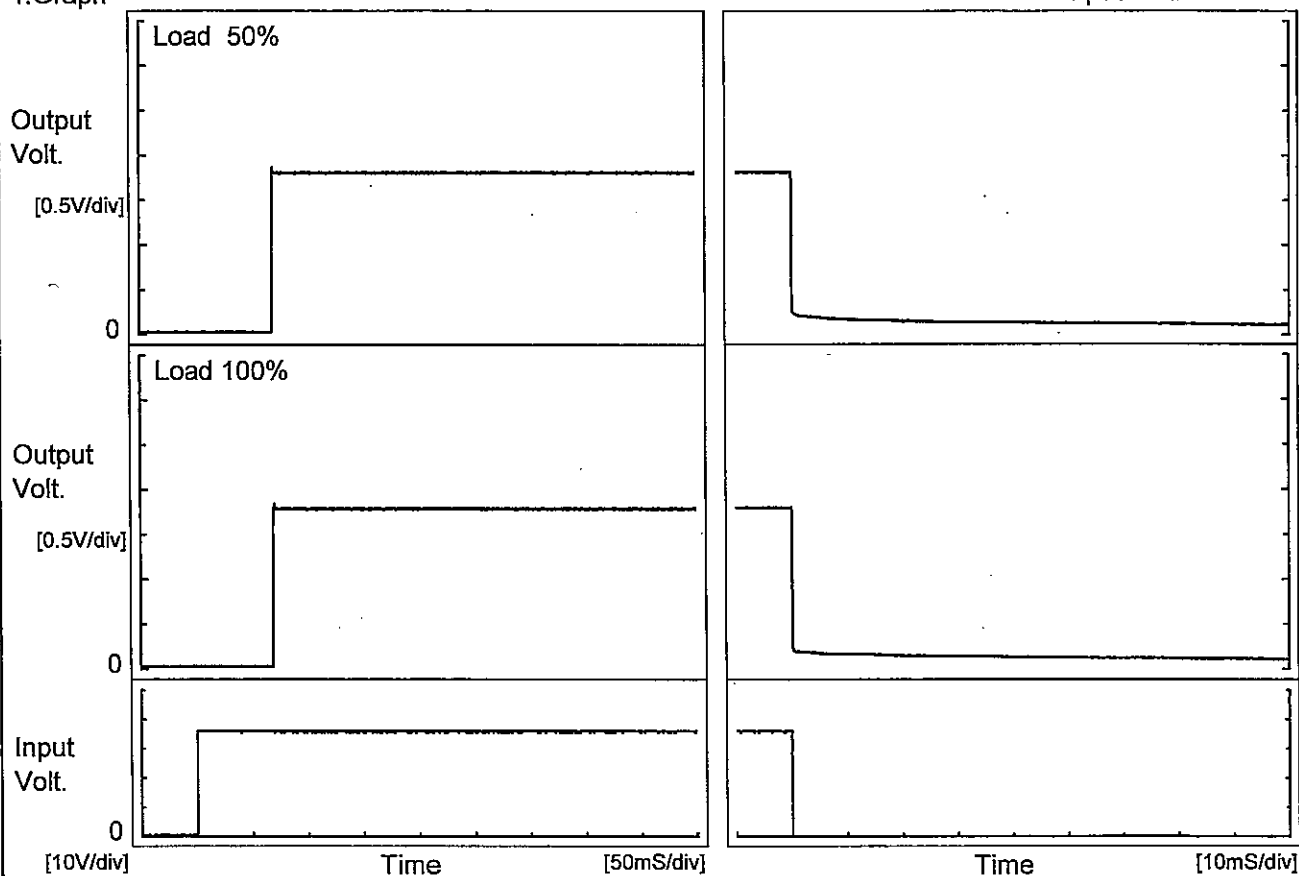


## 2. Values

		[mS]				
Load	Time	Td	Tr	Ts	Th	Tf
50 %		68.3	0.3	68.6	0.1	3.4
100 %		68.3	0.3	68.6	0.1	0.5

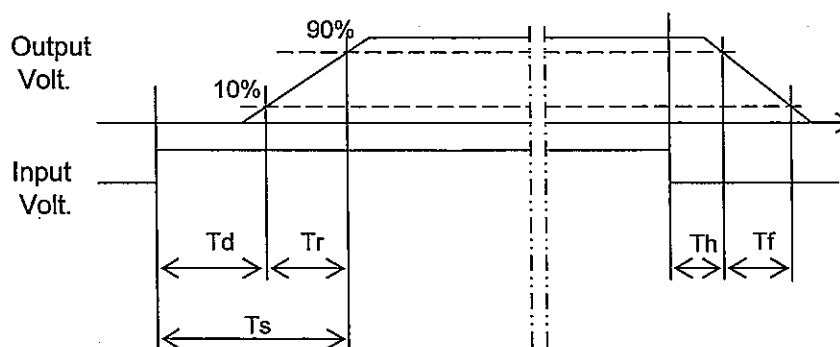

Testing Circuitry Figure A

## 2.Values

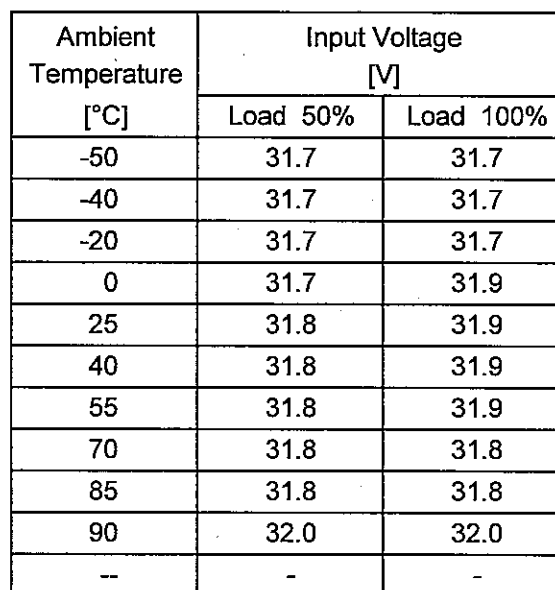


Note: Slanted line shows the range of the rated ambient temperature.

Temperature 25°C  
Testing Circuitry Figure A



Note: Slanted line shows the range of the rated load current.

When the output voltage fell to less than 1.62V ,the unit shuts off the output by operating low voltage protection .

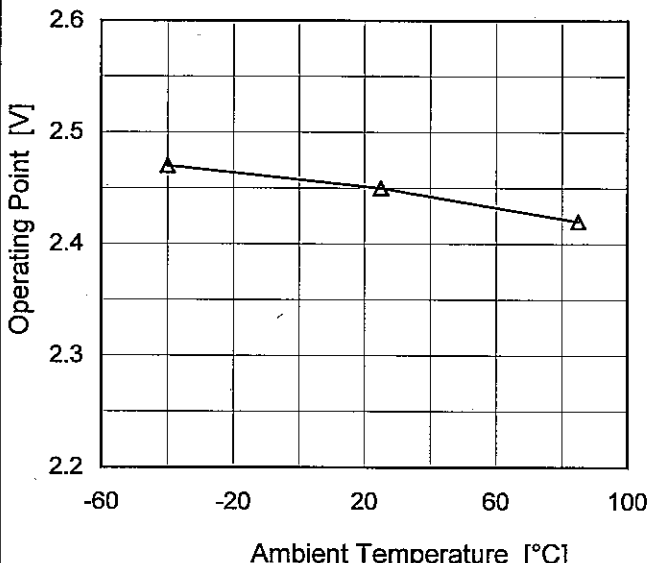Model	SFS30481R8																																																					
Item	Overvoltage Protection	Testing Circuitry    Figure A																																																				
Object	+1.8V9A																																																					
1.Graph		2.Values																																																				
<div><div>—△— Input Volt.    48V</div><div></div></div> <div>Operating Point [V]</div> <div>Ambient Temperature [°C]</div> <div>Load 0%</div> <div>Note: Slanted line shows the range of the rated ambient temperature.</div>		<table><tr><th rowspan="2">Ambient Temperature [°C]</th><th colspan="3">Operating Point [V]</th></tr><tr><th>Input Volt. 48[V]</th><th>Input Volt.</th><th>Input Volt.</th></tr><tr><td>-40</td><td>2.47</td><td>-</td><td>-</td></tr><tr><td>25</td><td>2.45</td><td>-</td><td>-</td></tr><tr><td>85</td><td>2.42</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Ambient Temperature [°C]	Operating Point [V]			Input Volt. 48[V]	Input Volt.	Input Volt.	-40	2.47	-	-	25	2.45	-	-	85	2.42	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Ambient Temperature [°C]	Operating Point [V]																																																					
	Input Volt. 48[V]	Input Volt.	Input Volt.																																																			
-40	2.47	-	-																																																			
25	2.45	-	-																																																			
85	2.42	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			

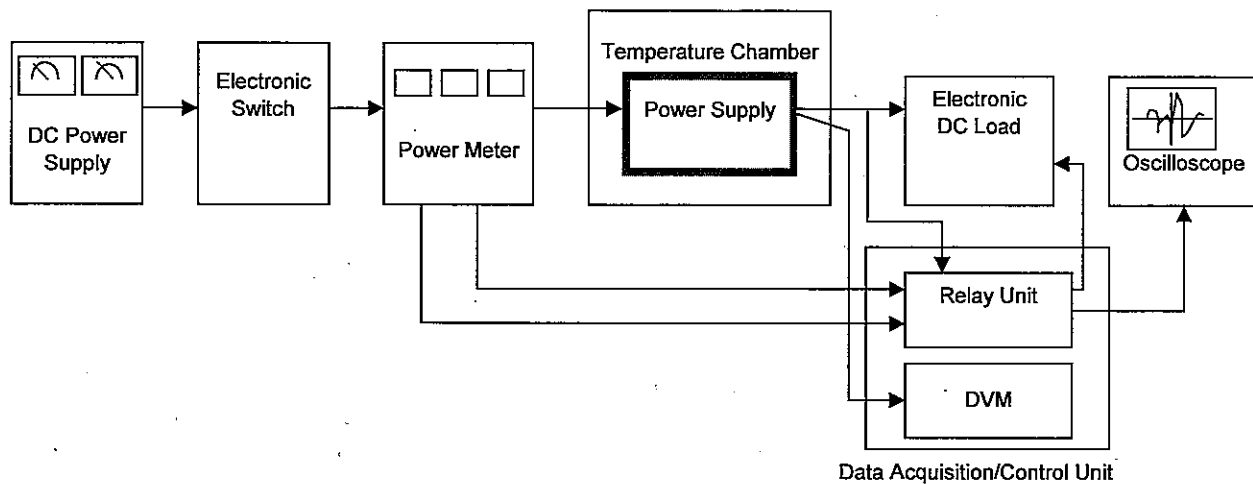


Figure A

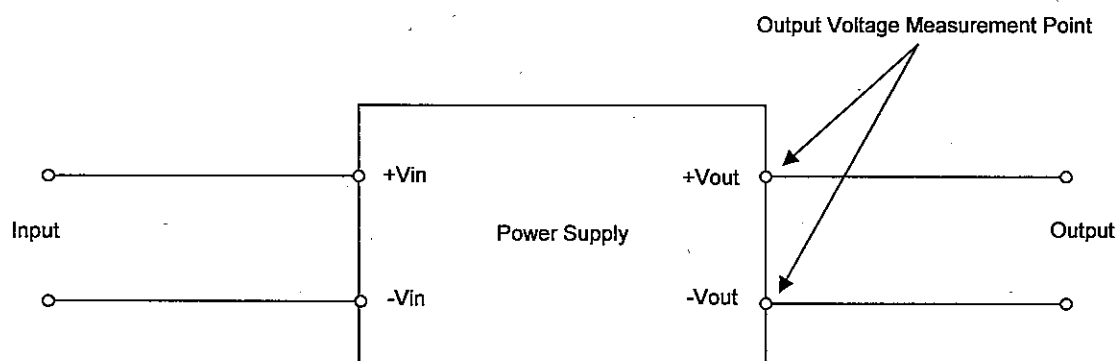


Figure B (General Electric Characteristic)

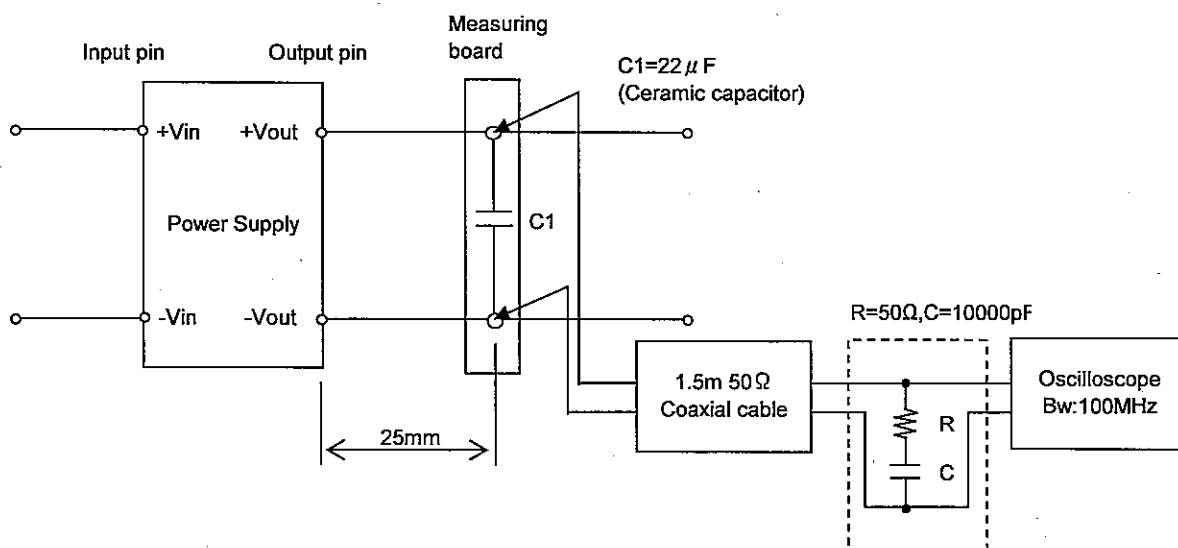


Figure C (Ripple and Ripple noise Characteristic)