

Temperature increase of main components

Model: CHS4002412,CHS4002415,CHS4002424  
CHS4002428,CHS4002432,CHS4002448

## 1. Conditions

- |                      |   |                 |
|----------------------|---|-----------------|
| (1) Input            | : | DC 24 [V]       |
| (2) Output           | : | Rated output    |
| (3) Air flow         | : | 2.0[m/s]        |
| (4) Measuring method | : | Shown as Fig1.1 |

## 2. Result

Table 2.1 Temperature increase of main components

No.	Parts name	Symbol No.	Increase ( $\Delta T$ )						Rated temp. [°C]	Reference		
			[°C]									
			12V	15V	24V	28V	32V	48V				
1	Switching MOS-FET	TR104	99	114	98	113	104	72	150	Junction temp.		
2	Switching MOS-FET	TR102	98	111	96	110	102	76	150	Junction temp.		
3	Rectifying MOS-FET	TR501	89	99	100	137	109	78	150	Junction temp.		
4	Rectifying MOS-FET	TR503	88	100	100	140	110	80	150	Junction temp.		
5	Transformer	T101	62	84	79	89	80	52	130			
6	Power control IC	IC431	78	92	78	96	85	61	150	Junction temp.		
7	Power control IC	IC710	63	69	71	98	76	55	150	Junction temp.		
8												
9												
10												
11												
12												
13												
14												
15												

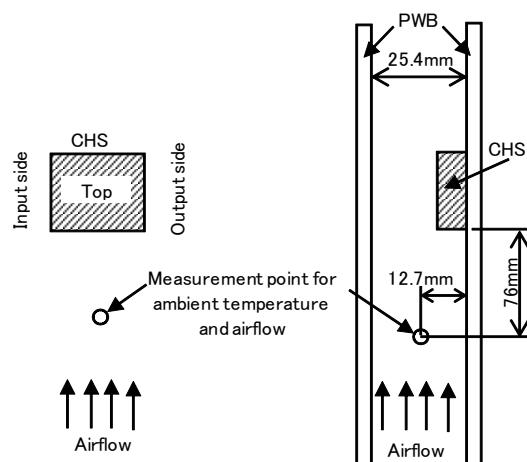


Fig1.1 Measuring method