

Date : Aug.18,2004

Temperature increase of main components


Model: SFS1048series

1. Conditions

- (1) Input : DC36-76V
- (2) Output : Rated output
- (3) Mounting method : Shown as Fig.1.1

2. Result

No.	Parts name	Symbol No.	Increase (ΔT)						Rated temp. [°C]	Reference
			[deg]							
			1.2V	1.5V	1.8V	2V	2.5V	3.3V		
1	Switching MOS-FET	TR101	21	25	27	26	28	22	150	Junction Temp.
2	Power control IC	IC101	20	22	22	20	19	20	150	Junction Temp.
3	Transformer (PWB)	T101	19	23	21	20	19	19	130	
4	Rectifying MOS-FET	TR501	18	24	22	20	24	27	150	Junction Temp.
5	Rectifying MOS-FET	TR502	18	25	23	20	25	24	150	Junction Temp.
6										
7										
8										
9										
10										
11										
12										
13										
14										
15										
16										
17										
18										
19										
20										

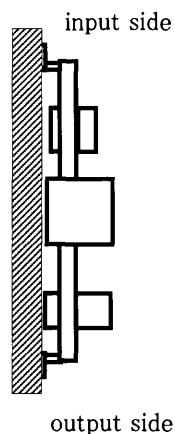

(Side view)

Fig.1.1 Mounting method

Date : Aug.18,2004

Temperature increase of main components


Model: SFS1048series

1. Conditions

- (1) Input : DC36-76V
- (2) Output : Rated output
- (3) Mounting method : Shown as Fig.1.1

2. Result

No.	Parts name	Symbol No.	Increase (ΔT)					Rated temp. [°C]	Reference
			[deg]						
			5V	12V	15V				
1	Switching MOS-FET	TR101	35	25	33			150	Junction Temp.
2	Power control IC	IC101	23	25	27			150	Junction Temp.
3	Transformer (PWB)	T101	23	29	32			130	
4	Rectifying MOS-FET	TR501	25	27	24			150	Junction Temp.
5	Rectifying MOS-FET	TR502	26	23	22			150	Junction Temp.
6									
7									
8									
9									
10									
11									
12									
13									
14									
15									
16									
17									
18									
19									
20									

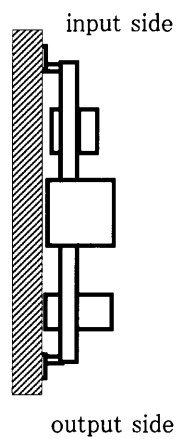

(Side view)

Fig.1.1 Mounting method