



TEST DATA OF CES48150-4

Regulated DC Power Supply
May 16, 2008

Approved by : Tatsuya Mano
Tatsuya Mano Design Manager

Prepared by : Yoshimichi Hirokawa
Yoshimichi Hirokawa Design Engineer

COSEL CO.,LTD.

CONTENTS


1.Input Current (by Input Voltage)	1
2.Input Current (by Load Current)	2
3.Input Power (by Load Current)	3
4.Efficiency (by Input Voltage)	4
5.Efficiency (by Load Current)	5
6.Line Regulation	6
7.Load Regulation	7
8.Dynamic Load Response	8
9.Ripple Voltage (by Load Current)	9
10.Ripple-Noise	10
11.Ripple Voltage (by Ambient Temperature)	11
12.Ambient Temperature Drift	12
13.Output Voltage Accuracy	13
14.Time Lapse Drift	14
15.Rise and Fall Time	15
16.Minimum Input Voltage for Regulated Output Voltage	16
17.Overcurrent Protection	17
18.Overvoltage Protection	18
19.Figure of Testing Circuitry	19

(Final Page 19)



Model	CES48150-4
Item	Input Current (by Input Voltage)
Object	_____

Temperature 25°C
Testing Circuitry Figure A

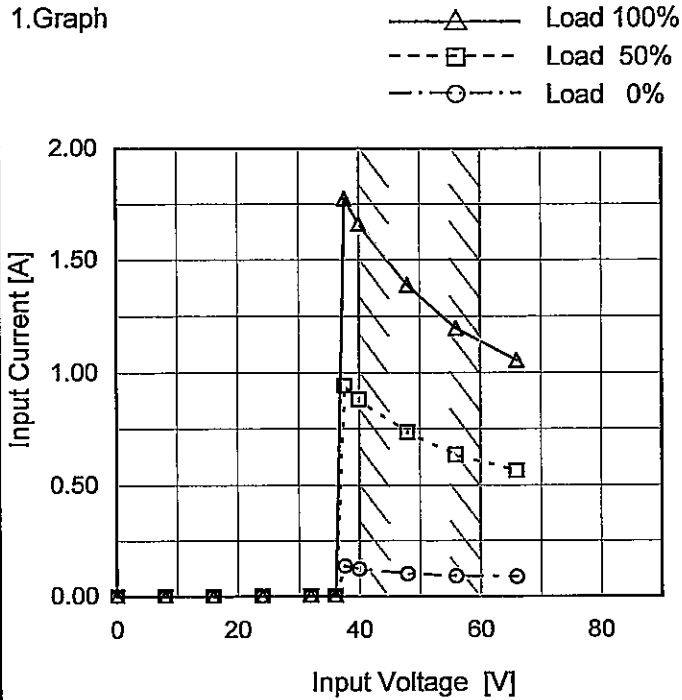

Note: Slanted line shows the range of the rated input voltage.

2. Values

Input Voltage [V]	Input Current [A]		
	Load 0%	Load 50%	Load 100%
0.0	0.000	0.000	0.000
8.0	0.000	0.000	0.000
16.0	0.000	0.000	0.000
24.0	0.002	0.002	0.000
32.0	0.002	0.002	0.002
36.0	0.002	0.002	0.002
37.6	0.136	0.944	1.776
40.0	0.123	0.882	1.663
48.0	0.100	0.735	1.389
56.0	0.090	0.637	1.198
66.0	0.087	0.566	1.056
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-



Model		CES48150-4		Temperature	25°C																																																			
Item		Input Current (by Load Current)		Testing Circuitry	Figure A																																																			
Object		_____																																																						
1.Graph		—△—	Input Volt. 40V	2.Values																																																				
		- - □ - -	Input Volt. 48V																																																					
		- - ○ - -	Input Volt. 60V																																																					
<p>Note: Slanted line shows the range of the rated load current.</p>																																																								
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 40[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 60[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.121</td><td>0.100</td><td>0.088</td></tr> <tr><td>0.8</td><td>0.422</td><td>0.351</td><td>0.291</td></tr> <tr><td>1.6</td><td>0.729</td><td>0.607</td><td>0.497</td></tr> <tr><td>2.4</td><td>1.041</td><td>0.866</td><td>0.705</td></tr> <tr><td>3.2</td><td>1.354</td><td>1.128</td><td>0.914</td></tr> <tr><td>4.0</td><td>1.663</td><td>1.389</td><td>1.126</td></tr> <tr><td>4.4</td><td>1.831</td><td>1.525</td><td>1.232</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Load Current [A]	Input Current [A]			Input Volt. 40[V]	Input Volt. 48[V]	Input Volt. 60[V]	0.0	0.121	0.100	0.088	0.8	0.422	0.351	0.291	1.6	0.729	0.607	0.497	2.4	1.041	0.866	0.705	3.2	1.354	1.128	0.914	4.0	1.663	1.389	1.126	4.4	1.831	1.525	1.232	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Load Current [A]	Input Current [A]																																																							
	Input Volt. 40[V]	Input Volt. 48[V]	Input Volt. 60[V]																																																					
0.0	0.121	0.100	0.088																																																					
0.8	0.422	0.351	0.291																																																					
1.6	0.729	0.607	0.497																																																					
2.4	1.041	0.866	0.705																																																					
3.2	1.354	1.128	0.914																																																					
4.0	1.663	1.389	1.126																																																					
4.4	1.831	1.525	1.232																																																					
-	-	-	-																																																					
-	-	-	-																																																					
-	-	-	-																																																					
-	-	-	-																																																					



Model		CES48150-4		Temperature 25°C																																																				
Item		Input Power (by Load Current)		Testing Circuitry Figure A																																																				
Object		_____																																																						
1.Graph		<p>—△— Input Volt. 40V</p> <p>---□--- Input Volt. 48V</p> <p>---○--- Input Volt. 60V</p>		2.Values																																																				
				<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 40[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 60[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>4.91</td><td>4.80</td><td>5.31</td></tr> <tr><td>0.8</td><td>16.90</td><td>16.90</td><td>17.51</td></tr> <tr><td>1.6</td><td>29.22</td><td>29.21</td><td>29.89</td></tr> <tr><td>2.4</td><td>41.70</td><td>41.60</td><td>42.30</td></tr> <tr><td>3.2</td><td>54.10</td><td>54.20</td><td>55.00</td></tr> <tr><td>4.0</td><td>66.52</td><td>66.70</td><td>67.60</td></tr> <tr><td>4.4</td><td>73.20</td><td>73.00</td><td>73.50</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Input Power [W]			Input Volt. 40[V]	Input Volt. 48[V]	Input Volt. 60[V]	0.0	4.91	4.80	5.31	0.8	16.90	16.90	17.51	1.6	29.22	29.21	29.89	2.4	41.70	41.60	42.30	3.2	54.10	54.20	55.00	4.0	66.52	66.70	67.60	4.4	73.20	73.00	73.50	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Power [W]																																																							
	Input Volt. 40[V]	Input Volt. 48[V]	Input Volt. 60[V]																																																					
0.0	4.91	4.80	5.31																																																					
0.8	16.90	16.90	17.51																																																					
1.6	29.22	29.21	29.89																																																					
2.4	41.70	41.60	42.30																																																					
3.2	54.10	54.20	55.00																																																					
4.0	66.52	66.70	67.60																																																					
4.4	73.20	73.00	73.50																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
<p>Note: Slanted line shows the range of the rated load current.</p>																																																								



COSEL																																			
Model	CES48150-4	Temperature	25°C																																
Item	Efficiency (by Input Voltage)	Testing Circuitry	Figure A																																
Object	_____																																		
1.Graph		2.Values																																	
<p style="text-align: right;"> ---□--- Load 50% —△— Load 100% </p>		<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr> <td>—</td> <td>-</td> <td>-</td> </tr> <tr> <td>39</td> <td>85.4</td> <td>90.3</td> </tr> <tr> <td>40</td> <td>85.5</td> <td>90.4</td> </tr> <tr> <td>48</td> <td>85.6</td> <td>90.6</td> </tr> <tr> <td>52</td> <td>85.1</td> <td>90.2</td> </tr> <tr> <td>60</td> <td>83.8</td> <td>89.1</td> </tr> <tr> <td>66</td> <td>82.6</td> <td>88.4</td> </tr> <tr> <td>—</td> <td>-</td> <td>-</td> </tr> <tr> <td>—</td> <td>-</td> <td>-</td> </tr> </tbody> </table>		Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	—	-	-	39	85.4	90.3	40	85.5	90.4	48	85.6	90.6	52	85.1	90.2	60	83.8	89.1	66	82.6	88.4	—	-	-	—	-	-
Input Voltage [V]	Efficiency [%]																																		
	Load 50%	Load 100%																																	
—	-	-																																	
39	85.4	90.3																																	
40	85.5	90.4																																	
48	85.6	90.6																																	
52	85.1	90.2																																	
60	83.8	89.1																																	
66	82.6	88.4																																	
—	-	-																																	
—	-	-																																	
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																			



Model		CES48150-4		Temperature 25°C																																																				
Item		Efficiency (by Load Current)		Testing Circuitry Figure A																																																				
Object		_____																																																						
1.Graph		—△— Input Volt. 40V - - - □ - - - Input Volt. 48V - - - ○ - - - Input Volt. 60V		2.Values																																																				
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 40[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 60[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.8</td><td>72.2</td><td>72.3</td><td>69.7</td></tr> <tr><td>1.6</td><td>82.9</td><td>83.0</td><td>81.1</td></tr> <tr><td>2.4</td><td>87.0</td><td>87.1</td><td>85.7</td></tr> <tr><td>3.2</td><td>89.2</td><td>89.0</td><td>87.7</td></tr> <tr><td>4.0</td><td>90.4</td><td>90.6</td><td>89.1</td></tr> <tr><td>4.4</td><td>90.5</td><td>90.8</td><td>90.1</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Efficiency [%]			Input Volt. 40[V]	Input Volt. 48[V]	Input Volt. 60[V]	0.0	-	-	-	0.8	72.2	72.3	69.7	1.6	82.9	83.0	81.1	2.4	87.0	87.1	85.7	3.2	89.2	89.0	87.7	4.0	90.4	90.6	89.1	4.4	90.5	90.8	90.1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
Load Current [A]	Efficiency [%]																																																							
	Input Volt. 40[V]	Input Volt. 48[V]	Input Volt. 60[V]																																																					
0.0	-	-	-																																																					
0.8	72.2	72.3	69.7																																																					
1.6	82.9	83.0	81.1																																																					
2.4	87.0	87.1	85.7																																																					
3.2	89.2	89.0	87.7																																																					
4.0	90.4	90.6	89.1																																																					
4.4	90.5	90.8	90.1																																																					
-	-	-	-																																																					
-	-	-	-																																																					
-	-	-	-																																																					
-	-	-	-																																																					
Note: Slanted line shows the range of the rated load current.																																																								



COSEL																																			
Model	CES48150-4	Temperature	25°C																																
Item	Line Regulation	Testing Circuitry	Figure A																																
Object	+15V4A																																		
<p>1. Graph</p> <div style="text-align: right;"> <p>---□--- Load 50%</p> <p>—△— Load 100%</p> </div> <p style="text-align: center;">Input Voltage [V]</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>38</td><td>15.053</td><td>15.053</td></tr> <tr><td>39</td><td>15.053</td><td>15.053</td></tr> <tr><td>40</td><td>15.053</td><td>15.053</td></tr> <tr><td>48</td><td>15.053</td><td>15.053</td></tr> <tr><td>52</td><td>15.053</td><td>15.053</td></tr> <tr><td>60</td><td>15.053</td><td>15.053</td></tr> <tr><td>66</td><td>15.053</td><td>15.053</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>		Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	38	15.053	15.053	39	15.053	15.053	40	15.053	15.053	48	15.053	15.053	52	15.053	15.053	60	15.053	15.053	66	15.053	15.053	--	-	-	--	-	-
Input Voltage [V]	Output Voltage [V]																																		
	Load 50%	Load 100%																																	
38	15.053	15.053																																	
39	15.053	15.053																																	
40	15.053	15.053																																	
48	15.053	15.053																																	
52	15.053	15.053																																	
60	15.053	15.053																																	
66	15.053	15.053																																	
--	-	-																																	
--	-	-																																	
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																			




Model		CES48150-4		Temperature 25°C																																																				
Item		Load Regulation		Testing Circuitry Figure A																																																				
Object		+15V4A																																																						
1. Graph		—△— Input Volt. 40V ---□--- Input Volt. 48V -·-○-·- Input Volt. 60V		2. Values																																																				
				<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 40[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 60[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>15.052</td><td>15.053</td><td>15.053</td></tr> <tr><td>0.8</td><td>15.053</td><td>15.053</td><td>15.053</td></tr> <tr><td>1.6</td><td>15.053</td><td>15.053</td><td>15.053</td></tr> <tr><td>2.4</td><td>15.053</td><td>15.053</td><td>15.053</td></tr> <tr><td>3.2</td><td>15.053</td><td>15.053</td><td>15.053</td></tr> <tr><td>4.0</td><td>15.053</td><td>15.053</td><td>15.053</td></tr> <tr><td>4.4</td><td>15.053</td><td>15.053</td><td>15.053</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Output Voltage [V]			Input Volt. 40[V]	Input Volt. 48[V]	Input Volt. 60[V]	0.0	15.052	15.053	15.053	0.8	15.053	15.053	15.053	1.6	15.053	15.053	15.053	2.4	15.053	15.053	15.053	3.2	15.053	15.053	15.053	4.0	15.053	15.053	15.053	4.4	15.053	15.053	15.053	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																							
	Input Volt. 40[V]	Input Volt. 48[V]	Input Volt. 60[V]																																																					
0.0	15.052	15.053	15.053																																																					
0.8	15.053	15.053	15.053																																																					
1.6	15.053	15.053	15.053																																																					
2.4	15.053	15.053	15.053																																																					
3.2	15.053	15.053	15.053																																																					
4.0	15.053	15.053	15.053																																																					
4.4	15.053	15.053	15.053																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
Note: Slanted line shows the range of the rated load current.																																																								




Model		CES48150-4	Temperature		25°C
Item		Dynamic Load Response	Testing Circuitry		Figure A
Object		+15V4A			

Input Volt. 48 V
 Cycle 5 mS

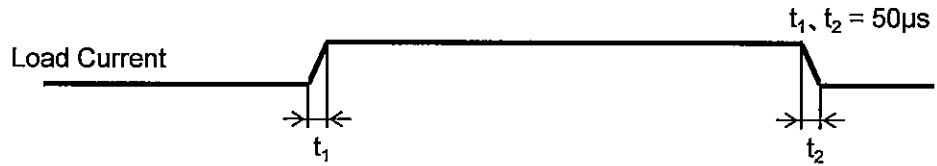


Min. Load (0A) ←→
 Load 100% (4A)

100mV/div

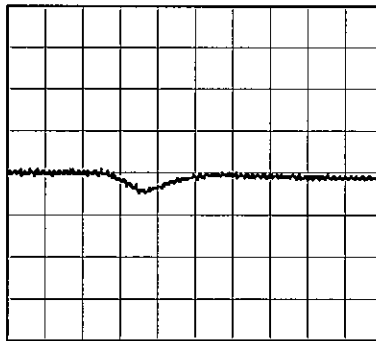


100µs/div

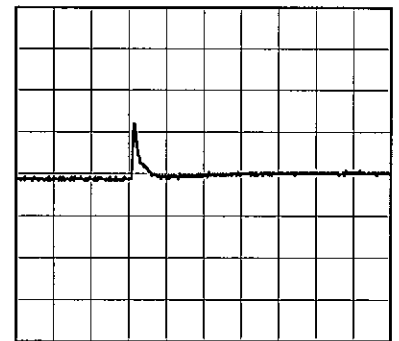


200µs/div

Min. Load (0A) ←→
 Load 50% (2A)

100mV/div

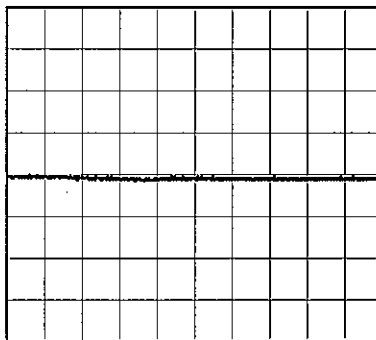


200µs/div

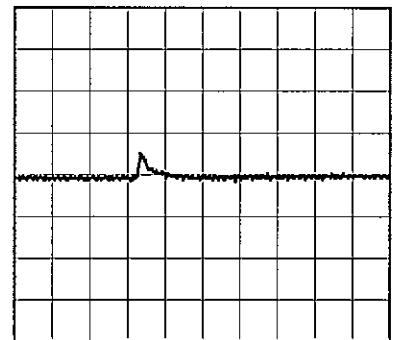


100µs/div

Load 50% (2A) ←→
 Load 100% (4A)

100mV/div

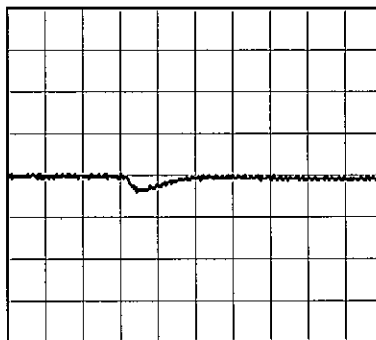

100µs/div

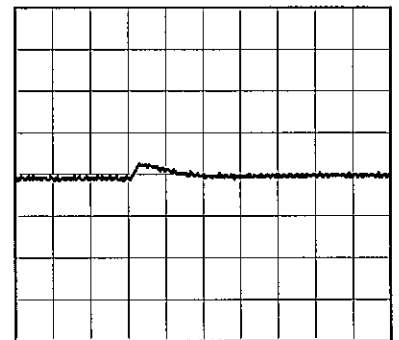

100µs/div




Model		CES48150-4		Temperature 25°C Testing Circuitry Figure A																																						
Item		Ripple Voltage (by Load Current)																																								
Object		+15V4A																																								
1. Graph <div style="text-align: right; margin-right: 50px;"> —△— Input Volt. 40V - - ○ - - - Input Volt. 60V </div>			2. Values <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Input Volt. 40 [V]</th> <th>Input Volt. 60 [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>12</td><td>18</td></tr> <tr><td>1.0</td><td>13</td><td>18</td></tr> <tr><td>2.0</td><td>14</td><td>19</td></tr> <tr><td>3.0</td><td>14</td><td>19</td></tr> <tr><td>4.0</td><td>14</td><td>19</td></tr> <tr><td>4.4</td><td>14</td><td>19</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Ripple Voltage [mV]		Input Volt. 40 [V]	Input Volt. 60 [V]	0.0	12	18	1.0	13	18	2.0	14	19	3.0	14	19	4.0	14	19	4.4	14	19	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Load Current [A]	Ripple Voltage [mV]																																									
	Input Volt. 40 [V]	Input Volt. 60 [V]																																								
0.0	12	18																																								
1.0	13	18																																								
2.0	14	19																																								
3.0	14	19																																								
4.0	14	19																																								
4.4	14	19																																								
-	-	-																																								
-	-	-																																								
-	-	-																																								
-	-	-																																								
-	-	-																																								
Measured by 100 MHz Oscilloscope. Ripple Voltage is shown as p-p in the figure below. Note: Stanted line shows the range of the rated load current.																																										
Ripple [mVp-p]																																										
Fig. Complex Ripple Wave Form																																										



Model	CES48150-4
Item	Ripple-Noise
Object	+15V4A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

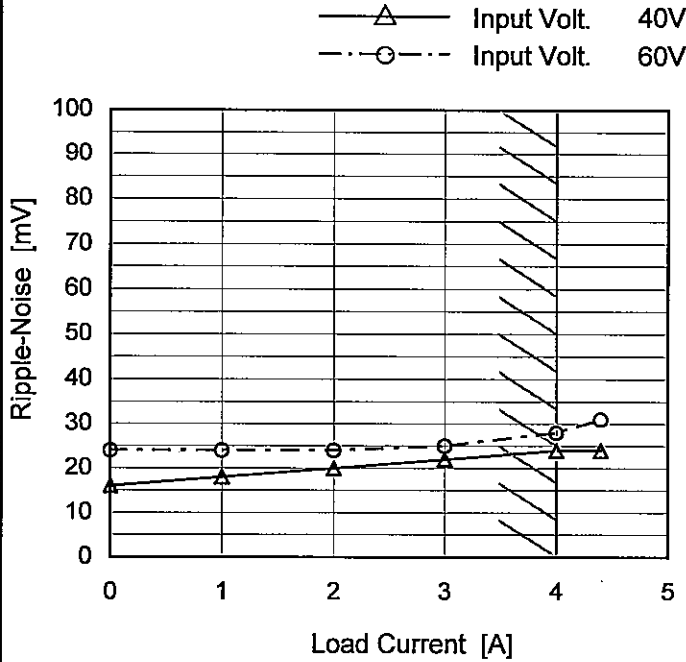

2. Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 40 [V]	Input Volt. 60 [V]
0.0	16	24
1.0	18	24
2.0	20	24
3.0	22	25
4.0	24	28
4.4	24	31
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-

Measured by 100 MHz Oscilloscope.
Ripple-Noise is shown as p-p in the figure below.
Note: Slanted line shows the range of the rated load current.

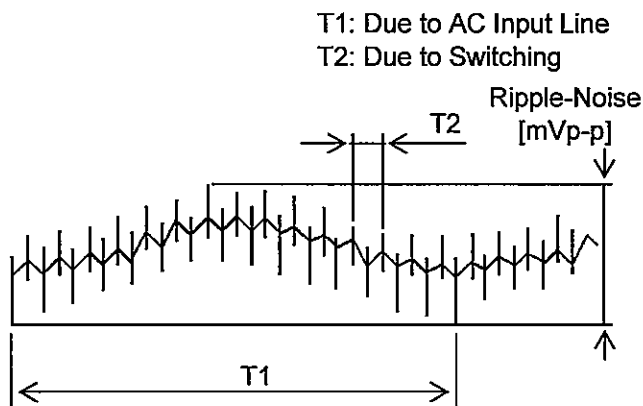



Fig. Complex Ripple Wave Form



Model	CES48150-4
Item	Ripple Voltage (by Ambient Temp.)
Object	+15V4A

Testing Circuitry Figure A

1. Graph

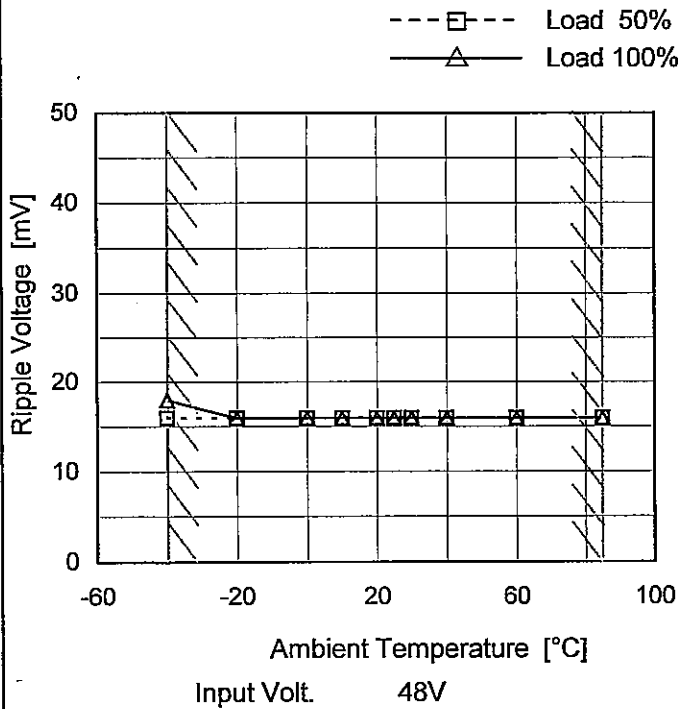

2. Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-40	16	18
-20	16	16
0	16	16
10	16	16
20	16	16
25	16	16
30	16	16
40	16	16
60	16	16
85	16	16
—	-	-

Measured by 100 MHz Oscilloscope.

Note: Slanted line shows the range of the rated ambient temperature.




Model	CES48150-4
Item	Ambient Temperature Drift
Object	+15V4A

Testing Circuitry Figure A

1.Graph

—△— Input Volt. 40V
 - - - □ - - - Input Volt. 48V
 - - - ○ - - - Input Volt. 60V

2.Values

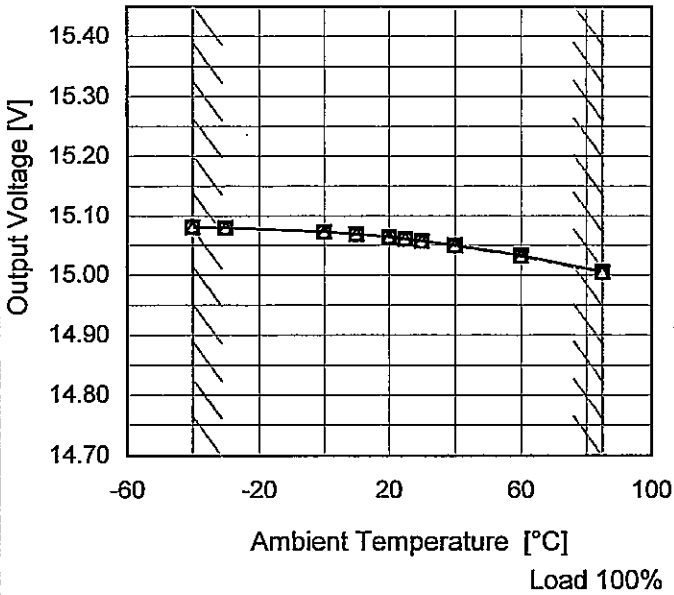

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 40[V]	Input Volt. 48[V]	Input Volt. 60[V]
-40	15.081	15.081	15.082
-30	15.080	15.080	15.080
0	15.073	15.073	15.073
10	15.069	15.069	15.069
20	15.064	15.064	15.064
25	15.061	15.061	15.061
30	15.058	15.057	15.057
40	15.050	15.050	15.049
60	15.033	15.033	15.032
85	15.006	15.005	15.004
-	-	-	-

Note: Slanted line shows the range of the rated ambient temperature.



COSEL		
Model	CES48150-4	
Item	Output Voltage Accuracy	Testing Circuitry Figure A
Object	+15V4A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 85°C

Input Voltage : 40 - 60V

Load Current : 0 - 4A

* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) =
$$\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	-40	60	4	15.082	±39	±0.3
Minimum Voltage	85	60	4	15.004		




COSEL																									
Model	CES48150-4	Temperature	25°C																						
Item	Time Lapse Drift	Testing Circuitry	Figure A																						
Object	+15V4A																								
1.Graph		2.Values																							
<p style="text-align: center;">Time [H]</p> <p>Input Volt. 48V Load 100%</p>		<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>15.058</td></tr> <tr><td>0.5</td><td>15.053</td></tr> <tr><td>1.0</td><td>15.053</td></tr> <tr><td>2.0</td><td>15.053</td></tr> <tr><td>3.0</td><td>15.053</td></tr> <tr><td>4.0</td><td>15.053</td></tr> <tr><td>5.0</td><td>15.053</td></tr> <tr><td>6.0</td><td>15.053</td></tr> <tr><td>7.0</td><td>15.053</td></tr> <tr><td>8.0</td><td>15.053</td></tr> </tbody> </table>		Time since start [H]	Output Voltage [V]	0.0	15.058	0.5	15.053	1.0	15.053	2.0	15.053	3.0	15.053	4.0	15.053	5.0	15.053	6.0	15.053	7.0	15.053	8.0	15.053
Time since start [H]	Output Voltage [V]																								
0.0	15.058																								
0.5	15.053																								
1.0	15.053																								
2.0	15.053																								
3.0	15.053																								
4.0	15.053																								
5.0	15.053																								
6.0	15.053																								
7.0	15.053																								
8.0	15.053																								




Model	CES48150-4	Temperature	25°C
Item	Rise and Fall Time	Testing Circuitry	Figure A
Object	+15V4A		

1. Graph

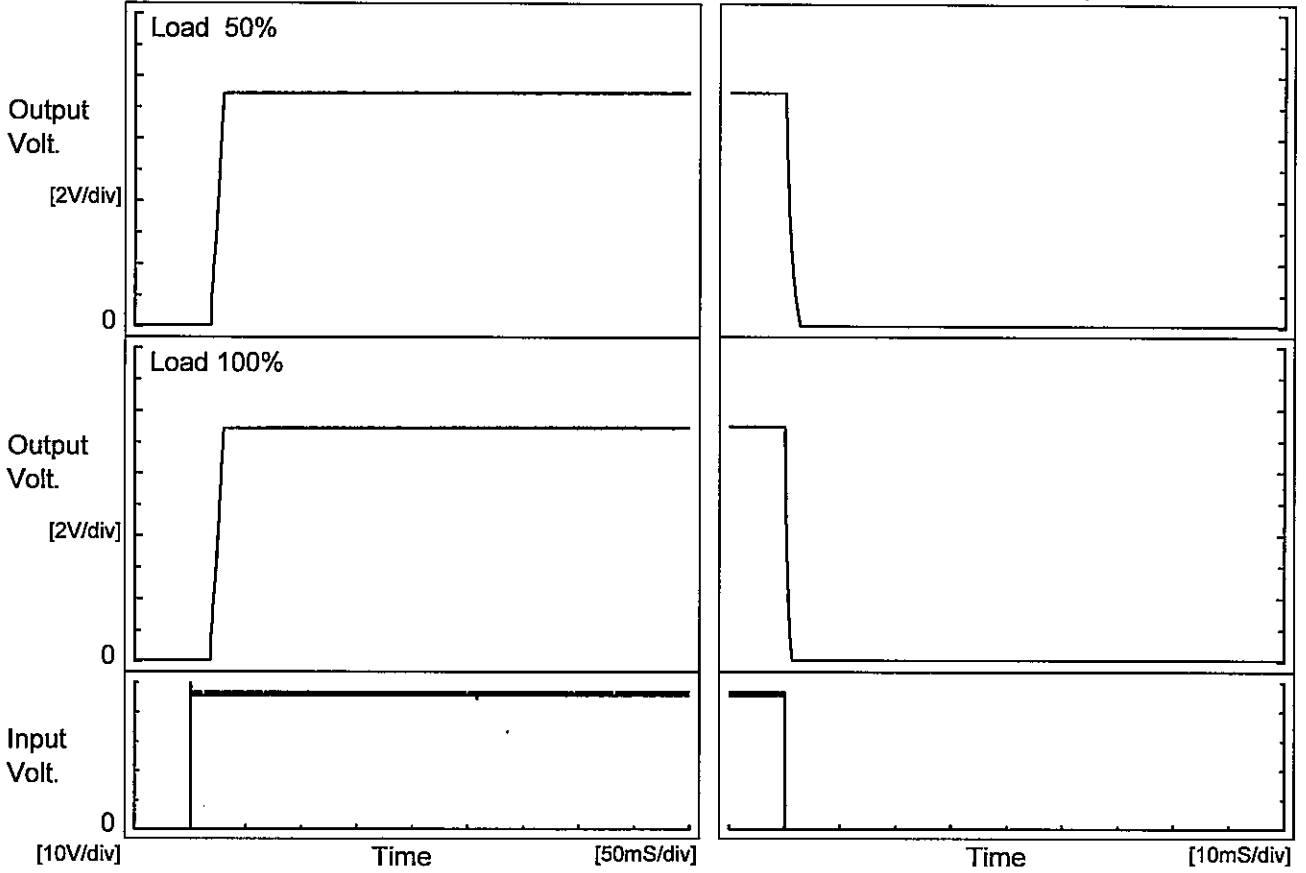

2. Values

		[mS]				
Load \ Time	Time	Td	Tr	Ts	Th	Tf
50 %		18.8	10.0	28.8	0.2	1.9
100 %		18.8	10.3	29.1	0.1	0.9

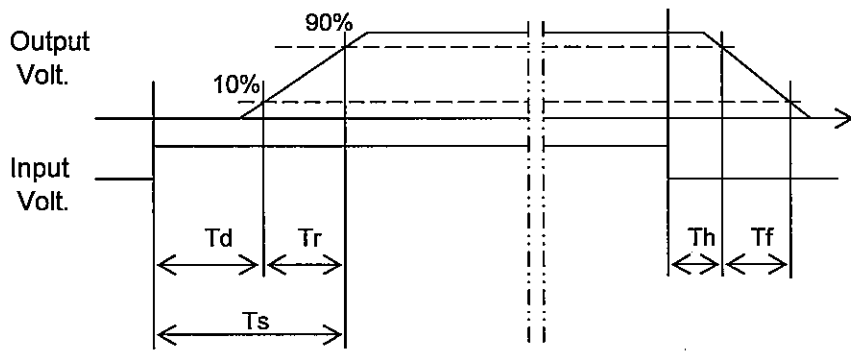




Model	CES48150-4
Item	Minimum Input Voltage for Regulated Output Voltage
Object	+15V4A

Testing Circuitry Figure A

1. Graph

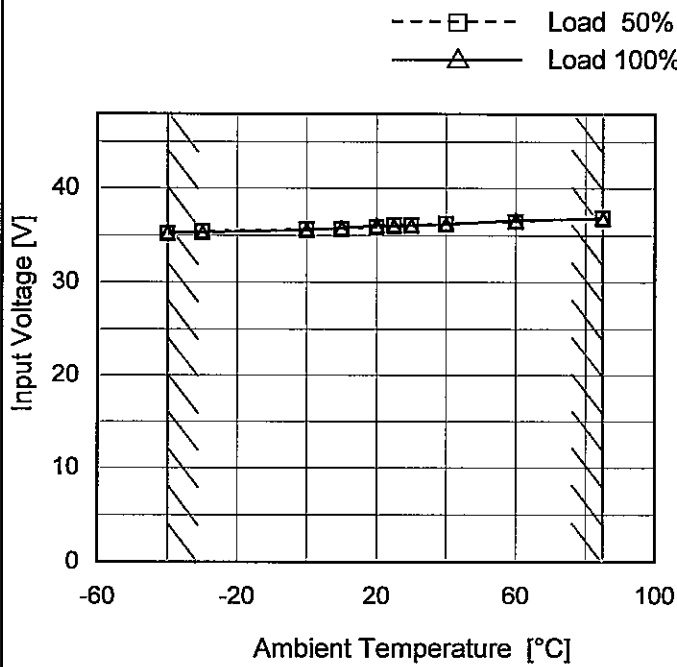

2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-40	35.2	35.4
-30	35.5	35.4
0	35.7	35.6
10	35.7	35.9
20	35.9	36.1
25	36.1	36.1
30	36.1	36.1
40	36.3	36.2
60	36.5	36.7
85	36.9	36.9
--	-	-


Note: Slanted line shows the range of the rated ambient temperature.



Model	CES48150-4
Item	Overcurrent Protection
Object	+15V4A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

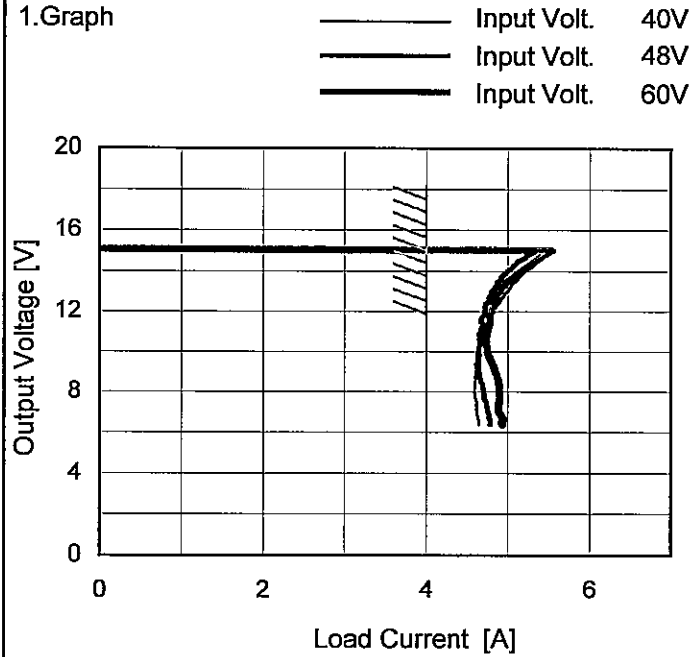

Note: Slanted line shows the range of the rated load current.

2. Values

Output Voltage [V]	Load Current [A]		
	Input Volt. 40[V]	Input Volt. 48[V]	Input Volt. 60[V]
15.0	5.57	5.33	5.54
14.3	5.31	5.06	5.25
13.5	5.57	5.33	5.54
12.0	4.82	4.73	4.81
10.5	4.67	4.65	4.74
9.0	4.62	4.65	4.84
7.5	4.61	4.72	4.90
6.0	4.65	4.79	4.94
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—




Model	CES48150-4
Item	Oversvoltage Protection
Object	+15V4A

Testing Circuitry Figure A

1. Graph

—△— Input Volt. 40V
 - - - □ - - - Input Volt. 48V
 - - - ○ - - - Input Volt. 60V

2. Values

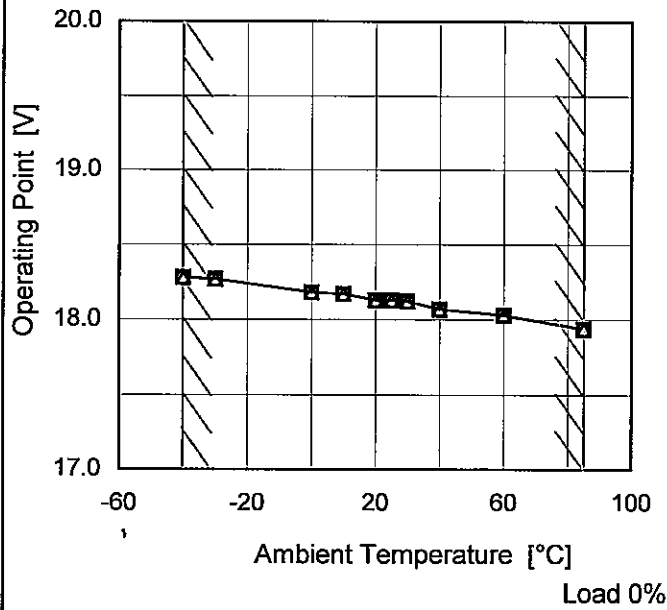

Ambient Temperature [°C]	Operating Point [V]		
	Input Volt. 40[V]	Input Volt. 48[V]	Input Volt. 60[V]
-40	18.28	18.28	18.28
-30	18.27	18.27	18.27
0	18.18	18.18	18.18
10	18.17	18.17	18.17
20	18.13	18.13	18.13
25	18.13	18.13	18.13
30	18.12	18.12	18.12
40	18.07	18.07	18.07
60	18.03	18.03	18.03
85	17.94	17.94	17.94
-	-	-	-

Note: Slanted line shows the range of the rated ambient temperature.

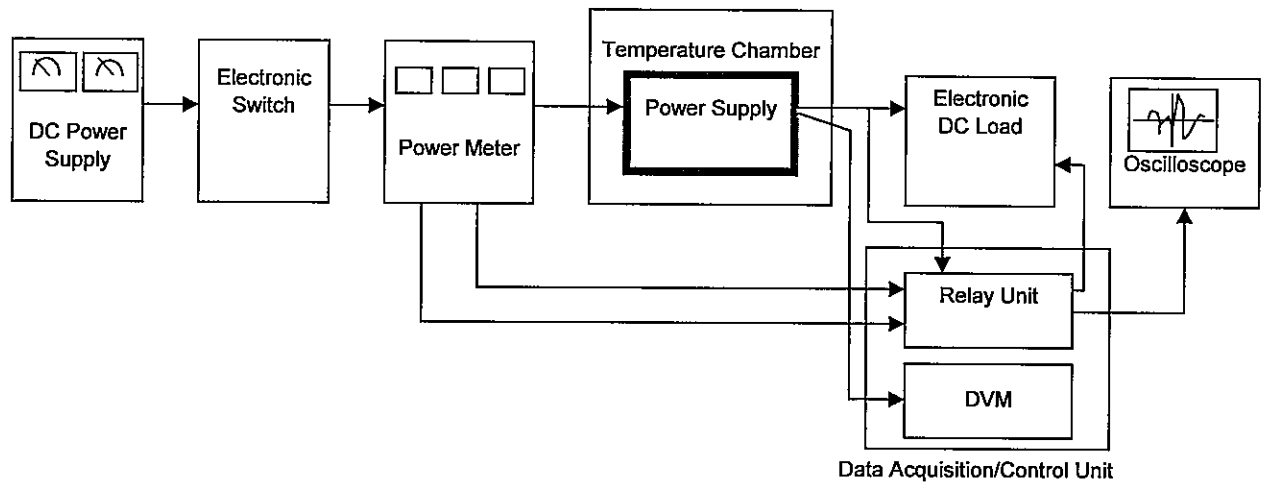


Figure A

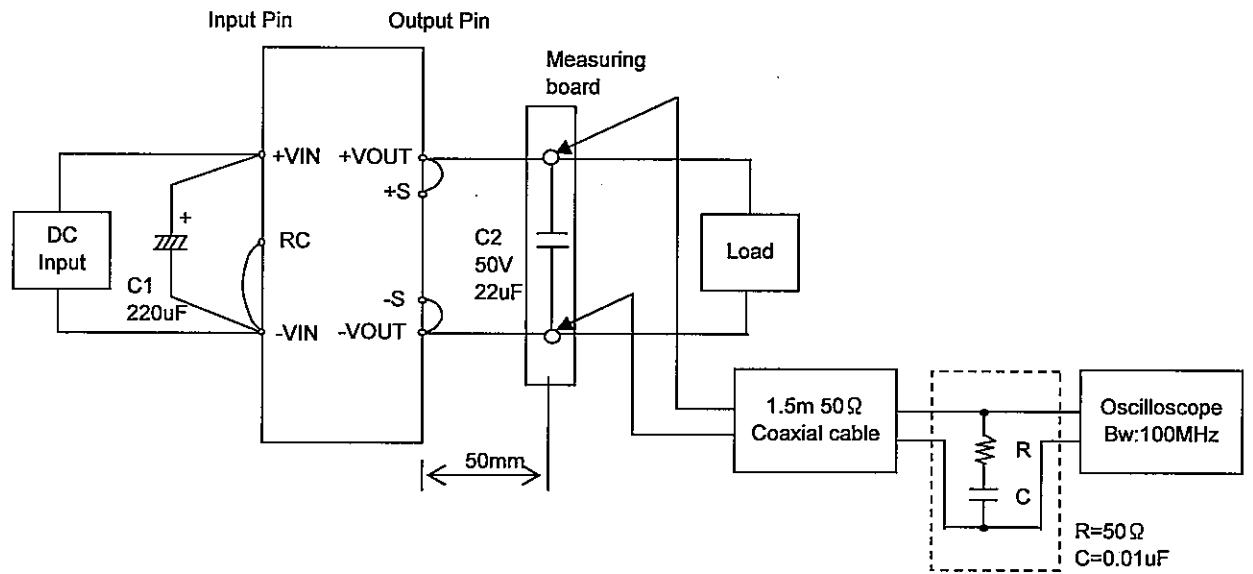


Figure B