



# TEST DATA OF LDA300W-12

(200V INPUT)

Regulated DC Power Supply

Date : Feb. 22. 1997

Approved by : K. Nagahara  
Design Manager

Prepared by : Y. Mano  
Design Engineer

コーセル株式会社

COSEL CO., LTD.

CONTENTS


1. Line Regulation . . . . .	1
静的入力変動	
2. Efficiency . . . . .	2
効率	
3. Hold-Up Time . . . . .	3
出力保持時間	
4. Instantaneous Interruption Compensation . . . . .	4
瞬時停電保障	
5. Load Regulation . . . . .	5
静的負荷変動	
6. Ripple Voltage (by Load Current) . . . . .	6
リップル電圧(負荷電流特性)	
7. Ripple-Noise . . . . .	7
リップルノイズ	
8. Overcurrent Protection . . . . .	8
過電流保護	
9. Overvoltage Protection . . . . .	9
過電圧保護	
10. Inrush Current . . . . .	10
突入電流	
11. Dynamic Load Responce . . . . .	11
動的負荷変動	
12. Rise and Fall Time . . . . .	12
立上り、立下り時間	
13. Ambient Temperature Drift . . . . .	13
周囲温度変動	
14. Minimum Input Voltage for Regulated Output Voltage . . . . .	14
最低レギュレーション電圧	
15. Ripple Voltage (by Ambient Temperature) . . . . .	15
リップル電圧(周囲温度特性)	
16. Time Lapse Drift . . . . .	16
経時ドリフト	
17. Voltage Accuracy . . . . .	17
定電圧精度	
18. Condensation . . . . .	18
結露特性	
19. Leakage Current . . . . .	19
漏洩電流	
20. Line Noise Tolerance . . . . .	20
入力雑音耐量	
21. Conducted Emission . . . . .	21
雑音端子電圧	
22. Figure of Testing Circuitry . . . . .	22
測定回路図	

(Final Page 23 )

# COSEL

Model	LDA300W-12
Item	Line Regulation 静的入力変動
Object	+12V27A

Temperature 25°C  
Testing Circuitry Figure A

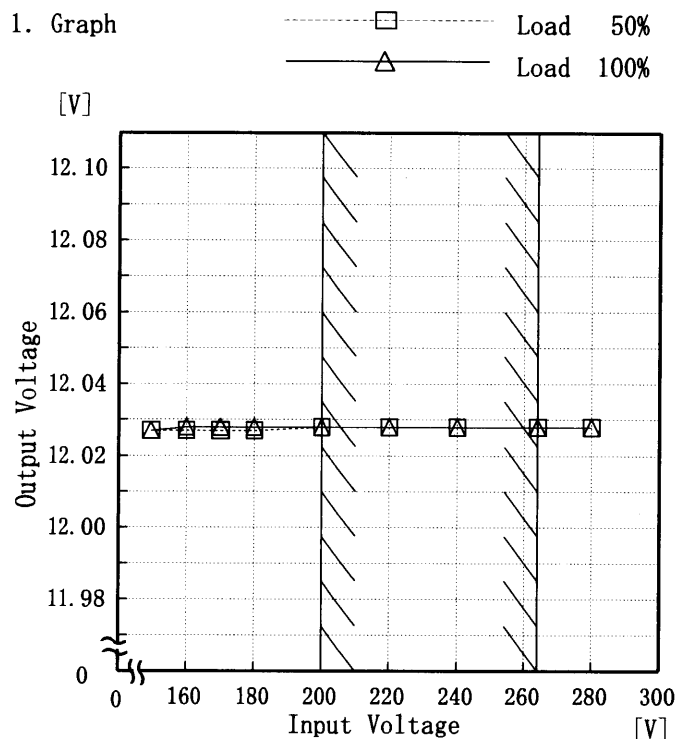

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

2. Values

Input Voltage [V]	Load 50%	Load 100%
	Output Volt. [V]	Output Volt. [V]
150	12.027	12.027
160	12.027	12.028
170	12.027	12.028
180	12.027	12.028
200	12.028	12.028
220	12.028	12.028
240	12.028	12.028
264	12.028	12.028
280	12.028	12.028



Model		LDA300W-12	Temperature	25°C																																
Item		Efficiency 効率	Testing Circuitry	Figure A																																
Object																																				
1. Graph		<p>□ Load 50%</p> <p>△ Load 100%</p>	2. Values																																	
			<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th>Load 50%</th> <th>Load 100%</th> </tr> <tr> <th>Efficiency [%]</th> <th>Efficiency [%]</th> </tr> </thead> <tbody> <tr><td>150</td><td>83.14</td><td>82.02</td></tr> <tr><td>160</td><td>83.11</td><td>82.22</td></tr> <tr><td>170</td><td>83.24</td><td>82.42</td></tr> <tr><td>180</td><td>83.16</td><td>82.64</td></tr> <tr><td>200</td><td>82.94</td><td>83.05</td></tr> <tr><td>220</td><td>82.72</td><td>83.06</td></tr> <tr><td>240</td><td>82.30</td><td>83.26</td></tr> <tr><td>264</td><td>81.88</td><td>83.05</td></tr> <tr><td>280</td><td>81.47</td><td>83.06</td></tr> </tbody> </table>		Input Voltage [V]	Load 50%	Load 100%	Efficiency [%]	Efficiency [%]	150	83.14	82.02	160	83.11	82.22	170	83.24	82.42	180	83.16	82.64	200	82.94	83.05	220	82.72	83.06	240	82.30	83.26	264	81.88	83.05	280	81.47	83.06
Input Voltage [V]	Load 50%	Load 100%																																		
	Efficiency [%]	Efficiency [%]																																		
150	83.14	82.02																																		
160	83.11	82.22																																		
170	83.24	82.42																																		
180	83.16	82.64																																		
200	82.94	83.05																																		
220	82.72	83.06																																		
240	82.30	83.26																																		
264	81.88	83.05																																		
280	81.47	83.06																																		
		Note: Slanted line shows the range of the rated input voltage.																																		
		(注)斜線は定格入力電圧範囲を示す。																																		




Model		LDA300W-12	Temperature		25°C																																
Item		Hold-Up Time 出力保持時間	Testing Circuitry		Figure A																																
Object		+12V27A																																			
<p>1. Graph</p> <p>-----□----- Load 50%</p> <p>-----△----- Load 100%</p> <p>Hold-Up Time [mS]</p> <p>Input Voltage [V]</p>			<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th>Load 50%</th> <th>Load 100%</th> </tr> <tr> <th>Hold-Up Time [mS]</th> <th>Hold-Up Time [mS]</th> </tr> </thead> <tbody> <tr><td>150</td><td>31</td><td>10</td></tr> <tr><td>160</td><td>39</td><td>14</td></tr> <tr><td>170</td><td>47</td><td>19</td></tr> <tr><td>180</td><td>56</td><td>23</td></tr> <tr><td>200</td><td>75</td><td>33</td></tr> <tr><td>220</td><td>97</td><td>44</td></tr> <tr><td>240</td><td>120</td><td>56</td></tr> <tr><td>264</td><td>150</td><td>72</td></tr> <tr><td>280</td><td>173</td><td>83</td></tr> </tbody> </table>			Input Voltage [V]	Load 50%	Load 100%	Hold-Up Time [mS]	Hold-Up Time [mS]	150	31	10	160	39	14	170	47	19	180	56	23	200	75	33	220	97	44	240	120	56	264	150	72	280	173	83
Input Voltage [V]	Load 50%	Load 100%																																			
	Hold-Up Time [mS]	Hold-Up Time [mS]																																			
150	31	10																																			
160	39	14																																			
170	47	19																																			
180	56	23																																			
200	75	33																																			
220	97	44																																			
240	120	56																																			
264	150	72																																			
280	173	83																																			
<p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</p> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>出力保持時間とは、AC入力断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>																																					



Model	LDA300W-12
Item	Instantaneous Interruption Compensation 瞬時停電保障
Object	+12V27A

Testing Circuitry Figure A 25°C

1. Graph

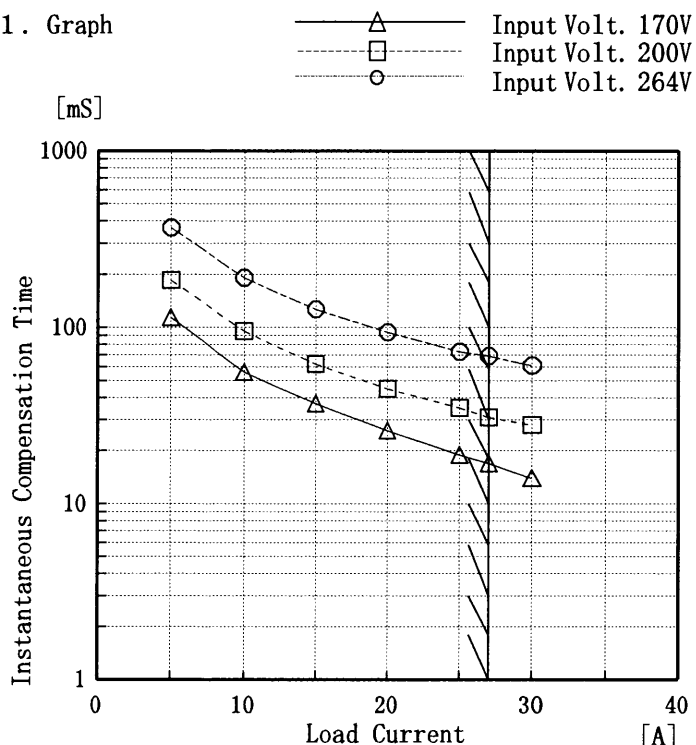

This duration covers from Shut-off of AC-IN to the moment when output voltage descends to its 95% of the rated.

Note: Slanted line shows the range of the rated load current.

瞬時停電保障時間とは、出力電圧が定格値の95%になる時の瞬時停電時間をいう。

(注)斜線は定格負荷電流範囲を示す。

2. Values

Load Current [A]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
	Time [mS]		
0.0	—	—	—
5.0	114	185	368
10.0	56	95	191
15.0	37	62	127
20.0	26	45	94
25.0	19	35	73
27.0	17	31	69
30.0	14	28	61
—	—	—	—
—	—	—	—
—	—	—	—



Model		LDA300W-12	Temperature		25°C																																															
Item		Load Regulation 静的負荷変動	Testing Circuitry		Figure A																																															
Object		+12V27A																																																		
1. Graph			2. Values																																																	
<p> <span style="border-bottom: 1px solid black; display: inline-block; width: 1em; margin-right: 0.5em;"></span> △ Input Volt. 200V  <span style="border-bottom: 1px dashed black; display: inline-block; width: 1em; margin-right: 0.5em;"></span> □ Input Volt. 200V  <span style="border-bottom: 1px dotted black; display: inline-block; width: 1em; margin-right: 0.5em;"></span> ○ Input Volt. 264V                 </p> <p>Output Voltage [V]</p> <p>Load Current [A]</p>			<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> <tr> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>12.036</td><td>12.036</td><td>12.036</td></tr> <tr><td>4.0</td><td>12.034</td><td>12.034</td><td>12.034</td></tr> <tr><td>8.0</td><td>12.033</td><td>12.033</td><td>12.033</td></tr> <tr><td>12.0</td><td>12.031</td><td>12.032</td><td>12.032</td></tr> <tr><td>16.0</td><td>12.030</td><td>12.030</td><td>12.031</td></tr> <tr><td>20.0</td><td>12.029</td><td>12.029</td><td>12.030</td></tr> <tr><td>24.0</td><td>12.028</td><td>12.028</td><td>12.028</td></tr> <tr><td>27.0</td><td>12.027</td><td>12.027</td><td>12.028</td></tr> <tr><td>29.7</td><td>12.026</td><td>12.027</td><td>12.027</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Input Volt. 200[V]	Input Volt. 200[V]	Input Volt. 264[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.0	12.036	12.036	12.036	4.0	12.034	12.034	12.034	8.0	12.033	12.033	12.033	12.0	12.031	12.032	12.032	16.0	12.030	12.030	12.031	20.0	12.029	12.029	12.030	24.0	12.028	12.028	12.028	27.0	12.027	12.027	12.028	29.7	12.026	12.027	12.027	—	—	—	—
Load Current [A]	Input Volt. 200[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																	
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																	
0.0	12.036	12.036	12.036																																																	
4.0	12.034	12.034	12.034																																																	
8.0	12.033	12.033	12.033																																																	
12.0	12.031	12.032	12.032																																																	
16.0	12.030	12.030	12.031																																																	
20.0	12.029	12.029	12.030																																																	
24.0	12.028	12.028	12.028																																																	
27.0	12.027	12.027	12.028																																																	
29.7	12.026	12.027	12.027																																																	
—	—	—	—																																																	
<p>Note: Slanted line shows the range of the rated load current.</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>																																																				



<p>Model LDA300W-12</p> <p>Item Ripple Voltage (by Load Current) リップル電圧(負荷電流特性)</p> <p>Object +12V27A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																					
<p>1. Graph</p> <p>[mV]</p> <p>-----□----- Input Volt. 170V</p> <p>-----△----- Input Volt. 264V</p> <p>Ripple Voltage</p> <p>Load Current [A]</p>	<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 170 [V]</th> <th>Input Volt. 264 [V]</th> </tr> <tr> <th>Ripple Output Volt. [mV]</th> <th>Ripple Output Volt. [mV]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>10</td><td>10</td></tr> <tr><td>5.0</td><td>20</td><td>20</td></tr> <tr><td>10.0</td><td>25</td><td>25</td></tr> <tr><td>15.0</td><td>30</td><td>25</td></tr> <tr><td>20.0</td><td>35</td><td>30</td></tr> <tr><td>25.0</td><td>40</td><td>30</td></tr> <tr><td>27.0</td><td>45</td><td>35</td></tr> <tr><td>30.0</td><td>50</td><td>40</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Load Current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	0.0	10	10	5.0	20	20	10.0	25	25	15.0	30	25	20.0	35	30	25.0	40	30	27.0	45	35	30.0	50	40	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Volt. 170 [V]		Input Volt. 264 [V]																																				
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																					
0.0	10	10																																					
5.0	20	20																																					
10.0	25	25																																					
15.0	30	25																																					
20.0	35	30																																					
25.0	40	30																																					
27.0	45	35																																					
30.0	50	40																																					
—	—	—																																					
—	—	—																																					
—	—	—																																					
<p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップル電圧は、下図 p-p 値で示される。</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line 入力商用周期</p> <p>T2: Due to Switching スイッチング周期</p> <p>Ripple [mVp-p]</p> <p>T1</p> <p>T2</p>																																							
<p>Fig. Complex Ripple Wave Form</p> <p>図 リップル波形詳細図</p>																																							





Model		LDA300W-12	Temperature	25°C																																						
Item		Ripple-Noise リップルノイズ	Testing Circuitry	Figure A																																						
Object		+12V27A																																								
1. Graph		<p>-----□----- Input Volt. 170V</p> <p>-----△----- Input Volt. 264V</p>	2. Values																																							
<p>[mV]</p> <p>Ripple-Noise</p> <p>Load Current [A]</p>		<table border="1"> <thead> <tr> <th rowspan="2">Load current [A]</th> <th>Input Volt. 170 [V]</th> <th>Input Volt. 264 [V]</th> </tr> <tr> <th>Ripple-Noise [mV]</th> <th>Ripple-Noise [mV]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>20</td><td>20</td></tr> <tr><td>5.0</td><td>25</td><td>30</td></tr> <tr><td>10.0</td><td>30</td><td>40</td></tr> <tr><td>15.0</td><td>35</td><td>45</td></tr> <tr><td>20.0</td><td>45</td><td>50</td></tr> <tr><td>25.0</td><td>55</td><td>55</td></tr> <tr><td>27.0</td><td>60</td><td>60</td></tr> <tr><td>30.0</td><td>70</td><td>70</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]	Ripple-Noise [mV]	Ripple-Noise [mV]	0.0	20	20	5.0	25	30	10.0	30	40	15.0	35	45	20.0	45	50	25.0	55	55	27.0	60	60	30.0	70	70	—	—	—	—	—	—	—	—	—
Load current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]																																								
	Ripple-Noise [mV]	Ripple-Noise [mV]																																								
0.0	20	20																																								
5.0	25	30																																								
10.0	30	40																																								
15.0	35	45																																								
20.0	45	50																																								
25.0	55	55																																								
27.0	60	60																																								
30.0	70	70																																								
—	—	—																																								
—	—	—																																								
—	—	—																																								
<p>Ripple-Noise is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p>																																										
<p>リップルノイズは、下図 p-p 値で示される。</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>																																										
<p>T1: Due to AC Input Line 入力商用周期</p> <p>T2: Due to Switching スイッチング周期</p>																																										
<p>Ripple-Noise [mVp-p]</p>																																										
<p>Fig. Complex Ripple Wave Form</p> <p>図 リップル波形詳細図</p>																																										




<p>Model LDA300W-12</p> <p>Item Overcurrent Protection 過電流保護</p> <p>Object +12V27A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																																							
<p>1. Graph</p> <p>[V]</p> <p>Input Volt. 170 V Input Volt. 200 V Input Volt. 264 V</p> <p>Output Voltage</p> <p>Load Current [A]</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> <tr> <th>Load Current [A]</th> <th>Load Current [A]</th> <th>Load Current [A]</th> </tr> </thead> <tbody> <tr><td>12.00</td><td>33.31</td><td>33.23</td><td>33.18</td></tr> <tr><td>11.40</td><td>33.35</td><td>33.28</td><td>33.26</td></tr> <tr><td>10.80</td><td>33.40</td><td>33.35</td><td>33.33</td></tr> <tr><td>9.60</td><td>33.51</td><td>33.47</td><td>33.46</td></tr> <tr><td>8.40</td><td>33.64</td><td>33.61</td><td>33.59</td></tr> <tr><td>7.20</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>6.00</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>4.80</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>3.60</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>2.40</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>1.20</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>0.00</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Output Voltage [V]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	Load Current [A]	Load Current [A]	Load Current [A]	12.00	33.31	33.23	33.18	11.40	33.35	33.28	33.26	10.80	33.40	33.35	33.33	9.60	33.51	33.47	33.46	8.40	33.64	33.61	33.59	7.20	—	—	—	6.00	—	—	—	4.80	—	—	—	3.60	—	—	—	2.40	—	—	—	1.20	—	—	—	0.00	—	—	—
Output Voltage [V]	Input Volt. 170[V]	Input Volt. 200[V]		Input Volt. 264[V]																																																					
	Load Current [A]	Load Current [A]	Load Current [A]																																																						
12.00	33.31	33.23	33.18																																																						
11.40	33.35	33.28	33.26																																																						
10.80	33.40	33.35	33.33																																																						
9.60	33.51	33.47	33.46																																																						
8.40	33.64	33.61	33.59																																																						
7.20	—	—	—																																																						
6.00	—	—	—																																																						
4.80	—	—	—																																																						
3.60	—	—	—																																																						
2.40	—	—	—																																																						
1.20	—	—	—																																																						
0.00	—	—	—																																																						
<p>Note: Slanted line shows the range of the rated load current.</p> <p>Hiccap operation occurs when the output voltage is under 8V.</p> <p>(注)斜線は定格負荷電流範囲を示す。 8V以下は間欠動作となる。</p>																																																									

# COSEL


Model		LDA300W-12	Testing Circuitry Figure A																																																				
Item		Overvoltage Protection 過電圧保護																																																					
Object		+12V27A																																																					
1. Graph			2. Values																																																				
<p> <input type="checkbox"/>—△— Input Volt. 170 V  <input type="checkbox"/>---□--- Input Volt. 200 V  <input type="checkbox"/>---○--- Input Volt. 264 V                 </p> <p>[V]</p> <p>Operating Point</p> <p>Ambient Temperature [°C]</p>			<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temp. [°C]</th> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> <tr> <th colspan="3">Operating Point [V]</th> </tr> </thead> <tbody> <tr><td>-20</td><td>15.27</td><td>15.27</td><td>15.27</td></tr> <tr><td>-10</td><td>15.40</td><td>15.40</td><td>15.40</td></tr> <tr><td>0</td><td>15.48</td><td>15.48</td><td>15.48</td></tr> <tr><td>10</td><td>15.55</td><td>15.55</td><td>15.55</td></tr> <tr><td>20</td><td>15.65</td><td>15.65</td><td>15.65</td></tr> <tr><td>25</td><td>15.69</td><td>15.69</td><td>15.69</td></tr> <tr><td>30</td><td>15.74</td><td>15.74</td><td>15.74</td></tr> <tr><td>40</td><td>15.83</td><td>15.83</td><td>15.83</td></tr> <tr><td>50</td><td>15.92</td><td>15.92</td><td>15.92</td></tr> <tr><td>60</td><td>16.00</td><td>16.00</td><td>16.00</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Ambient Temp. [°C]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	Operating Point [V]			-20	15.27	15.27	15.27	-10	15.40	15.40	15.40	0	15.48	15.48	15.48	10	15.55	15.55	15.55	20	15.65	15.65	15.65	25	15.69	15.69	15.69	30	15.74	15.74	15.74	40	15.83	15.83	15.83	50	15.92	15.92	15.92	60	16.00	16.00	16.00	—	—	—	—
Ambient Temp. [°C]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																				
	Operating Point [V]																																																						
-20	15.27	15.27	15.27																																																				
-10	15.40	15.40	15.40																																																				
0	15.48	15.48	15.48																																																				
10	15.55	15.55	15.55																																																				
20	15.65	15.65	15.65																																																				
25	15.69	15.69	15.69																																																				
30	15.74	15.74	15.74																																																				
40	15.83	15.83	15.83																																																				
50	15.92	15.92	15.92																																																				
60	16.00	16.00	16.00																																																				
—	—	—	—																																																				
<p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注)斜線は定格周囲温度範囲を示す。</p>																																																							



Model	LDA300W-12	Temperature	25°C
Item	Inrush Current 突入電流	Testing Circuitry	Figure A
Object	_____		

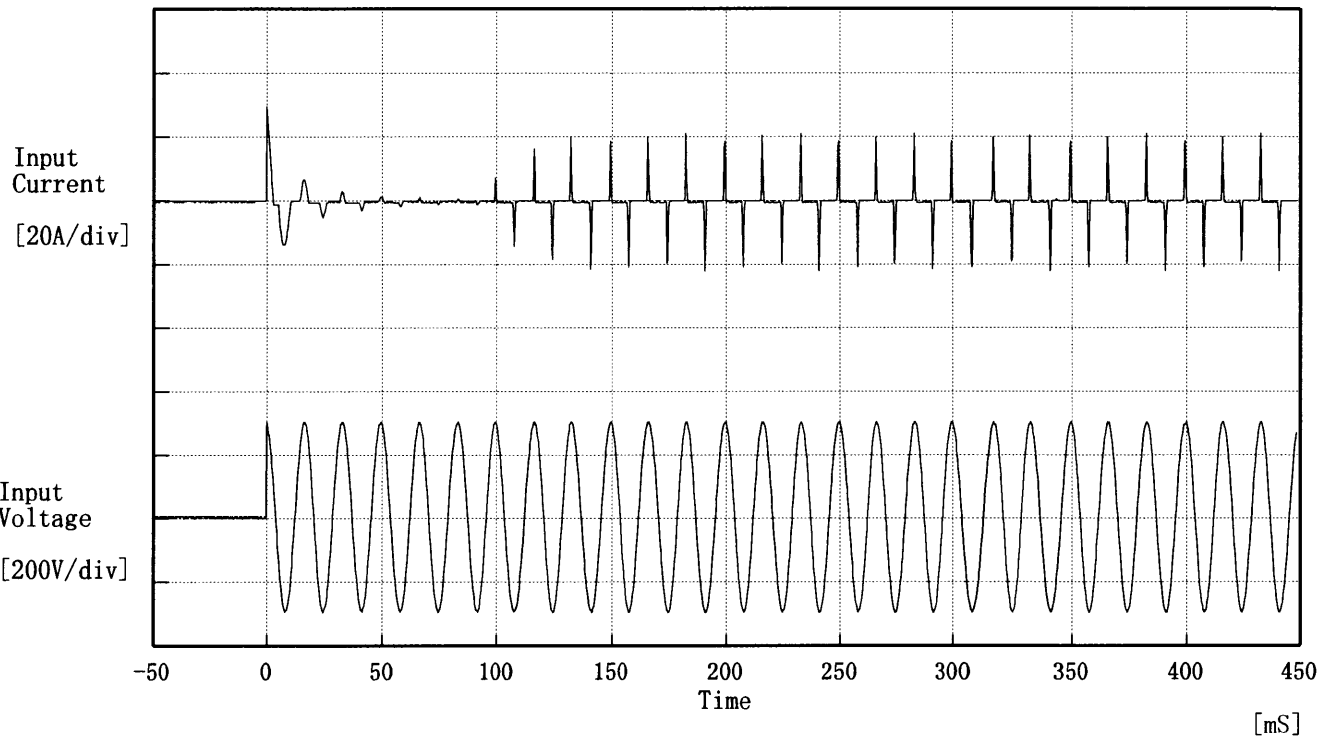

Input Voltage 200 V  
 Frequency 60 Hz  
 Load 100 %  
 Inrush Current  
 ① 29.40 [A]  
 ② 22.20 [A]

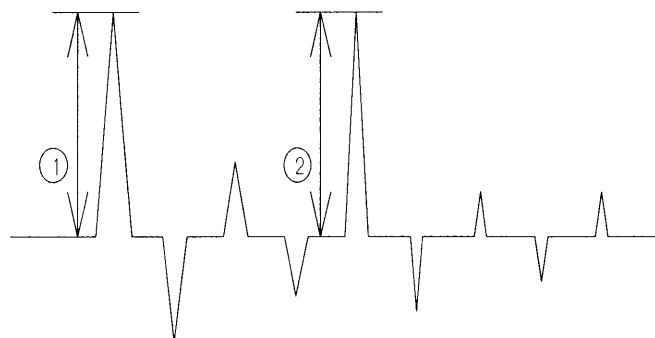



Model	LDA300W-12	Temperature	25°C
Item	Dynamic Load Responce 動的負荷変動	Testing Circuitry	Figure A
Object	+12V27A		



Input Volt. 200 V

Cycle 1000 mS



Min. Load ↔



Load 100 %

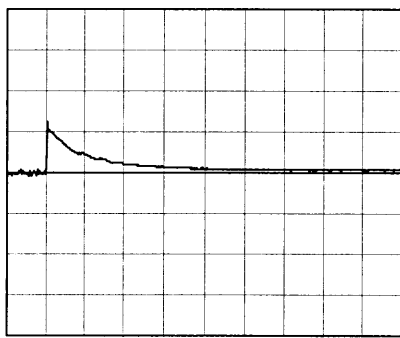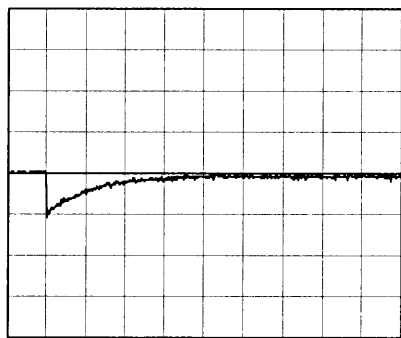

Min. Load ↔

Load 50 %

100 mV/div

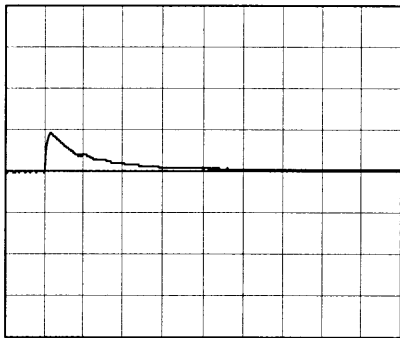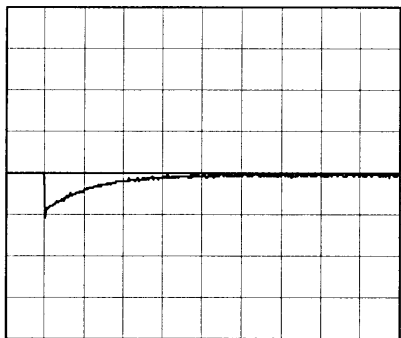


10 mV/div

# COSEL


Model	LDA300W-12	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+12V27A		

1. Graph

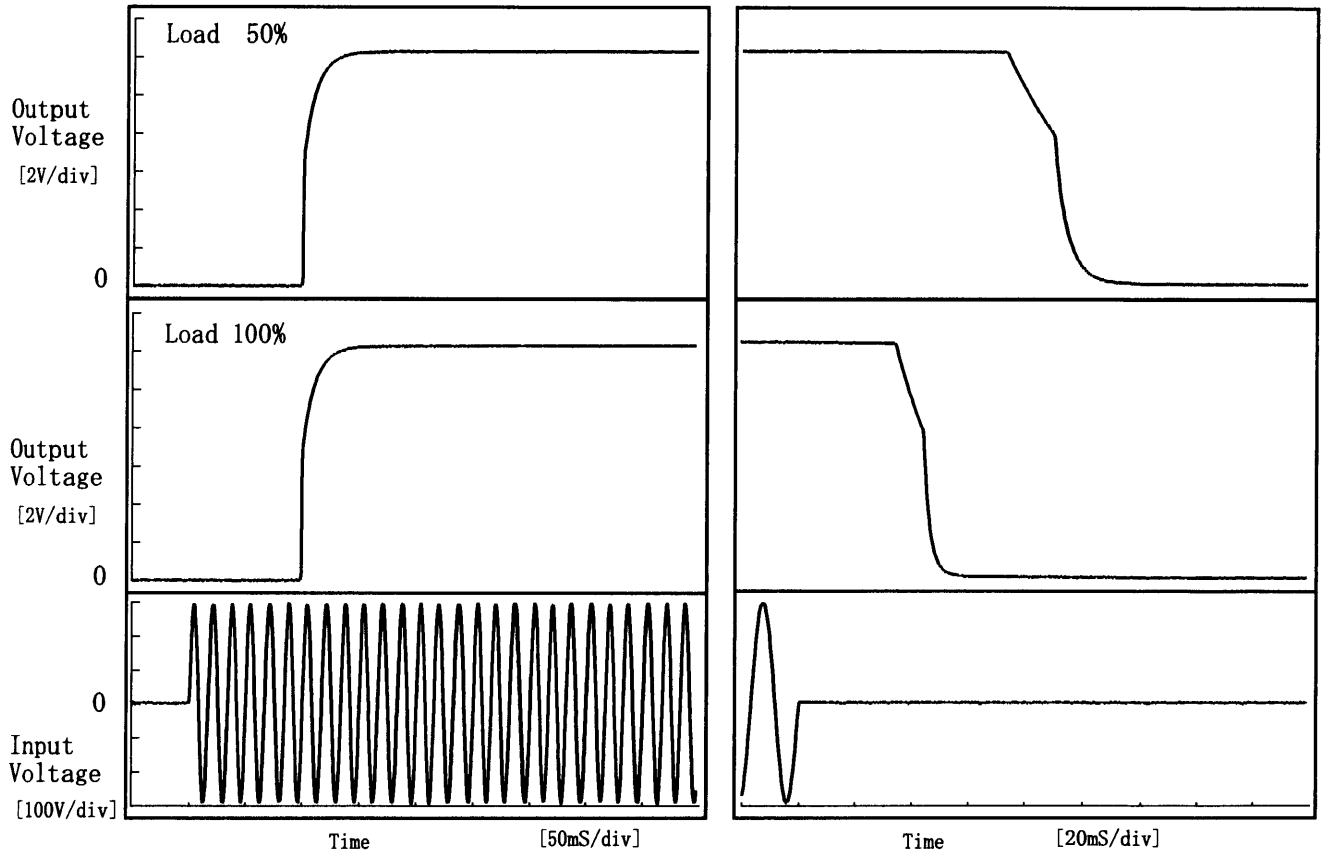

2. Values

Load	Time	[mS]				
		T <sub>d</sub>	T <sub>r</sub>	T <sub>s</sub>	T <sub>h</sub>	T <sub>f</sub>
50 %		98.8	15.0	113.8	78.8	20.5
100 %		99.0	14.8	113.8	37.3	11.9

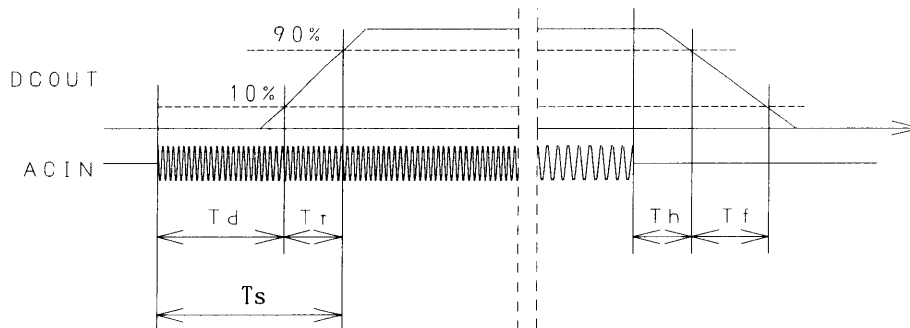




Model	LDA300W-12
Item	Ambient Temperature Drift 周囲温度変動
Object	+12V27A

Testing Circuitry Figure A

1. Graph

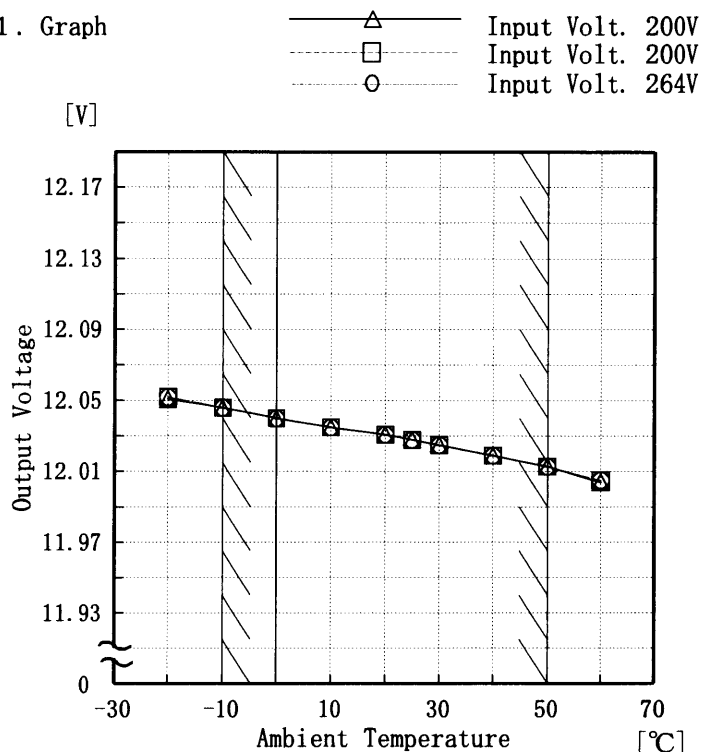

Load 100%

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

2. Values


Temperature [°C]	Input Volt. 200[V]	Input Volt. 200[V]	Input Volt. 264[V]
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
-20	12.051	12.052	12.052
-10	12.046	12.046	12.046
0	12.040	12.040	12.040
10	12.035	12.035	12.035
20	12.031	12.031	12.031
25	12.028	12.028	12.028
30	12.025	12.025	12.025
40	12.019	12.019	12.019
50	12.013	12.013	12.013
60	12.004	12.005	12.005
-	-	-	-



Model	LDA300W-12
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧
Object	+12V27A

Testing Circuitry Figure A

1. Graph

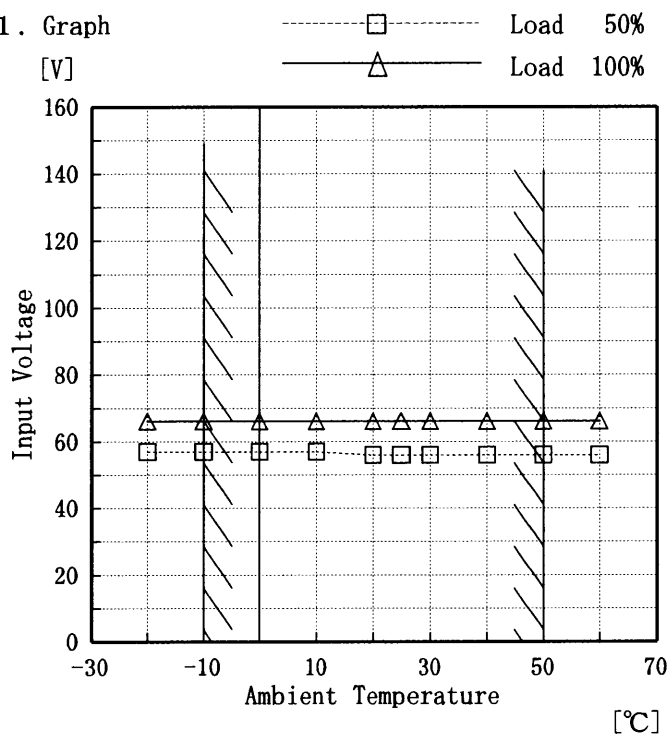

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]
-20	57	66
-10	57	66
0	57	66
10	57	66
20	56	66
25	56	66
30	56	66
40	56	66
50	56	66
60	56	66
—	—	—






Model	LDA300W-12
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)
Object	+12V27A

Testing Circuitry Figure A

1. Graph

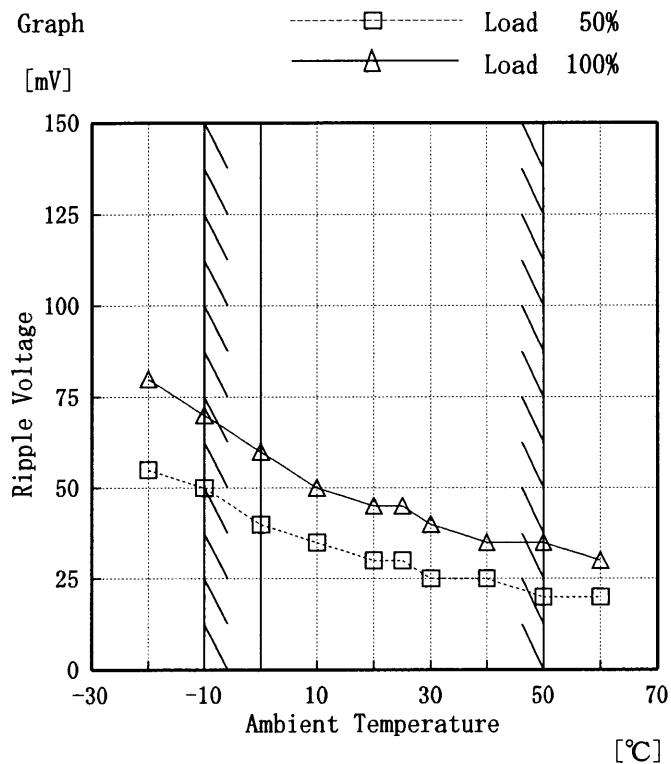

Input Volt. 170 V

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
-20	55	80
-10	50	70
0	40	60
10	35	50
20	30	45
25	30	45
30	25	40
40	25	35
50	20	35
60	20	30
—	—	—



<b>COSEL</b>																								
Model	LDA300W-12																							
Item	Time Lapse Drift 経時ドリフト	Temperature 25 °C Testing Circuitry Figure A																						
Object	+12V27A																							
<p>1. Graph</p> <p>[V]</p> <p style="text-align: center;">Time [H]</p> <p style="text-align: center;">Input Volt. 200V Load 100%</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>12.033</td></tr> <tr><td>0.5</td><td>12.030</td></tr> <tr><td>1.0</td><td>12.030</td></tr> <tr><td>2.0</td><td>12.030</td></tr> <tr><td>3.0</td><td>12.030</td></tr> <tr><td>4.0</td><td>12.030</td></tr> <tr><td>5.0</td><td>12.030</td></tr> <tr><td>6.0</td><td>12.030</td></tr> <tr><td>7.0</td><td>12.030</td></tr> <tr><td>8.0</td><td>12.030</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	12.033	0.5	12.030	1.0	12.030	2.0	12.030	3.0	12.030	4.0	12.030	5.0	12.030	6.0	12.030	7.0	12.030	8.0	12.030
Time since start [H]	Output Voltage [V]																							
0.0	12.033																							
0.5	12.030																							
1.0	12.030																							
2.0	12.030																							
3.0	12.030																							
4.0	12.030																							
5.0	12.030																							
6.0	12.030																							
7.0	12.030																							
8.0	12.030																							



Model		LDA300W-12	Testing Circuitry Figure A
Item	Output Voltage Accuracy	定電圧精度	
Object	+12V27A		

Output Voltage Accuracy

This is defined as the maximum value of the output voltage regulation load, temperature and input voltage vary at random in the range as specified below.

Temperature : -10~50 °C

Input Voltage : 200~264 V

Load Current : 0~27 A

\* Output Voltage Accuracy =  $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage})/2$

$$\text{Output Voltage Accuracy (Ration)} = \frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

定電圧精度

温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -10~50 °C

入力電圧 200~264 V

負過電流 0~27 A

\* 定電圧精度(変動値) =  $\pm(\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

$$\text{定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	-10	264	0	12.046	±16	±0.137
Minimum Voltage	50	200	27	12.013		



Model		LDA300W-12	Testing Circuitry Figure A
Item		Condensation 結露特性	
Object		+12V27A	

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 45%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度45%RHの状態におき結露させ、その電気的特性の測定を3度行い、異常のないことを確認する。

2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50%	1	12.03	40	60
	2	12.03	40	60
	3	12.03	40	60
Load 100%	1	12.03	40	60
	2	12.03	40	60
	3	12.03	40	60

Input Volt. 200 V



Model		LDA300W-12	Testing Circuitry Figure B
Item		Leakage Current 漏洩電流	
Object		+12V27A	

1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DENTORI	—	—	—
(B) UL	—	—	—
(C) CSA	—	—	—

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 220 [V]	Input Volt. 264 [V]
(D) VDE	0.32	0.37	0.52

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力 of 両相について測定し、その大きい方を漏洩電流測定値とする。

Load 100 %



Model		LDA300W-12	Testing Circuitry Figure C
Item		Line Noise Tolerance 入力雑音耐量	
Object		+12V27A	

1. Results

Pulse Width [n S]	MODE	Operating Point of Overvoltage Protection [V] 過電圧保護動作値	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	15.64	no regulation
	NORMAL	15.64	no regulation
1000	COMMON	15.64	no regulation
	NORMAL	15.64	no regulation

Conditions

Input Voltage :200 V  
 Pulse Voltage :2000 V  
 Pulse Cycle :10 mS  
 Pulse Input Duration:1 min. or more  
 Load :100 %



Model	LDA300W-12
Item	Conducted Emission 雑音端子電圧
Object	+12V27A

Testing Circuitry Figure D

1. Graph



Remarks

Input Volt. 240 V  
Load 100 %

Note: Slanted line shows the range of Tolerance.

(注)斜線は許容値を示す。

NO	Standards	Standards Complied	Frequency [MHz]	Tolerance [dB/μV]
1	FCC Class A		0.45~1.6	60
			1.6~30	69.5
2	FCC Class B		0.45~30	48
3	VCCI -1		0.15~0.5	79
			0.5~30	73
4	VCCI -2		0.15~0.5	66-56
			0.5~5	56
			5~30	60
5	CISPR 22 Class A (EN55022)		0.15~0.5	79
			0.5~30	73
6	CISPR 22 Class B (EN55022)	○	0.15~0.5	66-56
			0.5~5	56
			5~30	60

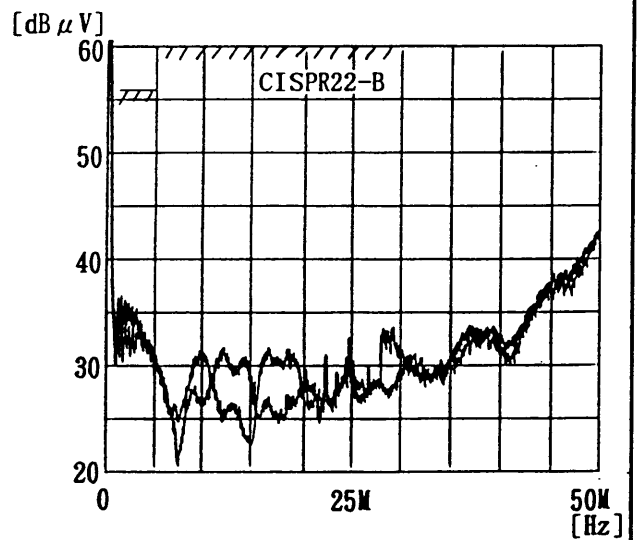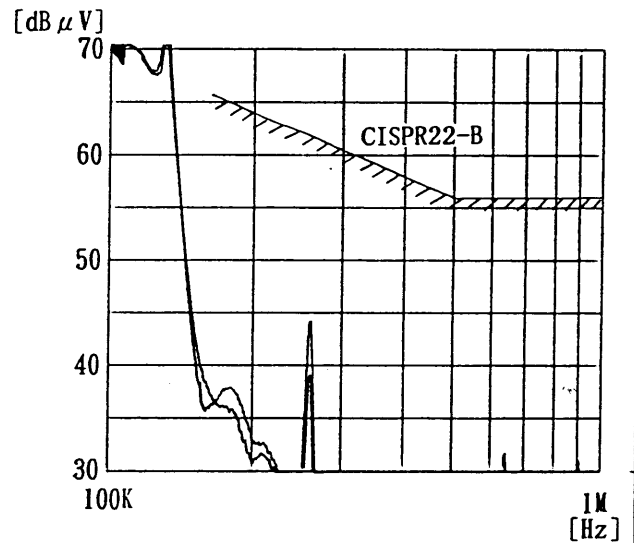

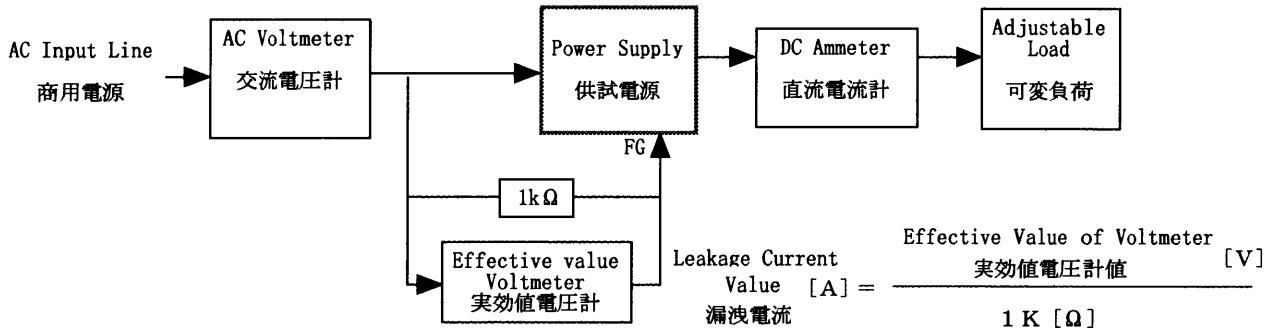
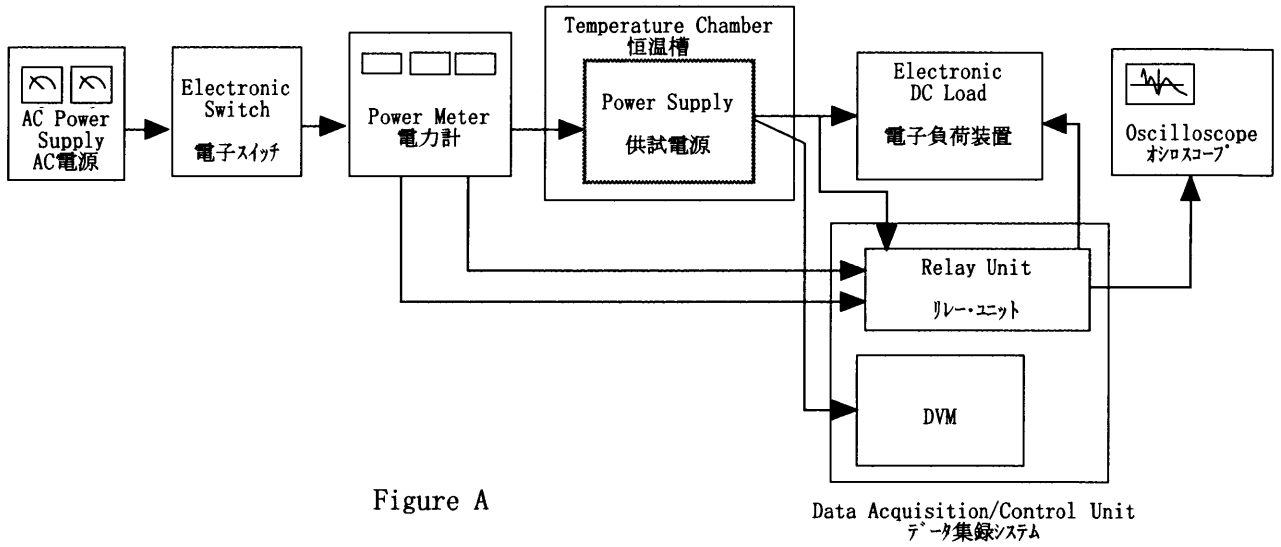


Figure B (DENTORI)

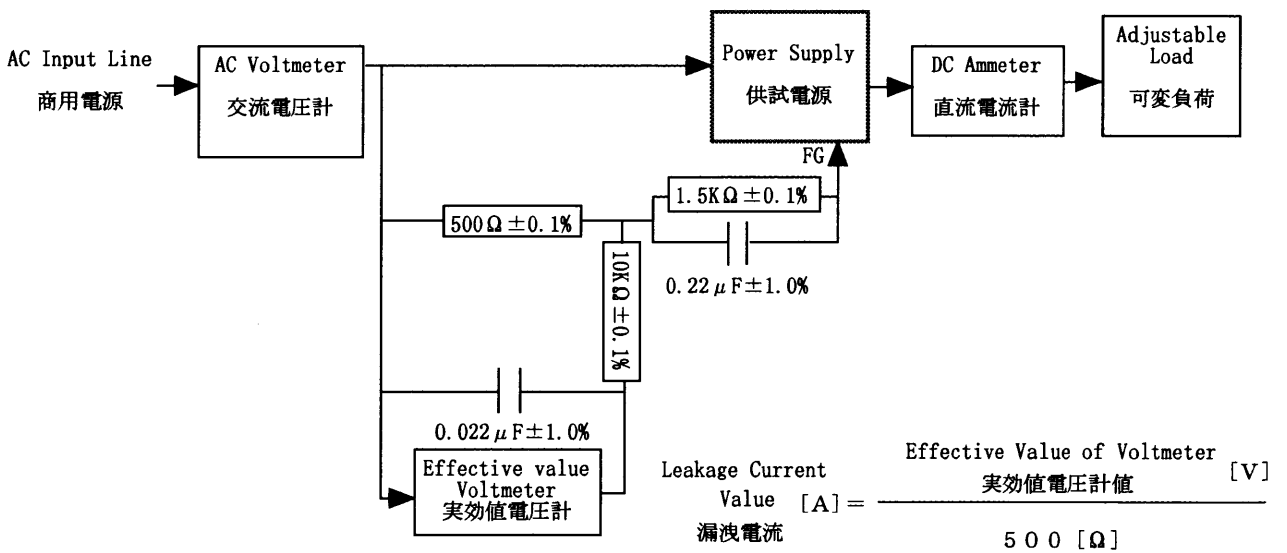


Figure B (UL, CSA, VDE)



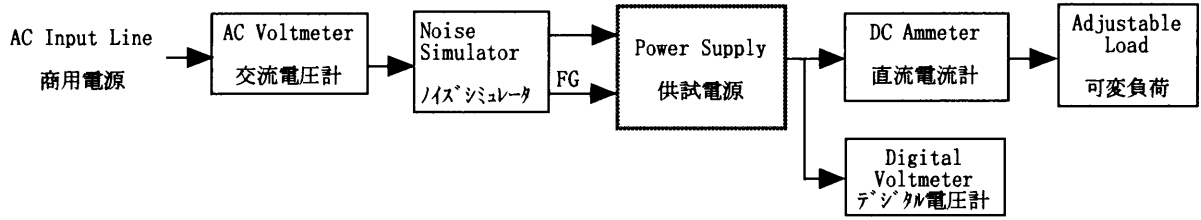


Figure C

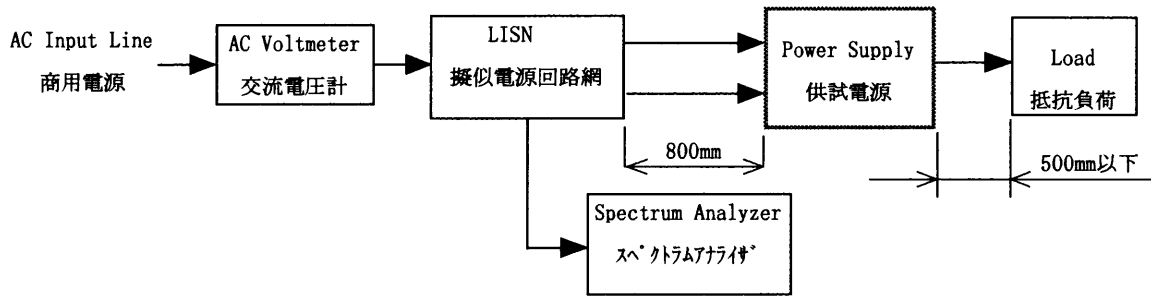


Figure D

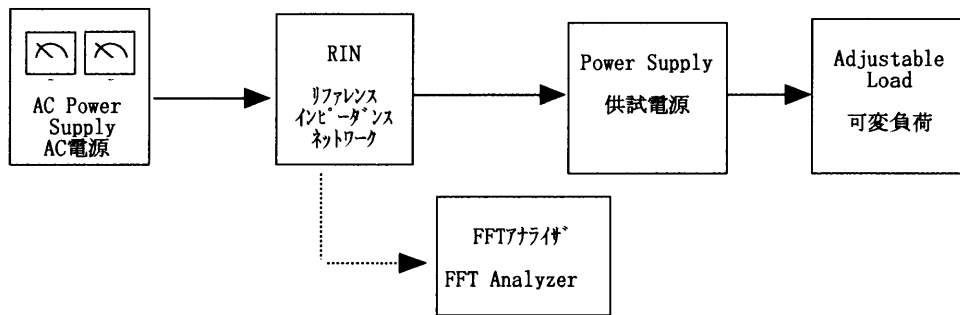


Figure E