



TEST DATA OF LDA75F-15
(200V INPUT)

Regulated DC Power Supply

Aug. 20. 1999

Approved by : H. Yamaguchi
Design Manager

Prepared by : J. Asano
Design Engineer

コーセル株式会社
COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Input Current (by Load Current)	2
入力電流 (負荷特性)	
3. Input Power (by Load Current)	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage)	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current)	5
効率 (負荷特性)	
6. Hold-Up Time	6
出力保持時間	
7. Instantaneous Interruption Compensation	7
瞬時停電保障	
8. Load Regulation	8
静的負荷変動	
9. Ripple Voltage (by Load Current)	9
リップル電圧 (負荷特性)	
10. Ripple-Noise	10
リップルノイズ	
11. Overcurrent Protection	11
過電流保護	
12. Overvoltage Protection	12
過電圧保護	
13. Inrush Current	13
突入電流	
14. Dynamic Load Responce	14
動的負荷変動	
15. Rise and Fall Time	15
立上り、立下がり時間	
16. Ambient Temperature Drift	16
周囲温度変動	
17. Minimum Input Voltage for Regulated Output Voltage .	17
最低レギュレーション電圧	
18. Ripple Voltage (by Ambient Temperature)	18
リップル電圧 (周囲温度特性)	
19. Time Lapse Drift	19
経時ドリフト	
20. Output Voltage Accuracy	20
定電圧精度	
21. Condensation	21
結露特性	
22. Leakage Current	22
漏洩電流	
23. Line Noise Tolerance	23
入力雑音耐量	
24. Conducted Emission	24
雑音端子電圧	
25. Figure of Testing Circuitry	25
測定回路図	

(Final Page 26)

COSEL

Model		LDA75F-15	Temperature	25°C																																
Item		Line Regulation 静的入力変動	Testing Circuitry	Figure A																																
Object		+15.0V5A																																		
1. Graph		<div style="display: flex; justify-content: space-around;"> <div>□ Load 50%</div> <div>△ Load 100%</div> </div>	2. Values																																	
			<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>150</td><td>15.093</td><td>15.090</td></tr> <tr><td>160</td><td>15.093</td><td>15.090</td></tr> <tr><td>170</td><td>15.093</td><td>15.090</td></tr> <tr><td>180</td><td>15.093</td><td>15.090</td></tr> <tr><td>200</td><td>15.093</td><td>15.090</td></tr> <tr><td>220</td><td>15.093</td><td>15.090</td></tr> <tr><td>240</td><td>15.092</td><td>15.090</td></tr> <tr><td>264</td><td>15.092</td><td>15.090</td></tr> <tr><td>280</td><td>15.092</td><td>15.090</td></tr> </tbody> </table>		Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	150	15.093	15.090	160	15.093	15.090	170	15.093	15.090	180	15.093	15.090	200	15.093	15.090	220	15.093	15.090	240	15.092	15.090	264	15.092	15.090	280	15.092	15.090
Input Voltage [V]	Output Voltage [V]																																			
	Load 50%	Load 100%																																		
150	15.093	15.090																																		
160	15.093	15.090																																		
170	15.093	15.090																																		
180	15.093	15.090																																		
200	15.093	15.090																																		
220	15.093	15.090																																		
240	15.092	15.090																																		
264	15.092	15.090																																		
280	15.092	15.090																																		
Note: Slanted line shows the range of the rated input voltage.																																				
(注)斜線は定格入力電圧範囲を示す。																																				



Model LDA75F-15		Temperature 25°C																																																							
Item Input Current (by Load Current) 入力電流 (負荷特性)		Testing Circuitry Figure A																																																							
Output																																																									
<p>1. Graph</p> <p>—△— Input Volt. 170V —□— Input Volt. 200V —○— Input Volt. 264V</p> <p>Note: Slanted line shows the range of the rated load current</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.070</td><td>0.073</td><td>0.076</td></tr> <tr><td>0.8</td><td>0.240</td><td>0.226</td><td>0.209</td></tr> <tr><td>1.6</td><td>0.387</td><td>0.354</td><td>0.312</td></tr> <tr><td>2.4</td><td>0.540</td><td>0.488</td><td>0.418</td></tr> <tr><td>3.2</td><td>0.697</td><td>0.624</td><td>0.526</td></tr> <tr><td>4.0</td><td>0.858</td><td>0.764</td><td>0.637</td></tr> <tr><td>4.8</td><td>1.025</td><td>0.911</td><td>0.754</td></tr> <tr><td>5.0</td><td>1.069</td><td>0.949</td><td>0.785</td></tr> <tr><td>5.5</td><td>1.168</td><td>1.038</td><td>0.856</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Load Current [A]	Input Current [A]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.0	0.070	0.073	0.076	0.8	0.240	0.226	0.209	1.6	0.387	0.354	0.312	2.4	0.540	0.488	0.418	3.2	0.697	0.624	0.526	4.0	0.858	0.764	0.637	4.8	1.025	0.911	0.754	5.0	1.069	0.949	0.785	5.5	1.168	1.038	0.856	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Current [A]																																																								
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																						
0.0	0.070	0.073	0.076																																																						
0.8	0.240	0.226	0.209																																																						
1.6	0.387	0.354	0.312																																																						
2.4	0.540	0.488	0.418																																																						
3.2	0.697	0.624	0.526																																																						
4.0	0.858	0.764	0.637																																																						
4.8	1.025	0.911	0.754																																																						
5.0	1.069	0.949	0.785																																																						
5.5	1.168	1.038	0.856																																																						
—	—	—	—																																																						
—	—	—	—																																																						
—	—	—	—																																																						



Model		LDA75F-15		Temperature	25°C																																																							
Item		Input Power (by Load Current) 入力電力 (負荷特性)		Testing Circuitry	Figure A																																																							
Output		—————																																																										
1. Graph			2. Values																																																									
<p> Input Volt. 170V Input Volt. 200V Input Volt. 264V </p>			<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 170 [V]</th> <th>Input Volt. 200 [V]</th> <th>Input Volt. 264 [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>3.80</td><td>4.50</td><td>6.00</td></tr> <tr><td>0.8</td><td>18.80</td><td>20.00</td><td>23.00</td></tr> <tr><td>1.6</td><td>32.60</td><td>33.80</td><td>36.80</td></tr> <tr><td>2.4</td><td>46.20</td><td>47.40</td><td>50.40</td></tr> <tr><td>3.2</td><td>59.70</td><td>60.80</td><td>63.80</td></tr> <tr><td>4.0</td><td>73.70</td><td>74.60</td><td>77.40</td></tr> <tr><td>4.8</td><td>88.30</td><td>89.20</td><td>91.80</td></tr> <tr><td>5.0</td><td>91.70</td><td>92.50</td><td>95.10</td></tr> <tr><td>5.5</td><td>100.70</td><td>101.50</td><td>104.00</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Input Power [W]			Input Volt. 170 [V]	Input Volt. 200 [V]	Input Volt. 264 [V]	0.0	3.80	4.50	6.00	0.8	18.80	20.00	23.00	1.6	32.60	33.80	36.80	2.4	46.20	47.40	50.40	3.2	59.70	60.80	63.80	4.0	73.70	74.60	77.40	4.8	88.30	89.20	91.80	5.0	91.70	92.50	95.10	5.5	100.70	101.50	104.00	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Power [W]																																																											
	Input Volt. 170 [V]	Input Volt. 200 [V]	Input Volt. 264 [V]																																																									
0.0	3.80	4.50	6.00																																																									
0.8	18.80	20.00	23.00																																																									
1.6	32.60	33.80	36.80																																																									
2.4	46.20	47.40	50.40																																																									
3.2	59.70	60.80	63.80																																																									
4.0	73.70	74.60	77.40																																																									
4.8	88.30	89.20	91.80																																																									
5.0	91.70	92.50	95.10																																																									
5.5	100.70	101.50	104.00																																																									
—	—	—	—																																																									
—	—	—	—																																																									
—	—	—	—																																																									
<p>Note: Slanted line shows the range of the rated load current</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>																																																												



Model		LDA75F-15		Temperature		25°C																																	
Item		Efficiency 効率		Testing Circuitry		Figure A																																	
Object																																							
1. Graph				2. Values																																			
<p>□ Load 50% △ Load 100%</p>				<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>150</td><td>80.7</td><td>83.6</td></tr> <tr><td>160</td><td>80.2</td><td>83.4</td></tr> <tr><td>170</td><td>79.7</td><td>83.2</td></tr> <tr><td>180</td><td>78.8</td><td>82.9</td></tr> <tr><td>200</td><td>77.5</td><td>82.3</td></tr> <tr><td>220</td><td>75.9</td><td>81.5</td></tr> <tr><td>240</td><td>74.3</td><td>80.8</td></tr> <tr><td>264</td><td>72.9</td><td>80.0</td></tr> <tr><td>280</td><td>71.5</td><td>79.1</td></tr> </tbody> </table>				Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	150	80.7	83.6	160	80.2	83.4	170	79.7	83.2	180	78.8	82.9	200	77.5	82.3	220	75.9	81.5	240	74.3	80.8	264	72.9	80.0	280	71.5	79.1
Input Voltage [V]	Efficiency [%]																																						
	Load 50%	Load 100%																																					
150	80.7	83.6																																					
160	80.2	83.4																																					
170	79.7	83.2																																					
180	78.8	82.9																																					
200	77.5	82.3																																					
220	75.9	81.5																																					
240	74.3	80.8																																					
264	72.9	80.0																																					
280	71.5	79.1																																					
<p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>																																							



Model		LDA75F-15	Temperature		25°C																																																							
Item		Efficiency (by Load Current) 効率 (負荷電流特性)	Testing Circuitry		Figure A																																																							
Output		—————																																																										
1. Graph			2. Values																																																									
<p> Input Volt. 170V Input Volt. 200V Input Volt. 264V </p>			<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 170 [V]</th> <th>Input Volt. 200 [V]</th> <th>Input Volt. 264 [V]</th> </tr> </thead> <tbody> <tr><td>0.8</td><td>65.8</td><td>61.9</td><td>54.1</td></tr> <tr><td>1.6</td><td>75.6</td><td>72.9</td><td>67.1</td></tr> <tr><td>2.4</td><td>79.5</td><td>77.4</td><td>72.9</td></tr> <tr><td>3.2</td><td>81.3</td><td>79.9</td><td>76.1</td></tr> <tr><td>4.0</td><td>82.3</td><td>81.2</td><td>78.3</td></tr> <tr><td>4.8</td><td>82.8</td><td>82.0</td><td>79.7</td></tr> <tr><td>5.0</td><td>82.9</td><td>82.2</td><td>80.0</td></tr> <tr><td>5.5</td><td>83.1</td><td>82.4</td><td>80.4</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Efficiency [%]			Input Volt. 170 [V]	Input Volt. 200 [V]	Input Volt. 264 [V]	0.8	65.8	61.9	54.1	1.6	75.6	72.9	67.1	2.4	79.5	77.4	72.9	3.2	81.3	79.9	76.1	4.0	82.3	81.2	78.3	4.8	82.8	82.0	79.7	5.0	82.9	82.2	80.0	5.5	83.1	82.4	80.4	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Efficiency [%]																																																											
	Input Volt. 170 [V]	Input Volt. 200 [V]	Input Volt. 264 [V]																																																									
0.8	65.8	61.9	54.1																																																									
1.6	75.6	72.9	67.1																																																									
2.4	79.5	77.4	72.9																																																									
3.2	81.3	79.9	76.1																																																									
4.0	82.3	81.2	78.3																																																									
4.8	82.8	82.0	79.7																																																									
5.0	82.9	82.2	80.0																																																									
5.5	83.1	82.4	80.4																																																									
—	—	—	—																																																									
—	—	—	—																																																									
—	—	—	—																																																									
—	—	—	—																																																									
<p>Note: Slanted line shows the range of the rated load current</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>																																																												



Model		LDA75F-15	Temperature	25°C																																
Item		Hold-Up Time 出力保持時間	Testing Circuitry	Figure A																																
Object		+15.0V5A																																		
1. Graph		<div style="display: flex; justify-content: space-around;"> □ Load 50% △ Load 100% </div>	2. Values																																	
			<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Hold-Up Time [mS]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>150</td><td>144</td><td>72</td></tr> <tr><td>160</td><td>167</td><td>83</td></tr> <tr><td>170</td><td>191</td><td>96</td></tr> <tr><td>180</td><td>217</td><td>109</td></tr> <tr><td>200</td><td>272</td><td>138</td></tr> <tr><td>220</td><td>333</td><td>170</td></tr> <tr><td>240</td><td>399</td><td>205</td></tr> <tr><td>264</td><td>486</td><td>251</td></tr> <tr><td>280</td><td>548</td><td>285</td></tr> </tbody> </table>		Input Voltage [V]	Hold-Up Time [mS]		Load 50%	Load 100%	150	144	72	160	167	83	170	191	96	180	217	109	200	272	138	220	333	170	240	399	205	264	486	251	280	548	285
Input Voltage [V]	Hold-Up Time [mS]																																			
	Load 50%	Load 100%																																		
150	144	72																																		
160	167	83																																		
170	191	96																																		
180	217	109																																		
200	272	138																																		
220	333	170																																		
240	399	205																																		
264	486	251																																		
280	548	285																																		
<p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</p> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>																																				



Model		LDA75F-15		Temperature		25°C																																																				
Item		Instantaneous Interruption Compensation 瞬時停電保障		Testing Circuitry		Figure A																																																				
Object		+15.0V5A																																																								
1. Graph				2. Values																																																						
<p> △ Input Volt. 170 V □ Input Volt. 200 V ○ Input Volt. 264 V </p>				<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Time [mS]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>0.8</td><td>535</td><td>746</td><td>968</td></tr> <tr><td>1.6</td><td>294</td><td>414</td><td>585</td></tr> <tr><td>2.4</td><td>200</td><td>287</td><td>511</td></tr> <tr><td>3.2</td><td>151</td><td>215</td><td>378</td></tr> <tr><td>4.0</td><td>121</td><td>173</td><td>315</td></tr> <tr><td>4.8</td><td>98</td><td>145</td><td>264</td></tr> <tr><td>5.0</td><td>96</td><td>138</td><td>254</td></tr> <tr><td>5.5</td><td>86</td><td>124</td><td>230</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Load Current [A]	Time [mS]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.0	—	—	—	0.8	535	746	968	1.6	294	414	585	2.4	200	287	511	3.2	151	215	378	4.0	121	173	315	4.8	98	145	264	5.0	96	138	254	5.5	86	124	230	—	—	—	—	—	—	—	—
Load Current [A]	Time [mS]																																																									
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																							
0.0	—	—	—																																																							
0.8	535	746	968																																																							
1.6	294	414	585																																																							
2.4	200	287	511																																																							
3.2	151	215	378																																																							
4.0	121	173	315																																																							
4.8	98	145	264																																																							
5.0	96	138	254																																																							
5.5	86	124	230																																																							
—	—	—	—																																																							
—	—	—	—																																																							
<p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</p> <p>Note: Slanted line shows the range of the rated load current.</p>																																																										
<p>瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間をいう。</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>																																																										





Model		LDA75F-15	Temperature		25°C																																															
Item		Load Regulation 静的負荷変動	Testing Circuitry		Figure A																																															
Object		+15.0V5A																																																		
<p>1. Graph</p> <p>—△— Input Volt. 170 V □ Input Volt. 200 V ○ Input Volt. 264 V</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>			<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>15.097</td><td>15.097</td><td>15.097</td></tr> <tr><td>0.8</td><td>15.096</td><td>15.096</td><td>15.096</td></tr> <tr><td>1.6</td><td>15.095</td><td>15.095</td><td>15.094</td></tr> <tr><td>2.4</td><td>15.094</td><td>15.094</td><td>15.094</td></tr> <tr><td>3.2</td><td>15.093</td><td>15.093</td><td>15.093</td></tr> <tr><td>4.0</td><td>15.092</td><td>15.092</td><td>15.092</td></tr> <tr><td>4.8</td><td>15.091</td><td>15.091</td><td>15.091</td></tr> <tr><td>5.0</td><td>15.091</td><td>15.091</td><td>15.091</td></tr> <tr><td>5.5</td><td>15.090</td><td>15.090</td><td>15.090</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Output Voltage [V]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.0	15.097	15.097	15.097	0.8	15.096	15.096	15.096	1.6	15.095	15.095	15.094	2.4	15.094	15.094	15.094	3.2	15.093	15.093	15.093	4.0	15.092	15.092	15.092	4.8	15.091	15.091	15.091	5.0	15.091	15.091	15.091	5.5	15.090	15.090	15.090	—	—	—	—
Load Current [A]	Output Voltage [V]																																																			
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																	
0.0	15.097	15.097	15.097																																																	
0.8	15.096	15.096	15.096																																																	
1.6	15.095	15.095	15.094																																																	
2.4	15.094	15.094	15.094																																																	
3.2	15.093	15.093	15.093																																																	
4.0	15.092	15.092	15.092																																																	
4.8	15.091	15.091	15.091																																																	
5.0	15.091	15.091	15.091																																																	
5.5	15.090	15.090	15.090																																																	
—	—	—	—																																																	



<p>Model LDA75F-15</p>		<p>Temperature 25°C Testing Circuitry Figure A</p>																																						
<p>Item Ripple Voltage (by Load Current) リップル電圧 (負荷電流特性)</p>																																								
<p>Object +15.0V5A</p>																																								
<p>1. Graph</p> <p>[mV]</p> <p>□ Input Volt. 170V △ Input Volt. 264V</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 170 [V]</th> <th>Input Volt. 264 [V]</th> </tr> <tr> <th>Ripple Output Volt. [mV]</th> <th>Ripple Output Volt. [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>10</td><td>10</td></tr> <tr><td>0.60</td><td>25</td><td>25</td></tr> <tr><td>1.20</td><td>25</td><td>25</td></tr> <tr><td>1.80</td><td>25</td><td>30</td></tr> <tr><td>2.40</td><td>25</td><td>30</td></tr> <tr><td>3.00</td><td>25</td><td>30</td></tr> <tr><td>3.60</td><td>25</td><td>30</td></tr> <tr><td>4.20</td><td>30</td><td>30</td></tr> <tr><td>4.80</td><td>30</td><td>30</td></tr> <tr><td>5.00</td><td>30</td><td>30</td></tr> <tr><td>5.50</td><td>30</td><td>30</td></tr> </tbody> </table>	Load Current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	0.00	10	10	0.60	25	25	1.20	25	25	1.80	25	30	2.40	25	30	3.00	25	30	3.60	25	30	4.20	30	30	4.80	30	30	5.00	30	30	5.50	30	30
Load Current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]																																						
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																						
0.00	10	10																																						
0.60	25	25																																						
1.20	25	25																																						
1.80	25	30																																						
2.40	25	30																																						
3.00	25	30																																						
3.60	25	30																																						
4.20	30	30																																						
4.80	30	30																																						
5.00	30	30																																						
5.50	30	30																																						
<p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップル電圧は、下図 p-p 値で示される。 (注) 斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line 入力商用周期 T2: Due to Switching スイッチング周期</p> <p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																								

COSEL

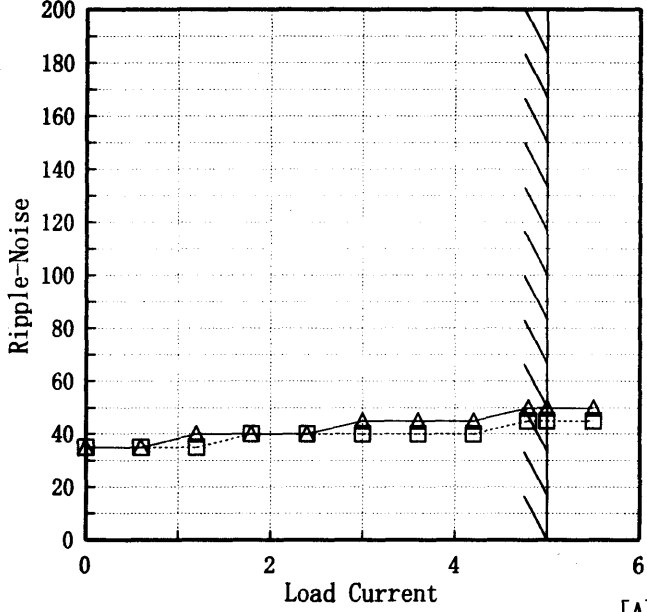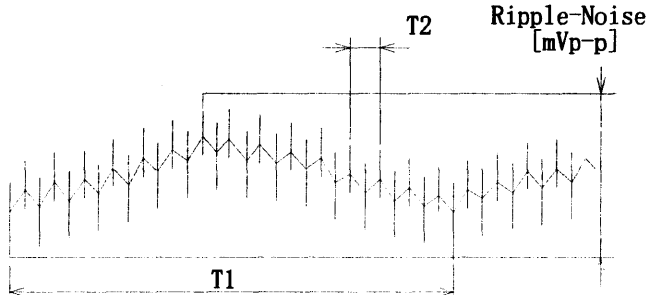Model		LDA75F-15	Temperature		25°C																																						
Item		Ripple-Noise リップルノイズ	Testing Circuitry		Figure A																																						
Object		+15.0V5A																																									
<p>1. Graph</p> <p>[mV]</p> <p>-----□----- Input Volt. 170V</p> <p>-----△----- Input Volt. 264V</p>  <p>Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p> <p>リップルノイズは、下図 p-p 値で示される。 (注) 斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line 入力商用周期</p> <p>T2: Due to Switching スイッチング周期</p>  <p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>			<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load current [A]</th> <th>Input Volt. 170 [V]</th> <th>Input Volt. 264 [V]</th> </tr> <tr> <th>Ripple-Noise [mV]</th> <th>Ripple-Noise [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>35</td><td>35</td></tr> <tr><td>0.60</td><td>35</td><td>35</td></tr> <tr><td>1.20</td><td>35</td><td>40</td></tr> <tr><td>1.80</td><td>40</td><td>40</td></tr> <tr><td>2.40</td><td>40</td><td>40</td></tr> <tr><td>3.00</td><td>40</td><td>45</td></tr> <tr><td>3.60</td><td>40</td><td>45</td></tr> <tr><td>4.20</td><td>40</td><td>45</td></tr> <tr><td>4.80</td><td>45</td><td>50</td></tr> <tr><td>5.00</td><td>45</td><td>50</td></tr> <tr><td>5.50</td><td>45</td><td>50</td></tr> </tbody> </table>			Load current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]	Ripple-Noise [mV]	Ripple-Noise [mV]	0.00	35	35	0.60	35	35	1.20	35	40	1.80	40	40	2.40	40	40	3.00	40	45	3.60	40	45	4.20	40	45	4.80	45	50	5.00	45	50	5.50	45	50
Load current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]																																									
	Ripple-Noise [mV]	Ripple-Noise [mV]																																									
0.00	35	35																																									
0.60	35	35																																									
1.20	35	40																																									
1.80	40	40																																									
2.40	40	40																																									
3.00	40	45																																									
3.60	40	45																																									
4.20	40	45																																									
4.80	45	50																																									
5.00	45	50																																									
5.50	45	50																																									

COSEL

Model LDA75F-15 Item Overcurrent Protection 過電流保護 Object +15.0V5A		Temperature 25°C Testing Circuitry Figure A																																																							
1. Graph [V] ●●●●●●●● Input Volt. 170 V ————— Input Volt. 200 V ————— Input Volt. 264 V 		2. Values <table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>15.00</td><td>6.85</td><td>6.88</td><td>6.98</td></tr> <tr><td>14.25</td><td>6.87</td><td>6.91</td><td>7.01</td></tr> <tr><td>13.50</td><td>6.90</td><td>6.94</td><td>7.04</td></tr> <tr><td>12.00</td><td>6.96</td><td>7.00</td><td>7.08</td></tr> <tr><td>10.50</td><td>7.02</td><td>7.04</td><td>7.13</td></tr> <tr><td>9.00</td><td>7.07</td><td>7.10</td><td>7.22</td></tr> <tr><td>7.50</td><td>7.11</td><td>7.13</td><td>7.26</td></tr> <tr><td>6.00</td><td>7.15</td><td>7.17</td><td>7.25</td></tr> <tr><td>4.50</td><td>7.17</td><td>7.21</td><td>7.24</td></tr> <tr><td>3.00</td><td>7.14</td><td>7.13</td><td>7.12</td></tr> <tr><td>1.50</td><td>6.89</td><td>6.77</td><td>6.58</td></tr> <tr><td>0.00</td><td>6.40</td><td>6.33</td><td>6.34</td></tr> </tbody> </table>	Output Voltage [V]	Load Current [A]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	15.00	6.85	6.88	6.98	14.25	6.87	6.91	7.01	13.50	6.90	6.94	7.04	12.00	6.96	7.00	7.08	10.50	7.02	7.04	7.13	9.00	7.07	7.10	7.22	7.50	7.11	7.13	7.26	6.00	7.15	7.17	7.25	4.50	7.17	7.21	7.24	3.00	7.14	7.13	7.12	1.50	6.89	6.77	6.58	0.00	6.40	6.33	6.34
Output Voltage [V]	Load Current [A]																																																								
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																						
15.00	6.85	6.88	6.98																																																						
14.25	6.87	6.91	7.01																																																						
13.50	6.90	6.94	7.04																																																						
12.00	6.96	7.00	7.08																																																						
10.50	7.02	7.04	7.13																																																						
9.00	7.07	7.10	7.22																																																						
7.50	7.11	7.13	7.26																																																						
6.00	7.15	7.17	7.25																																																						
4.50	7.17	7.21	7.24																																																						
3.00	7.14	7.13	7.12																																																						
1.50	6.89	6.77	6.58																																																						
0.00	6.40	6.33	6.34																																																						
Note: Slanted line shows the range of the rated load current. (注)斜線は定格負荷電流範囲を示す。																																																									




Model	LDA75F-15
Item	Overvoltage Protection 過電圧保護
Object	+15.0V5A

Testing Circuitry Figure A

1. Graph

Input Volt. 170 V
 Input Volt. 200 V
 Input Volt. 264 V

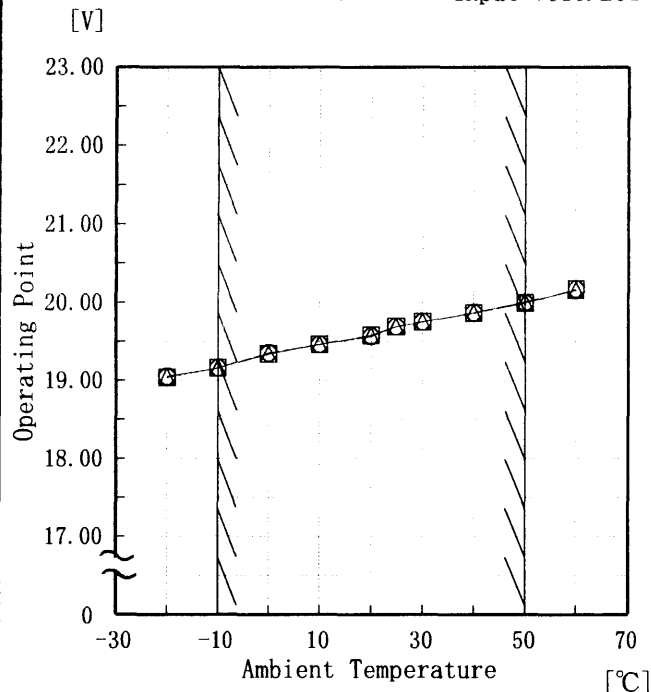

Load 0%

Note: Slanted line shows the range of the rated ambient temperature.


(注) 斜線は定格周囲温度範囲を示す。

2. Values


Ambient Temp. [°C]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
	Operating Point [V]		
-20	19.05	19.04	19.05
-10	19.16	19.16	19.16
0	19.34	19.34	19.35
10	19.46	19.46	19.46
20	19.58	19.58	19.57
25	19.69	19.69	19.69
30	19.75	19.75	19.75
40	19.87	19.86	19.87
50	20.00	19.99	19.99
60	20.16	20.17	20.17
—	—	—	—



Model		LDA75F-15	Temperature	25°C
Item		Inrush Current 突入電流	Testing Circuitry	Figure A
Object		_____		

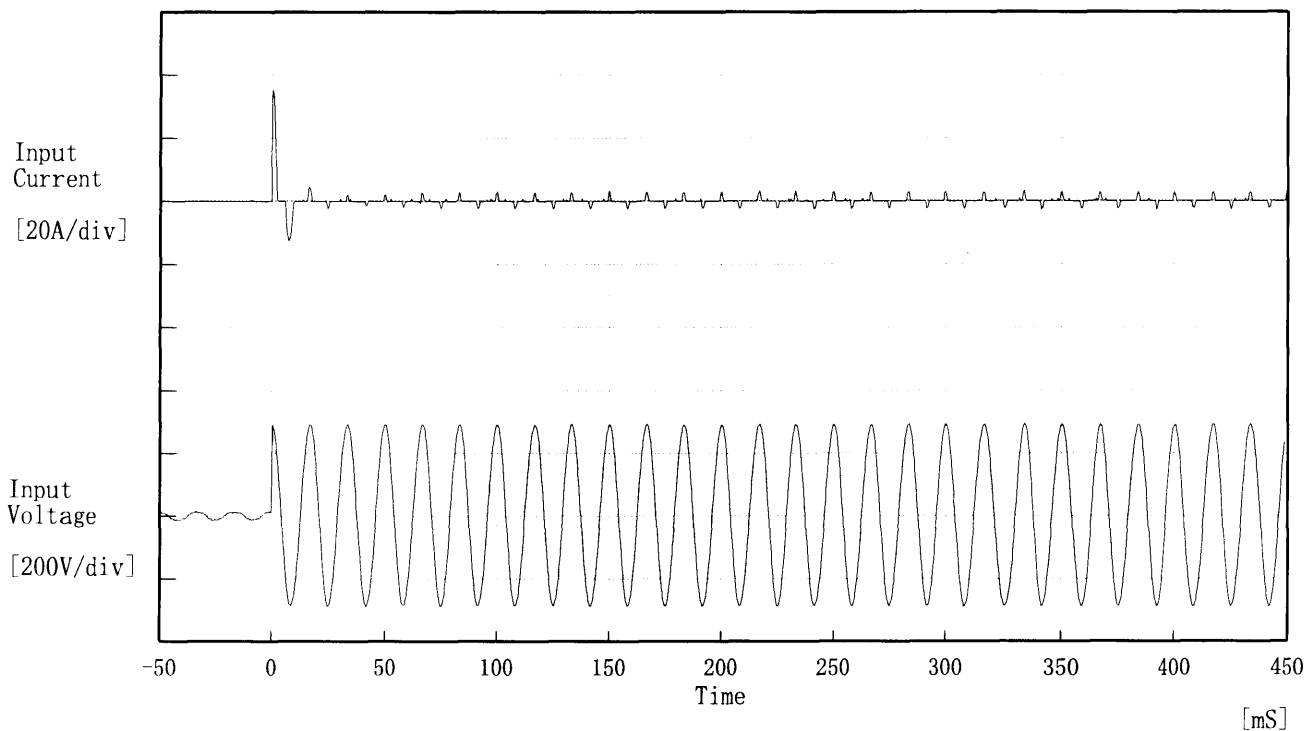


Input Voltage 200 V
 Frequency 60 Hz
 Load 100 %
 Inrush Current
 ① 35.14 [A]
 ② 3.14 [A]

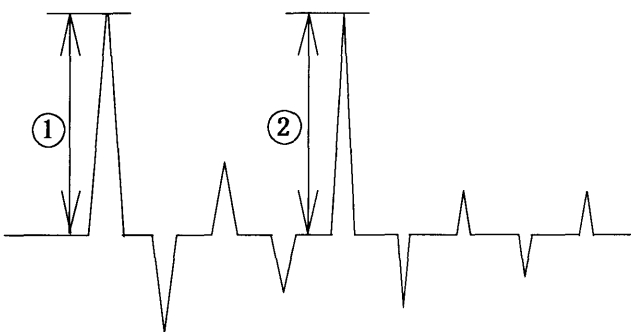



COSEL

Model	LDA75F-15	Temperature 25°C Testing Circuitry Figure A
Item	Dynamic Load Responce 動的負荷変動	
Object	+15.0V5A	



Input Volt. 200 V
Cycle 1000 mS



Load 0% ↔
Load 100 %

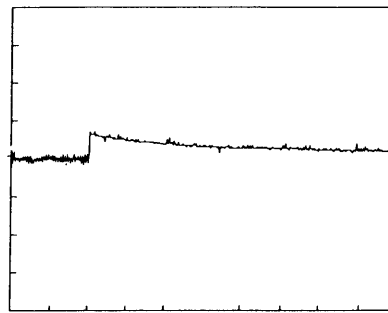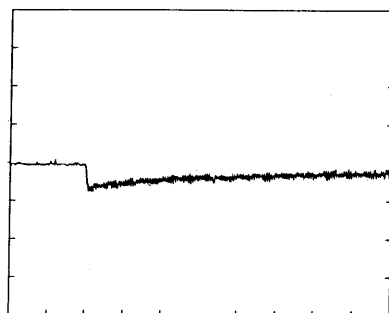

Load 0% ↔
Load 50 %

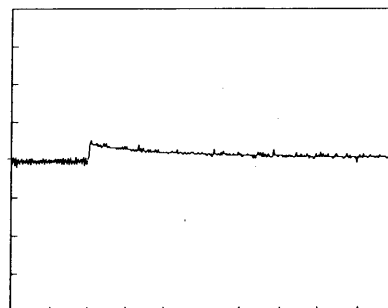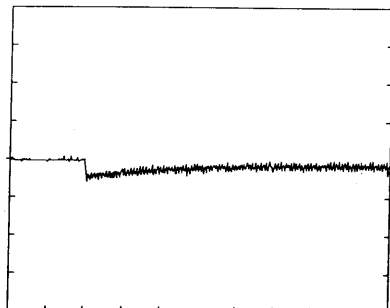

100 mV/div


10 mS/div

COSEL

Model	LDA75F-15	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+15.0V5A		

1. Graph


Input Volt. 170 V

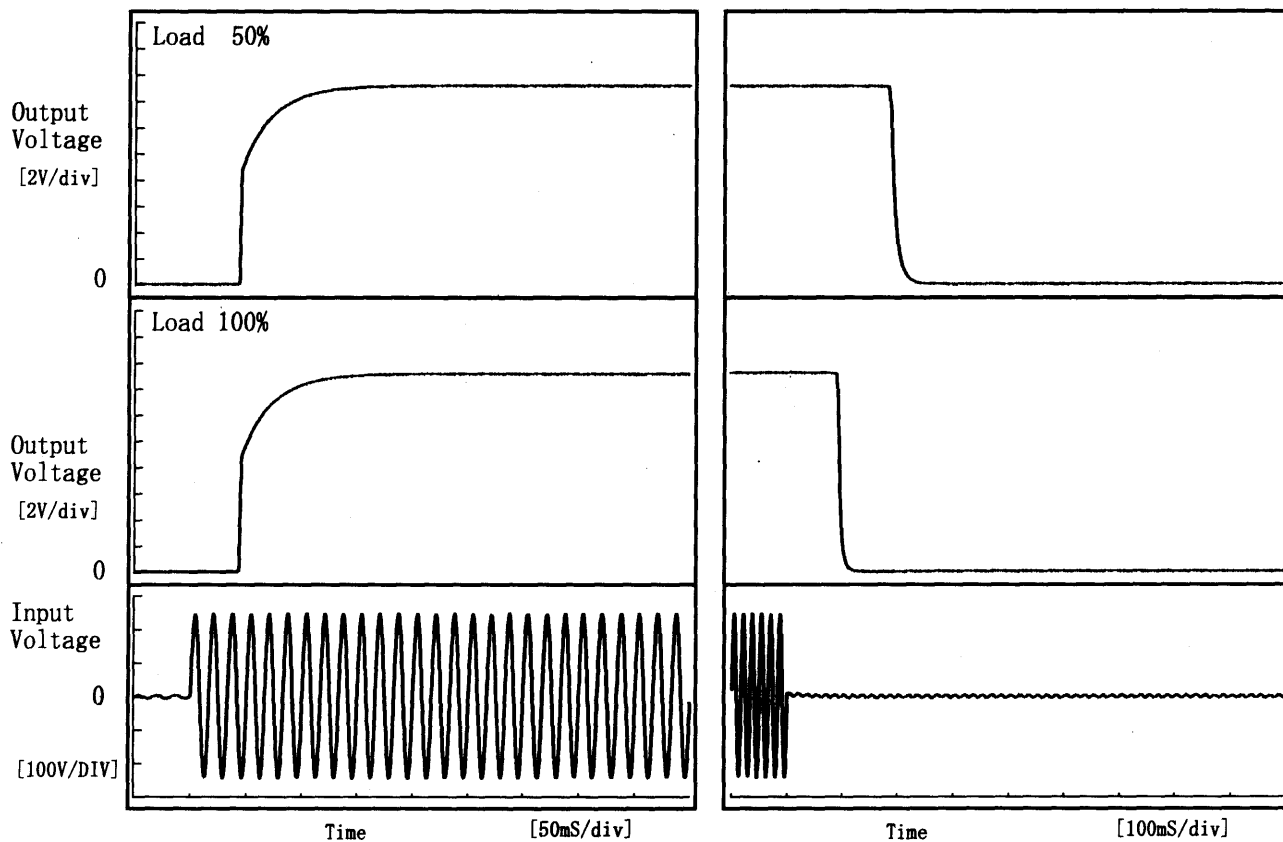

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	42.8	40.0	82.8	191.0	19.5
100 %	42.8	39.3	82.0	95.5	11.0

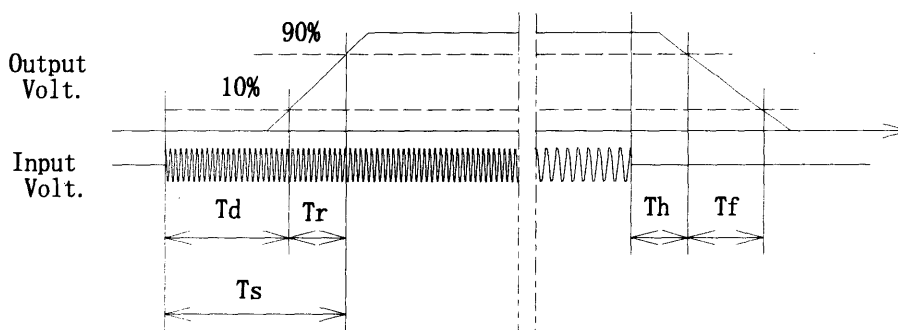




Model	LDA75F-15
Item	Ambient Temperature Drift 周囲温度変動
Object	+15.0V5A

Testing Circuitry Figure A

1. Graph

△ Input Volt. 170V
 □ Input Volt. 200V
 ○ Input Volt. 264V

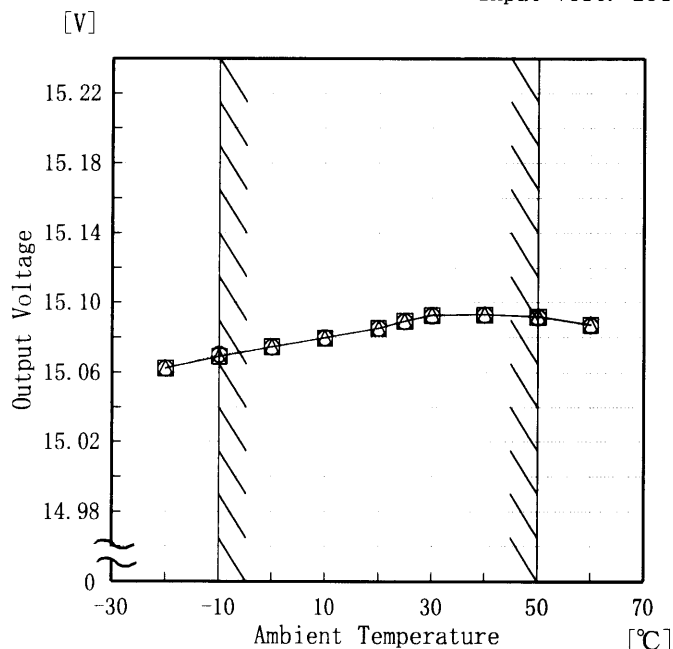

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

2. Values


Temperature [°C]	Output Voltage [V]		
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
-20	15.062	15.062	15.062
-10	15.069	15.069	15.070
0	15.074	15.074	15.074
10	15.080	15.080	15.080
20	15.085	15.085	15.085
25	15.090	15.089	15.089
30	15.093	15.093	15.092
40	15.093	15.093	15.093
50	15.092	15.092	15.092
60	15.087	15.087	15.087
—	—	—	—



Model	LDA75F-15
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧
Object	+15.0V5A

Testing Circuitry Figure A

1. Graph
 [V] □ Load 50%
 △ Load 100%

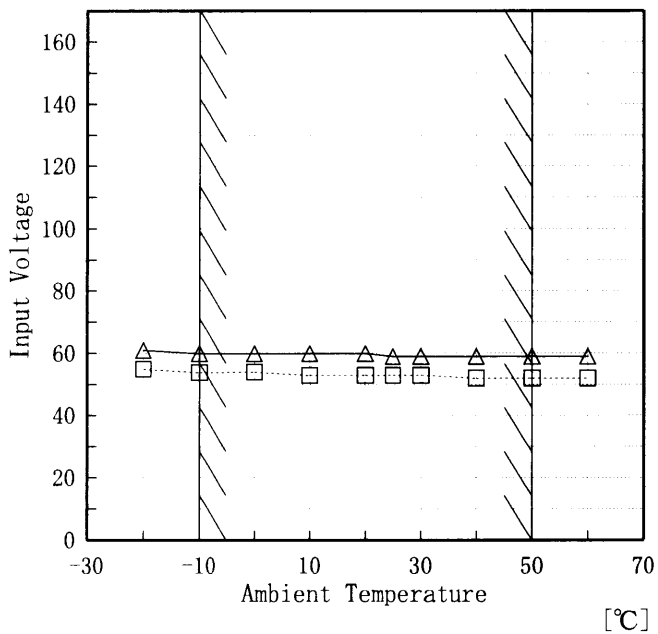

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-20	55	61
-10	54	60
0	54	60
10	53	60
20	53	60
25	53	59
30	53	59
40	52	59
50	52	59
60	52	59
—	—	—



Model		LDA75F-15																																								
Item		Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)	Testing Circuitry Figure A																																							
Object		+15.0V5A																																								
1. Graph		<div style="display: flex; justify-content: space-around;"> □ Load 50% △ Load 100% </div> <p style="text-align: center;">Input Volt. 200 V</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注)斜線は定格周囲温度範囲を示す。</p>	2. Values																																							
			<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temp. [°C]</th> <th>Load 50%</th> <th>Load 100%</th> </tr> <tr> <th>Ripple Output Volt. [mV]</th> <th>Ripple Output Volt. [mV]</th> </tr> </thead> <tbody> <tr><td>-20</td><td>70</td><td>70</td></tr> <tr><td>-10</td><td>55</td><td>55</td></tr> <tr><td>0</td><td>45</td><td>45</td></tr> <tr><td>10</td><td>40</td><td>40</td></tr> <tr><td>20</td><td>35</td><td>35</td></tr> <tr><td>25</td><td>30</td><td>30</td></tr> <tr><td>30</td><td>30</td><td>30</td></tr> <tr><td>40</td><td>25</td><td>25</td></tr> <tr><td>50</td><td>25</td><td>25</td></tr> <tr><td>60</td><td>20</td><td>25</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Ambient Temp. [°C]	Load 50%	Load 100%	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	-20	70	70	-10	55	55	0	45	45	10	40	40	20	35	35	25	30	30	30	30	30	40	25	25	50	25	25	60	20	25	—	—	—
Ambient Temp. [°C]	Load 50%	Load 100%																																								
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																								
-20	70	70																																								
-10	55	55																																								
0	45	45																																								
10	40	40																																								
20	35	35																																								
25	30	30																																								
30	30	30																																								
40	25	25																																								
50	25	25																																								
60	20	25																																								
—	—	—																																								



COSEL																								
Model	LDA75F-15																							
Item	Time Lapse Drift 経時ドリフト	Temperature 25°C Testing Circuitry Figure A																						
Object	+15.0V5A																							
<p>1. Graph</p> <p style="text-align: center;">Input Volt. 200V Load 100%</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>15.086</td></tr> <tr><td>0.5</td><td>15.085</td></tr> <tr><td>1.0</td><td>15.085</td></tr> <tr><td>2.0</td><td>15.085</td></tr> <tr><td>3.0</td><td>15.085</td></tr> <tr><td>4.0</td><td>15.085</td></tr> <tr><td>5.0</td><td>15.085</td></tr> <tr><td>6.0</td><td>15.085</td></tr> <tr><td>7.0</td><td>15.085</td></tr> <tr><td>8.0</td><td>15.085</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	15.086	0.5	15.085	1.0	15.085	2.0	15.085	3.0	15.085	4.0	15.085	5.0	15.085	6.0	15.085	7.0	15.085	8.0	15.085
Time since start [H]	Output Voltage [V]																							
0.0	15.086																							
0.5	15.085																							
1.0	15.085																							
2.0	15.085																							
3.0	15.085																							
4.0	15.085																							
5.0	15.085																							
6.0	15.085																							
7.0	15.085																							
8.0	15.085																							



COSEL		
Model	LDA75F-15	
Item	Output Voltage Accuracy 定電圧精度	Testing Circuitry Figure A
Object	+15.0V5A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -10~50 °C

Input Voltage : 170~264 V

Load Current : 0~5 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -10~50 °C

入力電圧 170~264 V

負荷電流 0~5 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy (Ration) [%]
Maximum Voltage	50	264	0	15.098	±15	±0.1
Minimum Voltage	-10	170	5	15.070		

COSEL

Model		LDA75F-15	Testing Circuitry Figure A												
Item		Condensation 結露特性													
Object		+15.0V5A													
<p>1. Condensation test</p> <p>Testing procedure is as follows.</p> <p>① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.</p> <p>② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.</p> <p>③ Testing electrical characteristics of the unit to confirm there be no fault.</p> <p>1. 結露特性試験</p> <p>入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。</p>															
2. Values															
<table border="1"> <thead> <tr> <th>Item</th> <th>Data</th> <th>Testing Conditions</th> </tr> </thead> <tbody> <tr> <td>Output Voltage [V]</td> <td>15.091</td> <td>Input Volt.: 200V, Load Current:5A</td> </tr> <tr> <td>Line Regulation [mV]</td> <td>4</td> <td>Input Volt.: 170~264V, Load Current:5A</td> </tr> <tr> <td>Load Regulation [mV]</td> <td>9</td> <td>Input Volt.: 200V, Load Current:0~5A</td> </tr> </tbody> </table>				Item	Data	Testing Conditions	Output Voltage [V]	15.091	Input Volt.: 200V, Load Current:5A	Line Regulation [mV]	4	Input Volt.: 170~264V, Load Current:5A	Load Regulation [mV]	9	Input Volt.: 200V, Load Current:0~5A
Item	Data	Testing Conditions													
Output Voltage [V]	15.091	Input Volt.: 200V, Load Current:5A													
Line Regulation [mV]	4	Input Volt.: 170~264V, Load Current:5A													
Load Regulation [mV]	9	Input Volt.: 200V, Load Current:0~5A													



Model		LDA75F-15	Temperature 25°C Testing Circuitry Figure B
Item		Leakage Current 漏洩電流	
Object		_____	

1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DENTORI	—	—	—
(B) IEC60950	—	—	—

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 230 [V]	Input Volt. 264 [V]
(B) IEC60950	0.31	0.40	0.46

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力 of 両相について測定し、その大きい方を漏洩電流測定値とする。



Model		LDA75F--15	Temperature 25°C Testing Circuitry Figure C
Item		Line Noise Tolerance 入力雑音耐量	
Object		+15.0V5A	

1. Results

Pulse Width [nS]	MODE	No protection failure should occur 保護回路の誤動作がない	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation
1000	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation

2. Conditions

Input Voltage : 200 V
 Pulse Voltage : 2000 V
 Pulse Cycle : 10 mS
 Pulse Input Duration : 1 min. or more
 Load : 100 %




Model		LDA75F-15	Temperature		25°C
Item		Conducted Emission 雑音端子電圧	Testing Circuitry		Figure D
Object					

1. Graph

Remarks

Input Volt. 230 V
Load 100 %

規格 1: [EN 55022] Class B(QP)
規格 2: [EN 55022] Class B(平均値)

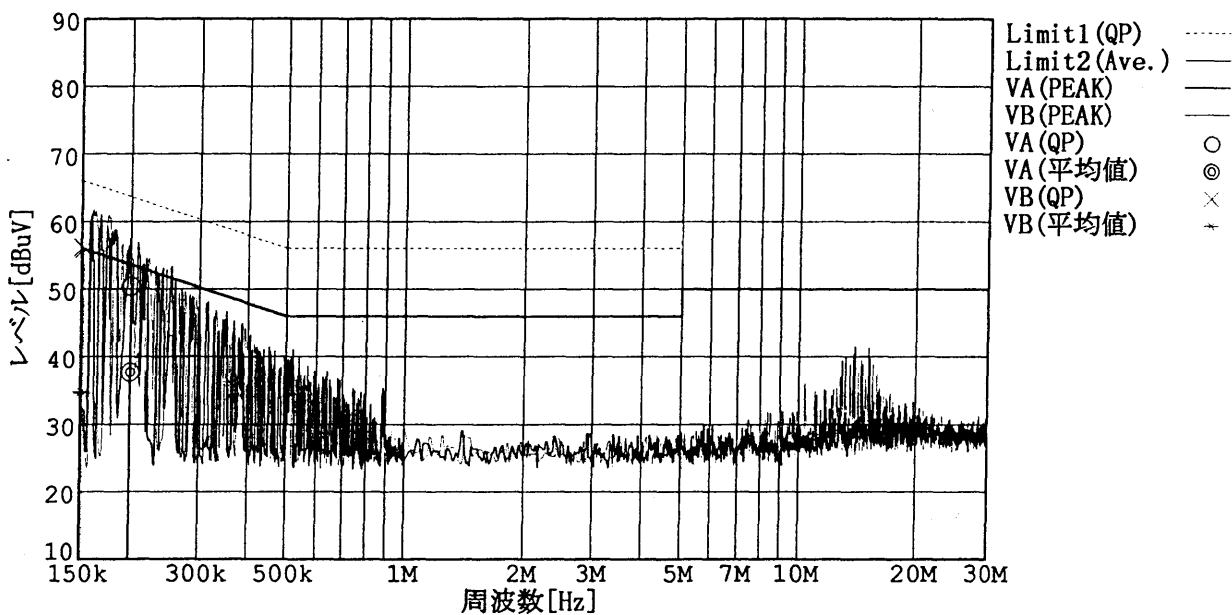

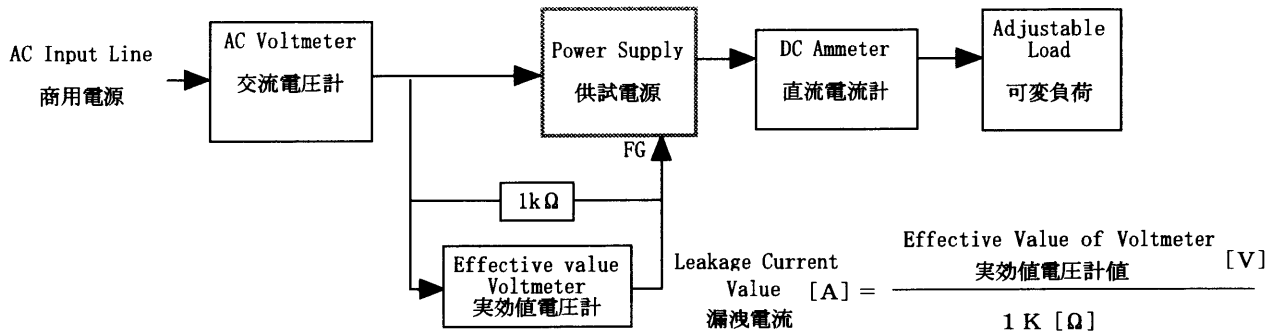
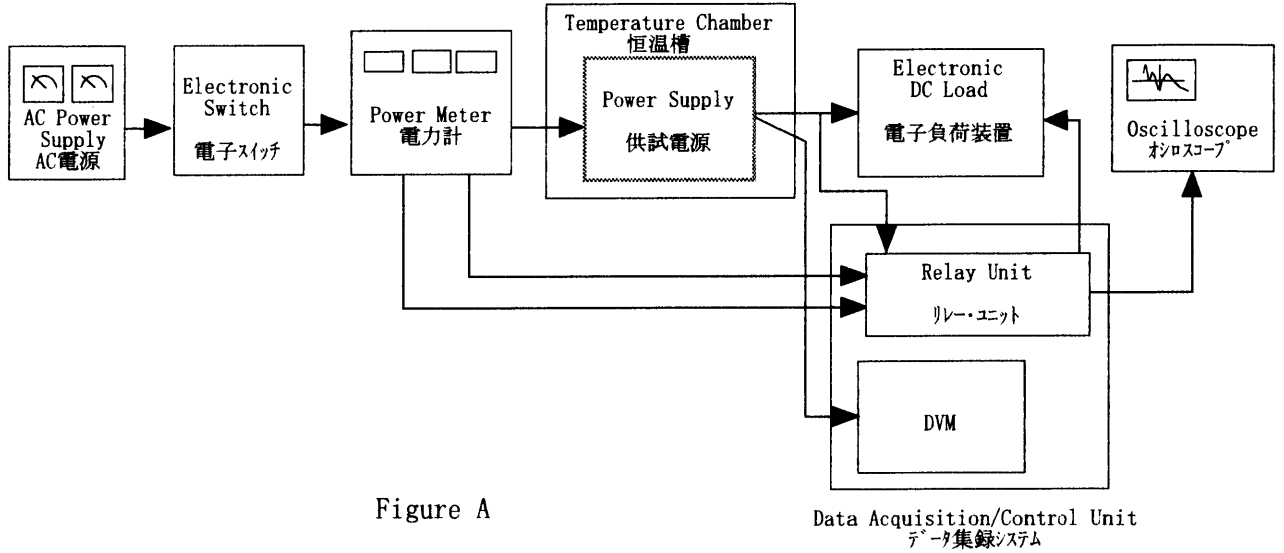


Figure B (DENTORI)

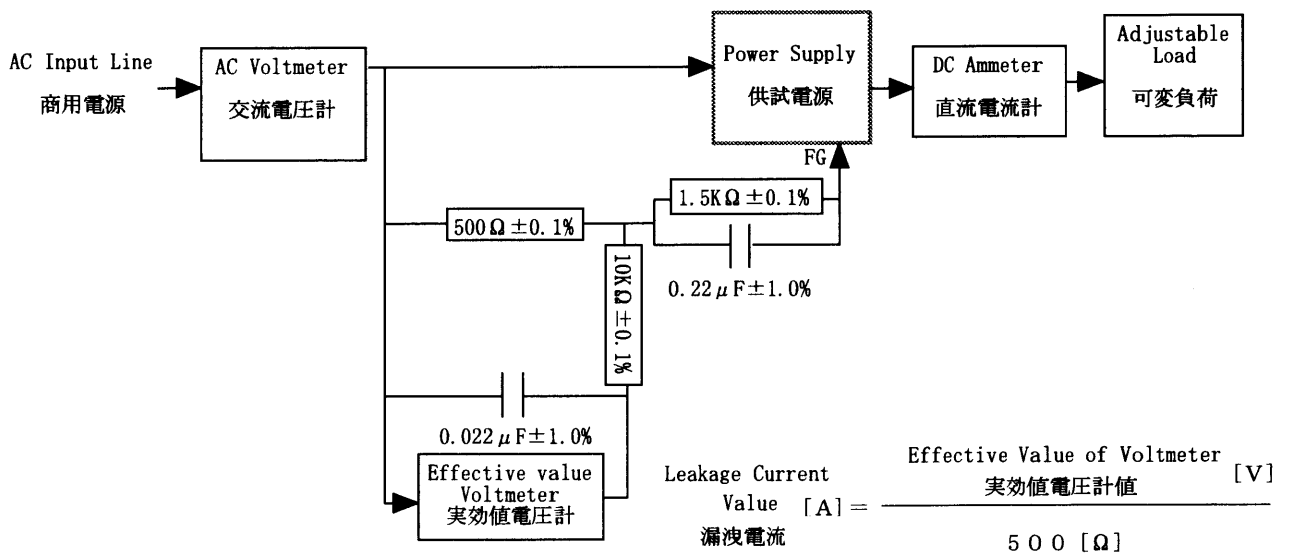


Figure B (IEC 60950)

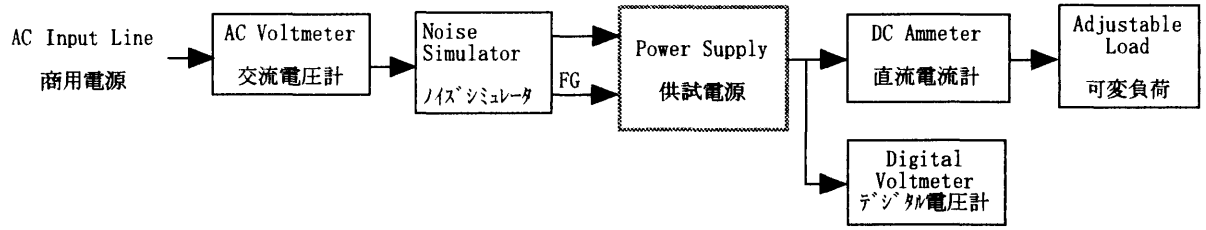


Figure C

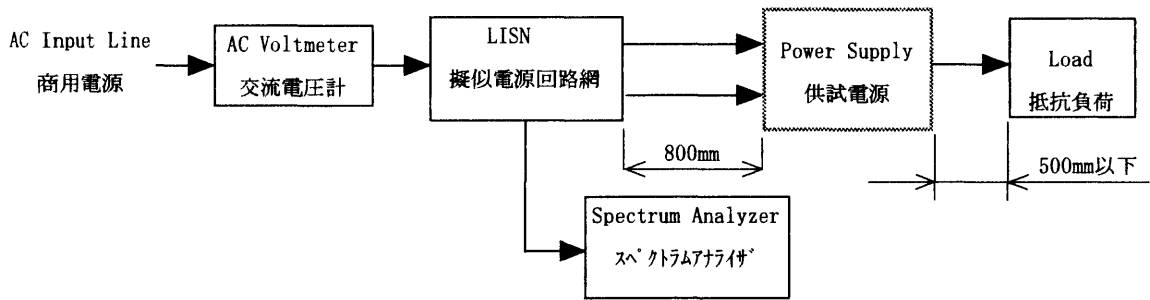


Figure D

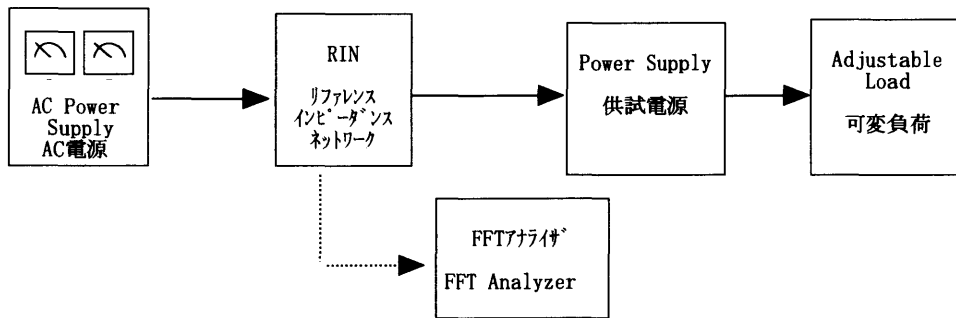


Figure E