



TEST DATA OF LDA75F-24
(200V INPUT)

Regulated DC Power Supply

Aug. 20. 1999

Approved by : *H. Yamaguchi*
Design Manager

Prepared by : *J. Asano*
Design Engineer

コーセル株式会社

COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Input Current (by Load Current)	2
入力電流 (負荷特性)	
3. Input Power (by Load Current)	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage)	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current)	5
効率 (負荷特性)	
6. Hold-Up Time	6
出力保持時間	
7. Instantaneous Interruption Compensation	7
瞬時停電保障	
8. Load Regulation	8
静的負荷変動	
9. Ripple Voltage (by Load Current)	9
リップル電圧 (負荷特性)	
10. Ripple-Noise	10
リップルノイズ	
11. Overcurrent Protection	11
過電流保護	
12. Overvoltage Protection	12
過電圧保護	
13. Inrush Current	13
突入電流	
14. Dynamic Load Responce	14
動的負荷変動	
15. Rise and Fall Time	15
立上り、立下がり時間	
16. Ambient Temperature Drift	16
周囲温度変動	
17. Minimum Input Voltage for Regulated Output Voltage	17
最低レギュレーション電圧	
18. Ripple Voltage (by Ambient Temperature)	18
リップル電圧 (周囲温度特性)	
19. Time Lapse Drift	19
経時ドリフト	
20. Output Voltage Accuracy	20
定電圧精度	
21. Condensation	21
結露特性	
22. Leakage Current	22
漏洩電流	
23. Line Noise Tolerance	23
入力雑音耐量	
24. Conducted Emission	24
雑音端子電圧	
25. Figure of Testing Circuitry	25
測定回路図	

(Final Page 26)



Model		LDA75F-24	Temperature		25°C																																
Item		Line Regulation 静的入力変動	Testing Circuitry		Figure A																																
Object		+24.0V3.2A																																			
<p>1. Graph</p> <p style="text-align: right;">□ Load 50%</p> <p style="text-align: center;">—△— Load 100%</p> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注) 斜線は定格入力電圧範囲を示す。</p>			<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>150</td><td>24.109</td><td>24.107</td></tr> <tr><td>160</td><td>24.109</td><td>24.107</td></tr> <tr><td>170</td><td>24.109</td><td>24.107</td></tr> <tr><td>180</td><td>24.109</td><td>24.107</td></tr> <tr><td>200</td><td>24.108</td><td>24.106</td></tr> <tr><td>220</td><td>24.108</td><td>24.106</td></tr> <tr><td>240</td><td>24.108</td><td>24.105</td></tr> <tr><td>264</td><td>24.107</td><td>24.105</td></tr> <tr><td>280</td><td>24.107</td><td>24.104</td></tr> </tbody> </table>			Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	150	24.109	24.107	160	24.109	24.107	170	24.109	24.107	180	24.109	24.107	200	24.108	24.106	220	24.108	24.106	240	24.108	24.105	264	24.107	24.105	280	24.107	24.104
Input Voltage [V]	Output Voltage [V]																																				
	Load 50%	Load 100%																																			
150	24.109	24.107																																			
160	24.109	24.107																																			
170	24.109	24.107																																			
180	24.109	24.107																																			
200	24.108	24.106																																			
220	24.108	24.106																																			
240	24.108	24.105																																			
264	24.107	24.105																																			
280	24.107	24.104																																			



Model LDA75F-24		Temperature 25°C																																																							
Item Input Current (by Load Current) 入力電流 (負荷特性)		Testing Circuitry Figure A																																																							
Output																																																									
<p>1. Graph</p> <p>—△— Input Volt. 170V - -□- - Input Volt. 200V - -○- - Input Volt. 264V</p> <p>Note: Slanted line shows the range of the rated load current</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.073</td><td>0.074</td><td>0.080</td></tr> <tr><td>0.60</td><td>0.269</td><td>0.252</td><td>0.233</td></tr> <tr><td>1.20</td><td>0.442</td><td>0.403</td><td>0.353</td></tr> <tr><td>1.80</td><td>0.627</td><td>0.563</td><td>0.482</td></tr> <tr><td>2.40</td><td>0.816</td><td>0.728</td><td>0.614</td></tr> <tr><td>3.00</td><td>1.008</td><td>0.895</td><td>0.748</td></tr> <tr><td>3.20</td><td>1.075</td><td>0.953</td><td>0.796</td></tr> <tr><td>3.52</td><td>1.171</td><td>1.042</td><td>0.867</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Input Current [A]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.00	0.073	0.074	0.080	0.60	0.269	0.252	0.233	1.20	0.442	0.403	0.353	1.80	0.627	0.563	0.482	2.40	0.816	0.728	0.614	3.00	1.008	0.895	0.748	3.20	1.075	0.953	0.796	3.52	1.171	1.042	0.867	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Load Current [A]	Input Current [A]																																																								
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																						
0.00	0.073	0.074	0.080																																																						
0.60	0.269	0.252	0.233																																																						
1.20	0.442	0.403	0.353																																																						
1.80	0.627	0.563	0.482																																																						
2.40	0.816	0.728	0.614																																																						
3.00	1.008	0.895	0.748																																																						
3.20	1.075	0.953	0.796																																																						
3.52	1.171	1.042	0.867																																																						
-	-	-	-																																																						
-	-	-	-																																																						
-	-	-	-																																																						
-	-	-	-																																																						



Model		LDA75F-24		Temperature 25°C																																																								
Item		Input Power (by Load Current) 入力電力 (負荷特性)		Testing Circuitry Figure A																																																								
Output		_____																																																										
1. Graph			2. Values																																																									
<p> Input Volt. 170V Input Volt. 200V Input Volt. 264V </p>			<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>4.00</td><td>4.70</td><td>6.40</td></tr> <tr><td>0.60</td><td>21.60</td><td>22.80</td><td>26.10</td></tr> <tr><td>1.20</td><td>37.70</td><td>38.90</td><td>42.10</td></tr> <tr><td>1.80</td><td>54.00</td><td>55.10</td><td>58.50</td></tr> <tr><td>2.40</td><td>70.40</td><td>71.50</td><td>74.90</td></tr> <tr><td>3.00</td><td>87.20</td><td>88.20</td><td>91.40</td></tr> <tr><td>3.20</td><td>92.70</td><td>93.60</td><td>96.80</td></tr> <tr><td>3.52</td><td>101.70</td><td>102.70</td><td>105.80</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Input Power [W]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.00	4.00	4.70	6.40	0.60	21.60	22.80	26.10	1.20	37.70	38.90	42.10	1.80	54.00	55.10	58.50	2.40	70.40	71.50	74.90	3.00	87.20	88.20	91.40	3.20	92.70	93.60	96.80	3.52	101.70	102.70	105.80	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Power [W]																																																											
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																									
0.00	4.00	4.70	6.40																																																									
0.60	21.60	22.80	26.10																																																									
1.20	37.70	38.90	42.10																																																									
1.80	54.00	55.10	58.50																																																									
2.40	70.40	71.50	74.90																																																									
3.00	87.20	88.20	91.40																																																									
3.20	92.70	93.60	96.80																																																									
3.52	101.70	102.70	105.80																																																									
—	—	—	—																																																									
—	—	—	—																																																									
—	—	—	—																																																									
—	—	—	—																																																									
<p>Note: Slanted line shows the range of the rated load current</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>																																																												



Model		LDA75F-24	Temperature		25°C																																
Item		Efficiency 効率	Testing Circuitry		Figure A																																
Object																																					
1. Graph			2. Values																																		
<p>□ Load 50% △ Load 100%</p>			<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>150</td><td>82.9</td><td>84.3</td></tr> <tr><td>160</td><td>82.4</td><td>84.1</td></tr> <tr><td>170</td><td>81.5</td><td>83.8</td></tr> <tr><td>180</td><td>80.8</td><td>83.6</td></tr> <tr><td>200</td><td>79.3</td><td>82.8</td></tr> <tr><td>220</td><td>77.6</td><td>82.0</td></tr> <tr><td>240</td><td>76.0</td><td>81.2</td></tr> <tr><td>264</td><td>74.2</td><td>80.1</td></tr> <tr><td>280</td><td>72.9</td><td>79.4</td></tr> </tbody> </table>			Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	150	82.9	84.3	160	82.4	84.1	170	81.5	83.8	180	80.8	83.6	200	79.3	82.8	220	77.6	82.0	240	76.0	81.2	264	74.2	80.1	280	72.9	79.4
Input Voltage [V]	Efficiency [%]																																				
	Load 50%	Load 100%																																			
150	82.9	84.3																																			
160	82.4	84.1																																			
170	81.5	83.8																																			
180	80.8	83.6																																			
200	79.3	82.8																																			
220	77.6	82.0																																			
240	76.0	81.2																																			
264	74.2	80.1																																			
280	72.9	79.4																																			
<p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>																																					



Model		LDA75F-24		Temperature 25°C																																																								
Item		Efficiency (by Load Current) 効率 (負荷電流特性)		Testing Circuitry Figure A																																																								
Output		_____																																																										
1. Graph			2. Values																																																									
<p> Input Volt. 170V Input Volt. 200V Input Volt. 264V </p> <p> Note: Slanted line shows the range of the rated load current (注) 斜線は定格負荷電流範囲を示す。 </p>			<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0.60</td><td>68.0</td><td>64.5</td><td>56.3</td></tr> <tr><td>1.20</td><td>77.4</td><td>75.1</td><td>69.4</td></tr> <tr><td>1.80</td><td>81.0</td><td>79.4</td><td>74.8</td></tr> <tr><td>2.40</td><td>82.8</td><td>81.5</td><td>77.8</td></tr> <tr><td>3.00</td><td>83.6</td><td>82.6</td><td>79.7</td></tr> <tr><td>3.20</td><td>83.7</td><td>82.9</td><td>80.2</td></tr> <tr><td>3.52</td><td>84.0</td><td>83.1</td><td>80.7</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Efficiency [%]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.60	68.0	64.5	56.3	1.20	77.4	75.1	69.4	1.80	81.0	79.4	74.8	2.40	82.8	81.5	77.8	3.00	83.6	82.6	79.7	3.20	83.7	82.9	80.2	3.52	84.0	83.1	80.7	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Efficiency [%]																																																											
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																									
0.60	68.0	64.5	56.3																																																									
1.20	77.4	75.1	69.4																																																									
1.80	81.0	79.4	74.8																																																									
2.40	82.8	81.5	77.8																																																									
3.00	83.6	82.6	79.7																																																									
3.20	83.7	82.9	80.2																																																									
3.52	84.0	83.1	80.7																																																									
—	—	—	—																																																									
—	—	—	—																																																									
—	—	—	—																																																									
—	—	—	—																																																									
—	—	—	—																																																									



Model		LDA75F-24	Temperature	25°C																																
Item		Hold-Up Time 出力保持時間	Testing Circuitry	Figure A																																
Object		+24.0V3.2A																																		
1. Graph		<div style="display: flex; justify-content: space-around;"> □ Load 50% △ Load 100% </div>	2. Values																																	
			<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Hold-Up Time [mS]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>150</td><td>133</td><td>71</td></tr> <tr><td>160</td><td>154</td><td>82</td></tr> <tr><td>170</td><td>176</td><td>95</td></tr> <tr><td>180</td><td>200</td><td>108</td></tr> <tr><td>200</td><td>251</td><td>136</td></tr> <tr><td>220</td><td>307</td><td>168</td></tr> <tr><td>240</td><td>368</td><td>203</td></tr> <tr><td>264</td><td>448</td><td>248</td></tr> <tr><td>280</td><td>506</td><td>281</td></tr> </tbody> </table>		Input Voltage [V]	Hold-Up Time [mS]		Load 50%	Load 100%	150	133	71	160	154	82	170	176	95	180	200	108	200	251	136	220	307	168	240	368	203	264	448	248	280	506	281
Input Voltage [V]	Hold-Up Time [mS]																																			
	Load 50%	Load 100%																																		
150	133	71																																		
160	154	82																																		
170	176	95																																		
180	200	108																																		
200	251	136																																		
220	307	168																																		
240	368	203																																		
264	448	248																																		
280	506	281																																		
		<p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</p> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>																																		



Model		LDA75F-24		Temperature		25°C																																																				
Item		Instantaneous Interruption Compensation 瞬時停電保障		Testing Circuitry		Figure A																																																				
Object		+24.0V3.2A																																																								
1. Graph				2. Values																																																						
<p> </p> <p> Input Volt. 170 V Input Volt. 200 V Input Volt. 264 V </p> <p> This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy. Note: Slanted line shows the range of the rated load current. </p> <p> 瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間をいう。 (注)斜線は定格負荷電流範囲を示す。 </p>				<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Time [mS]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>0.60</td><td>447</td><td>623</td><td>1079</td></tr> <tr><td>1.20</td><td>252</td><td>356</td><td>631</td></tr> <tr><td>1.80</td><td>171</td><td>244</td><td>437</td></tr> <tr><td>2.40</td><td>132</td><td>190</td><td>345</td></tr> <tr><td>3.00</td><td>103</td><td>148</td><td>269</td></tr> <tr><td>3.20</td><td>96</td><td>138</td><td>252</td></tr> <tr><td>3.52</td><td>86</td><td>124</td><td>228</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Load Current [A]	Time [mS]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.00	—	—	—	0.60	447	623	1079	1.20	252	356	631	1.80	171	244	437	2.40	132	190	345	3.00	103	148	269	3.20	96	138	252	3.52	86	124	228	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Time [mS]																																																									
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																							
0.00	—	—	—																																																							
0.60	447	623	1079																																																							
1.20	252	356	631																																																							
1.80	171	244	437																																																							
2.40	132	190	345																																																							
3.00	103	148	269																																																							
3.20	96	138	252																																																							
3.52	86	124	228																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							




Model		LDA75F-24	Temperature	25°C																																															
Item		Load Regulation 静的負荷変動	Testing Circuitry	Figure A																																															
Object		+24.0V3.2A																																																	
1. Graph		<p> △ Input Volt. 170 V □ Input Volt. 200 V ○ Input Volt. 264 V </p>	2. Values																																																
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>24.113</td><td>24.113</td><td>24.113</td></tr> <tr><td>0.60</td><td>24.111</td><td>24.111</td><td>24.110</td></tr> <tr><td>1.20</td><td>24.111</td><td>24.110</td><td>24.109</td></tr> <tr><td>1.80</td><td>24.110</td><td>24.109</td><td>24.108</td></tr> <tr><td>2.40</td><td>24.109</td><td>24.108</td><td>24.107</td></tr> <tr><td>3.00</td><td>24.108</td><td>24.107</td><td>24.106</td></tr> <tr><td>3.20</td><td>24.108</td><td>24.107</td><td>24.106</td></tr> <tr><td>3.52</td><td>24.108</td><td>24.107</td><td>24.105</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Output Voltage [V]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.00	24.113	24.113	24.113	0.60	24.111	24.111	24.110	1.20	24.111	24.110	24.109	1.80	24.110	24.109	24.108	2.40	24.109	24.108	24.107	3.00	24.108	24.107	24.106	3.20	24.108	24.107	24.106	3.52	24.108	24.107	24.105	—	—	—	—	—	—	—	—
Load Current [A]	Output Voltage [V]																																																		
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																
0.00	24.113	24.113	24.113																																																
0.60	24.111	24.111	24.110																																																
1.20	24.111	24.110	24.109																																																
1.80	24.110	24.109	24.108																																																
2.40	24.109	24.108	24.107																																																
3.00	24.108	24.107	24.106																																																
3.20	24.108	24.107	24.106																																																
3.52	24.108	24.107	24.105																																																
—	—	—	—																																																
—	—	—	—																																																
<p>Note: Slanted line shows the range of the rated load current.</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>																																																			

COSEL

Model	LDA75F-24
Item	Ripple Voltage (by Load Current) リップル電圧(負荷電流特性)
Object	+24.0V 3.2A

Temperature	25°C
Testing Circuitry	Figure A

1. Graph
 [mV] □ Input Volt. 170V
 △ Input Volt. 264V

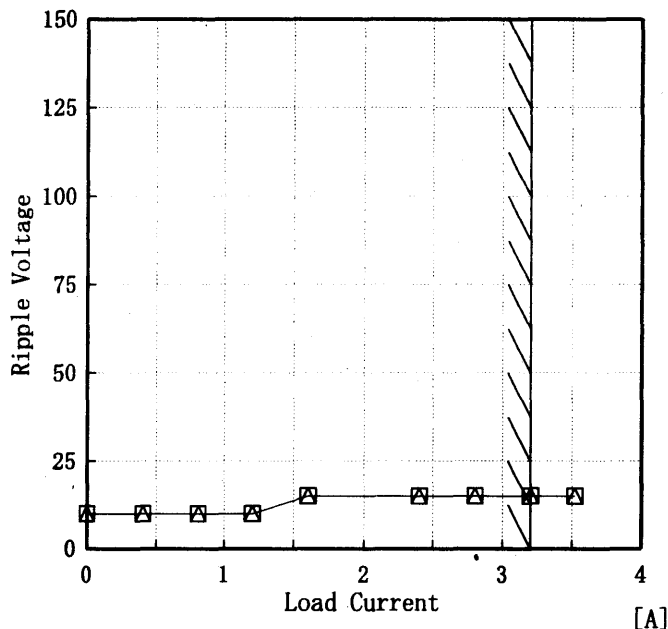

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p-p 値で示される。

(注) 斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
 入力商用周期

T2: Due to Switching
 スイッチング周期

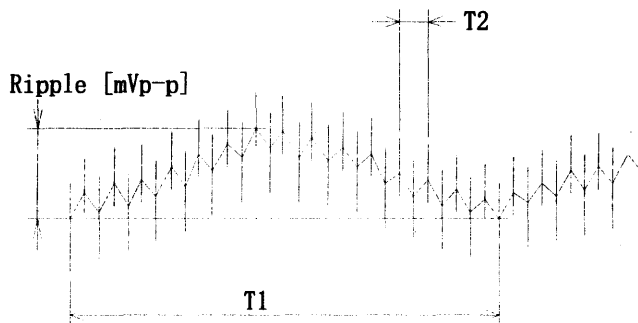


Fig. Complex Ripple Wave Form
 図 リップル波形詳細図


2. Values

Load Current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.00	10	10
0.40	10	10
0.80	10	10
1.20	10	10
1.60	15	15
2.40	15	15
2.80	15	15
3.20	15	15
3.52	15	15
—	—	—
—	—	—

COSEL

Model	LDA75F-24	Temperature	25°C
Item	Ripple-Noise リップルノイズ	Testing Circuitry	Figure A
Object	+24.0V3.2A		

1. Graph
 [mV]
 -----□----- Input Volt. 170V
 -----△----- Input Volt. 264V

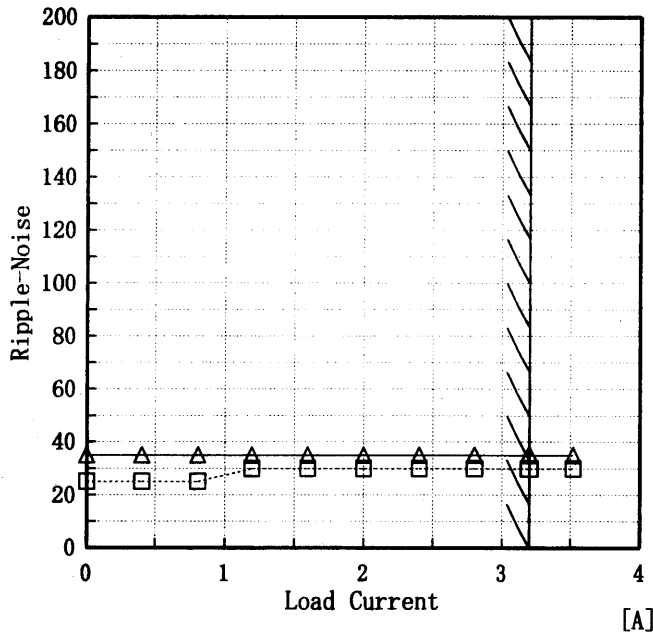

Ripple-Noise is shown as p-p in the figure below.
 Note: Slanted line shows the range of the rated load current.

リップルノイズは、下図 p-p 値で示される。
 (注)斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
 入力商用周期
 T2: Due to Switching
 スイッチング周期

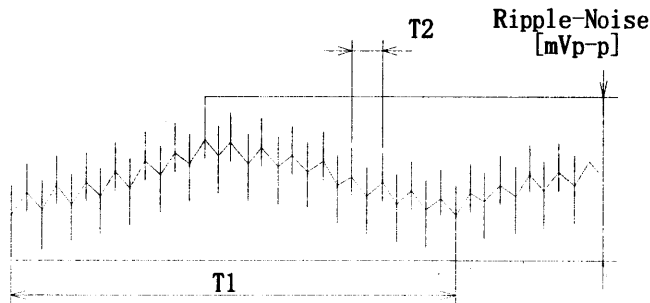


Fig. Complex Ripple Wave Form
 図 リップル波形詳細図

2. Values

Load current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]
	Ripple-Noise [mV]	Ripple-Noise [mV]
0.00	25	35
0.40	25	35
0.80	25	35
1.20	30	35
1.60	30	35
2.00	30	35
2.40	30	35
2.80	30	35
3.20	30	35
3.52	30	35
—	—	—

COSEL


<p>Model LDA75F-24</p> <p>Item Overcurrent Protection 過電流保護</p> <p>Object +24.0V3.2A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																																							
<p>1. Graph</p> <p>[V]</p> <p>----- Input Volt. 170 V</p> <p>————— Input Volt. 200 V</p> <p>————— Input Volt. 264 V</p> <p>Output Voltage</p> <p>Load Current [A]</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>24.00</td><td>4.26</td><td>4.29</td><td>4.33</td></tr> <tr><td>22.80</td><td>4.28</td><td>4.32</td><td>4.35</td></tr> <tr><td>21.60</td><td>4.29</td><td>4.32</td><td>4.36</td></tr> <tr><td>19.20</td><td>4.32</td><td>4.33</td><td>4.37</td></tr> <tr><td>16.80</td><td>4.33</td><td>4.35</td><td>4.39</td></tr> <tr><td>14.40</td><td>4.35</td><td>4.37</td><td>4.42</td></tr> <tr><td>12.00</td><td>4.37</td><td>4.38</td><td>4.44</td></tr> <tr><td>9.60</td><td>4.38</td><td>4.39</td><td>4.44</td></tr> <tr><td>7.20</td><td>4.38</td><td>4.39</td><td>4.41</td></tr> <tr><td>4.80</td><td>4.35</td><td>4.33</td><td>4.31</td></tr> <tr><td>2.40</td><td>4.19</td><td>4.14</td><td>4.06</td></tr> <tr><td>0.00</td><td>3.93</td><td>3.93</td><td>4.03</td></tr> </tbody> </table>	Output Voltage [V]	Load Current [A]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	24.00	4.26	4.29	4.33	22.80	4.28	4.32	4.35	21.60	4.29	4.32	4.36	19.20	4.32	4.33	4.37	16.80	4.33	4.35	4.39	14.40	4.35	4.37	4.42	12.00	4.37	4.38	4.44	9.60	4.38	4.39	4.44	7.20	4.38	4.39	4.41	4.80	4.35	4.33	4.31	2.40	4.19	4.14	4.06	0.00	3.93	3.93	4.03
Output Voltage [V]	Load Current [A]																																																								
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																						
24.00	4.26	4.29	4.33																																																						
22.80	4.28	4.32	4.35																																																						
21.60	4.29	4.32	4.36																																																						
19.20	4.32	4.33	4.37																																																						
16.80	4.33	4.35	4.39																																																						
14.40	4.35	4.37	4.42																																																						
12.00	4.37	4.38	4.44																																																						
9.60	4.38	4.39	4.44																																																						
7.20	4.38	4.39	4.41																																																						
4.80	4.35	4.33	4.31																																																						
2.40	4.19	4.14	4.06																																																						
0.00	3.93	3.93	4.03																																																						
<p>Note: Slanted line shows the range of the rated load current.</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>																																																									




Model		LDA75F-24		Testing Circuitry Figure A																																																		
Item		Overvoltage Protection 過電圧保護																																																				
Object		+24.0V3.2A		2. Values																																																		
1. Graph		—△— Input Volt. 170 V —□— Input Volt. 200 V —○— Input Volt. 264 V																																																				
		<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temp. [°C]</th> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> <tr> <th colspan="3">Operating Point [V]</th> </tr> </thead> <tbody> <tr><td>-20</td><td>29.60</td><td>29.59</td><td>29.59</td></tr> <tr><td>-10</td><td>29.77</td><td>29.77</td><td>29.77</td></tr> <tr><td>0</td><td>30.02</td><td>30.01</td><td>30.01</td></tr> <tr><td>10</td><td>30.17</td><td>30.18</td><td>30.17</td></tr> <tr><td>20</td><td>30.42</td><td>30.42</td><td>30.42</td></tr> <tr><td>25</td><td>30.54</td><td>30.55</td><td>30.54</td></tr> <tr><td>30</td><td>30.60</td><td>30.60</td><td>30.60</td></tr> <tr><td>40</td><td>30.84</td><td>30.84</td><td>30.84</td></tr> <tr><td>50</td><td>31.09</td><td>31.08</td><td>31.08</td></tr> <tr><td>60</td><td>31.26</td><td>31.27</td><td>31.26</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Ambient Temp. [°C]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	Operating Point [V]			-20	29.60	29.59	29.59	-10	29.77	29.77	29.77	0	30.02	30.01	30.01	10	30.17	30.18	30.17	20	30.42	30.42	30.42	25	30.54	30.55	30.54	30	30.60	30.60	30.60	40	30.84	30.84	30.84	50	31.09	31.08	31.08	60	31.26	31.27	31.26	—	—	—	—
Ambient Temp. [°C]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																			
	Operating Point [V]																																																					
-20	29.60	29.59	29.59																																																			
-10	29.77	29.77	29.77																																																			
0	30.02	30.01	30.01																																																			
10	30.17	30.18	30.17																																																			
20	30.42	30.42	30.42																																																			
25	30.54	30.55	30.54																																																			
30	30.60	30.60	30.60																																																			
40	30.84	30.84	30.84																																																			
50	31.09	31.08	31.08																																																			
60	31.26	31.27	31.26																																																			
—	—	—	—																																																			
Load 0% Note: Slanted line shows the range of the rated ambient temperature. (注)斜線は定格周囲温度範囲を示す。																																																						

COSEL

Model	LDA75F-24	Temperature	25°C
Item	Inrush Current 突入電流	Testing Circuitry	Figure A
Object	_____		

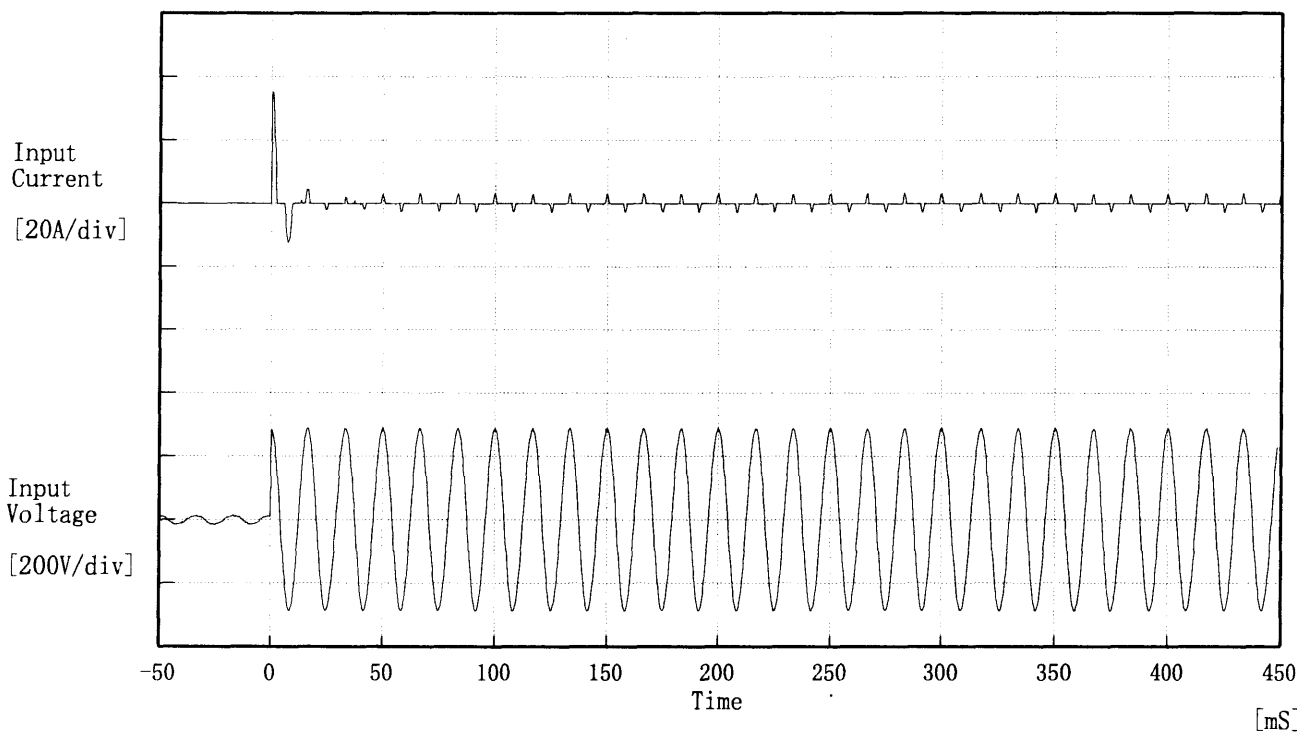


Input Voltage 200 V
 Frequency 60 Hz
 Load 100 %
 Inrush Current
 ① 35.20 [A]
 ② 3.20 [A]

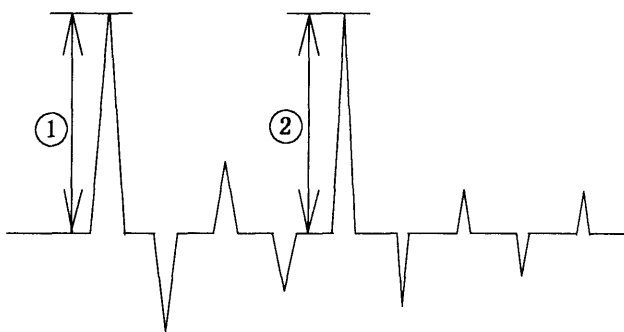



COSEL

Model		LDA75F-24	Temperature		25°C
Item		Dynamic Load Responce 動的負荷変動	Testing Circuitry		Figure A
Object		+24.0V3.2A			



Input Volt. 200 V
Cycle 1000 mS



Load 0% ←→
Load 100%

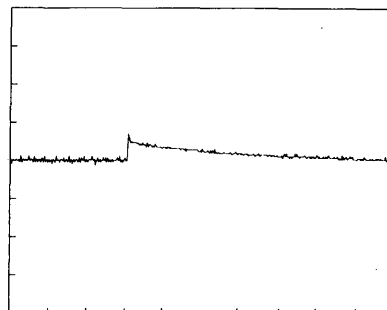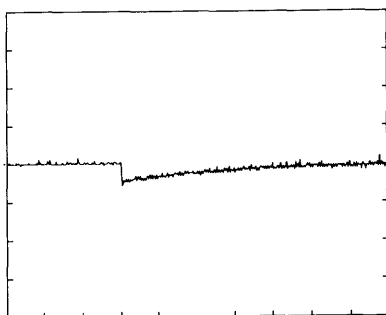

Load 0% ←→
Load 50%

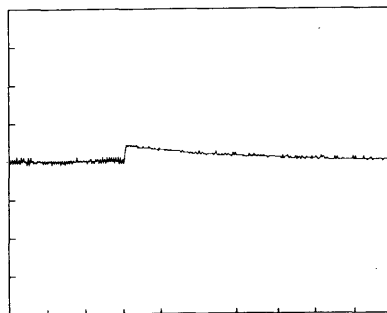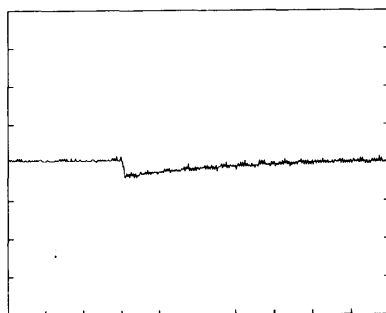

100 mV/div


10 mS/div

COSEL

Model	LDA75F-24	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+24.0V3.2A		

1. Graph


Input Volt. 170 V

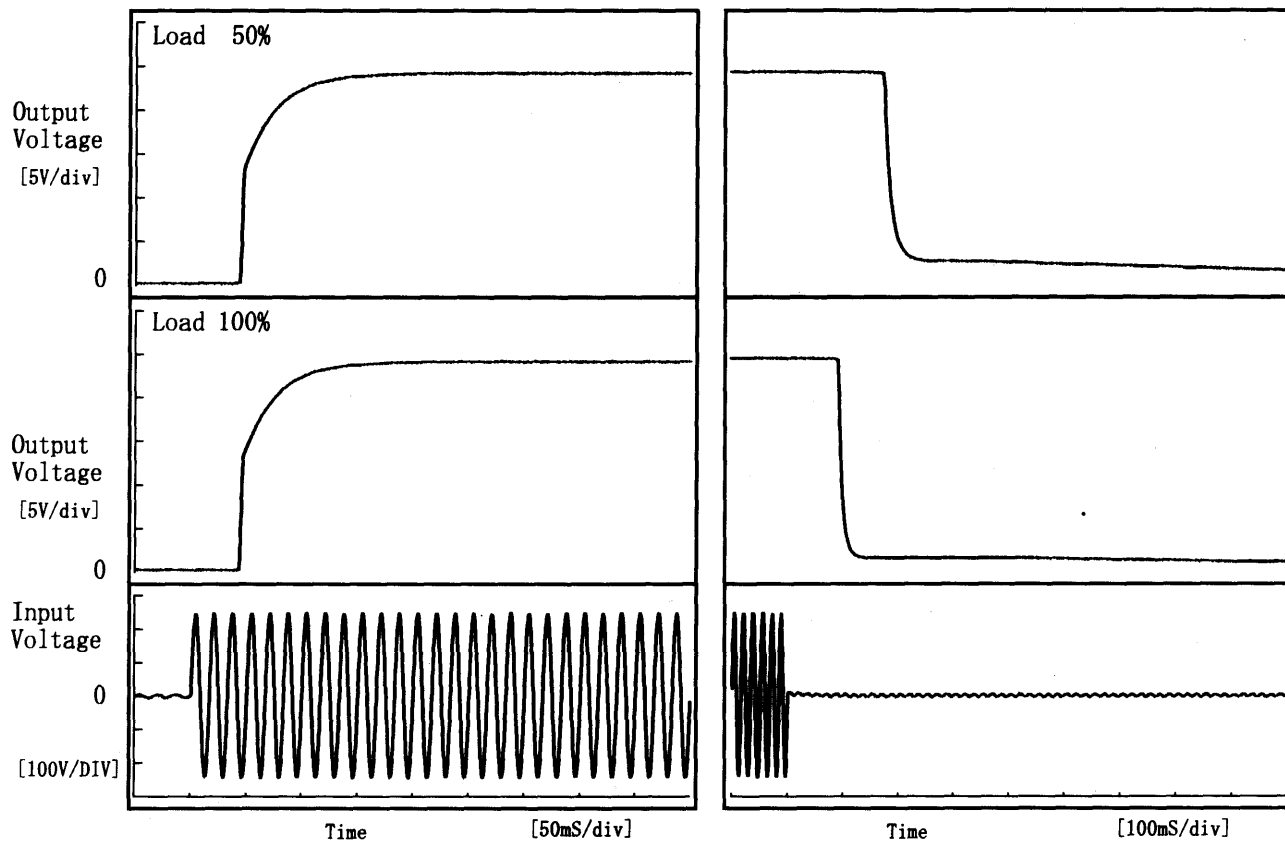

2. Values

[mS]

Load	Time	T d	T r	T s	T h	T f
50 %		43.3	47.3	90.5	176.0	236.0
100 %		43.3	47.3	90.5	95.0	22.0

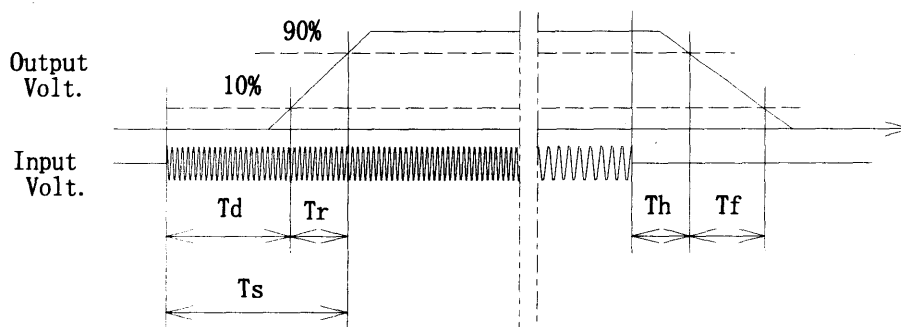

COSEL


Model		LDA75F-24		Testing Circuitry Figure A																																																				
Item		Ambient Temperature Drift 周囲温度変動																																																						
Object		+24.0V3.2A																																																						
1. Graph		<p> <input type="checkbox"/> Δ Input Volt. 170V <input type="checkbox"/> \square Input Volt. 200V <input type="checkbox"/> \circ Input Volt. 264V </p>	2. Values																																																					
<p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p>		<table border="1"> <thead> <tr> <th rowspan="2">Temperature [°C]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>-20</td><td>24.107</td><td>24.107</td><td>24.106</td></tr> <tr><td>-10</td><td>24.108</td><td>24.107</td><td>24.106</td></tr> <tr><td>0</td><td>24.107</td><td>24.106</td><td>24.105</td></tr> <tr><td>10</td><td>24.107</td><td>24.107</td><td>24.105</td></tr> <tr><td>20</td><td>24.108</td><td>24.107</td><td>24.106</td></tr> <tr><td>25</td><td>24.107</td><td>24.107</td><td>24.105</td></tr> <tr><td>30</td><td>24.106</td><td>24.105</td><td>24.104</td></tr> <tr><td>40</td><td>24.100</td><td>24.099</td><td>24.098</td></tr> <tr><td>50</td><td>24.089</td><td>24.088</td><td>24.086</td></tr> <tr><td>60</td><td>24.075</td><td>24.074</td><td>24.073</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Temperature [°C]	Output Voltage [V]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	-20	24.107	24.107	24.106	-10	24.108	24.107	24.106	0	24.107	24.106	24.105	10	24.107	24.107	24.105	20	24.108	24.107	24.106	25	24.107	24.107	24.105	30	24.106	24.105	24.104	40	24.100	24.099	24.098	50	24.089	24.088	24.086	60	24.075	24.074	24.073	—	—	—	—
Temperature [°C]	Output Voltage [V]																																																							
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																					
-20	24.107	24.107	24.106																																																					
-10	24.108	24.107	24.106																																																					
0	24.107	24.106	24.105																																																					
10	24.107	24.107	24.105																																																					
20	24.108	24.107	24.106																																																					
25	24.107	24.107	24.105																																																					
30	24.106	24.105	24.104																																																					
40	24.100	24.099	24.098																																																					
50	24.089	24.088	24.086																																																					
60	24.075	24.074	24.073																																																					
—	—	—	—																																																					
<p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注)斜線は定格周囲温度範囲を示す。</p>																																																								



Model	LDA75F-24
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧
Object	+24.0V3.2A

Testing Circuitry Figure A

1. Graph
 [V] □ Load 50%
 △ Load 100%

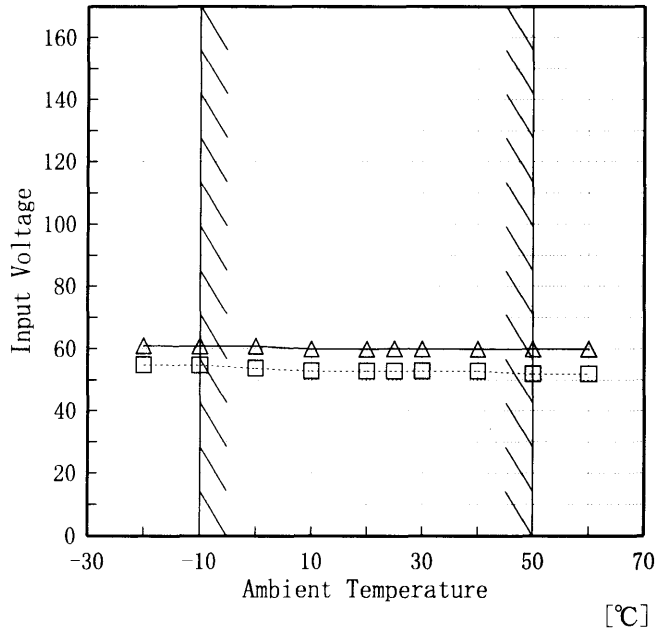

2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-20	55	61
-10	55	61
0	54	61
10	53	60
20	53	60
25	53	60
30	53	60
40	53	60
50	52	60
60	52	60
—	—	—


Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。



Model	LDA75F-24
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)
Object	+24.0V 3.2A

Testing Circuitry Figure A

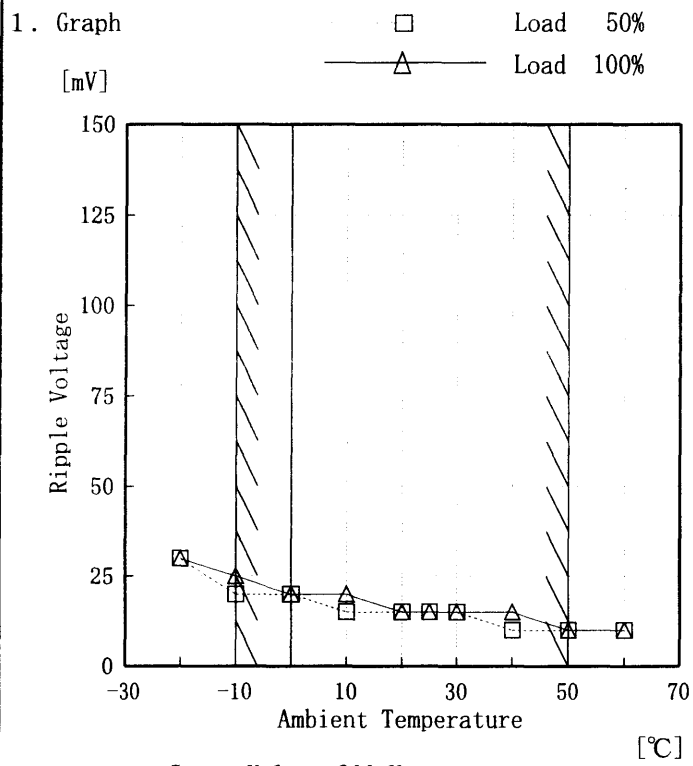

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]
-20	30	30
-10	20	25
0	20	20
10	15	20
20	15	15
25	15	15
30	15	15
40	10	15
50	10	10
60	10	10
—	—	—



COSEL																									
Model	LDA75F-24	Temperature	25°C																						
Item	Time Lapse Drift 経時ドリフト	Testing Circuitry	Figure A																						
Object	+24.0V3.2A																								
1. Graph		2. Values																							
<p>[V]</p> <p style="text-align: center;">Time [H]</p> <p>Input Volt. 200V Load 100%</p>		<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>24.102</td></tr> <tr><td>0.5</td><td>24.091</td></tr> <tr><td>1.0</td><td>24.091</td></tr> <tr><td>2.0</td><td>24.092</td></tr> <tr><td>3.0</td><td>24.092</td></tr> <tr><td>4.0</td><td>24.092</td></tr> <tr><td>5.0</td><td>24.092</td></tr> <tr><td>6.0</td><td>24.092</td></tr> <tr><td>7.0</td><td>24.092</td></tr> <tr><td>8.0</td><td>24.092</td></tr> </tbody> </table>		Time since start [H]	Output Voltage [V]	0.0	24.102	0.5	24.091	1.0	24.091	2.0	24.092	3.0	24.092	4.0	24.092	5.0	24.092	6.0	24.092	7.0	24.092	8.0	24.092
Time since start [H]	Output Voltage [V]																								
0.0	24.102																								
0.5	24.091																								
1.0	24.091																								
2.0	24.092																								
3.0	24.092																								
4.0	24.092																								
5.0	24.092																								
6.0	24.092																								
7.0	24.092																								
8.0	24.092																								



COSEL		
Model	LDA75F-24	
Item	Output Voltage Accuracy 定電圧精度	Testing Circuitry Figure A
Object	+24.0V3.2A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -10~50 °C

Input Voltage : 170~264 V

Load Current : 0~3.2 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -10~50 °C

入力電圧 170~264 V

負荷電流 0~3.2 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	25	264	0.0	24.114	±16	±0.1
Minimum Voltage	50	264	3.2	24.083		



COSEL		
Model	LDA75F-24	
Item	Condensation 結露特性	Testing Circuitry Figure A
Object	+24.0V 3.2A	

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で-10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。

2. Values

Item	Data	Testing Conditions
Output Voltage [V]	24.108	Input Volt.: 200V, Load Current:3.2A
Line Regulation [mV]	6	Input Volt.: 170~264V, Load Current:3.2A
Load Regulation [mV]	9	Input Volt.: 200V, Load Current:0.0~3.2A



Model		LDA75F-24	Temperature 25°C Testing Circuitry Figure B
Item		Leakage Current 漏洩電流	
Object		_____	

1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DENTORI	—	—	—
(B) IEC60950	—	—	—

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 230 [V]	Input Volt. 264 [V]
(B) IEC60950	0.30	0.40	0.46

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力 of 両相について測定し、その大きい方を漏洩電流測定値とする。



Model		LDA75F-24	Temperature 25°C Testing Circuitry Figure C
Item		Line Noise Tolerance 入力雑音耐量	
Object		+24.0V3.2A	

1. Results

Pulse Width [nS]	MODE	No protection failure should occur 保護回路の誤動作がない	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation
1000	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation

2. Conditions

Input Voltage : 200 V
 Pulse Voltage : 2000 V
 Pulse Cycle : 10 mS
 Pulse Input Duration : 1 min. or more
 Load : 100 %




Model		LDA75F-24	Temperature		25°C
Item		Conducted Emission 雑音端子電圧	Testing Circuitry		Figure D
Object					

1. Graph

Remarks

Input Volt. 230 V
Load 100 %

規格 1 : [EN 55022] Class B(QP)
規格 2 : [EN 55022] Class B(平均値)

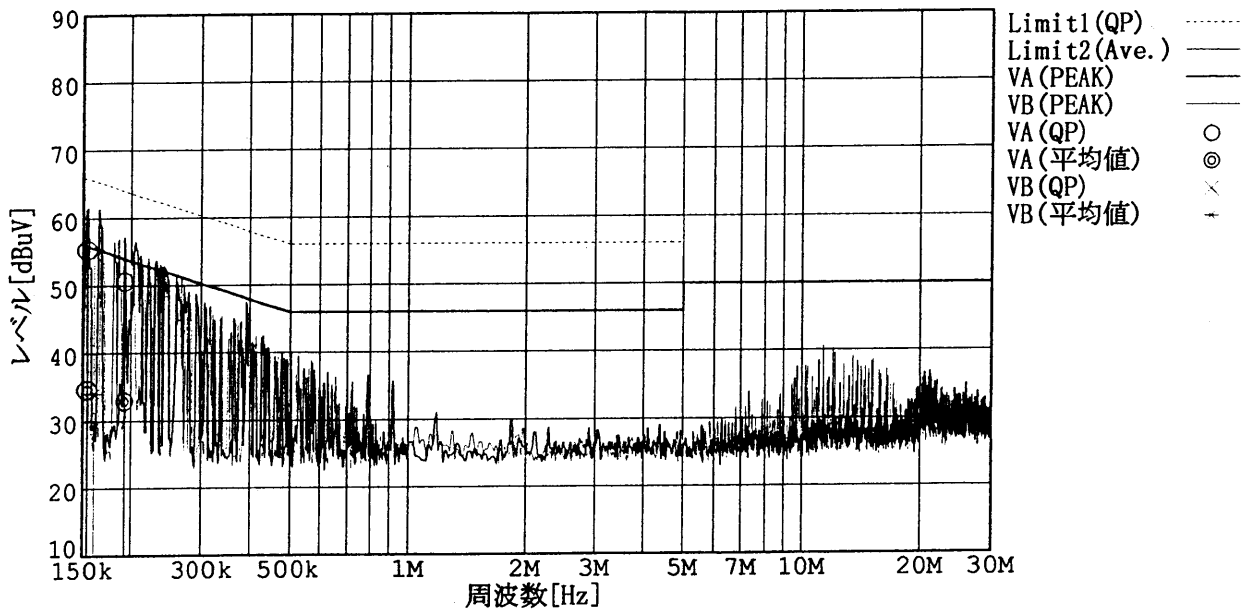

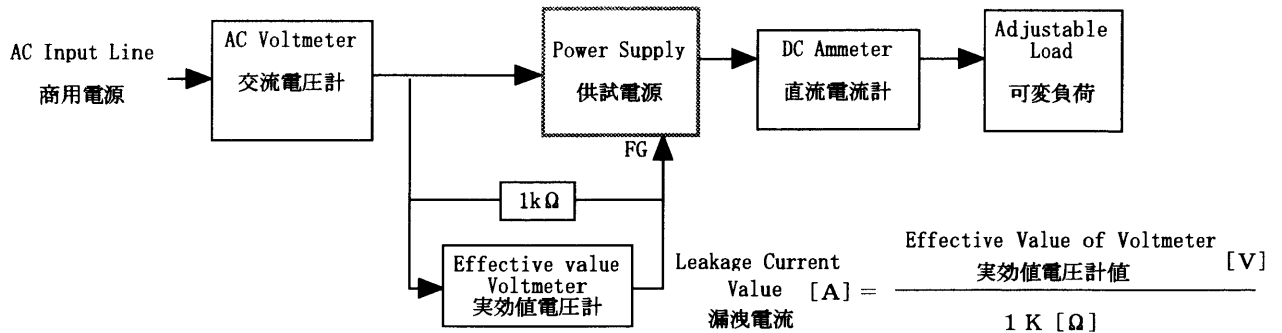
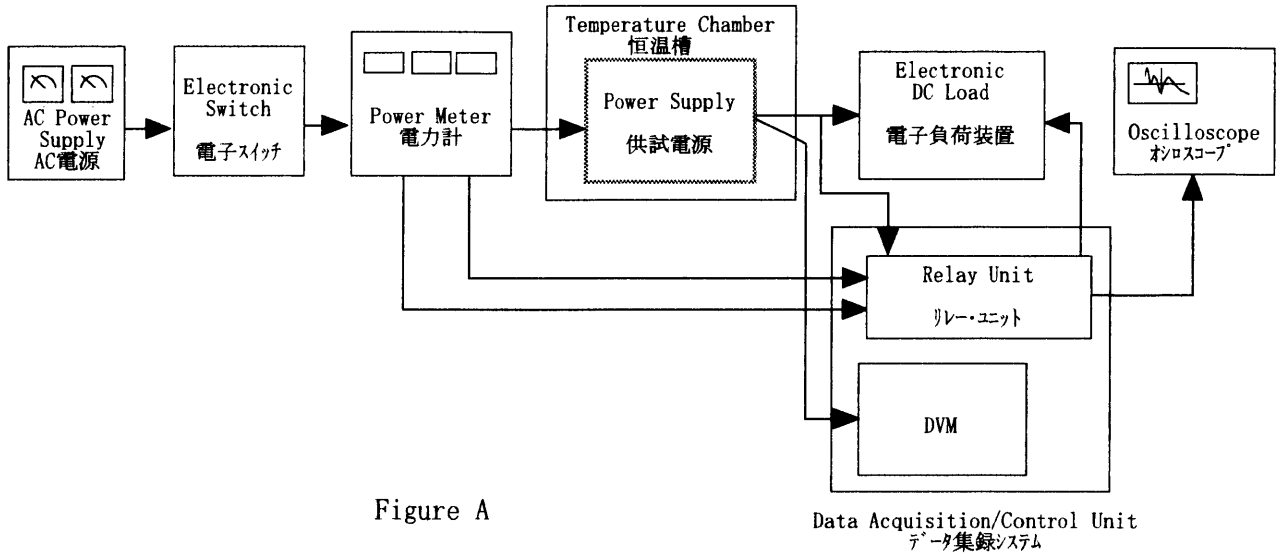


Figure B (DENTORI)

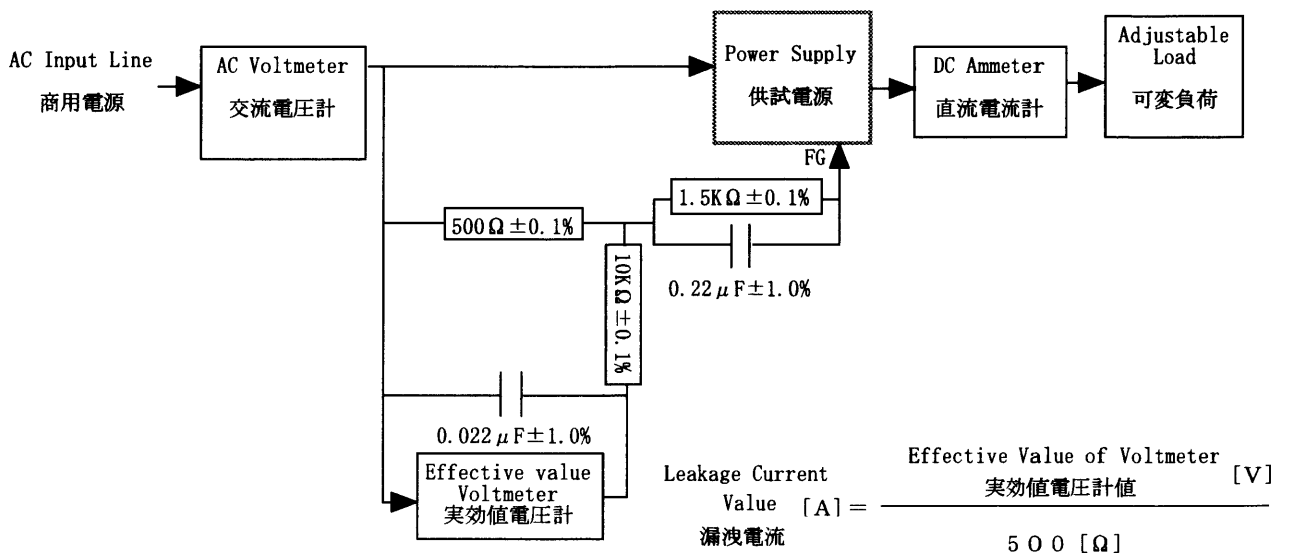


Figure B (IEC 60950)

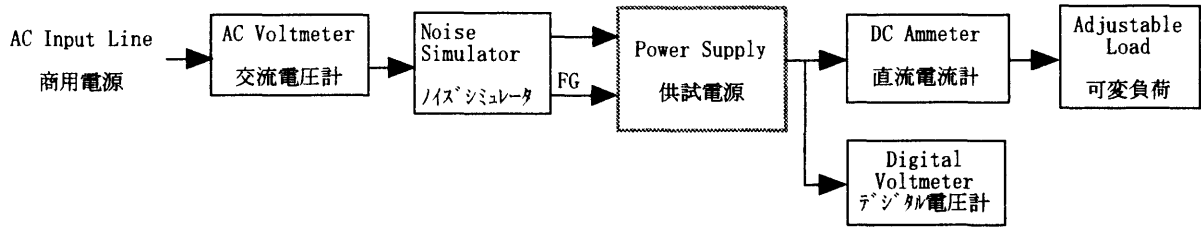


Figure C

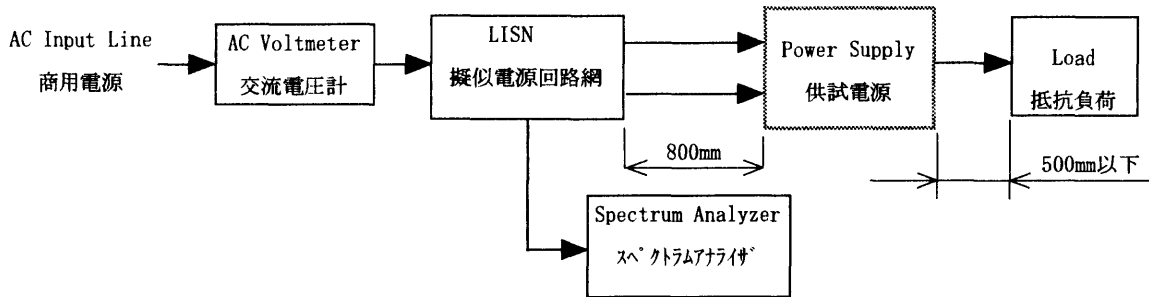


Figure D

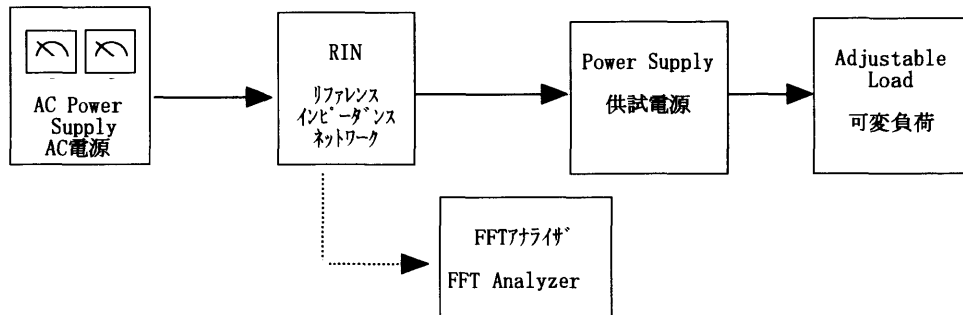


Figure E