

Temperature increase of main components

Model: MGFS348□□

1. Conditions

- (1) Input :DC 48 [V]
- (2) Output :Rated output
- (3) Cooling method :Convection cooling
- (4) Mounting method :Shown as Fig.1.1

2. Result

Table 2.1 Temperature increase of main components

No.	Parts name	Symbol No.	Increase ( $\Delta T$ )				Rated temp. [°C]	Reference
			[deg]					
			3.3V	5V	12V	15V		
1	Switching MOS-FET	TR11	31	30	27	25	150	Junction Temp.
2	Switching MOS-FET	TR101	33	33	30	27	150	Junction Temp.
3	Power control IC	IC12	33	32	29	27	150	Junction Temp.
4	Rectified diode (Output)	D201	39	36	32	29	150	Junction Temp.
5	Rectified diode (Output)	D202	40	39	33	29	150	Junction Temp.
6	Photocoupler	PC11	32	31	27	25	125	Junction Temp.
7	Transformer (PCB)	P2	36	35	32	29	130	
8	CASE	CASE	32	31	27	26	110	Top Surface Center
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								

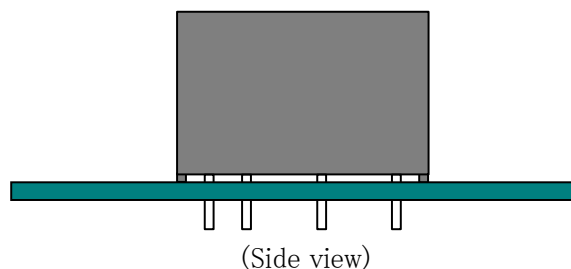


Fig.1.1 Mounting method (Normal position)