

# TEST DATA OF MGFS62405

Regulated DC Power Supply  
December 16, 2016

Approved by : Takayuki Fukuda  
Takayuki Fukuda Design Manager

Prepared by : Takaaki Sekiguchi  
Takaaki Sekiguchi Design Engineer

**COSEL CO.,LTD.**

CONTENTS

1.Input Current (by Input Voltage) . . . . . 1  
 2.Input Current (by Load Current) . . . . . 2  
 3.Input Power (by Load Current) . . . . . 3  
 4.Efficiency (by Input Voltage) . . . . . 4  
 5.Efficiency (by Load Current) . . . . . 5  
 6.Line Regulation . . . . . 6  
 7.Load Regulation . . . . . 7  
 8.Dynamic Load Response . . . . . 8  
 9.Ripple Voltage (by Load Current) . . . . . 9  
 10.Ripple-Noise . . . . . 10  
 11.Ripple Voltage (by Ambient Temperature) . . . . . 11  
 12.Ambient Temperature Drift . . . . . 12  
 13.Output Voltage Accuracy . . . . . 13  
 14.Time Lapse Drift . . . . . 14  
 15.Rise and Fall Time . . . . . 15  
 16.Minimum Input Voltage for Regulated Output Voltage . . . . . 16  
 17.Overcurrent Protection . . . . . 17  
 18.Switching frequency (by Load Current) . . . . . 18  
 19.Figure of Testing Circuitry . . . . . 19

(Final Page 19)



Model		MGFS62405		Temperature	25°C																																																																															
Item		Input Current (by Input Voltage)		Testing Circuitry	Figure A																																																																															
Object		_____																																																																																		
1.Graph			—△— Load 100% - - - □ - - Load 50% - · - ○ - · - Load 0%	2.Values																																																																																
			<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>6.0</td><td>0.003</td><td>0.003</td><td>0.003</td></tr> <tr><td>8.0</td><td>0.004</td><td>0.003</td><td>0.004</td></tr> <tr><td>8.2</td><td>0.026</td><td>0.004</td><td>0.910</td></tr> <tr><td>8.4</td><td>0.025</td><td>0.436</td><td>0.887</td></tr> <tr><td>8.6</td><td>0.025</td><td>0.426</td><td>0.863</td></tr> <tr><td>8.8</td><td>0.024</td><td>0.414</td><td>0.840</td></tr> <tr><td>9.0</td><td>0.024</td><td>0.406</td><td>0.819</td></tr> <tr><td>12.0</td><td>0.020</td><td>0.304</td><td>0.604</td></tr> <tr><td>18.0</td><td>0.015</td><td>0.204</td><td>0.399</td></tr> <tr><td>24.0</td><td>0.008</td><td>0.156</td><td>0.298</td></tr> <tr><td>30.0</td><td>0.005</td><td>0.125</td><td>0.240</td></tr> <tr><td>36.0</td><td>0.004</td><td>0.106</td><td>0.201</td></tr> <tr><td>40.0</td><td>0.004</td><td>0.096</td><td>0.182</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0.0	0.000	0.000	0.000	6.0	0.003	0.003	0.003	8.0	0.004	0.003	0.004	8.2	0.026	0.004	0.910	8.4	0.025	0.436	0.887	8.6	0.025	0.426	0.863	8.8	0.024	0.414	0.840	9.0	0.024	0.406	0.819	12.0	0.020	0.304	0.604	18.0	0.015	0.204	0.399	24.0	0.008	0.156	0.298	30.0	0.005	0.125	0.240	36.0	0.004	0.106	0.201	40.0	0.004	0.096	0.182	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Input Voltage [V]	Input Current [A]																																																																																			
	Load 0%	Load 50%	Load 100%																																																																																	
0.0	0.000	0.000	0.000																																																																																	
6.0	0.003	0.003	0.003																																																																																	
8.0	0.004	0.003	0.004																																																																																	
8.2	0.026	0.004	0.910																																																																																	
8.4	0.025	0.436	0.887																																																																																	
8.6	0.025	0.426	0.863																																																																																	
8.8	0.024	0.414	0.840																																																																																	
9.0	0.024	0.406	0.819																																																																																	
12.0	0.020	0.304	0.604																																																																																	
18.0	0.015	0.204	0.399																																																																																	
24.0	0.008	0.156	0.298																																																																																	
30.0	0.005	0.125	0.240																																																																																	
36.0	0.004	0.106	0.201																																																																																	
40.0	0.004	0.096	0.182																																																																																	
--	-	-	-																																																																																	
--	-	-	-																																																																																	
--	-	-	-																																																																																	
--	-	-	-																																																																																	
Note: Slanted line shows the range of the rated input voltage.																																																																																				



Model		MGFS62405		Temperature	25°C																																																																													
Item		Input Current (by Load Current)		Testing Circuitry	Figure A																																																																													
Object		_____																																																																																
1.Graph		<p>—△— Input Volt. 9V</p> <p>---□--- Input Volt. 12V</p> <p>-·-·*·-·- Input Volt. 18V</p> <p>-·-·○-·- Input Volt. 24V</p> <p>-·-·◇-·- Input Volt. 36V</p>		2.Values																																																																														
				<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="5">Input Current [A]</th> </tr> <tr> <th>Input Volt. 9[V]</th> <th>Input Volt. 12[V]</th> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.024</td><td>0.020</td><td>0.015</td><td>0.008</td><td>0.004</td></tr> <tr><td>0.24</td><td>0.174</td><td>0.133</td><td>0.091</td><td>0.070</td><td>0.049</td></tr> <tr><td>0.48</td><td>0.329</td><td>0.246</td><td>0.167</td><td>0.125</td><td>0.086</td></tr> <tr><td>0.72</td><td>0.488</td><td>0.365</td><td>0.244</td><td>0.184</td><td>0.125</td></tr> <tr><td>0.96</td><td>0.654</td><td>0.484</td><td>0.321</td><td>0.241</td><td>0.163</td></tr> <tr><td>1.20</td><td>0.819</td><td>0.604</td><td>0.399</td><td>0.298</td><td>0.201</td></tr> <tr><td>1.32</td><td>0.914</td><td>0.670</td><td>0.441</td><td>0.329</td><td>0.221</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Input Current [A]					Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	0.024	0.020	0.015	0.008	0.004	0.24	0.174	0.133	0.091	0.070	0.049	0.48	0.329	0.246	0.167	0.125	0.086	0.72	0.488	0.365	0.244	0.184	0.125	0.96	0.654	0.484	0.321	0.241	0.163	1.20	0.819	0.604	0.399	0.298	0.201	1.32	0.914	0.670	0.441	0.329	0.221	--	-	-	-	-	-	--	-	-	-	-	-	--	-	-	-	-	-	--	-	-	-	-	-
Load Current [A]	Input Current [A]																																																																																	
	Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																																													
0.00	0.024	0.020	0.015	0.008	0.004																																																																													
0.24	0.174	0.133	0.091	0.070	0.049																																																																													
0.48	0.329	0.246	0.167	0.125	0.086																																																																													
0.72	0.488	0.365	0.244	0.184	0.125																																																																													
0.96	0.654	0.484	0.321	0.241	0.163																																																																													
1.20	0.819	0.604	0.399	0.298	0.201																																																																													
1.32	0.914	0.670	0.441	0.329	0.221																																																																													
--	-	-	-	-	-																																																																													
--	-	-	-	-	-																																																																													
--	-	-	-	-	-																																																																													
--	-	-	-	-	-																																																																													
Note: Slanted line shows the range of the rated load current.																																																																																		




Model		MGFS62405		Temperature 25°C																																																																												
Item		Input Power (by Load Current)		Testing Circuitry Figure A																																																																												
Object		_____																																																																														
1.Graph		<p>                 —△— Input Volt. 9V                  ---□--- Input Volt. 12V                  -·-*·-·- Input Volt. 18V                  -·-○-·- Input Volt. 24V                  -·-◇-·- Input Volt. 36V             </p>		2.Values																																																																												
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="5">Input Power [W]</th> </tr> <tr> <th>Input Volt. 9[V]</th> <th>Input Volt. 12[V]</th> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.21</td><td>0.24</td><td>0.28</td><td>0.22</td><td>0.15</td></tr> <tr><td>0.24</td><td>1.56</td><td>1.59</td><td>1.63</td><td>1.69</td><td>1.75</td></tr> <tr><td>0.48</td><td>2.94</td><td>2.94</td><td>3.00</td><td>3.00</td><td>3.11</td></tr> <tr><td>0.72</td><td>4.36</td><td>4.35</td><td>4.37</td><td>4.41</td><td>4.51</td></tr> <tr><td>0.96</td><td>5.83</td><td>5.77</td><td>5.75</td><td>5.78</td><td>5.86</td></tr> <tr><td>1.20</td><td>7.33</td><td>7.24</td><td>7.17</td><td>7.19</td><td>7.26</td></tr> <tr><td>1.32</td><td>8.11</td><td>7.98</td><td>7.90</td><td>7.88</td><td>7.95</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Input Power [W]					Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	0.21	0.24	0.28	0.22	0.15	0.24	1.56	1.59	1.63	1.69	1.75	0.48	2.94	2.94	3.00	3.00	3.11	0.72	4.36	4.35	4.37	4.41	4.51	0.96	5.83	5.77	5.75	5.78	5.86	1.20	7.33	7.24	7.17	7.19	7.26	1.32	8.11	7.98	7.90	7.88	7.95	--	-	-	-	-	-	--	-	-	-	-	-	--	-	-	-	-	-	--	-	-	-	-	-
Load Current [A]	Input Power [W]																																																																															
	Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																																											
0.00	0.21	0.24	0.28	0.22	0.15																																																																											
0.24	1.56	1.59	1.63	1.69	1.75																																																																											
0.48	2.94	2.94	3.00	3.00	3.11																																																																											
0.72	4.36	4.35	4.37	4.41	4.51																																																																											
0.96	5.83	5.77	5.75	5.78	5.86																																																																											
1.20	7.33	7.24	7.17	7.19	7.26																																																																											
1.32	8.11	7.98	7.90	7.88	7.95																																																																											
--	-	-	-	-	-																																																																											
--	-	-	-	-	-																																																																											
--	-	-	-	-	-																																																																											
--	-	-	-	-	-																																																																											
<p>Note: Slanted line shows the range of the rated load current.</p>																																																																																



Model	MGFS62405
Item	Efficiency (by Input Voltage)
Object	_____

Temperature 25°C  
Testing Circuitry Figure A

1.Graph

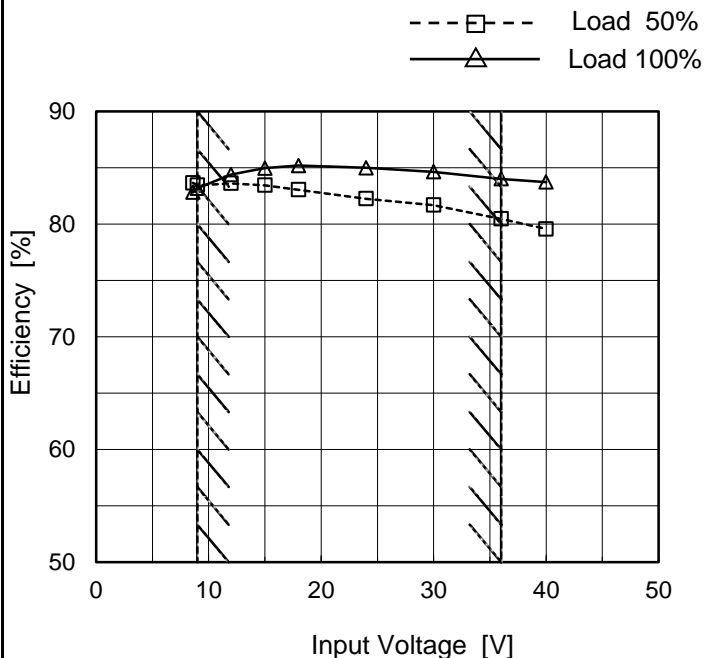

Note: Slanted line shows the range of the rated input voltage.

2.Values

Input Voltage [V]	Efficiency [%]	
	Load 50%	Load 100%
8.6	83.7	82.8
9.0	83.4	83.2
12.0	83.6	84.4
15.0	83.4	85.0
18.0	83.1	85.2
24.0	82.3	85.0
30.0	81.7	84.7
36.0	80.5	84.0
40.0	79.6	83.7



Model		MGFS62405		Temperature	25°C																																																																													
Item		Efficiency (by Load Current)		Testing Circuitry	Figure A																																																																													
Object		_____																																																																																
1.Graph		<ul style="list-style-type: none"> <li>—△— Input Volt. 9V</li> <li>---□--- Input Volt. 12V</li> <li>-·-·*·-·- Input Volt. 18V</li> <li>-·-·○-·- Input Volt. 24V</li> <li>-·-·◇-·- Input Volt. 36V</li> </ul>		2.Values																																																																														
<p style="text-align: center;">Load Current [A]</p>		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="5">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 9[V]</th> <th>Input Volt. 12[V]</th> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.24</td><td>78.3</td><td>76.8</td><td>74.7</td><td>72.2</td><td>69.6</td></tr> <tr><td>0.48</td><td>82.9</td><td>82.8</td><td>81.4</td><td>81.2</td><td>78.3</td></tr> <tr><td>0.72</td><td>83.9</td><td>84.2</td><td>83.7</td><td>83.0</td><td>81.2</td></tr> <tr><td>0.96</td><td>83.8</td><td>84.6</td><td>84.8</td><td>84.5</td><td>83.2</td></tr> <tr><td>1.20</td><td>83.2</td><td>84.4</td><td>85.2</td><td>85.0</td><td>84.0</td></tr> <tr><td>1.32</td><td>82.8</td><td>84.2</td><td>85.0</td><td>85.2</td><td>84.4</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Load Current [A]	Efficiency [%]					Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	-	-	-	-	-	0.24	78.3	76.8	74.7	72.2	69.6	0.48	82.9	82.8	81.4	81.2	78.3	0.72	83.9	84.2	83.7	83.0	81.2	0.96	83.8	84.6	84.8	84.5	83.2	1.20	83.2	84.4	85.2	85.0	84.0	1.32	82.8	84.2	85.0	85.2	84.4	--	-	-	-	-	-	--	-	-	-	-	-	--	-	-	-	-	-	--	-	-	-	-	-
Load Current [A]	Efficiency [%]																																																																																	
	Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																																													
0.00	-	-	-	-	-																																																																													
0.24	78.3	76.8	74.7	72.2	69.6																																																																													
0.48	82.9	82.8	81.4	81.2	78.3																																																																													
0.72	83.9	84.2	83.7	83.0	81.2																																																																													
0.96	83.8	84.6	84.8	84.5	83.2																																																																													
1.20	83.2	84.4	85.2	85.0	84.0																																																																													
1.32	82.8	84.2	85.0	85.2	84.4																																																																													
--	-	-	-	-	-																																																																													
--	-	-	-	-	-																																																																													
--	-	-	-	-	-																																																																													
--	-	-	-	-	-																																																																													
Note: Slanted line shows the range of the rated load current.																																																																																		




<p>Model MGFS62405</p>		<p>Temperature 25°C Testing Circuitry Figure A</p>																																
<p>Item Line Regulation</p>																																		
<p>Object +5V1.2A</p>																																		
<p>1.Graph</p> <p>---□--- Load 50% —△— Load 100%</p> <p>Note: Slanted line shows the range of the rated input voltage.</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>8.6</td><td>5.077</td><td>5.078</td></tr> <tr><td>9.0</td><td>5.077</td><td>5.078</td></tr> <tr><td>12.0</td><td>5.077</td><td>5.078</td></tr> <tr><td>15.0</td><td>5.077</td><td>5.078</td></tr> <tr><td>18.0</td><td>5.077</td><td>5.078</td></tr> <tr><td>24.0</td><td>5.077</td><td>5.078</td></tr> <tr><td>30.0</td><td>5.077</td><td>5.078</td></tr> <tr><td>36.0</td><td>5.077</td><td>5.077</td></tr> <tr><td>40.0</td><td>5.077</td><td>5.077</td></tr> </tbody> </table>	Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	8.6	5.077	5.078	9.0	5.077	5.078	12.0	5.077	5.078	15.0	5.077	5.078	18.0	5.077	5.078	24.0	5.077	5.078	30.0	5.077	5.078	36.0	5.077	5.077	40.0	5.077	5.077
Input Voltage [V]	Output Voltage [V]																																	
	Load 50%	Load 100%																																
8.6	5.077	5.078																																
9.0	5.077	5.078																																
12.0	5.077	5.078																																
15.0	5.077	5.078																																
18.0	5.077	5.078																																
24.0	5.077	5.078																																
30.0	5.077	5.078																																
36.0	5.077	5.077																																
40.0	5.077	5.077																																





Model	MGFS62405
Item	Load Regulation
Object	+5V1.2A

Temperature 25°C  
Testing Circuitry Figure A

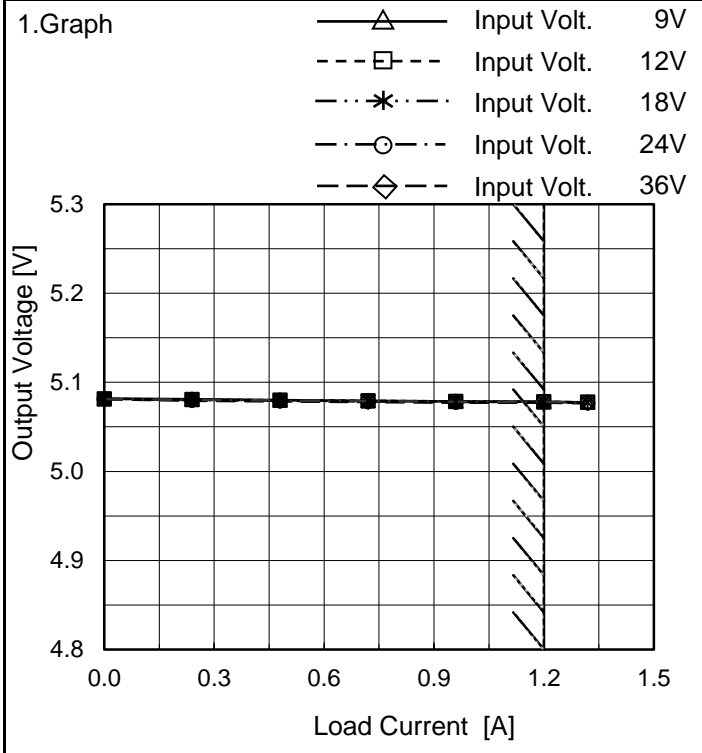

2.Values

Load Current [A]	Output Voltage [V]				
	Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
0.00	5.082	5.081	5.081	5.081	5.081
0.24	5.081	5.081	5.080	5.080	5.079
0.48	5.080	5.080	5.080	5.079	5.079
0.72	5.079	5.079	5.079	5.078	5.078
0.96	5.079	5.078	5.078	5.078	5.077
1.20	5.078	5.078	5.078	5.078	5.077
1.32	5.078	5.078	5.077	5.077	5.076
--	-	-	-	-	-
--	-	-	-	-	-
--	-	-	-	-	-
--	-	-	-	-	-



Model	MGFS62405	Temperature	25°C
Item	Dynamic Load Response	Testing Circuitry	Figure A
Object	+5V1.2A		


Input Volt. 24 V  
 Cycle 100 ms

t1, t2 = 100 μs




Min. Load (0A) ←→  
 Load 100% (1.2A)

200 mV/div

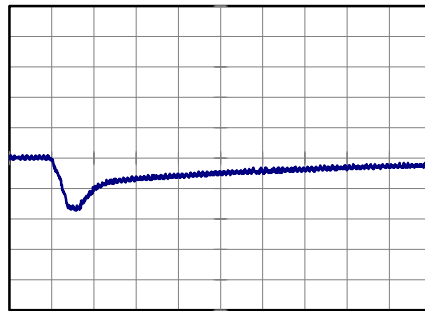


100 μs/div

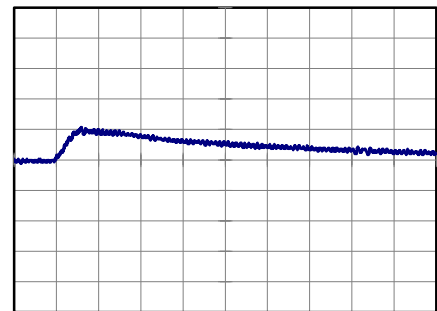


100 μs/div

Min. Load (0A) ←→  
 Load 50% (0.6A)

200 mV/div

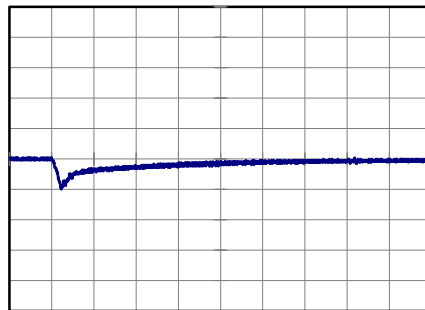


200 μs/div

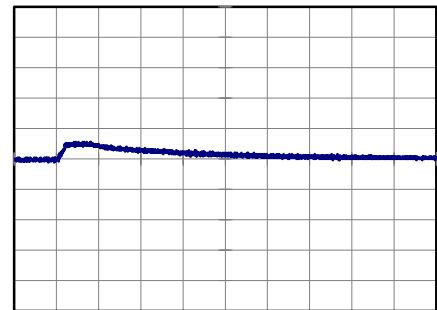


200 μs/div

Load 50% (0.6A) ←→  
 Load 100% (1.2A)

200 mV/div

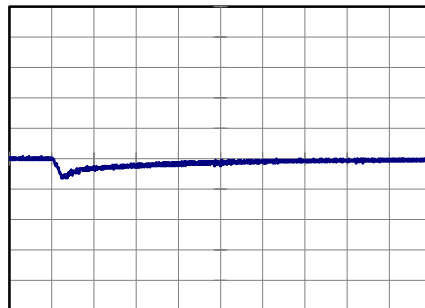

200 μs/div

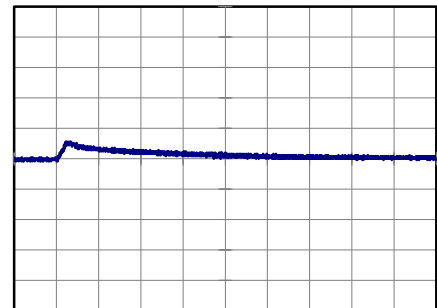

200 μs/div



<p>Model MGFS62405</p> <p>Item Ripple Voltage (by Load Current)</p> <p>Object +5V1.2A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure B</p>																																						
<p>1.Graph</p> <p>             —△— Input Volt. 9V              - - ○ - - Input Volt. 36V         </p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Input Volt. 9 [V]</th> <th>Input Volt. 36 [V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>5</td><td>25</td></tr> <tr><td>0.24</td><td>5</td><td>5</td></tr> <tr><td>0.48</td><td>5</td><td>5</td></tr> <tr><td>0.72</td><td>10</td><td>5</td></tr> <tr><td>0.96</td><td>15</td><td>5</td></tr> <tr><td>1.20</td><td>25</td><td>10</td></tr> <tr><td>1.32</td><td>25</td><td>5</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Ripple Voltage [mV]		Input Volt. 9 [V]	Input Volt. 36 [V]	0.00	5	25	0.24	5	5	0.48	5	5	0.72	10	5	0.96	15	5	1.20	25	10	1.32	25	5	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple Voltage [mV]																																							
	Input Volt. 9 [V]	Input Volt. 36 [V]																																						
0.00	5	25																																						
0.24	5	5																																						
0.48	5	5																																						
0.72	10	5																																						
0.96	15	5																																						
1.20	25	10																																						
1.32	25	5																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Measured by 100 MHz Oscilloscope.                  Ripple Voltage is shown as p-p in the figure below.                  Note: Slanted line shows the range of the rated load current.</p>																																								
<p>Ripple [mVp-p]</p> <p>Fig.Complex Ripple Wave Form</p>																																								



<p>Model MGFS62405</p> <p>Item Ripple-Noise</p> <p>Object +5V1.2A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure B</p>																																						
<p>1.Graph</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple-Noise [mV]</th> </tr> <tr> <th>Input Volt. 9 [V]</th> <th>Input Volt. 36 [V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>5</td><td>25</td></tr> <tr><td>0.24</td><td>5</td><td>10</td></tr> <tr><td>0.48</td><td>10</td><td>5</td></tr> <tr><td>0.72</td><td>10</td><td>10</td></tr> <tr><td>0.96</td><td>20</td><td>10</td></tr> <tr><td>1.20</td><td>30</td><td>10</td></tr> <tr><td>1.32</td><td>30</td><td>10</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Ripple-Noise [mV]		Input Volt. 9 [V]	Input Volt. 36 [V]	0.00	5	25	0.24	5	10	0.48	10	5	0.72	10	10	0.96	20	10	1.20	30	10	1.32	30	10	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple-Noise [mV]																																							
	Input Volt. 9 [V]	Input Volt. 36 [V]																																						
0.00	5	25																																						
0.24	5	10																																						
0.48	10	5																																						
0.72	10	10																																						
0.96	20	10																																						
1.20	30	10																																						
1.32	30	10																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Measured by 100 MHz Oscilloscope.                  Ripple-Noise is shown as p-p in the figure below.                  Note: Slanted line shows the range of the rated load current.</p> <p>Ripple Noise[mVp-p]</p> <p>Fig.Complex Ripple Noise Wave Form</p>																																								




<b>COSEL</b>																																								
Model	MGFS62405																																							
Item	Ripple Voltage (by Ambient Temp.)	Testing Circuitry Figure B																																						
Object	+5V1.2A																																							
<p>1.Graph</p> <p style="text-align: center;">Ambient Temperature [°C] Input Volt. 24V</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>-60</td><td>5</td><td>5</td></tr> <tr><td>-40</td><td>5</td><td>10</td></tr> <tr><td>-20</td><td>5</td><td>5</td></tr> <tr><td>0</td><td>5</td><td>5</td></tr> <tr><td>25</td><td>5</td><td>5</td></tr> <tr><td>65</td><td>5</td><td>5</td></tr> <tr><td>75</td><td>5</td><td>5</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Ambient Temperature [°C]	Ripple Voltage [mV]		Load 50%	Load 100%	-60	5	5	-40	5	10	-20	5	5	0	5	5	25	5	5	65	5	5	75	5	5	--	-	-	--	-	-	--	-	-	--	-	-
Ambient Temperature [°C]	Ripple Voltage [mV]																																							
	Load 50%	Load 100%																																						
-60	5	5																																						
-40	5	10																																						
-20	5	5																																						
0	5	5																																						
25	5	5																																						
65	5	5																																						
75	5	5																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Measured by 100 MHz Oscilloscope. Note: Slanted line shows the range of the rated ambient temperature.</p>																																								



Model	MGFS62405
Item	Ambient Temperature Drift
Object	+5V1.2A

Testing Circuitry Figure A

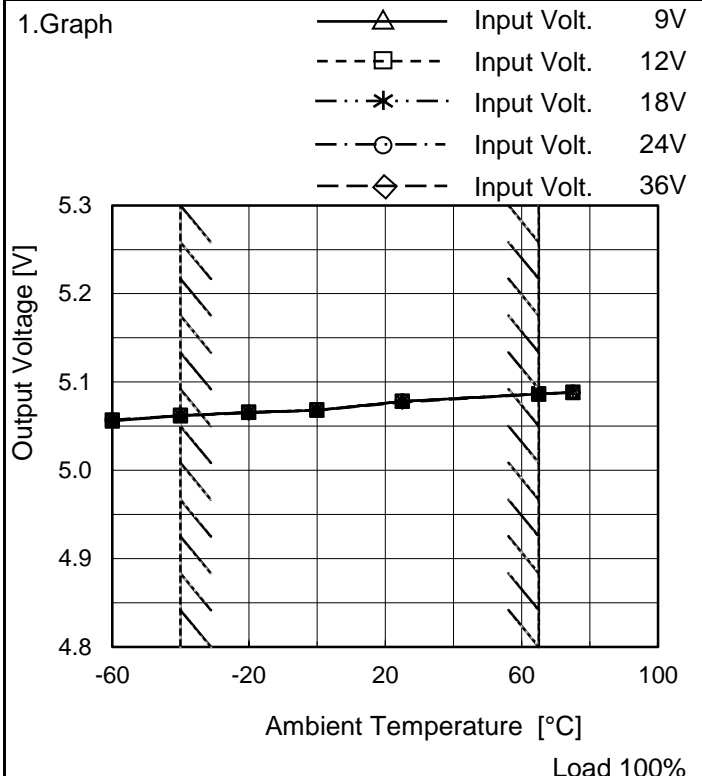

2.Values

Ambient Temperature [°C]	Output Voltage [V]				
	Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
-60	5.056	5.057	5.057	5.057	5.056
-40	5.062	5.062	5.062	5.062	5.062
-20	5.066	5.066	5.066	5.066	5.065
0	5.068	5.068	5.068	5.068	5.068
25	5.078	5.078	5.078	5.078	5.077
65	5.086	5.087	5.087	5.087	5.086
75	5.088	5.088	5.088	5.088	5.088
--	-	-	-	-	-
--	-	-	-	-	-
--	-	-	-	-	-
--	-	-	-	-	-

Note: Slanted line shows the range of the rated ambient temperature.



<b>COSEL</b>		
Model	MGFS62405	
Item	Output Voltage Accuracy	Testing Circuitry Figure A
Object	+5V1.2A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 65°C

Input Voltage : 9 - 36V

Load Current : 0 - 1.2A

\* Output Voltage Accuracy =  $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

\* Output Voltage Accuracy (Ratio) =  $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ratio [%]
Maximum Voltage	65	9	0	5.092	±15	±0.3
Minimum Voltage	-40	9	1.2	5.062		




<b>COSEL</b>																								
Model	MGFS62405																							
Item	Time Lapse Drift	Temperature 25°C Testing Circuitry Figure A																						
Object	+5V1.2A																							
<p>1.Graph</p> <p style="text-align: center;">Time [H]</p> <p>Input Volt. 24V Load 100%</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5.073</td></tr> <tr><td>0.5</td><td>5.078</td></tr> <tr><td>1.0</td><td>5.078</td></tr> <tr><td>2.0</td><td>5.078</td></tr> <tr><td>3.0</td><td>5.078</td></tr> <tr><td>4.0</td><td>5.078</td></tr> <tr><td>5.0</td><td>5.078</td></tr> <tr><td>6.0</td><td>5.078</td></tr> <tr><td>7.0</td><td>5.078</td></tr> <tr><td>8.0</td><td>5.078</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	5.073	0.5	5.078	1.0	5.078	2.0	5.078	3.0	5.078	4.0	5.078	5.0	5.078	6.0	5.078	7.0	5.078	8.0	5.078
Time since start [H]	Output Voltage [V]																							
0.0	5.073																							
0.5	5.078																							
1.0	5.078																							
2.0	5.078																							
3.0	5.078																							
4.0	5.078																							
5.0	5.078																							
6.0	5.078																							
7.0	5.078																							
8.0	5.078																							






Model		MGFS62405	Temperature	25°C
Item		Rise and Fall Time	Testing Circuitry	Figure A
Object		+5V1.2A		

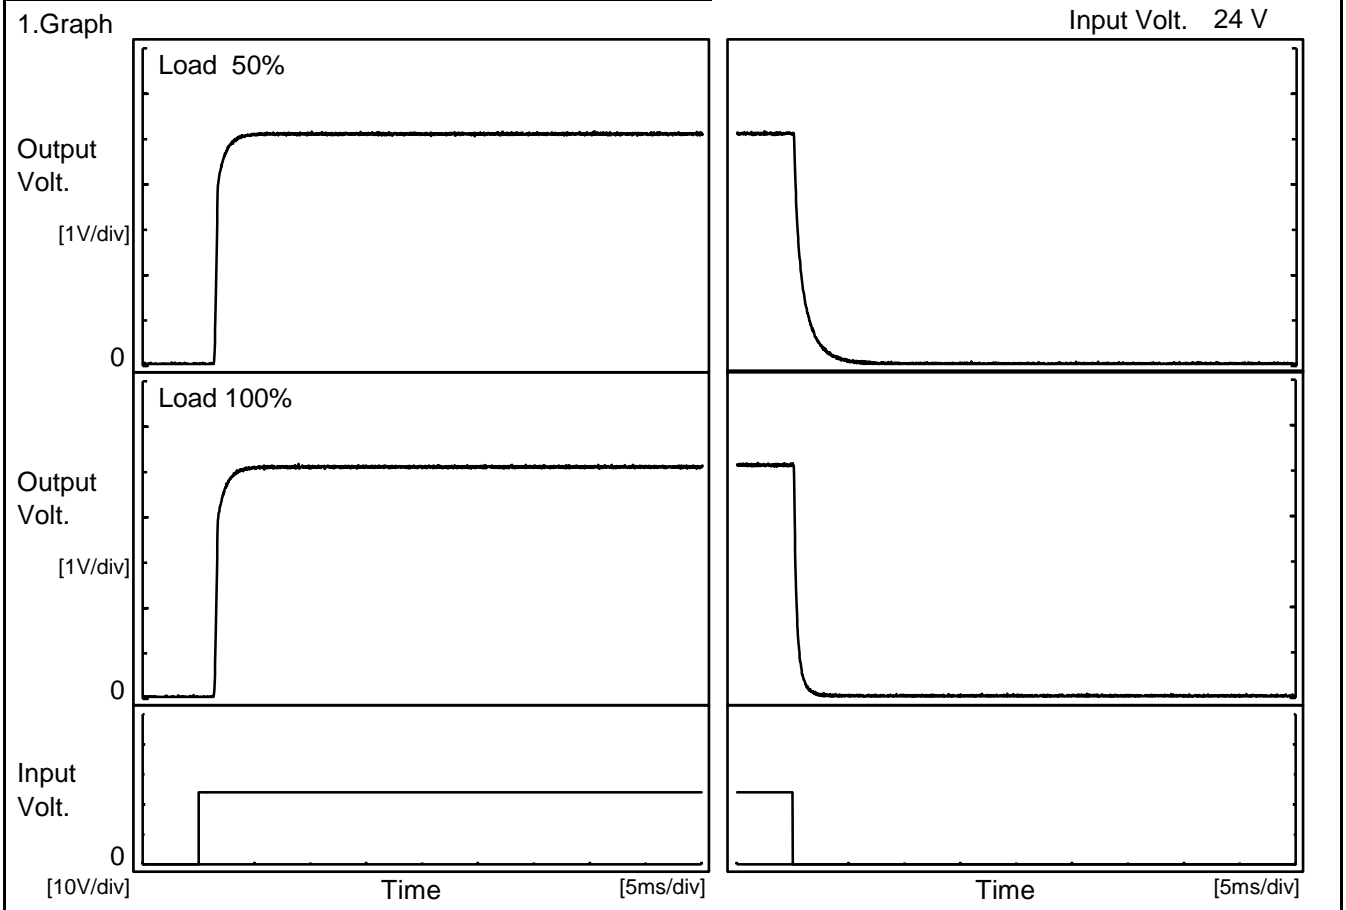

2.Values

Load	Time	Td	Tr	Ts	Th	Tf
50 %		1.5	0.7	2.2	0.2	2.1
100 %		1.5	0.8	2.3	0.1	0.7

[ms]

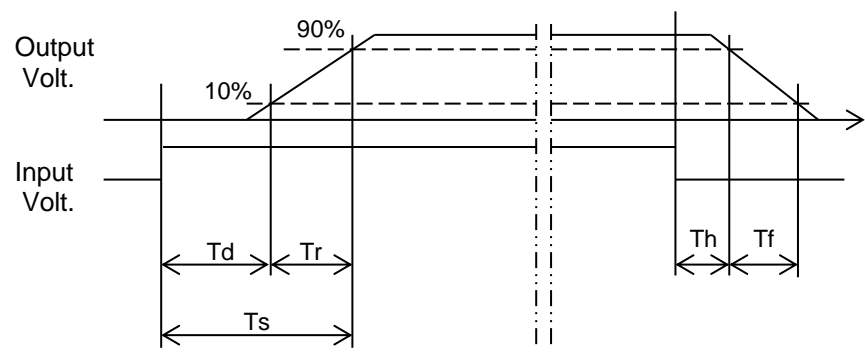



<b>COSEL</b>																																								
Model	MGFS62405																																							
Item	Minimum Input Voltage for Regulated Output Voltage	Testing Circuitry Figure A																																						
Object	+5V1.2A																																							
<p>1.Graph</p> <p style="text-align: right;">             ---□--- Load 50%              —△— Load 100%         </p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Input Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>-60</td><td>7.6</td><td>7.7</td></tr> <tr><td>-40</td><td>7.5</td><td>7.6</td></tr> <tr><td>-20</td><td>7.5</td><td>7.6</td></tr> <tr><td>0</td><td>7.5</td><td>7.6</td></tr> <tr><td>25</td><td>7.4</td><td>7.5</td></tr> <tr><td>65</td><td>7.3</td><td>7.4</td></tr> <tr><td>75</td><td>7.3</td><td>7.4</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Ambient Temperature [°C]	Input Voltage [V]		Load 50%	Load 100%	-60	7.6	7.7	-40	7.5	7.6	-20	7.5	7.6	0	7.5	7.6	25	7.4	7.5	65	7.3	7.4	75	7.3	7.4	--	-	-	--	-	-	--	-	-	--	-	-
Ambient Temperature [°C]	Input Voltage [V]																																							
	Load 50%	Load 100%																																						
-60	7.6	7.7																																						
-40	7.5	7.6																																						
-20	7.5	7.6																																						
0	7.5	7.6																																						
25	7.4	7.5																																						
65	7.3	7.4																																						
75	7.3	7.4																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																								



<p>Model MGFS62405</p>		<p>Temperature 25°C</p>																																																																																				
<p>Item Overcurrent Protection</p>		<p>Testing Circuitry Figure A</p>																																																																																				
<p>Object +5V1.2A</p>																																																																																						
<p>1.Graph</p> <div style="display: flex; align-items: flex-start;"> <div style="margin-right: 20px;"> <p>— Input Volt. 9V</p> <p>— Input Volt. 12V</p> <p>— Input Volt. 18V</p> <p>— Input Volt. 24V</p> <p>— Input Volt. 36V</p> </div> </div> <p style="text-align: center;">Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="5">Load Current [A]</th> </tr> <tr> <th>Input Volt. 9[V]</th> <th>Input Volt. 12[V]</th> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>4.75</td><td>1.549</td><td>1.604</td><td>1.581</td><td>1.582</td><td>1.602</td></tr> <tr><td>4.50</td><td>1.607</td><td>1.655</td><td>1.630</td><td>1.623</td><td>1.632</td></tr> <tr><td>4.00</td><td>1.735</td><td>1.776</td><td>1.742</td><td>1.709</td><td>1.696</td></tr> <tr><td>3.50</td><td>1.879</td><td>1.916</td><td>1.855</td><td>1.799</td><td>1.760</td></tr> <tr><td>3.00</td><td>2.054</td><td>2.069</td><td>1.964</td><td>1.891</td><td>1.841</td></tr> <tr><td>2.50</td><td>2.249</td><td>2.233</td><td>2.084</td><td>1.996</td><td>1.927</td></tr> <tr><td>2.00</td><td>2.467</td><td>2.408</td><td>2.218</td><td>2.102</td><td>2.013</td></tr> <tr><td>1.50</td><td>2.710</td><td>2.605</td><td>2.360</td><td>2.224</td><td>2.110</td></tr> <tr><td>1.00</td><td>2.941</td><td>2.853</td><td>2.522</td><td>2.354</td><td>2.212</td></tr> <tr><td>0.50</td><td>3.201</td><td>3.038</td><td>2.701</td><td>2.485</td><td>2.306</td></tr> <tr><td>0.00</td><td>3.599</td><td>3.268</td><td>2.736</td><td>2.485</td><td>2.261</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Output Voltage [V]	Load Current [A]					Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	4.75	1.549	1.604	1.581	1.582	1.602	4.50	1.607	1.655	1.630	1.623	1.632	4.00	1.735	1.776	1.742	1.709	1.696	3.50	1.879	1.916	1.855	1.799	1.760	3.00	2.054	2.069	1.964	1.891	1.841	2.50	2.249	2.233	2.084	1.996	1.927	2.00	2.467	2.408	2.218	2.102	2.013	1.50	2.710	2.605	2.360	2.224	2.110	1.00	2.941	2.853	2.522	2.354	2.212	0.50	3.201	3.038	2.701	2.485	2.306	0.00	3.599	3.268	2.736	2.485	2.261	--	-	-	-	-	-
Output Voltage [V]	Load Current [A]																																																																																					
	Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																																																	
4.75	1.549	1.604	1.581	1.582	1.602																																																																																	
4.50	1.607	1.655	1.630	1.623	1.632																																																																																	
4.00	1.735	1.776	1.742	1.709	1.696																																																																																	
3.50	1.879	1.916	1.855	1.799	1.760																																																																																	
3.00	2.054	2.069	1.964	1.891	1.841																																																																																	
2.50	2.249	2.233	2.084	1.996	1.927																																																																																	
2.00	2.467	2.408	2.218	2.102	2.013																																																																																	
1.50	2.710	2.605	2.360	2.224	2.110																																																																																	
1.00	2.941	2.853	2.522	2.354	2.212																																																																																	
0.50	3.201	3.038	2.701	2.485	2.306																																																																																	
0.00	3.599	3.268	2.736	2.485	2.261																																																																																	
--	-	-	-	-	-																																																																																	



<p>Model MGFS62405</p>		<p>Temperature 25°C</p>																																																																														
<p>Item Switching frequency (by Load Current)</p>		<p>Testing Circuitry Figure A</p>																																																																														
<p>Object +5V1.2A</p>																																																																																
<p>1.Graph</p> <p>                     —△— Input Volt. 9V                      - - - □ - - - Input Volt. 12V                      - · · * · · - · - Input Volt. 18V                      - · - ○ - · - - Input Volt. 24V                      - - ◇ - - - Input Volt. 36V                 </p> <p>Switching Frequency [kHz]</p> <p>Load Current [A]</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="5">Input Current [A]</th> </tr> <tr> <th>Input Volt. 9[V]</th> <th>Input Volt. 12[V]</th> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>787</td><td>895</td><td>1042</td><td>1095</td><td>1245</td></tr> <tr><td>0.24</td><td>462</td><td>571</td><td>723</td><td>814</td><td>910</td></tr> <tr><td>0.48</td><td>328</td><td>421</td><td>555</td><td>643</td><td>739</td></tr> <tr><td>0.72</td><td>252</td><td>332</td><td>451</td><td>531</td><td>623</td></tr> <tr><td>0.96</td><td>205</td><td>274</td><td>379</td><td>452</td><td>538</td></tr> <tr><td>1.20</td><td>172</td><td>233</td><td>327</td><td>393</td><td>474</td></tr> <tr><td>1.32</td><td>159</td><td>216</td><td>306</td><td>369</td><td>447</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Input Current [A]					Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	787	895	1042	1095	1245	0.24	462	571	723	814	910	0.48	328	421	555	643	739	0.72	252	332	451	531	623	0.96	205	274	379	452	538	1.20	172	233	327	393	474	1.32	159	216	306	369	447	--	-	-	-	-	-	--	-	-	-	-	-	--	-	-	-	-	-	--	-	-	-	-	-
Load Current [A]	Input Current [A]																																																																															
	Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																																											
0.00	787	895	1042	1095	1245																																																																											
0.24	462	571	723	814	910																																																																											
0.48	328	421	555	643	739																																																																											
0.72	252	332	451	531	623																																																																											
0.96	205	274	379	452	538																																																																											
1.20	172	233	327	393	474																																																																											
1.32	159	216	306	369	447																																																																											
--	-	-	-	-	-																																																																											
--	-	-	-	-	-																																																																											
--	-	-	-	-	-																																																																											
--	-	-	-	-	-																																																																											
<p>Note: Slanted line shows the range of the rated load current.</p> <p>When load current is low, MG operates intermittently, so switching frequency would not become constant.</p>																																																																																

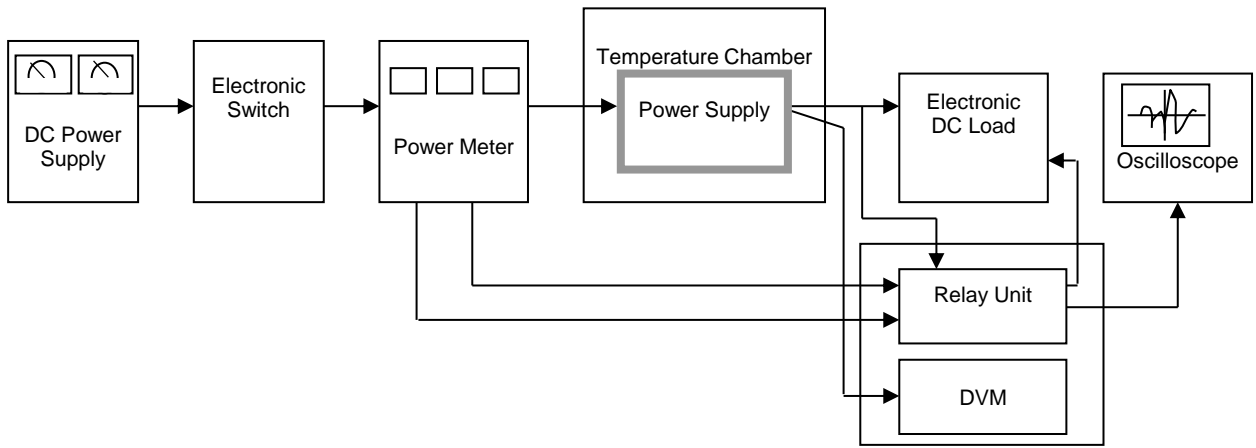


Figure A

Data Acquisition/Control Unit

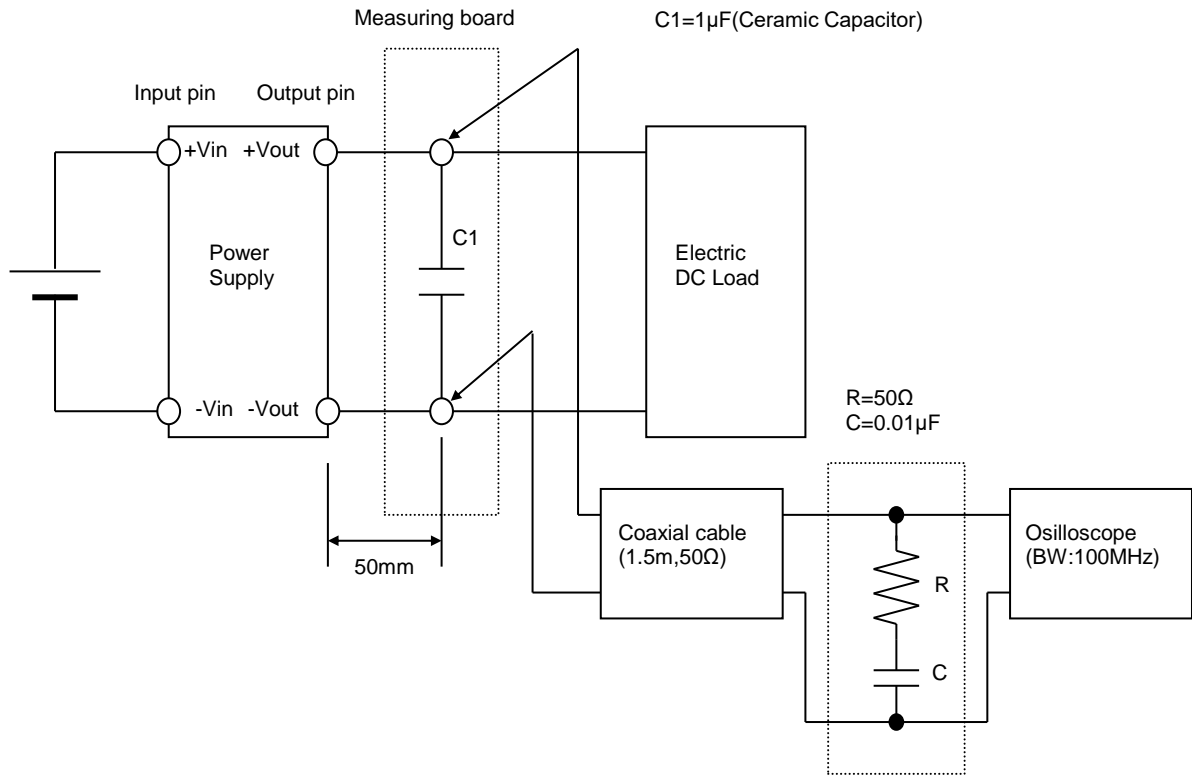


Figure B (Ripple and Ripple noise Characteristic)