

# TEST DATA OF MGS15123R3

Regulated DC Power Supply  
September 10, 2010

Approved by : *Kazunari Asano*  
Kazunari Asano Design Manager

Prepared by : *Shintaro Mizukami*  
Shintaro Mizukami Design Engineer

**COSEL CO.,LTD.**

## CONTENTS

1.Input Current (by Input Voltage) . . . . .	1
2.Input Current (by Load Current) . . . . .	2
3.Input Power (by Load Current) . . . . .	3
4.Efficiency (by Input Voltage) . . . . .	4
5.Efficiency (by Load Current) . . . . .	5
6.Line Regulation . . . . .	6
7.Load Regulation . . . . .	7
8.Dynamic Load Response . . . . .	8
9.Ripple Voltage (by Load Current) . . . . .	9
10.Ripple-Noise . . . . .	10
11.Ripple Voltage (by Ambient Temperature) . . . . .	11
12.Ambient Temperature Drift . . . . .	12
13.Output Voltage Accuracy . . . . .	13
14.Time Lapse Drift . . . . .	14
15.Rise and Fall Time . . . . .	15
16.Minimum Input Voltage for Regulated Output Voltage . . . . .	16
17.Overcurrent Protection . . . . .	17
18.Figure of Testing Circuitry . . . . .	18

(Final Page 18)



<p>Model MGS15123R3</p>		<p>Temperature 25°C Testing Circuitry Figure A</p>																																																																															
Item	Input Current (by Input Voltage)																																																																																
Object	_____																																																																																
<p>1.Graph</p> <p> <span style="display: inline-block; width: 1em; border-bottom: 1px solid black; margin-right: 0.5em;"></span> <span style="display: inline-block; width: 1em; border-bottom: 1px dashed black; margin-right: 0.5em;"></span> <span style="display: inline-block; width: 1em; border-bottom: 1px dash-dot black; margin-right: 0.5em;"></span> </p> <p> <span style="display: inline-block; width: 1em; border-bottom: 1px solid black; margin-right: 0.5em;"></span> △ Load 100%  <span style="display: inline-block; width: 1em; border-bottom: 1px dashed black; margin-right: 0.5em;"></span> □ Load 50%  <span style="display: inline-block; width: 1em; border-bottom: 1px dash-dot black; margin-right: 0.5em;"></span> ○ Load 0%                 </p> <p style="margin-top: 10px;">Note: Slanted line shows the range of the rated input voltage.</p>		<p>2.Values</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>2.0</td><td>0.001</td><td>0.001</td><td>0.001</td></tr> <tr><td>4.0</td><td>0.002</td><td>0.001</td><td>0.001</td></tr> <tr><td>6.0</td><td>0.002</td><td>0.002</td><td>0.002</td></tr> <tr><td>7.0</td><td>0.002</td><td>0.002</td><td>0.002</td></tr> <tr><td>8.0</td><td>0.002</td><td>0.002</td><td>0.002</td></tr> <tr><td>8.1</td><td>0.002</td><td>0.002</td><td>2.043</td></tr> <tr><td>8.3</td><td>0.080</td><td>0.946</td><td>1.942</td></tr> <tr><td>8.5</td><td>0.079</td><td>0.922</td><td>1.868</td></tr> <tr><td>9.0</td><td>0.076</td><td>0.870</td><td>1.774</td></tr> <tr><td>10.0</td><td>0.071</td><td>0.781</td><td>1.582</td></tr> <tr><td>12.0</td><td>0.063</td><td>0.650</td><td>1.301</td></tr> <tr><td>14.0</td><td>0.057</td><td>0.558</td><td>1.109</td></tr> <tr><td>16.0</td><td>0.052</td><td>0.489</td><td>0.967</td></tr> <tr><td>18.0</td><td>0.048</td><td>0.436</td><td>0.859</td></tr> <tr><td>20.0</td><td>0.045</td><td>0.393</td><td>0.777</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0.0	0.000	0.000	0.000	2.0	0.001	0.001	0.001	4.0	0.002	0.001	0.001	6.0	0.002	0.002	0.002	7.0	0.002	0.002	0.002	8.0	0.002	0.002	0.002	8.1	0.002	0.002	2.043	8.3	0.080	0.946	1.942	8.5	0.079	0.922	1.868	9.0	0.076	0.870	1.774	10.0	0.071	0.781	1.582	12.0	0.063	0.650	1.301	14.0	0.057	0.558	1.109	16.0	0.052	0.489	0.967	18.0	0.048	0.436	0.859	20.0	0.045	0.393	0.777	--	-	-	-	--	-	-	-
Input Voltage [V]	Input Current [A]																																																																																
	Load 0%	Load 50%	Load 100%																																																																														
0.0	0.000	0.000	0.000																																																																														
2.0	0.001	0.001	0.001																																																																														
4.0	0.002	0.001	0.001																																																																														
6.0	0.002	0.002	0.002																																																																														
7.0	0.002	0.002	0.002																																																																														
8.0	0.002	0.002	0.002																																																																														
8.1	0.002	0.002	2.043																																																																														
8.3	0.080	0.946	1.942																																																																														
8.5	0.079	0.922	1.868																																																																														
9.0	0.076	0.870	1.774																																																																														
10.0	0.071	0.781	1.582																																																																														
12.0	0.063	0.650	1.301																																																																														
14.0	0.057	0.558	1.109																																																																														
16.0	0.052	0.489	0.967																																																																														
18.0	0.048	0.436	0.859																																																																														
20.0	0.045	0.393	0.777																																																																														
--	-	-	-																																																																														
--	-	-	-																																																																														



Model		MGS15123R3	Temperature 25°C																																																				
Item		Input Current (by Load Current)	Testing Circuitry Figure A																																																				
Object		_____																																																					
1.Graph		<p>—△— Input Volt. 9V</p> <p>---□--- Input Volt. 12V</p> <p>-·-○-·- Input Volt. 18V</p>	2.Values																																																				
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 9[V]</th> <th>Input Volt. 12[V]</th> <th>Input Volt. 18[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.075</td><td>0.063</td><td>0.048</td></tr> <tr><td>0.8</td><td>0.376</td><td>0.287</td><td>0.198</td></tr> <tr><td>1.6</td><td>0.696</td><td>0.523</td><td>0.354</td></tr> <tr><td>2.4</td><td>1.035</td><td>0.770</td><td>0.517</td></tr> <tr><td>3.2</td><td>1.395</td><td>1.030</td><td>0.685</td></tr> <tr><td>4.0</td><td>1.776</td><td>1.300</td><td>0.859</td></tr> <tr><td>4.4</td><td>1.982</td><td>1.441</td><td>0.950</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Input Current [A]			Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	0.0	0.075	0.063	0.048	0.8	0.376	0.287	0.198	1.6	0.696	0.523	0.354	2.4	1.035	0.770	0.517	3.2	1.395	1.030	0.685	4.0	1.776	1.300	0.859	4.4	1.982	1.441	0.950	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Current [A]																																																						
	Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]																																																				
0.0	0.075	0.063	0.048																																																				
0.8	0.376	0.287	0.198																																																				
1.6	0.696	0.523	0.354																																																				
2.4	1.035	0.770	0.517																																																				
3.2	1.395	1.030	0.685																																																				
4.0	1.776	1.300	0.859																																																				
4.4	1.982	1.441	0.950																																																				
--	-	-	-																																																				
--	-	-	-																																																				
--	-	-	-																																																				
--	-	-	-																																																				
<p>Note: Slanted line shows the range of the rated load current.</p>																																																							



Model		MGS15123R3	Temperature 25°C																																																				
Item		Input Power (by Load Current)	Testing Circuitry Figure A																																																				
Object		_____																																																					
1.Graph		<p>—△— Input Volt. 9V</p> <p>---□--- Input Volt. 12V</p> <p>-·-○-·- Input Volt. 18V</p>	2.Values																																																				
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 9[V]</th> <th>Input Volt. 12[V]</th> <th>Input Volt. 18[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.70</td><td>0.76</td><td>0.88</td></tr> <tr><td>0.8</td><td>3.45</td><td>3.50</td><td>3.61</td></tr> <tr><td>1.6</td><td>6.35</td><td>6.37</td><td>6.43</td></tr> <tr><td>2.4</td><td>9.42</td><td>9.35</td><td>9.38</td></tr> <tr><td>3.2</td><td>12.61</td><td>12.48</td><td>12.42</td></tr> <tr><td>4.0</td><td>15.97</td><td>15.69</td><td>15.56</td></tr> <tr><td>4.4</td><td>17.79</td><td>17.37</td><td>17.19</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Input Power [W]			Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	0.0	0.70	0.76	0.88	0.8	3.45	3.50	3.61	1.6	6.35	6.37	6.43	2.4	9.42	9.35	9.38	3.2	12.61	12.48	12.42	4.0	15.97	15.69	15.56	4.4	17.79	17.37	17.19	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Power [W]																																																						
	Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]																																																				
0.0	0.70	0.76	0.88																																																				
0.8	3.45	3.50	3.61																																																				
1.6	6.35	6.37	6.43																																																				
2.4	9.42	9.35	9.38																																																				
3.2	12.61	12.48	12.42																																																				
4.0	15.97	15.69	15.56																																																				
4.4	17.79	17.37	17.19																																																				
--	-	-	-																																																				
--	-	-	-																																																				
--	-	-	-																																																				
--	-	-	-																																																				
Note: Slanted line shows the range of the rated load current.																																																							



<p>Model MGS15123R3</p>		<p>Temperature 25°C Testing Circuitry Figure A</p>																																
Item	Efficiency (by Input Voltage)																																	
Object																																		
<p>1.Graph</p> <p>---□--- Load 50% —△— Load 100%</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr> <td>8.5</td> <td>84.8</td> <td>83.2</td> </tr> <tr> <td>9.0</td> <td>85.2</td> <td>83.8</td> </tr> <tr> <td>10.0</td> <td>85.4</td> <td>84.3</td> </tr> <tr> <td>12.0</td> <td>85.3</td> <td>85.1</td> </tr> <tr> <td>15.0</td> <td>85.4</td> <td>85.7</td> </tr> <tr> <td>18.0</td> <td>85.0</td> <td>86.0</td> </tr> <tr> <td>20.0</td> <td>84.9</td> <td>86.0</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	8.5	84.8	83.2	9.0	85.2	83.8	10.0	85.4	84.3	12.0	85.3	85.1	15.0	85.4	85.7	18.0	85.0	86.0	20.0	84.9	86.0	--	-	-	--	-	-
Input Voltage [V]	Efficiency [%]																																	
	Load 50%	Load 100%																																
8.5	84.8	83.2																																
9.0	85.2	83.8																																
10.0	85.4	84.3																																
12.0	85.3	85.1																																
15.0	85.4	85.7																																
18.0	85.0	86.0																																
20.0	84.9	86.0																																
--	-	-																																
--	-	-																																
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																		



Model		MGS15123R3	Temperature 25°C																																																				
Item		Efficiency (by Load Current)	Testing Circuitry Figure A																																																				
Object		_____																																																					
1.Graph		<p>—△— Input Volt. 9V</p> <p>- - □ - - Input Volt. 12V</p> <p>- · - ○ - · - Input Volt. 18V</p>	2.Values																																																				
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 9[V]</th> <th>Input Volt. 12[V]</th> <th>Input Volt. 18[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.8</td><td>78.0</td><td>76.8</td><td>74.6</td></tr> <tr><td>1.6</td><td>84.5</td><td>84.3</td><td>83.5</td></tr> <tr><td>2.4</td><td>85.4</td><td>86.1</td><td>85.8</td></tr> <tr><td>3.2</td><td>85.0</td><td>85.9</td><td>86.3</td></tr> <tr><td>4.0</td><td>83.9</td><td>85.4</td><td>86.1</td></tr> <tr><td>4.4</td><td>82.8</td><td>84.8</td><td>85.7</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Efficiency [%]			Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	0.0	-	-	-	0.8	78.0	76.8	74.6	1.6	84.5	84.3	83.5	2.4	85.4	86.1	85.8	3.2	85.0	85.9	86.3	4.0	83.9	85.4	86.1	4.4	82.8	84.8	85.7	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Efficiency [%]																																																						
	Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]																																																				
0.0	-	-	-																																																				
0.8	78.0	76.8	74.6																																																				
1.6	84.5	84.3	83.5																																																				
2.4	85.4	86.1	85.8																																																				
3.2	85.0	85.9	86.3																																																				
4.0	83.9	85.4	86.1																																																				
4.4	82.8	84.8	85.7																																																				
--	-	-	-																																																				
--	-	-	-																																																				
--	-	-	-																																																				
--	-	-	-																																																				
<p>Note: Slanted line shows the range of the rated load current.</p>																																																							



<b>COSEL</b>																																			
Model	MGS15123R3	Temperature	25°C																																
Item	Line Regulation	Testing Circuitry	Figure A																																
Object	+3.3V4A																																		
<p>1.Graph</p> <div style="text-align: right;"> <p>---□--- Load 50%</p> <p>—△— Load 100%</p> </div> <p style="text-align: center;">Input Voltage [V]</p>		<p>2.Values</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>8.5</td><td>3.357</td><td>3.355</td></tr> <tr><td>9.0</td><td>3.357</td><td>3.355</td></tr> <tr><td>10.0</td><td>3.357</td><td>3.355</td></tr> <tr><td>12.0</td><td>3.357</td><td>3.355</td></tr> <tr><td>15.0</td><td>3.357</td><td>3.355</td></tr> <tr><td>18.0</td><td>3.357</td><td>3.355</td></tr> <tr><td>20.0</td><td>3.357</td><td>3.355</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>		Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	8.5	3.357	3.355	9.0	3.357	3.355	10.0	3.357	3.355	12.0	3.357	3.355	15.0	3.357	3.355	18.0	3.357	3.355	20.0	3.357	3.355	--	-	-	--	-	-
Input Voltage [V]	Output Voltage [V]																																		
	Load 50%	Load 100%																																	
8.5	3.357	3.355																																	
9.0	3.357	3.355																																	
10.0	3.357	3.355																																	
12.0	3.357	3.355																																	
15.0	3.357	3.355																																	
18.0	3.357	3.355																																	
20.0	3.357	3.355																																	
--	-	-																																	
--	-	-																																	
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																			






<b>COSEL</b>																																																						
Model	MGS15123R3	Temperature	25°C																																																			
Item	Load Regulation	Testing Circuitry	Figure A																																																			
Object	+3.3V4A																																																					
<p>1.Graph</p> <p>                     —△— Input Volt. 9V                      ---□--- Input Volt. 12V                      -·-○-·- Input Volt. 18V                 </p> <p style="text-align: center;">Output Voltage [V]</p> <p style="text-align: center;">Load Current [A]</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 9[V]</th> <th>Input Volt. 12[V]</th> <th>Input Volt. 18[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>3.357</td><td>3.357</td><td>3.357</td></tr> <tr><td>0.8</td><td>3.357</td><td>3.357</td><td>3.357</td></tr> <tr><td>1.6</td><td>3.357</td><td>3.357</td><td>3.357</td></tr> <tr><td>2.4</td><td>3.356</td><td>3.356</td><td>3.356</td></tr> <tr><td>3.2</td><td>3.356</td><td>3.356</td><td>3.356</td></tr> <tr><td>4.0</td><td>3.355</td><td>3.355</td><td>3.355</td></tr> <tr><td>4.4</td><td>3.355</td><td>3.355</td><td>3.355</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Output Voltage [V]			Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	0.0	3.357	3.357	3.357	0.8	3.357	3.357	3.357	1.6	3.357	3.357	3.357	2.4	3.356	3.356	3.356	3.2	3.356	3.356	3.356	4.0	3.355	3.355	3.355	4.4	3.355	3.355	3.355	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																					
	Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]																																																			
0.0	3.357	3.357	3.357																																																			
0.8	3.357	3.357	3.357																																																			
1.6	3.357	3.357	3.357																																																			
2.4	3.356	3.356	3.356																																																			
3.2	3.356	3.356	3.356																																																			
4.0	3.355	3.355	3.355																																																			
4.4	3.355	3.355	3.355																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
<p>Note: Slanted line shows the range of the rated load current.</p>																																																						




Model		MGS15123R3	Temperature 25°C Testing Circuitry Figure A
Item		Dynamic Load Response	
Object		+3.3V4A	


Input Volt. 12 V  
Cycle 1000 ms

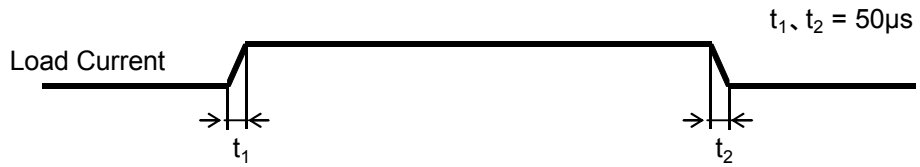

Min. Load (0A) ←→  
Load 100% (4A)

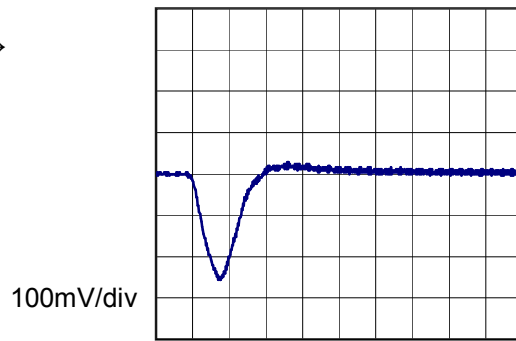


50µs/div

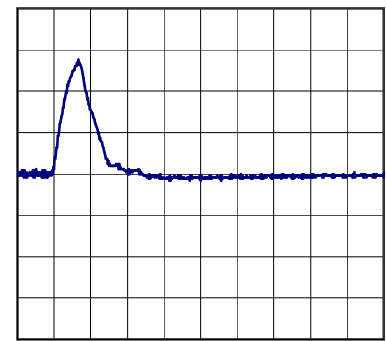


50µs/div

Min. Load (0A) ←→  
Load 50% (2A)

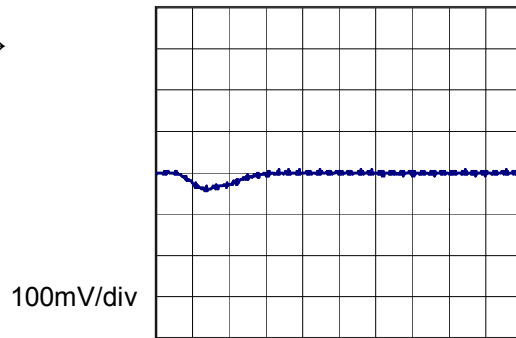


50µs/div

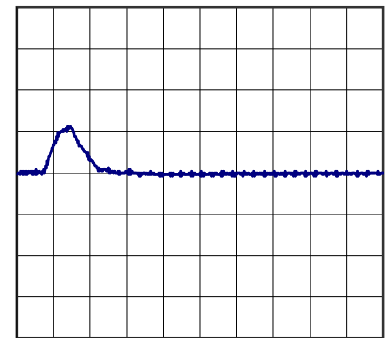


50µs/div

Load 50% (2A) ←→  
Load 100% (4A)

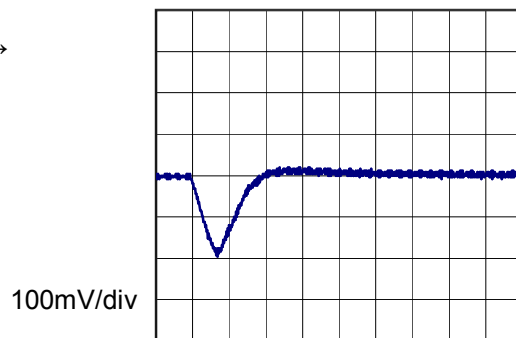


50µs/div

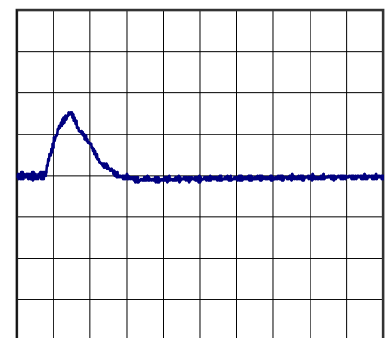

50µs/div

Model	MGS15123R3	Temperature	25°C
Item	Ripple Voltage (by Load Current)	Testing Circuitry	Figure B
Object	+3.3V4A		

1. Graph

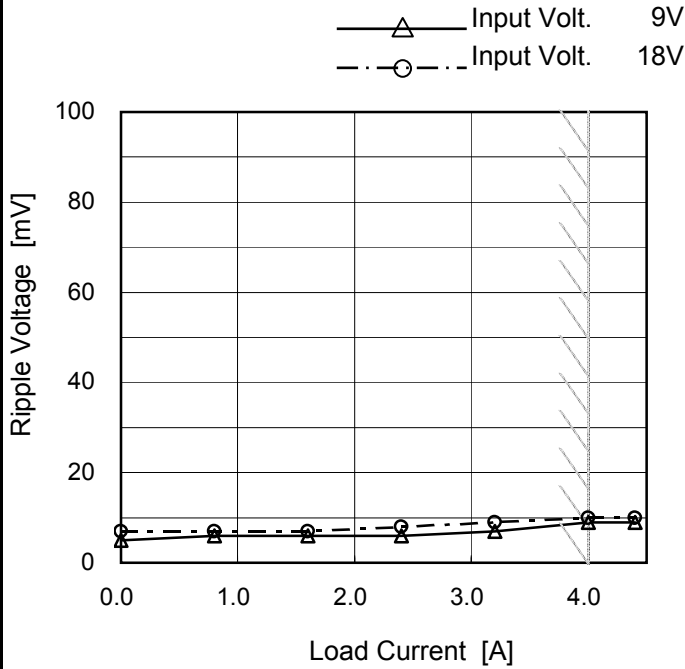

2. Values

Load Current [A]	Ripple Voltage [mV]	
	Input Volt. 9 [V]	Input Volt. 18 [V]
0.0	5	7
0.8	6	7
1.6	6	7
2.4	6	8
3.2	7	9
4.0	9	10
4.4	9	10
--	-	-
--	-	-
--	-	-
--	-	-

Measured by 100 MHz Oscilloscope.  
 Ripple Voltage is shown as p-p in the figure below.  
 Note: Slanted line shows the range of the rated load current.

Ripple [mVp-p]


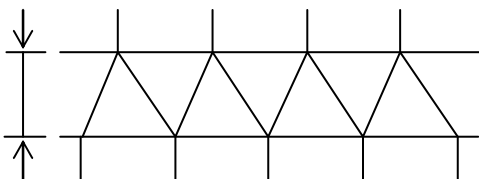


Fig. Complex Ripple Wave Form

Model	MGS15123R3	Temperature	25°C
Item	Ripple-Noise	Testing Circuitry	Figure B
Object	+3.3V4A		

1. Graph

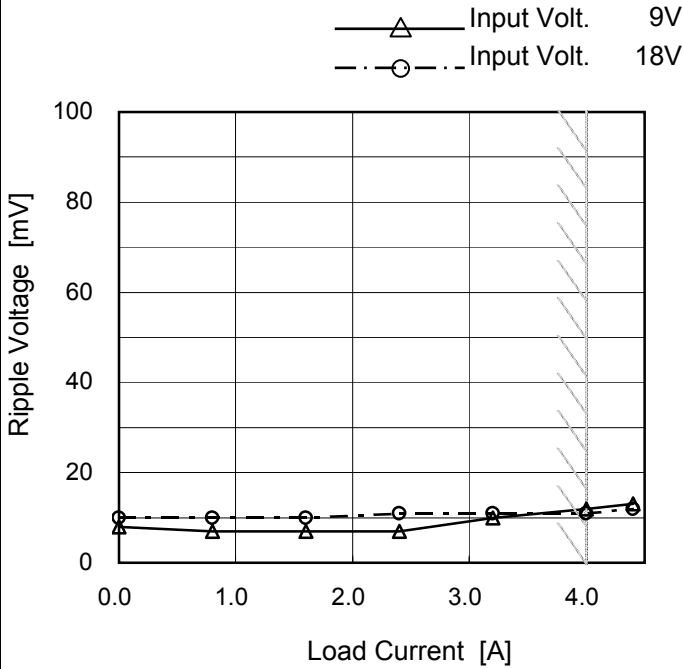

2. Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 9 [V]	Input Volt. 18 [V]
0.0	8	10
0.8	7	10
1.6	7	10
2.4	7	11
3.2	10	11
4.0	12	11
4.4	13	12
--	-	-
--	-	-
--	-	-
--	-	-

Measured by 100 MHz Oscilloscope.  
 Ripple-Noise is shown as p-p in the figure below.  
 Note: Slanted line shows the range of the rated load current.

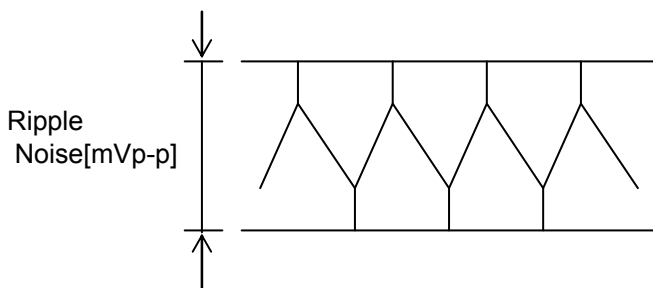


Fig. Complex Ripple Noise Wave Form



<b>COSEL</b>																																								
Model	MGS15123R3																																							
Item	Ripple Voltage (by Ambient Temp.)	Testing Circuitry Figure B																																						
Object	+3.3V4A																																							
<p>1. Graph</p> <p style="text-align: center;">Input Volt. 12V</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>-60</td><td>7</td><td>11</td></tr> <tr><td>-40</td><td>7</td><td>11</td></tr> <tr><td>-20</td><td>6</td><td>10</td></tr> <tr><td>0</td><td>6</td><td>9</td></tr> <tr><td>25</td><td>6</td><td>8</td></tr> <tr><td>60</td><td>6</td><td>7</td></tr> <tr><td>65</td><td>6</td><td>7</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Ambient Temperature [°C]	Ripple Voltage [mV]		Load 50%	Load 100%	-60	7	11	-40	7	11	-20	6	10	0	6	9	25	6	8	60	6	7	65	6	7	--	-	-	--	-	-	--	-	-	--	-	-
Ambient Temperature [°C]	Ripple Voltage [mV]																																							
	Load 50%	Load 100%																																						
-60	7	11																																						
-40	7	11																																						
-20	6	10																																						
0	6	9																																						
25	6	8																																						
60	6	7																																						
65	6	7																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Measured by 100 MHz Oscilloscope.                  Note: Slanted line shows the range of the rated ambient temperature.</p>																																								



<b>COSEL</b>																																																					
Model	MGS15123R3																																																				
Item	Ambient Temperature Drift	Testing Circuitry Figure A																																																			
Object	+3.3V4A																																																				
1.Graph	<p>—△— Input Volt. 9V                  ---□--- Input Volt. 12V                  -·-○-·- Input Volt. 18V</p> <p style="text-align: center;">Ambient Temperature [°C] Load 100%</p>	2.Values																																																			
		<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 9[V]</th> <th>Input Volt. 12[V]</th> <th>Input Volt. 18[V]</th> </tr> </thead> <tbody> <tr><td>-60</td><td>3.365</td><td>3.366</td><td>3.366</td></tr> <tr><td>-40</td><td>3.365</td><td>3.365</td><td>3.365</td></tr> <tr><td>-20</td><td>3.362</td><td>3.362</td><td>3.362</td></tr> <tr><td>0</td><td>3.358</td><td>3.358</td><td>3.358</td></tr> <tr><td>25</td><td>3.356</td><td>3.356</td><td>3.356</td></tr> <tr><td>60</td><td>3.350</td><td>3.350</td><td>3.350</td></tr> <tr><td>65</td><td>3.349</td><td>3.349</td><td>3.349</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	-60	3.365	3.366	3.366	-40	3.365	3.365	3.365	-20	3.362	3.362	3.362	0	3.358	3.358	3.358	25	3.356	3.356	3.356	60	3.350	3.350	3.350	65	3.349	3.349	3.349	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Ambient Temperature [°C]	Output Voltage [V]																																																				
	Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]																																																		
-60	3.365	3.366	3.366																																																		
-40	3.365	3.365	3.365																																																		
-20	3.362	3.362	3.362																																																		
0	3.358	3.358	3.358																																																		
25	3.356	3.356	3.356																																																		
60	3.350	3.350	3.350																																																		
65	3.349	3.349	3.349																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																																					



<b>COSEL</b>		
Model	MGS15123R3	
Item	Output Voltage Accuracy	Testing Circuitry Figure A
Object	+3.3V4A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 60°C

Input Voltage : 9 - 18V

Load Current : 0 - 4A

\* Output Voltage Accuracy =  $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

\* Output Voltage Accuracy (Ration) = 
$$\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	-40	9	0	3.367	±9	±0.3
Minimum Voltage	60	18	4	3.350		



<b>COSEL</b>																								
Model	MGS15123R3																							
Item	Time Lapse Drift	Temperature 25°C Testing Circuitry Figure A																						
Object	+3.3V4A																							
<p>1.Graph</p> <p style="text-align: center;">Time [H]</p> <p>Input Volt. 12V Load 100%</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>3.357</td></tr> <tr><td>0.5</td><td>3.354</td></tr> <tr><td>1.0</td><td>3.354</td></tr> <tr><td>2.0</td><td>3.354</td></tr> <tr><td>3.0</td><td>3.354</td></tr> <tr><td>4.0</td><td>3.354</td></tr> <tr><td>5.0</td><td>3.354</td></tr> <tr><td>6.0</td><td>3.354</td></tr> <tr><td>7.0</td><td>3.354</td></tr> <tr><td>8.0</td><td>3.354</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	3.357	0.5	3.354	1.0	3.354	2.0	3.354	3.0	3.354	4.0	3.354	5.0	3.354	6.0	3.354	7.0	3.354	8.0	3.354
Time since start [H]	Output Voltage [V]																							
0.0	3.357																							
0.5	3.354																							
1.0	3.354																							
2.0	3.354																							
3.0	3.354																							
4.0	3.354																							
5.0	3.354																							
6.0	3.354																							
7.0	3.354																							
8.0	3.354																							






Model		MGS15123R3	Temperature	25°C
Item		Rise and Fall Time	Testing Circuitry	Figure A
Object		+3.3V4A		


1. Graph

Input Volt. 12 V

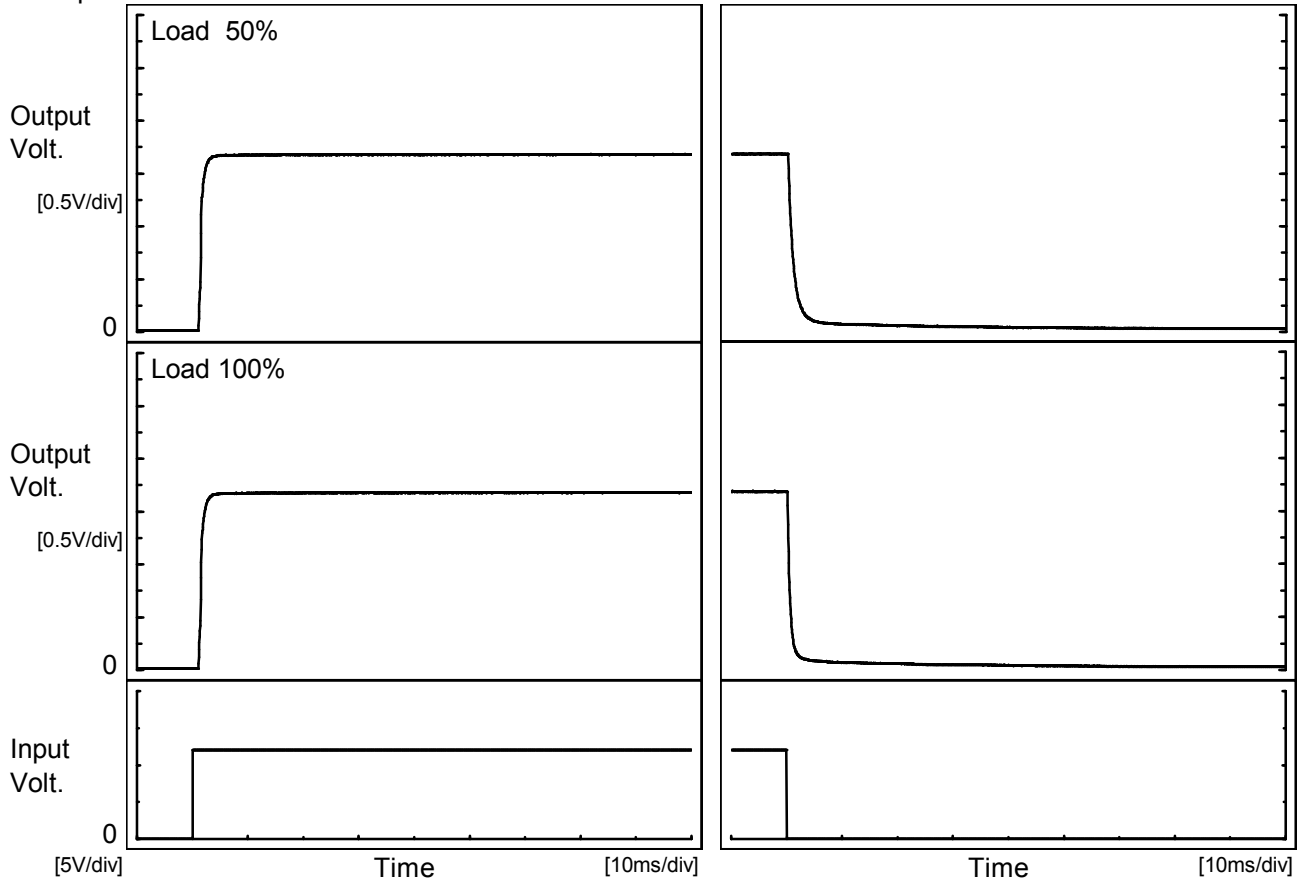

2. Values

		[ms]				
Load \ Time	Time	Td	Tr	Ts	Th	Tf
50 %		1.2	1.0	2.2	0.3	2.7
100 %		1.2	1.1	2.3	0.2	1.4

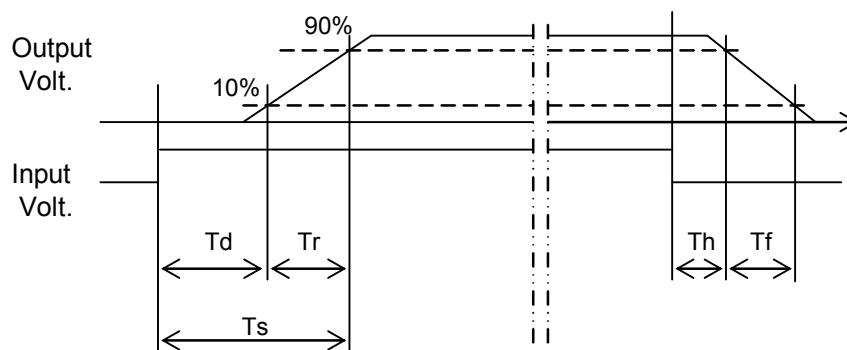



<b>COSEL</b>																																								
Model	MGS15123R3																																							
Item	Minimum Input Voltage for Regulated Output Voltage	Testing Circuitry Figure A																																						
Object	+3.3V4A																																							
<p>1. Graph</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Input Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr> <td>-60</td> <td>7.9</td> <td>8.0</td> </tr> <tr> <td>-40</td> <td>8.0</td> <td>8.0</td> </tr> <tr> <td>-20</td> <td>7.9</td> <td>7.9</td> </tr> <tr> <td>0</td> <td>8.0</td> <td>8.1</td> </tr> <tr> <td>25</td> <td>8.0</td> <td>8.0</td> </tr> <tr> <td>60</td> <td>8.0</td> <td>8.0</td> </tr> <tr> <td>65</td> <td>8.0</td> <td>7.9</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Ambient Temperature [°C]	Input Voltage [V]		Load 50%	Load 100%	-60	7.9	8.0	-40	8.0	8.0	-20	7.9	7.9	0	8.0	8.1	25	8.0	8.0	60	8.0	8.0	65	8.0	7.9	--	-	-	--	-	-	--	-	-	--	-	-
Ambient Temperature [°C]	Input Voltage [V]																																							
	Load 50%	Load 100%																																						
-60	7.9	8.0																																						
-40	8.0	8.0																																						
-20	7.9	7.9																																						
0	8.0	8.1																																						
25	8.0	8.0																																						
60	8.0	8.0																																						
65	8.0	7.9																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																								



<p>Model MGS15123R3</p> <p>Item Overcurrent Protection</p> <p>Object +3.3V4A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																																							
<p>1.Graph</p> <p> <span style="color: black;">—△</span> Input Volt. 9V  <span style="color: blue;">—□</span> Input Volt. 12V  <span style="color: orange;">—○</span> Input Volt. 18V                 </p> <p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>Intermittent operation occurs when overcurrent protection is activated.</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 9[V]</th> <th>Input Volt. 12[V]</th> <th>Input Volt. 18[V]</th> </tr> </thead> <tbody> <tr><td>3.30</td><td>4.77</td><td>5.15</td><td>5.22</td></tr> <tr><td>3.14</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>2.97</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>2.64</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>2.31</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>1.98</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>1.65</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>1.32</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.99</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.66</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.33</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.00</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Output Voltage [V]	Load Current [A]			Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	3.30	4.77	5.15	5.22	3.14	-	-	-	2.97	-	-	-	2.64	-	-	-	2.31	-	-	-	1.98	-	-	-	1.65	-	-	-	1.32	-	-	-	0.99	-	-	-	0.66	-	-	-	0.33	-	-	-	0.00	-	-	-
Output Voltage [V]	Load Current [A]																																																								
	Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]																																																						
3.30	4.77	5.15	5.22																																																						
3.14	-	-	-																																																						
2.97	-	-	-																																																						
2.64	-	-	-																																																						
2.31	-	-	-																																																						
1.98	-	-	-																																																						
1.65	-	-	-																																																						
1.32	-	-	-																																																						
0.99	-	-	-																																																						
0.66	-	-	-																																																						
0.33	-	-	-																																																						
0.00	-	-	-																																																						

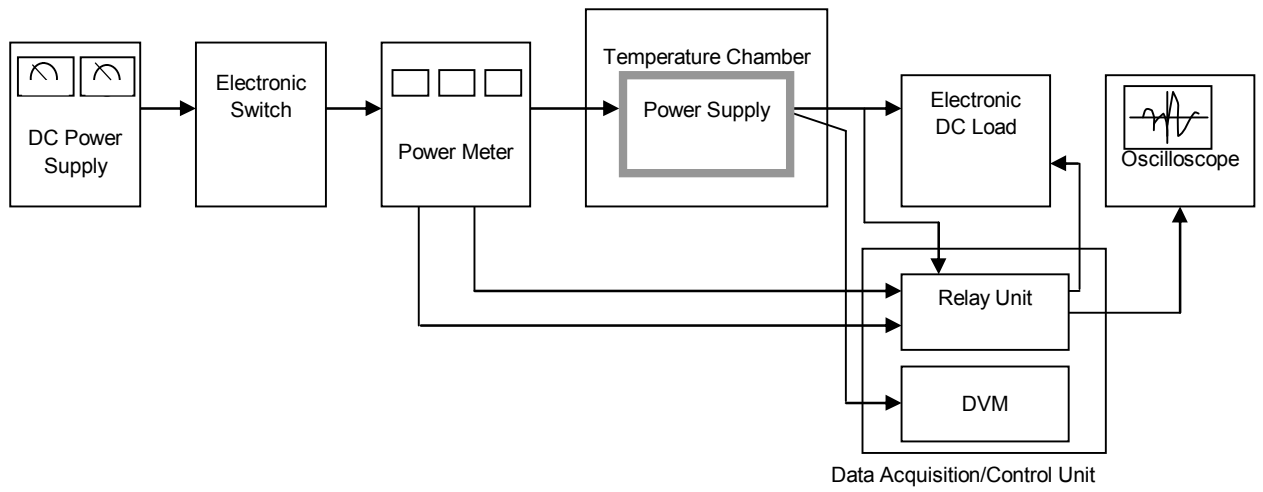


Figure A

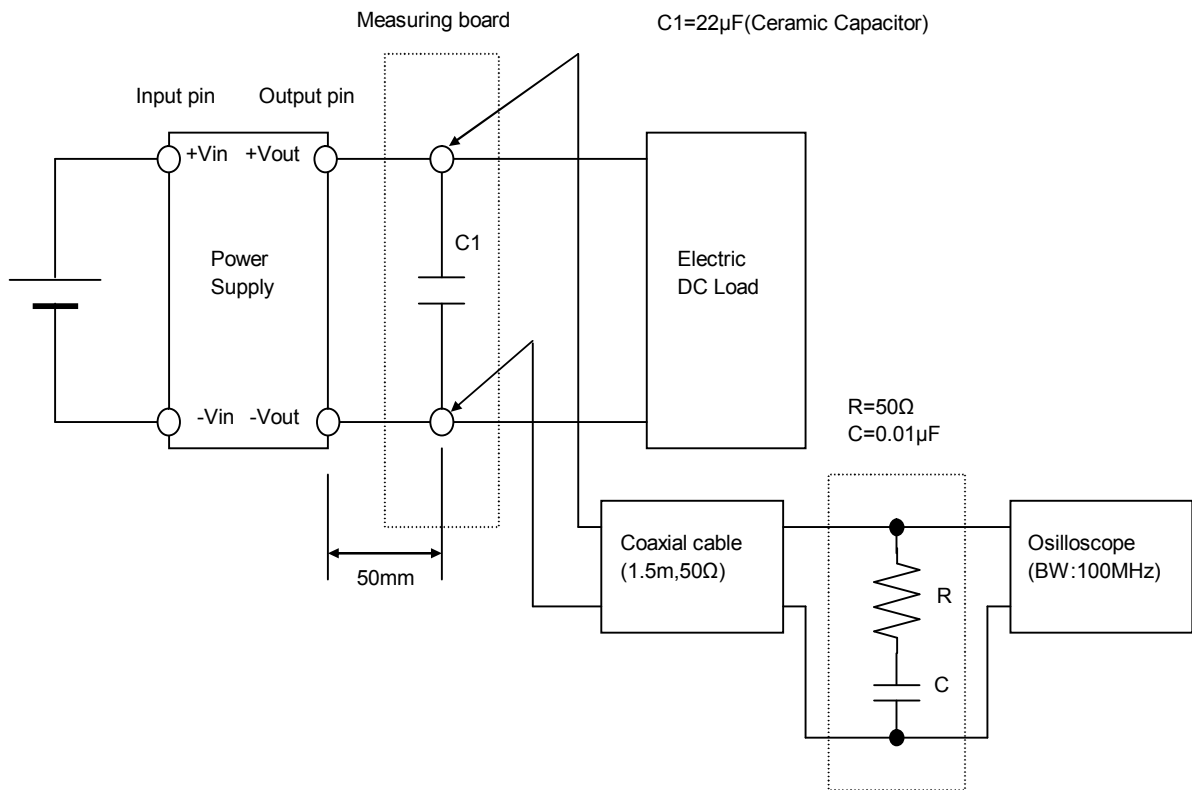


Figure B (Ripple and Ripple noise Characteristic)