

# TEST DATA OF MGS15483R3

Regulated DC Power Supply  
September 7, 2010

Approved by : *Kazunari Asano*  
Kazunari Asano Design Manager

Prepared by : *Hidetaka Kobayashi*  
Hidetaka Kobayashi Design Engineer

**COSEL CO.,LTD.**

## CONTENTS

1.Input Current (by Input Voltage) . . . . .	1
2.Input Current (by Load Current) . . . . .	2
3.Input Power (by Load Current) . . . . .	3
4.Efficiency (by Input Voltage) . . . . .	4
5.Efficiency (by Load Current) . . . . .	5
6.Line Regulation . . . . .	6
7.Load Regulation . . . . .	7
8.Dynamic Load Response . . . . .	8
9.Ripple Voltage (by Load Current) . . . . .	9
10.Ripple-Noise . . . . .	10
11.Ripple Voltage (by Ambient Temperature) . . . . .	11
12.Ambient Temperature Drift . . . . .	12
13.Output Voltage Accuracy . . . . .	13
14.Time Lapse Drift . . . . .	14
15.Rise and Fall Time . . . . .	15
16.Minimum Input Voltage for Regulated Output Voltage . . . . .	16
17.Overcurrent Protection . . . . .	17
18.Figure of Testing Circuitry . . . . .	18

(Final Page 18)



<b>COSEL</b>																																																																																		
Model	MGS15483R3	Temperature	25°C																																																																															
Item	Input Current (by Input Voltage)	Testing Circuitry	Figure A																																																																															
Object	_____																																																																																	
<p>1.Graph</p> <div style="display: flex; justify-content: space-between;"> <div style="width: 60%;"> </div> <div style="width: 35%;"> <p>—△— Load 100%</p> <p>- - -□- - Load 50%</p> <p>- · -○- · - Load 0%</p> </div> </div>		<p>2.Values</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>8.0</td><td>0.003</td><td>0.003</td><td>0.003</td></tr> <tr><td>16.0</td><td>0.003</td><td>0.003</td><td>0.003</td></tr> <tr><td>24.0</td><td>0.003</td><td>0.003</td><td>0.003</td></tr> <tr><td>28.0</td><td>0.003</td><td>0.003</td><td>0.003</td></tr> <tr><td>32.0</td><td>0.003</td><td>0.003</td><td>0.003</td></tr> <tr><td>33.6</td><td>0.019</td><td>0.231</td><td>0.468</td></tr> <tr><td>34.0</td><td>0.019</td><td>0.227</td><td>0.464</td></tr> <tr><td>36.0</td><td>0.018</td><td>0.215</td><td>0.437</td></tr> <tr><td>40.0</td><td>0.017</td><td>0.194</td><td>0.391</td></tr> <tr><td>48.0</td><td>0.016</td><td>0.162</td><td>0.325</td></tr> <tr><td>60.0</td><td>0.014</td><td>0.130</td><td>0.259</td></tr> <tr><td>70.0</td><td>0.014</td><td>0.113</td><td>0.223</td></tr> <tr><td>76.0</td><td>0.013</td><td>0.104</td><td>0.205</td></tr> <tr><td>80.0</td><td>0.013</td><td>0.099</td><td>0.195</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0.0	0.000	0.000	0.000	8.0	0.003	0.003	0.003	16.0	0.003	0.003	0.003	24.0	0.003	0.003	0.003	28.0	0.003	0.003	0.003	32.0	0.003	0.003	0.003	33.6	0.019	0.231	0.468	34.0	0.019	0.227	0.464	36.0	0.018	0.215	0.437	40.0	0.017	0.194	0.391	48.0	0.016	0.162	0.325	60.0	0.014	0.130	0.259	70.0	0.014	0.113	0.223	76.0	0.013	0.104	0.205	80.0	0.013	0.099	0.195	--	-	-	-	--	-	-	-	--	-	-	-
Input Voltage [V]	Input Current [A]																																																																																	
	Load 0%	Load 50%	Load 100%																																																																															
0.0	0.000	0.000	0.000																																																																															
8.0	0.003	0.003	0.003																																																																															
16.0	0.003	0.003	0.003																																																																															
24.0	0.003	0.003	0.003																																																																															
28.0	0.003	0.003	0.003																																																																															
32.0	0.003	0.003	0.003																																																																															
33.6	0.019	0.231	0.468																																																																															
34.0	0.019	0.227	0.464																																																																															
36.0	0.018	0.215	0.437																																																																															
40.0	0.017	0.194	0.391																																																																															
48.0	0.016	0.162	0.325																																																																															
60.0	0.014	0.130	0.259																																																																															
70.0	0.014	0.113	0.223																																																																															
76.0	0.013	0.104	0.205																																																																															
80.0	0.013	0.099	0.195																																																																															
--	-	-	-																																																																															
--	-	-	-																																																																															
--	-	-	-																																																																															
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																																																																		



Model		MGS15483R3		Temperature 25°C																																																				
Item		Input Current (by Load Current)		Testing Circuitry Figure A																																																				
Object		_____																																																						
1.Graph		—△— Input Volt. 36V - - - □ - - - Input Volt. 48V - · - ○ - · - - Input Volt. 76V		2.Values																																																				
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.018</td><td>0.016</td><td>0.013</td></tr> <tr><td>0.8</td><td>0.094</td><td>0.073</td><td>0.049</td></tr> <tr><td>1.6</td><td>0.175</td><td>0.132</td><td>0.086</td></tr> <tr><td>2.4</td><td>0.259</td><td>0.194</td><td>0.124</td></tr> <tr><td>3.2</td><td>0.346</td><td>0.258</td><td>0.164</td></tr> <tr><td>4.0</td><td>0.438</td><td>0.325</td><td>0.205</td></tr> <tr><td>4.4</td><td>0.486</td><td>0.359</td><td>0.226</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Input Current [A]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	0.018	0.016	0.013	0.8	0.094	0.073	0.049	1.6	0.175	0.132	0.086	2.4	0.259	0.194	0.124	3.2	0.346	0.258	0.164	4.0	0.438	0.325	0.205	4.4	0.486	0.359	0.226	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-		
Load Current [A]	Input Current [A]																																																							
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																					
0.0	0.018	0.016	0.013																																																					
0.8	0.094	0.073	0.049																																																					
1.6	0.175	0.132	0.086																																																					
2.4	0.259	0.194	0.124																																																					
3.2	0.346	0.258	0.164																																																					
4.0	0.438	0.325	0.205																																																					
4.4	0.486	0.359	0.226																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
Note: Slanted line shows the range of the rated load current.																																																								



<p>Model MGS15483R3</p>		<p>Temperature 25°C</p>																																																				
<p>Item Input Power (by Load Current)</p>		<p>Testing Circuitry Figure A</p>																																																				
<p>Object _____</p>																																																						
<p>1.Graph</p> <p>                     —△— Input Volt. 36V                      - - - □ - - Input Volt. 48V                      · · · ○ · · · Input Volt. 76V                 </p> <p>Input Power [W]</p> <p>Load Current [A]</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.66</td><td>0.77</td><td>1.02</td></tr> <tr><td>0.8</td><td>3.41</td><td>3.50</td><td>3.75</td></tr> <tr><td>1.6</td><td>6.29</td><td>6.34</td><td>6.54</td></tr> <tr><td>2.4</td><td>9.34</td><td>9.32</td><td>9.47</td></tr> <tr><td>3.2</td><td>12.47</td><td>12.39</td><td>12.48</td></tr> <tr><td>4.0</td><td>15.77</td><td>15.59</td><td>15.63</td></tr> <tr><td>4.4</td><td>17.50</td><td>17.24</td><td>17.24</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Input Power [W]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	0.66	0.77	1.02	0.8	3.41	3.50	3.75	1.6	6.29	6.34	6.54	2.4	9.34	9.32	9.47	3.2	12.47	12.39	12.48	4.0	15.77	15.59	15.63	4.4	17.50	17.24	17.24	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Power [W]																																																					
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																			
0.0	0.66	0.77	1.02																																																			
0.8	3.41	3.50	3.75																																																			
1.6	6.29	6.34	6.54																																																			
2.4	9.34	9.32	9.47																																																			
3.2	12.47	12.39	12.48																																																			
4.0	15.77	15.59	15.63																																																			
4.4	17.50	17.24	17.24																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
<p>Note: Slanted line shows the range of the rated load current.</p>																																																						



<b>COSEL</b>																																			
Model	MGS15483R3	Temperature	25°C																																
Item	Efficiency (by Input Voltage)	Testing Circuitry	Figure A																																
Object	_____																																		
<p>1.Graph</p> <p style="text-align: right;">             ---□--- Load 50%              —△— Load 100%         </p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>34</td><td>85.9</td><td>84.5</td></tr> <tr><td>36</td><td>86.0</td><td>84.8</td></tr> <tr><td>40</td><td>86.1</td><td>85.1</td></tr> <tr><td>48</td><td>85.9</td><td>85.6</td></tr> <tr><td>60</td><td>85.3</td><td>85.9</td></tr> <tr><td>76</td><td>84.1</td><td>85.5</td></tr> <tr><td>80</td><td>83.8</td><td>85.3</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>		Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	34	85.9	84.5	36	86.0	84.8	40	86.1	85.1	48	85.9	85.6	60	85.3	85.9	76	84.1	85.5	80	83.8	85.3	--	-	-	--	-	-
Input Voltage [V]	Efficiency [%]																																		
	Load 50%	Load 100%																																	
34	85.9	84.5																																	
36	86.0	84.8																																	
40	86.1	85.1																																	
48	85.9	85.6																																	
60	85.3	85.9																																	
76	84.1	85.5																																	
80	83.8	85.3																																	
--	-	-																																	
--	-	-																																	
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																			



Model		MGS15483R3		Temperature 25°C																																																				
Item		Efficiency (by Load Current)		Testing Circuitry Figure A																																																				
Object		_____																																																						
1.Graph		—△— Input Volt. 36V - - - □ - - - Input Volt. 48V - · - ○ - · - - Input Volt. 76V		2.Values																																																				
				<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.8</td><td>78.7</td><td>76.7</td><td>71.6</td></tr> <tr><td>1.6</td><td>85.4</td><td>84.7</td><td>82.1</td></tr> <tr><td>2.4</td><td>86.3</td><td>86.5</td><td>85.1</td></tr> <tr><td>3.2</td><td>85.8</td><td>86.4</td><td>85.7</td></tr> <tr><td>4.0</td><td>84.8</td><td>85.8</td><td>85.6</td></tr> <tr><td>4.4</td><td>84.1</td><td>85.4</td><td>85.4</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Efficiency [%]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	-	-	-	0.8	78.7	76.7	71.6	1.6	85.4	84.7	82.1	2.4	86.3	86.5	85.1	3.2	85.8	86.4	85.7	4.0	84.8	85.8	85.6	4.4	84.1	85.4	85.4	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Efficiency [%]																																																							
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																					
0.0	-	-	-																																																					
0.8	78.7	76.7	71.6																																																					
1.6	85.4	84.7	82.1																																																					
2.4	86.3	86.5	85.1																																																					
3.2	85.8	86.4	85.7																																																					
4.0	84.8	85.8	85.6																																																					
4.4	84.1	85.4	85.4																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
Note: Slanted line shows the range of the rated load current.																																																								



<b>COSEL</b>																																			
Model	MGS15483R3	Temperature	25°C																																
Item	Line Regulation	Testing Circuitry	Figure A																																
Object	+3.3V4A																																		
<p>1.Graph</p> <div style="text-align: right;"> <p>---□--- Load 50%</p> <p>—△— Load 100%</p> </div> <p style="text-align: center;">Note: Slanted line shows the range of the rated input voltage.</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>34</td><td>3.347</td><td>3.346</td></tr> <tr><td>36</td><td>3.347</td><td>3.346</td></tr> <tr><td>40</td><td>3.347</td><td>3.346</td></tr> <tr><td>48</td><td>3.347</td><td>3.346</td></tr> <tr><td>60</td><td>3.347</td><td>3.346</td></tr> <tr><td>76</td><td>3.347</td><td>3.346</td></tr> <tr><td>80</td><td>3.347</td><td>3.346</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>		Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	34	3.347	3.346	36	3.347	3.346	40	3.347	3.346	48	3.347	3.346	60	3.347	3.346	76	3.347	3.346	80	3.347	3.346	--	-	-	--	-	-
Input Voltage [V]	Output Voltage [V]																																		
	Load 50%	Load 100%																																	
34	3.347	3.346																																	
36	3.347	3.346																																	
40	3.347	3.346																																	
48	3.347	3.346																																	
60	3.347	3.346																																	
76	3.347	3.346																																	
80	3.347	3.346																																	
--	-	-																																	
--	-	-																																	






<p>Model MGS15483R3</p>		<p>Temperature 25°C</p>																																																				
<p>Item Load Regulation</p>		<p>Testing Circuitry Figure A</p>																																																				
<p>Object +3.3V4A</p>																																																						
<p>1.Graph</p> <p>                     —△— Input Volt. 36V                      ---□--- Input Volt. 48V                      ···○··· Input Volt. 76V                 </p> <p>Output Voltage [V]</p> <p>Load Current [A]</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>3.348</td><td>3.348</td><td>3.348</td></tr> <tr><td>0.8</td><td>3.348</td><td>3.348</td><td>3.348</td></tr> <tr><td>1.6</td><td>3.348</td><td>3.348</td><td>3.347</td></tr> <tr><td>2.4</td><td>3.347</td><td>3.347</td><td>3.347</td></tr> <tr><td>3.2</td><td>3.347</td><td>3.347</td><td>3.347</td></tr> <tr><td>4.0</td><td>3.346</td><td>3.346</td><td>3.346</td></tr> <tr><td>4.4</td><td>3.346</td><td>3.346</td><td>3.346</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Output Voltage [V]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	3.348	3.348	3.348	0.8	3.348	3.348	3.348	1.6	3.348	3.348	3.347	2.4	3.347	3.347	3.347	3.2	3.347	3.347	3.347	4.0	3.346	3.346	3.346	4.4	3.346	3.346	3.346	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																					
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																			
0.0	3.348	3.348	3.348																																																			
0.8	3.348	3.348	3.348																																																			
1.6	3.348	3.348	3.347																																																			
2.4	3.347	3.347	3.347																																																			
3.2	3.347	3.347	3.347																																																			
4.0	3.346	3.346	3.346																																																			
4.4	3.346	3.346	3.346																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
<p>Note: Slanted line shows the range of the rated load current.</p>																																																						




Model	MGS15483R3	Temperature 25°C Testing Circuitry Figure A
Item	Dynamic Load Response	
Object	+3.3V4A	


Input Volt. 48 V  
Cycle 1000 ms

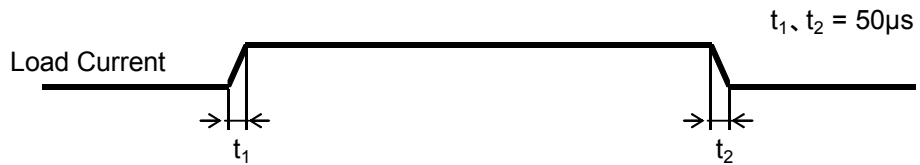

Min. Load (0A) ←→  
Load 100% (4A)

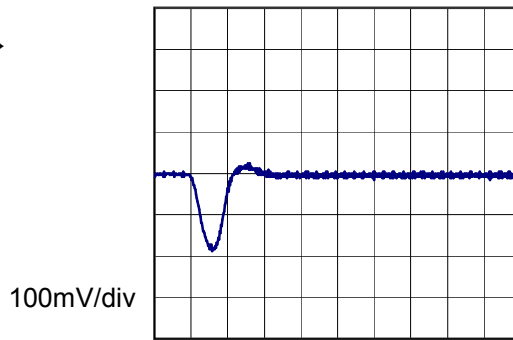


50µs/div

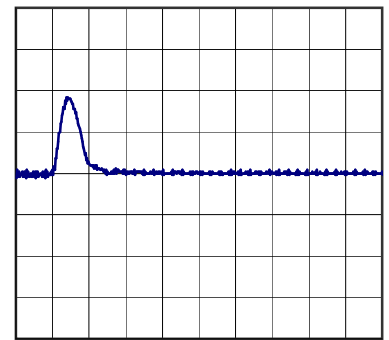


50µs/div

Min. Load (0A) ←→  
Load 50% (2A)

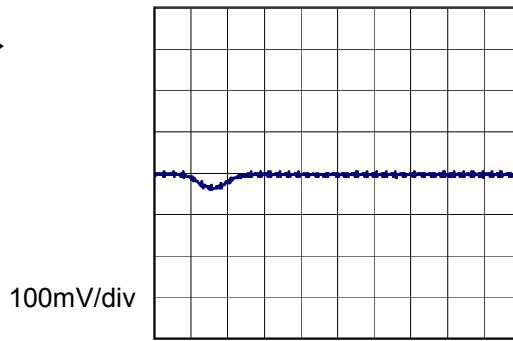


50µs/div

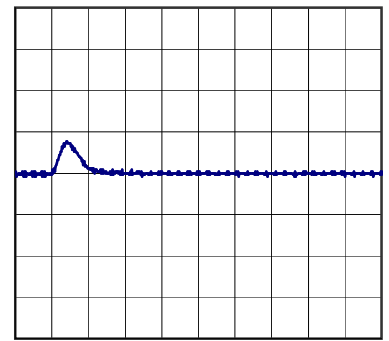


50µs/div

Load 50% (2A) ←→  
Load 100% (4A)

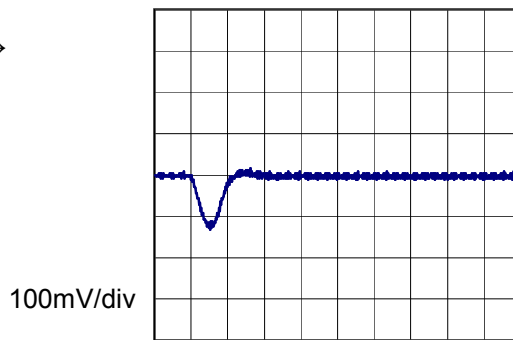

50µs/div

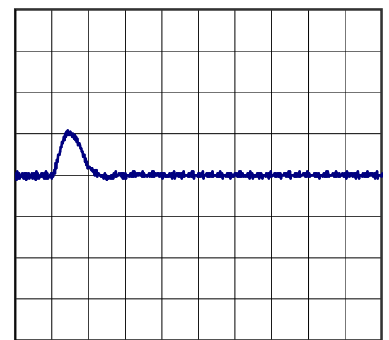


50µs/div

<p>Model MGS15483R3</p>		<p>Temperature 25°C Testing Circuitry Figure B</p>																																						
<p>Item Ripple Voltage (by Load Current)</p>																																								
<p>Object +3.3V4A</p>																																								
<p>1.Graph</p> <p>             —△— Input Volt. 36V              - -○- - Input Volt. 76V         </p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Input Volt. 36 [V]</th> <th>Input Volt. 76 [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>3</td><td>4</td></tr> <tr><td>0.8</td><td>3</td><td>4</td></tr> <tr><td>1.6</td><td>3</td><td>4</td></tr> <tr><td>2.4</td><td>3</td><td>5</td></tr> <tr><td>3.2</td><td>4</td><td>5</td></tr> <tr><td>4.0</td><td>4</td><td>5</td></tr> <tr><td>4.4</td><td>4</td><td>6</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Ripple Voltage [mV]		Input Volt. 36 [V]	Input Volt. 76 [V]	0.0	3	4	0.8	3	4	1.6	3	4	2.4	3	5	3.2	4	5	4.0	4	5	4.4	4	6	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple Voltage [mV]																																							
	Input Volt. 36 [V]	Input Volt. 76 [V]																																						
0.0	3	4																																						
0.8	3	4																																						
1.6	3	4																																						
2.4	3	5																																						
3.2	4	5																																						
4.0	4	5																																						
4.4	4	6																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Measured by 100 MHz Oscilloscope. Ripple Voltage is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p>																																								
<p>Ripple [mVp-p]</p> <p>Fig.Complex Ripple Wave Form</p>																																								

Model	MGS15483R3	Temperature	25°C
Item	Ripple-Noise	Testing Circuitry	Figure B
Object	+3.3V4A		

1.Graph

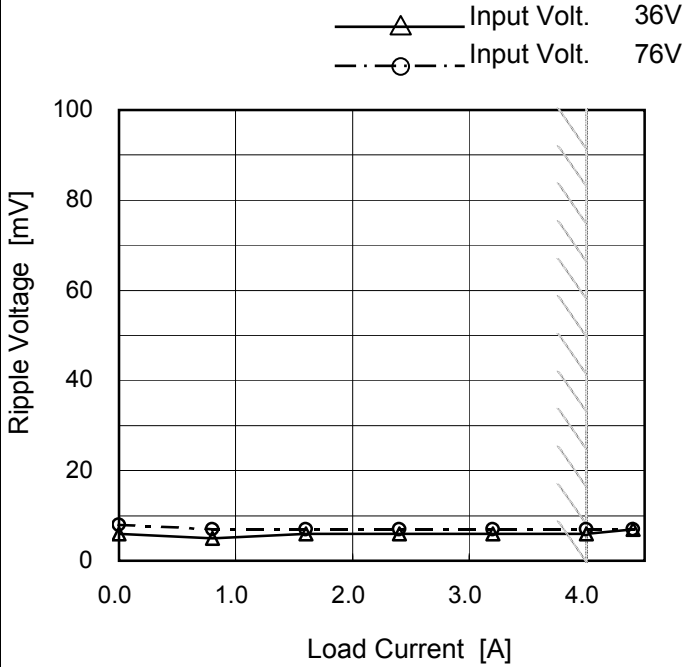

2.Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 36 [V]	Input Volt. 76 [V]
0.0	6	8
0.8	5	7
1.6	6	7
2.4	6	7
3.2	6	7
4.0	6	7
4.4	7	7
--	-	-
--	-	-
--	-	-
--	-	-

Measured by 100 MHz Oscilloscope.  
 Ripple-Noise is shown as p-p in the figure below.  
 Note: Slanted line shows the range of the rated load current.


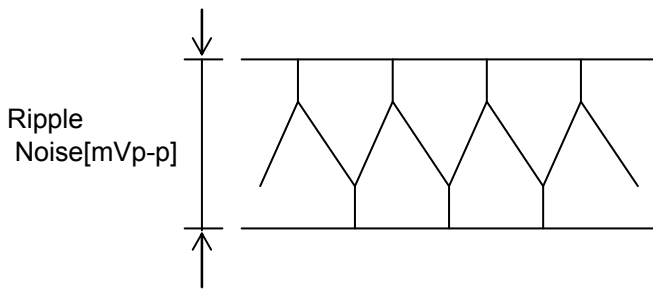


Fig.Complex Ripple Noise Wave Form

Model	MGS15483R3
Item	Ripple Voltage (by Ambient Temp.)
Object	+3.3V4A

Testing Circuitry Figure B

1. Graph

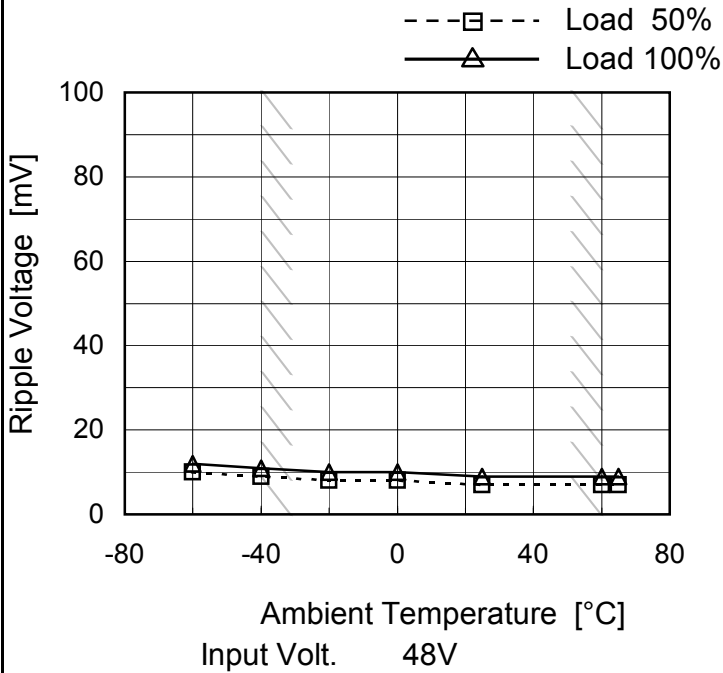

2. Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-60	10	12
-40	9	11
-20	8	10
0	8	10
25	7	9
60	7	9
65	7	9
--	-	-
--	-	-
--	-	-
--	-	-

Measured by 100 MHz Oscilloscope.  
 Note: Slanted line shows the range of the rated ambient temperature.



<b>COSEL</b>																																																						
Model	MGS15483R3																																																					
Item	Ambient Temperature Drift	Testing Circuitry Figure A																																																				
Object	+3.3V4A																																																					
<p>1.Graph</p> <p>                     —△— Input Volt. 36V                      ---□--- Input Volt. 48V                      -·-○-·- Input Volt. 76V                 </p> <p style="text-align: center;">Ambient Temperature [°C] Load 100%</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>-60</td><td>3.350</td><td>3.350</td><td>3.351</td></tr> <tr><td>-40</td><td>3.352</td><td>3.352</td><td>3.352</td></tr> <tr><td>-20</td><td>3.350</td><td>3.351</td><td>3.351</td></tr> <tr><td>0</td><td>3.348</td><td>3.348</td><td>3.348</td></tr> <tr><td>25</td><td>3.346</td><td>3.346</td><td>3.346</td></tr> <tr><td>60</td><td>3.343</td><td>3.343</td><td>3.343</td></tr> <tr><td>65</td><td>3.341</td><td>3.342</td><td>3.342</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	-60	3.350	3.350	3.351	-40	3.352	3.352	3.352	-20	3.350	3.351	3.351	0	3.348	3.348	3.348	25	3.346	3.346	3.346	60	3.343	3.343	3.343	65	3.341	3.342	3.342	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Ambient Temperature [°C]	Output Voltage [V]																																																					
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																			
-60	3.350	3.350	3.351																																																			
-40	3.352	3.352	3.352																																																			
-20	3.350	3.351	3.351																																																			
0	3.348	3.348	3.348																																																			
25	3.346	3.346	3.346																																																			
60	3.343	3.343	3.343																																																			
65	3.341	3.342	3.342																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																																						



<b>COSEL</b>		
Model	MGS15483R3	
Item	Output Voltage Accuracy	Testing Circuitry Figure A
Object	+3.3V4A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 60°C

Input Voltage : 36 - 76V

Load Current : 0 - 4A

\* Output Voltage Accuracy =  $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

\* Output Voltage Accuracy (Ration) =  $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	-40	36	0	3.354	±6	±0.2
Minimum Voltage	60	36	4	3.343		



<b>COSEL</b>																								
Model	MGS15483R3																							
Item	Time Lapse Drift	Temperature 25°C Testing Circuitry Figure A																						
Object	+3.3V4A																							
<p>1. Graph</p> <p style="text-align: center;">Time [H]</p> <p>Input Volt. 48V Load 100%</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>3.347</td></tr> <tr><td>0.5</td><td>3.347</td></tr> <tr><td>1.0</td><td>3.347</td></tr> <tr><td>2.0</td><td>3.347</td></tr> <tr><td>3.0</td><td>3.347</td></tr> <tr><td>4.0</td><td>3.347</td></tr> <tr><td>5.0</td><td>3.347</td></tr> <tr><td>6.0</td><td>3.347</td></tr> <tr><td>7.0</td><td>3.347</td></tr> <tr><td>8.0</td><td>3.347</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	3.347	0.5	3.347	1.0	3.347	2.0	3.347	3.0	3.347	4.0	3.347	5.0	3.347	6.0	3.347	7.0	3.347	8.0	3.347
Time since start [H]	Output Voltage [V]																							
0.0	3.347																							
0.5	3.347																							
1.0	3.347																							
2.0	3.347																							
3.0	3.347																							
4.0	3.347																							
5.0	3.347																							
6.0	3.347																							
7.0	3.347																							
8.0	3.347																							






Model		MGS15483R3	Temperature 25°C Testing Circuitry Figure A
Item		Rise and Fall Time	
Object		+3.3V4A	


1. Graph

Input Volt. 48 V

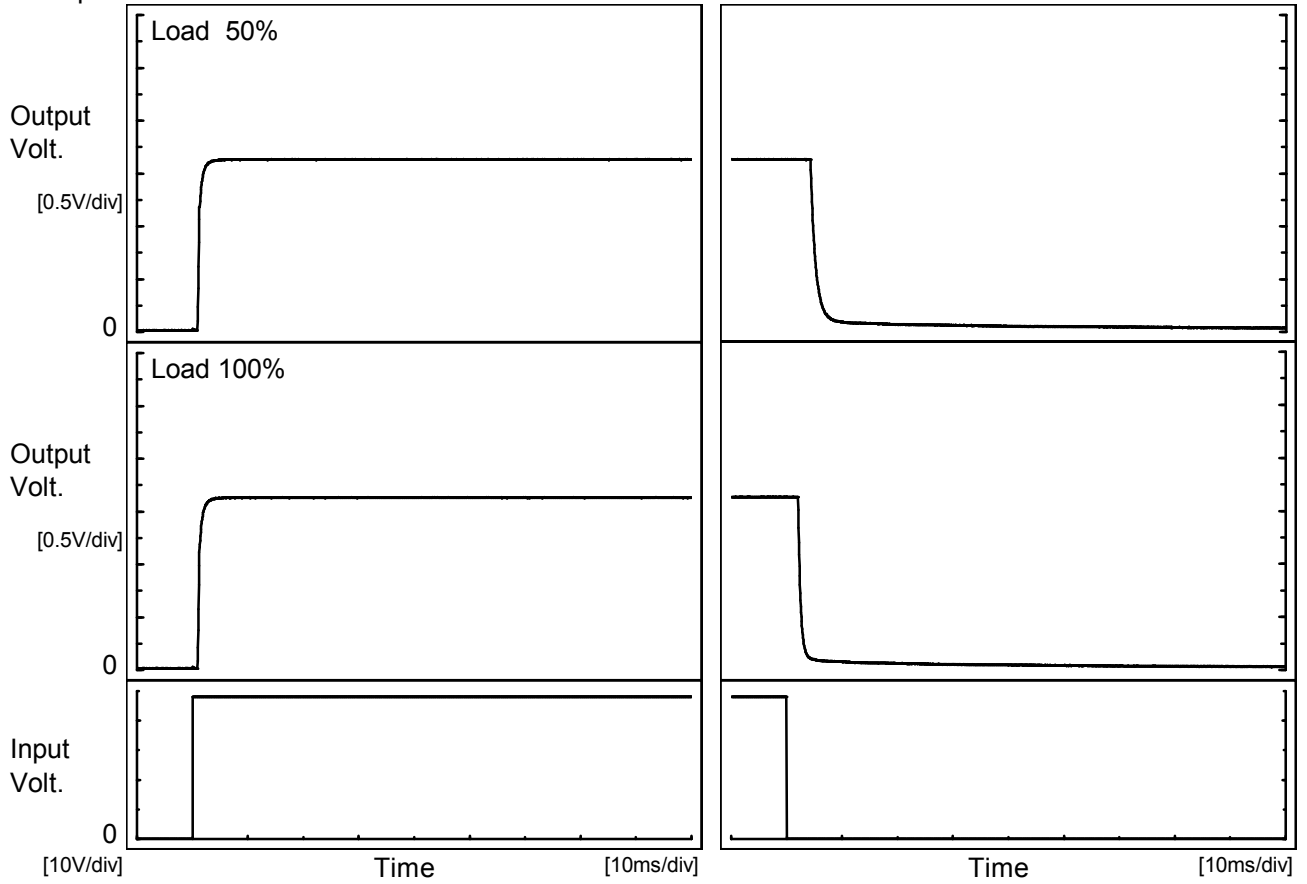

2. Values

		[ms]				
Load \ Time	Time	Td	Tr	Ts	Th	Tf
50 %		1.0	1.0	2.0	4.3	2.6
100 %		1.0	1.0	2.0	2.1	1.3

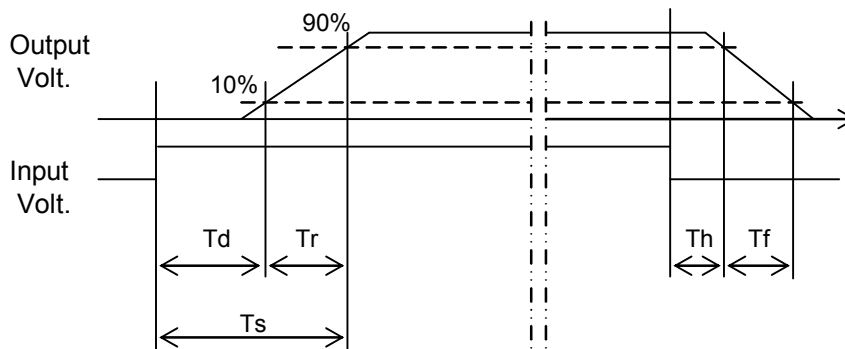



<b>COSEL</b>																																								
Model	MGS15483R3																																							
Item	Minimum Input Voltage for Regulated Output Voltage	Testing Circuitry Figure A																																						
Object	+3.3V4A																																							
<p>1.Graph</p> <p style="text-align: center;"> <span style="margin-right: 20px;">---□--- Load 50%</span>  <span>—△— Load 100%</span> </p> <p style="text-align: center;">Input Voltage [V]</p> <p style="text-align: center;">Ambient Temperature [°C]</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Input Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>-60</td><td>31.1</td><td>31.1</td></tr> <tr><td>-40</td><td>31.1</td><td>31.1</td></tr> <tr><td>-20</td><td>31.1</td><td>31.1</td></tr> <tr><td>0</td><td>31.1</td><td>31.1</td></tr> <tr><td>25</td><td>30.9</td><td>31.1</td></tr> <tr><td>60</td><td>30.9</td><td>30.9</td></tr> <tr><td>65</td><td>30.9</td><td>30.9</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Ambient Temperature [°C]	Input Voltage [V]		Load 50%	Load 100%	-60	31.1	31.1	-40	31.1	31.1	-20	31.1	31.1	0	31.1	31.1	25	30.9	31.1	60	30.9	30.9	65	30.9	30.9	--	-	-	--	-	-	--	-	-	--	-	-
Ambient Temperature [°C]	Input Voltage [V]																																							
	Load 50%	Load 100%																																						
-60	31.1	31.1																																						
-40	31.1	31.1																																						
-20	31.1	31.1																																						
0	31.1	31.1																																						
25	30.9	31.1																																						
60	30.9	30.9																																						
65	30.9	30.9																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						



<p>Model MGS15483R3</p> <p>Item Overcurrent Protection</p> <p>Object +3.3V4A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																																							
<p>1.Graph</p> <p> <span style="color: black;">—△</span> Input Volt. 36V  <span style="color: blue;">—□</span> Input Volt. 48V  <span style="color: orange;">—○</span> Input Volt. 76V                 </p> <p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>Intermittent operation occurs when overcurrent protection is activated.</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr> <td>3.30</td> <td>5.96</td> <td>6.23</td> <td>5.85</td> </tr> <tr> <td>3.14</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>2.97</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>2.64</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>2.31</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>1.98</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>1.65</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>1.32</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>0.99</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>0.66</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>0.33</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>0.00</td> <td>-</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Output Voltage [V]	Load Current [A]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	3.30	5.96	6.23	5.85	3.14	-	-	-	2.97	-	-	-	2.64	-	-	-	2.31	-	-	-	1.98	-	-	-	1.65	-	-	-	1.32	-	-	-	0.99	-	-	-	0.66	-	-	-	0.33	-	-	-	0.00	-	-	-
Output Voltage [V]	Load Current [A]																																																								
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																						
3.30	5.96	6.23	5.85																																																						
3.14	-	-	-																																																						
2.97	-	-	-																																																						
2.64	-	-	-																																																						
2.31	-	-	-																																																						
1.98	-	-	-																																																						
1.65	-	-	-																																																						
1.32	-	-	-																																																						
0.99	-	-	-																																																						
0.66	-	-	-																																																						
0.33	-	-	-																																																						
0.00	-	-	-																																																						

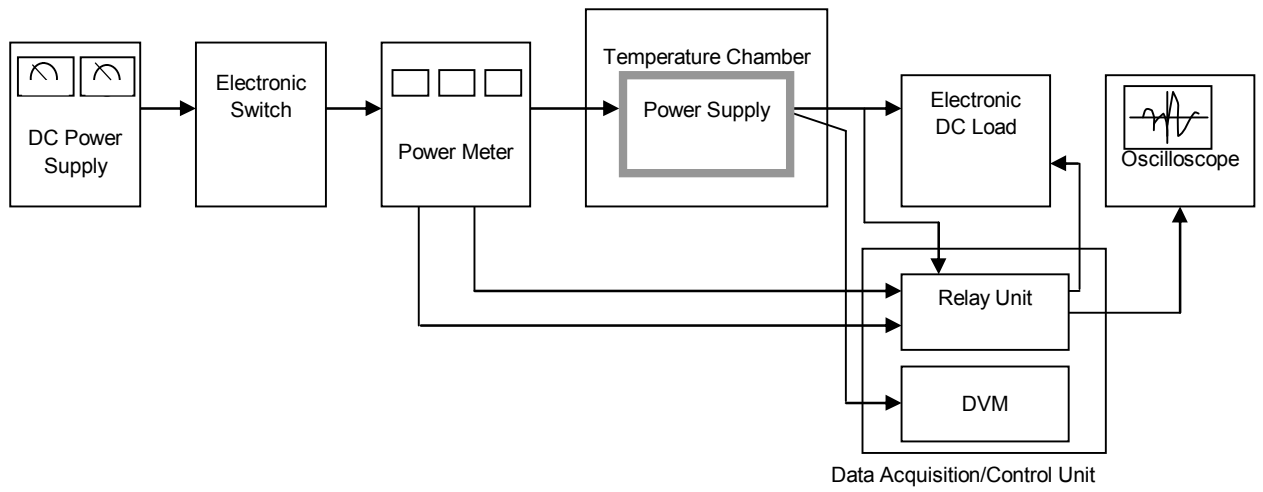


Figure A

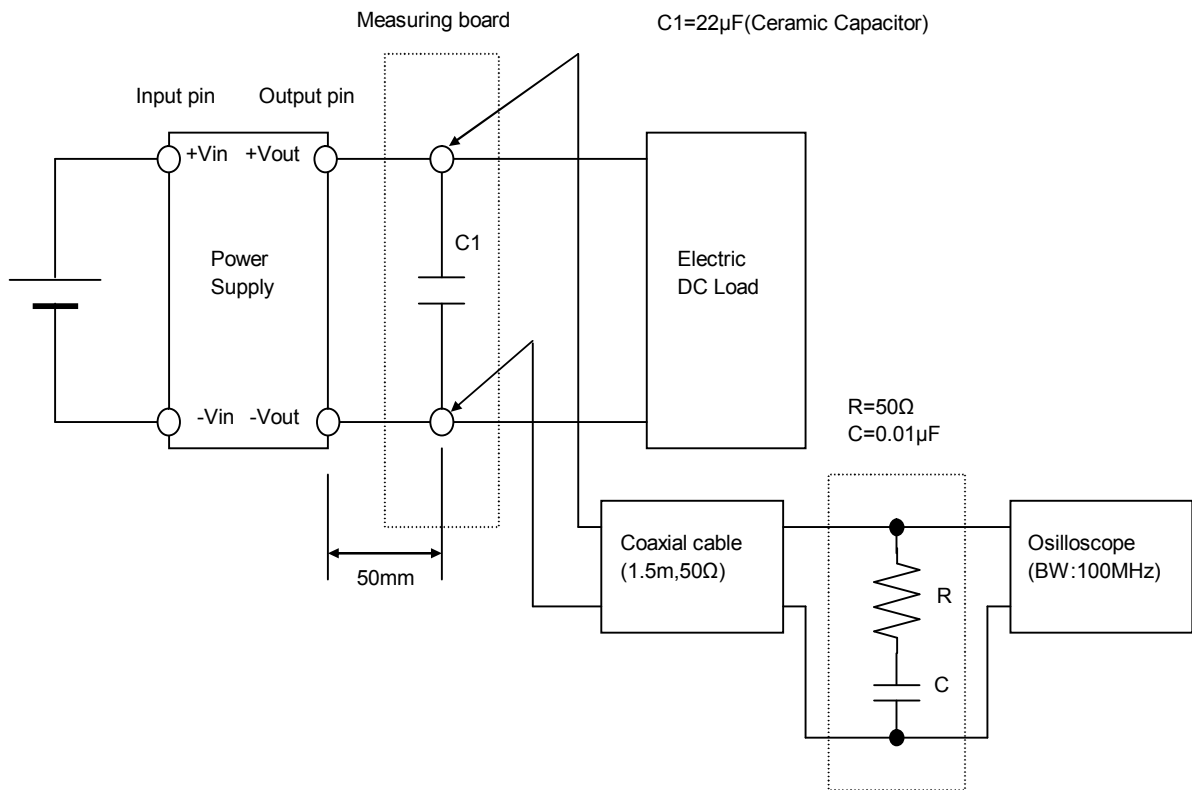


Figure B (Ripple and Ripple noise Characteristic)