

Temperature increase of main components

Model: MGS605□□

1. Conditions

- (1) Input :DC 5 [V]
- (2) Output :Rated output
- (3) Cooling method :Convection cooling
- (4) Mounting method :Shown as Fig.1.1

2. Result

Table 2.1 Temperature increase of main components

No.	Parts name	Symbol No.	Increase (ΔT)				Rate d temp. [°C]	Reference
			[deg]					
			3.3V	5V	12V	15V		
1	Switching MOS-FET	TR11	38	36	32	30	150	Junction Temp.
2	Power control IC	IC11	35	32	29	27	150	Junction Temp.
3	Rectified diode (Output)	D201	44	39	32	30	150	Junction Temp.
4	Photocoupler	PC11	35	32	29	27	125	Junction Temp.
5	Transformer (PCB)	P2	41	37	31	29	130	
6	CASE	CASE	34	32	29	27	105	Top Surface Center
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								

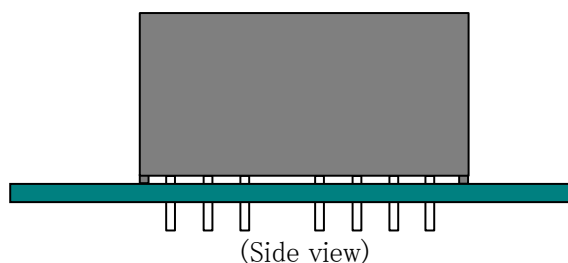


Fig.1.1 Mounting method (Normal position)