

COSEL

TEST DATA OF PAA600F-5
(100V INPUT)

Regulated DC Power Supply

Date : Aug. 28. 1997

Approved by : T. Yoneda
Design Manager

Prepared by : M. Hashino
Design Engineer

コーセル株式会社
COSEL CO.,LTD.

CONTENTS

1.	Line Regulation	1
	静的入力変動	
2.	Efficiency	2
	効率	
3.	Power Factor	3
	力率	
4.	Hold-Up Time	4
	出力保持時間	
5.	Instantaneous Interruption Compensation	5
	瞬時停電保障	
6.	Load Regulation	6
	静的負荷変動	
7.	Ripple Voltage (by Load Current)	7
	リップル電圧(負荷電流特性)	
8.	Ripple-Noise	8
	リップルノイズ	
9.	Overcurrent Protection	9
	過電流保護	
10.	Overvoltage Protection	10
	過電圧保護	
11.	Inrush Current	11
	突入電流	
12.	Dynamic Load Responce	12
	動的負荷変動	
13.	Rise and Fall Time	13
	立上り、立下り時間	
14.	Ambient Temperature Drift	14
	周囲温度変動	
15.	Minimum Input Voltage for Regulated Output Voltage	15
	最低レギュレーション電圧	
16.	Ripple Voltage (by Ambient Temperature)	16
	リップル電圧(周囲温度特性)	
17.	Time Lapse Drift	17
	経時ドリフト	
18.	Voltage Accuracy	18
	定電圧精度	
19.	Harmonic Current	19
	高調波電流	
20.	Condensation	21
	結露特性	
21.	Leakage Current	22
	漏洩電流	
22.	Line Noise Tolerance	23
	入力雑音耐量	
23.	Conducted Emission	24
	雑音端子電圧	
24.	Figure of Testing Circuitry	25
	測定回路図	




Model		PAA600F-5		Temperature		25°C																																				
Item		Line Regulation 静的入力変動		Testing Circuitry		Figure A																																				
Object		+5V120A																																								
1. Graph				2. Values																																						
<p>-----□----- Load 50%</p> <p>-----△----- Load 100%</p>				<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th>Load 50%</th> <th>Load 100%</th> </tr> <tr> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> </tr> </thead> <tbody> <tr><td>75</td><td>5.046</td><td>5.041</td></tr> <tr><td>80</td><td>5.046</td><td>5.041</td></tr> <tr><td>85</td><td>5.046</td><td>5.042</td></tr> <tr><td>90</td><td>5.046</td><td>5.042</td></tr> <tr><td>100</td><td>5.046</td><td>5.042</td></tr> <tr><td>110</td><td>5.046</td><td>5.042</td></tr> <tr><td>120</td><td>5.046</td><td>5.042</td></tr> <tr><td>130</td><td>5.046</td><td>5.042</td></tr> <tr><td>132</td><td>5.046</td><td>5.041</td></tr> <tr><td>140</td><td>5.046</td><td>5.041</td></tr> </tbody> </table>				Input Voltage [V]	Load 50%	Load 100%	Output Volt. [V]	Output Volt. [V]	75	5.046	5.041	80	5.046	5.041	85	5.046	5.042	90	5.046	5.042	100	5.046	5.042	110	5.046	5.042	120	5.046	5.042	130	5.046	5.042	132	5.046	5.041	140	5.046	5.041
Input Voltage [V]	Load 50%	Load 100%																																								
	Output Volt. [V]	Output Volt. [V]																																								
75	5.046	5.041																																								
80	5.046	5.041																																								
85	5.046	5.042																																								
90	5.046	5.042																																								
100	5.046	5.042																																								
110	5.046	5.042																																								
120	5.046	5.042																																								
130	5.046	5.042																																								
132	5.046	5.041																																								
140	5.046	5.041																																								
<p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>																																										



Model	PAA600F-5
Item	Efficiency 効率
Object	

Temperature 25°C
Testing Circuitry Figure A

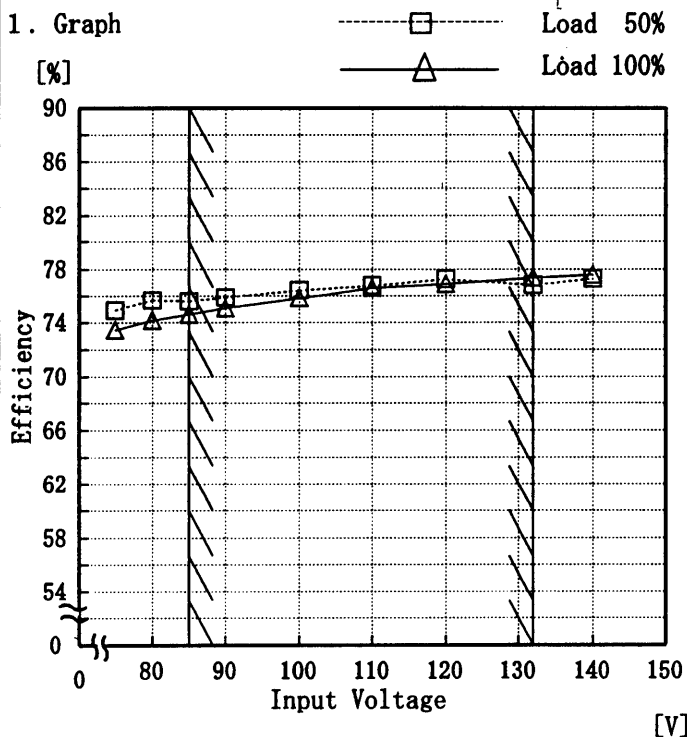

2. Values

Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
75	74.92	73.45
80	75.67	74.17
85	75.60	74.62
90	75.91	75.09
100	76.43	75.84
110	76.78	76.60
120	77.26	76.90
132	76.85	77.38
140	77.30	77.58

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

COSEL


Model		PAA600F-5		Temperature		25°C																																	
Item		Power Factor 力率		Testing Circuitry		Figure A																																	
Object																																							
1. Graph				2. Values																																			
<p>Legend: □ load 50% △ load 100%</p>				<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th>load 50%</th> <th>load 100%</th> </tr> <tr> <th>Power Factor</th> <th>Power Factor</th> </tr> </thead> <tbody> <tr><td>75</td><td>0.99</td><td>1.00</td></tr> <tr><td>80</td><td>0.99</td><td>1.00</td></tr> <tr><td>85</td><td>0.99</td><td>1.00</td></tr> <tr><td>90</td><td>0.98</td><td>1.00</td></tr> <tr><td>100</td><td>0.98</td><td>1.00</td></tr> <tr><td>110</td><td>0.98</td><td>0.99</td></tr> <tr><td>120</td><td>0.97</td><td>0.99</td></tr> <tr><td>132</td><td>0.97</td><td>0.99</td></tr> <tr><td>140</td><td>0.97</td><td>0.99</td></tr> </tbody> </table>				Input Voltage [V]	load 50%	load 100%	Power Factor	Power Factor	75	0.99	1.00	80	0.99	1.00	85	0.99	1.00	90	0.98	1.00	100	0.98	1.00	110	0.98	0.99	120	0.97	0.99	132	0.97	0.99	140	0.97	0.99
Input Voltage [V]	load 50%	load 100%																																					
	Power Factor	Power Factor																																					
75	0.99	1.00																																					
80	0.99	1.00																																					
85	0.99	1.00																																					
90	0.98	1.00																																					
100	0.98	1.00																																					
110	0.98	0.99																																					
120	0.97	0.99																																					
132	0.97	0.99																																					
140	0.97	0.99																																					
<p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注) 斜線は定格入力電圧範囲を示す。</p>																																							



Model	PAA600F-5
Item	Hold-Up Time 出力保持時間
Object	+5V120A

Temperature 25°C
Testing Circuitry Figure A

1. Graph -----□----- Load 50%
-----△----- Load 100%

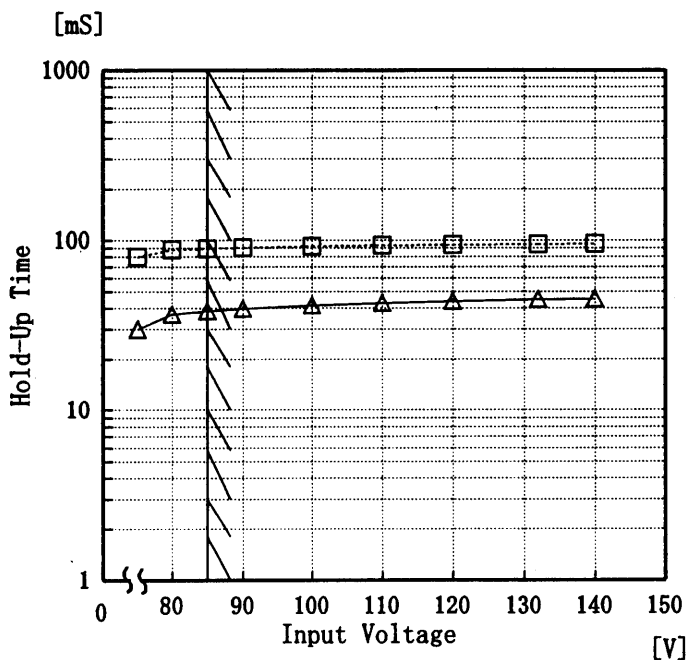

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note: Slanted line shows the range of the rated input voltage.

出力保持時間とは、AC入力断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。

(注)斜線は定格入力電圧範囲を示す。

2. Values


Input Voltage [V]	Load 50%	Load 100%
	Hold-Up Time [mS]	Hold-Up Time [mS]
75	80	30
80	88	37
85	89	38
90	91	40
100	92	42
110	93	43
120	94	44
132	95	45
140	95	45



Model	PAA600F-5
Item	Instantaneous Interruption Compensation 瞬時停電保障
Object	+5V120A

Testing Circuitry Figure A 25°C

1. Graph
- △— Input Volt. 85V
 - - -□- - - Input Volt. 100V
 - Input Volt. 132V

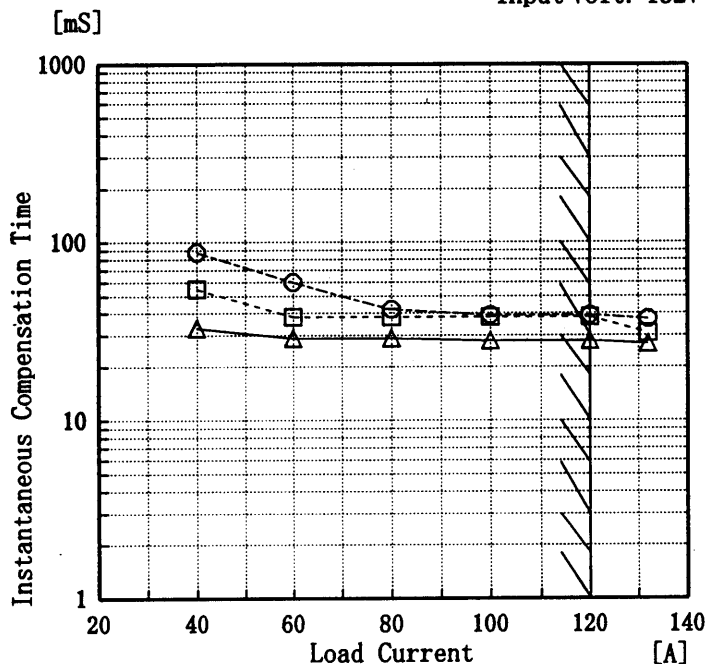

This duration covers from Shut-off of AC-IN to the moment when output voltage descends to its 95% of the rated.

Note: Slanted line shows the range of the rated load current.

瞬時停電保障時間とは、出力電圧が定格値の95%になる時の瞬時停電時間をいう。

(注)斜線は定格負荷電流範囲を示す。

2. Values

Load Current [A]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
	Time [mS]		
20.0	85	133	180
40.0	33	55	88
60.0	29	38	60
80.0	29	38	42
100.0	28	38	39
120.0	28	38	39
132.0	27	31	37

COSEL

Model PAA600F-5		Temperature 25°C Testing Circuitry Figure A																																															
Item	Load Regulation 静的負荷変動																																																
Object	+5V120A																																																
<p>1. Graph</p> <p> △ Input Volt. 85V □ Input Volt. 100V ○ Input Volt. 132V </p> <p>Output Voltage [V]</p> <p>Load Current [A]</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> <tr> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5.051</td><td>5.051</td><td>5.051</td></tr> <tr><td>20.0</td><td>5.049</td><td>5.049</td><td>5.049</td></tr> <tr><td>40.0</td><td>5.048</td><td>5.048</td><td>5.048</td></tr> <tr><td>60.0</td><td>5.046</td><td>5.046</td><td>5.046</td></tr> <tr><td>80.0</td><td>5.045</td><td>5.045</td><td>5.045</td></tr> <tr><td>100.0</td><td>5.043</td><td>5.043</td><td>5.043</td></tr> <tr><td>120.0</td><td>5.042</td><td>5.042</td><td>5.042</td></tr> <tr><td>120.0</td><td>5.042</td><td>5.042</td><td>5.042</td></tr> <tr><td>132.0</td><td>5.041</td><td>5.041</td><td>5.041</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Load Current [A]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.0	5.051	5.051	5.051	20.0	5.049	5.049	5.049	40.0	5.048	5.048	5.048	60.0	5.046	5.046	5.046	80.0	5.045	5.045	5.045	100.0	5.043	5.043	5.043	120.0	5.042	5.042	5.042	120.0	5.042	5.042	5.042	132.0	5.041	5.041	5.041	—	—	—	—
Load Current [A]	Input Volt. 85[V]	Input Volt. 100[V]		Input Volt. 132[V]																																													
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																														
0.0	5.051	5.051	5.051																																														
20.0	5.049	5.049	5.049																																														
40.0	5.048	5.048	5.048																																														
60.0	5.046	5.046	5.046																																														
80.0	5.045	5.045	5.045																																														
100.0	5.043	5.043	5.043																																														
120.0	5.042	5.042	5.042																																														
120.0	5.042	5.042	5.042																																														
132.0	5.041	5.041	5.041																																														
—	—	—	—																																														
<p>Note: Slanted line shows the range of the rated load current.</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>																																																	

COSEL


Model		PAA600F-5		Temperature		25°C																														
Item		Ripple Voltage (by Load Current) リップル電圧(負荷電流特性)		Testing Circuitry		Figure A																														
Object		+5V120A																																		
1. Graph				2. Values																																
[mV]		□ Input Volt. 85V △ Input Volt. 132V																																		
				<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 85 [V]</th> <th>Input Volt. 132 [V]</th> </tr> <tr> <th>Ripple Output Volt. [mV]</th> <th>Ripple Output Volt. [mV]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5</td><td>5</td></tr> <tr><td>20.0</td><td>20</td><td>20</td></tr> <tr><td>40.0</td><td>20</td><td>20</td></tr> <tr><td>60.0</td><td>20</td><td>20</td></tr> <tr><td>80.0</td><td>20</td><td>25</td></tr> <tr><td>100.0</td><td>30</td><td>30</td></tr> <tr><td>120.0</td><td>40</td><td>35</td></tr> <tr><td>132.0</td><td>40</td><td>40</td></tr> </tbody> </table>				Load Current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	0.0	5	5	20.0	20	20	40.0	20	20	60.0	20	20	80.0	20	25	100.0	30	30	120.0	40	35	132.0	40	40
Load Current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]																																		
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																		
0.0	5	5																																		
20.0	20	20																																		
40.0	20	20																																		
60.0	20	20																																		
80.0	20	25																																		
100.0	30	30																																		
120.0	40	35																																		
132.0	40	40																																		
Ripple Voltage is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.																																				
リップル電圧は、下図 p-p 値で示される。 (注) 斜線は定格負荷電流範囲を示す。																																				
T1: Due to AC Input Line 入力商用周期 T2: Due to Switching スイッチング周期																																				
Fig. Complex Ripple Wave Form 図 リップル波形詳細図																																				



Model	PAA600F-5
Item	Ripple-Noise リップルノイズ
Object	+5V 120A

Temperature 25°C
Testing Circuitry Figure A

1. Graph
[mV] □ Input Volt. 85V
 △ Input Volt. 132V

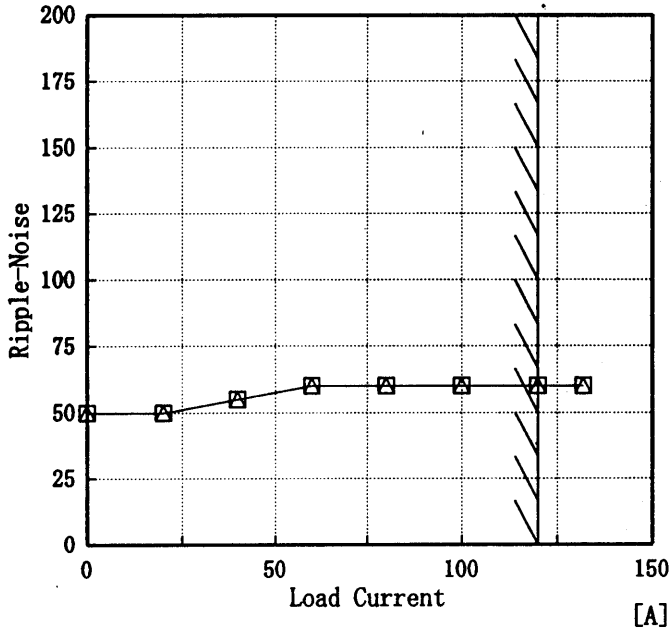

2. Values

Load current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]
	Ripple-Noise [mV]	Ripple-Noise [mV]
0.0	50	50
20.0	50	50
40.0	55	55
60.0	60	60
80.0	60	60
100.0	60	60
120.0	60	60
132.0	60	60

Ripple-Noise is shown as p-p in the figure below.
Note: Slanted line shows the range of the rated load current.

リップルノイズは、下図 p-p 値で示される。
(注)斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
入力商用周期
T2: Due to Switching
スイッチング周期

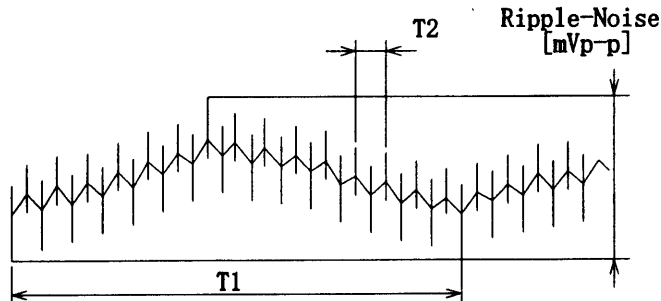


Fig. Complex Ripple Wave Form
図 リップル波形詳細図

COSEL

<p>Model PAA600F-5</p> <p>Item Overcurrent Protection 過電流保護</p> <p>Object +5V120A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																															
<p>1. Graph</p> <p>[V]</p> <p>Input Volt. 85 V Input Volt. 100 V Input Volt. 132 V</p> <p>Output Voltage [V]</p> <p>Load Current [A]</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> <tr> <th>Load Current [A]</th> <th>Load Current [A]</th> <th>Load Current [A]</th> </tr> </thead> <tbody> <tr> <td>5.00</td> <td>151.21</td> <td>152.01</td> <td>152.69</td> </tr> <tr> <td>4.75</td> <td>152.26</td> <td>153.21</td> <td>153.59</td> </tr> <tr> <td>4.50</td> <td>153.65</td> <td>154.32</td> <td>154.66</td> </tr> <tr> <td>4.00</td> <td>156.87</td> <td>157.29</td> <td>158.24</td> </tr> <tr> <td>3.50</td> <td>161.55</td> <td>162.81</td> <td>162.68</td> </tr> <tr> <td>3.00</td> <td>166.15</td> <td>166.53</td> <td>166.58</td> </tr> </tbody> </table>	Output Voltage [V]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	Load Current [A]	Load Current [A]	Load Current [A]	5.00	151.21	152.01	152.69	4.75	152.26	153.21	153.59	4.50	153.65	154.32	154.66	4.00	156.87	157.29	158.24	3.50	161.55	162.81	162.68	3.00	166.15	166.53	166.58
Output Voltage [V]	Input Volt. 85[V]	Input Volt. 100[V]		Input Volt. 132[V]																													
	Load Current [A]	Load Current [A]	Load Current [A]																														
5.00	151.21	152.01	152.69																														
4.75	152.26	153.21	153.59																														
4.50	153.65	154.32	154.66																														
4.00	156.87	157.29	158.24																														
3.50	161.55	162.81	162.68																														
3.00	166.15	166.53	166.58																														
<p>Note: Slanted line shows the range of the rated load current.</p> <p>(注)斜線は定格負荷電流範囲を示す。</p> <p>3V以下は間欠モードにはいる。</p>																																	




Model	PAA600F-5
Item	Overvoltage Protection 過電圧保護
Object	+5V120A

Testing Circuitry Figure A

1. Graph

- △— Input Volt. 85 V
- - -□- - - Input Volt. 100 V
- Input Volt. 132 V

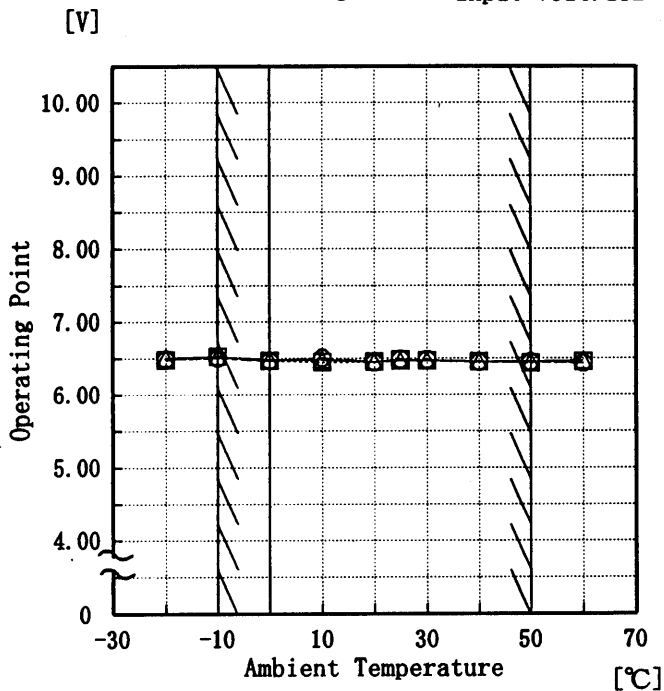

Note: Slanted line shows the range of the rated ambient temperature.


(注)斜線は定格周囲温度範囲を示す。

2. Values


Ambient Temp. [°C]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
	Operating Point [V]		
-20	6.51	6.48	6.49
-10	6.53	6.53	6.51
0	6.48	6.47	6.47
10	6.48	6.45	6.51
20	6.46	6.46	6.45
25	6.47	6.48	6.49
30	6.47	6.47	6.48
40	6.46	6.46	6.45
50	6.46	6.44	6.45
60	6.47	6.46	6.44
—	—	—	—



Model	PAA600F-5	Temperature 25°C Testing Circuitry Figure A
Item	Inrush Current 突入電流	
Object	_____	

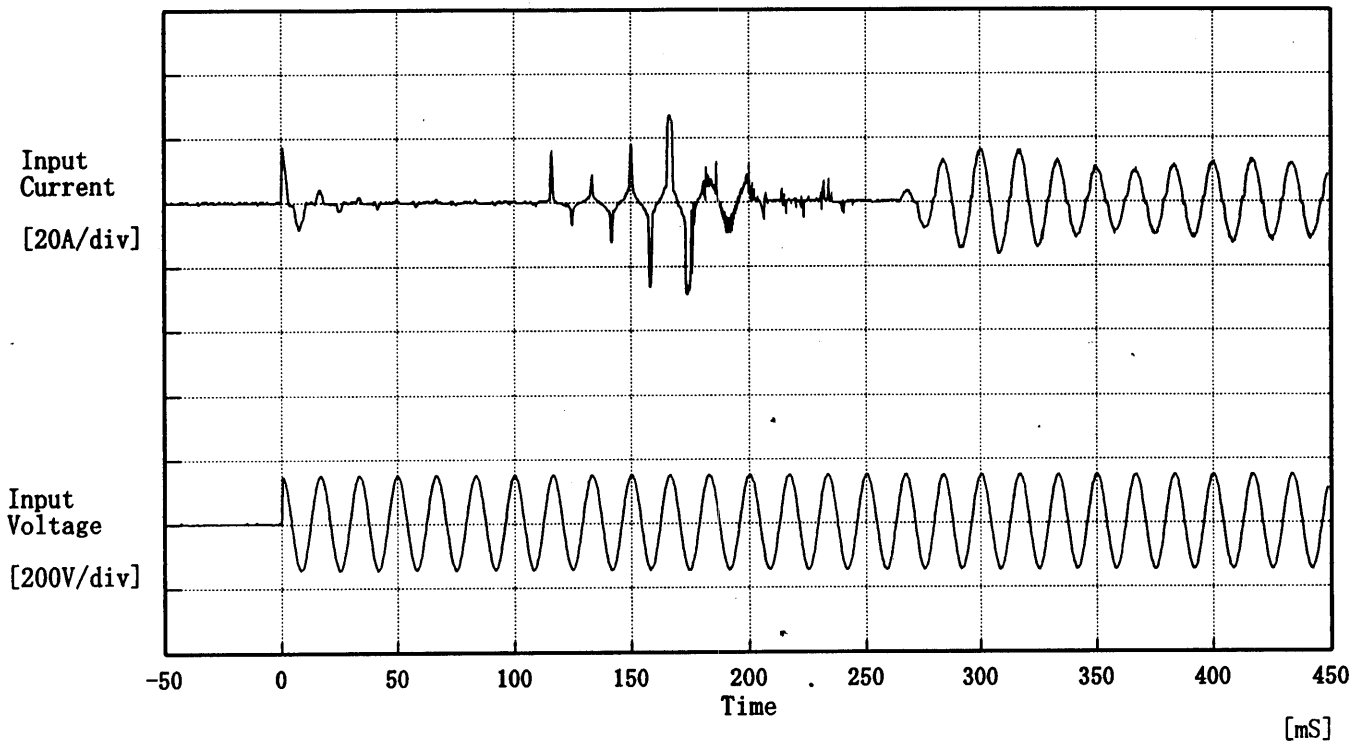

Input Voltage 100 V
 Frequency 60 Hz
 Load 100 %
 Inrush Current
 ① 17.40 [A]
 ② 28.80 [A]

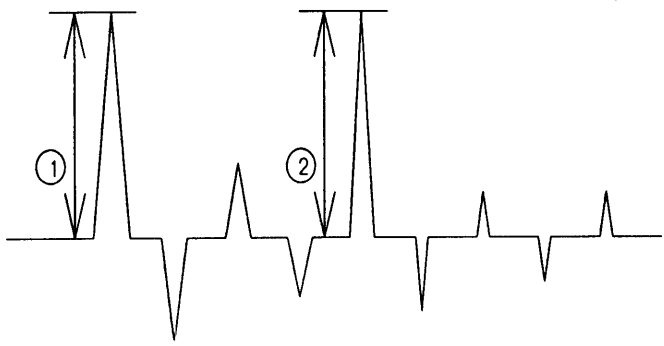



COSEL

Model		PAA600F-5	
Item	Dynamic Load Responce 動的負荷変動	Temperature	25°C
Object	+5V 120A	Testing Circuitry	Figure A



Input Volt. 100 V
Cycle 200 mS



Load 0% ↔
Load 100 %

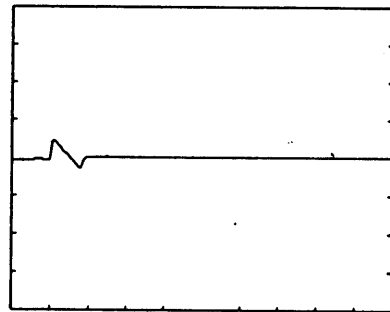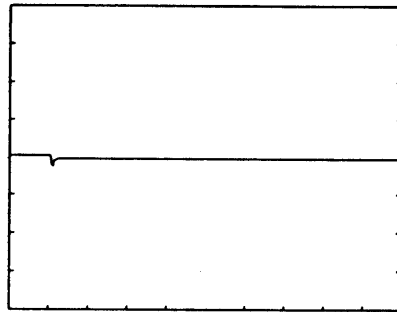

Load 0% ↔
Load 50 %

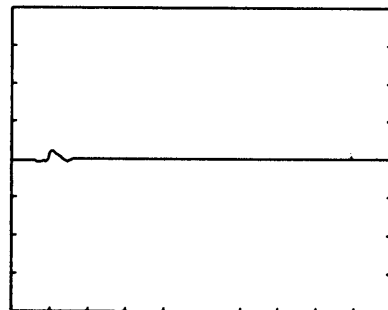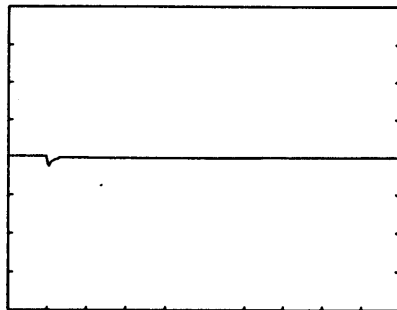

100 mV/div


10 mS/div



Model	PAA600F-5	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+5V120A		

1. Graph


Input Volt. 85 V

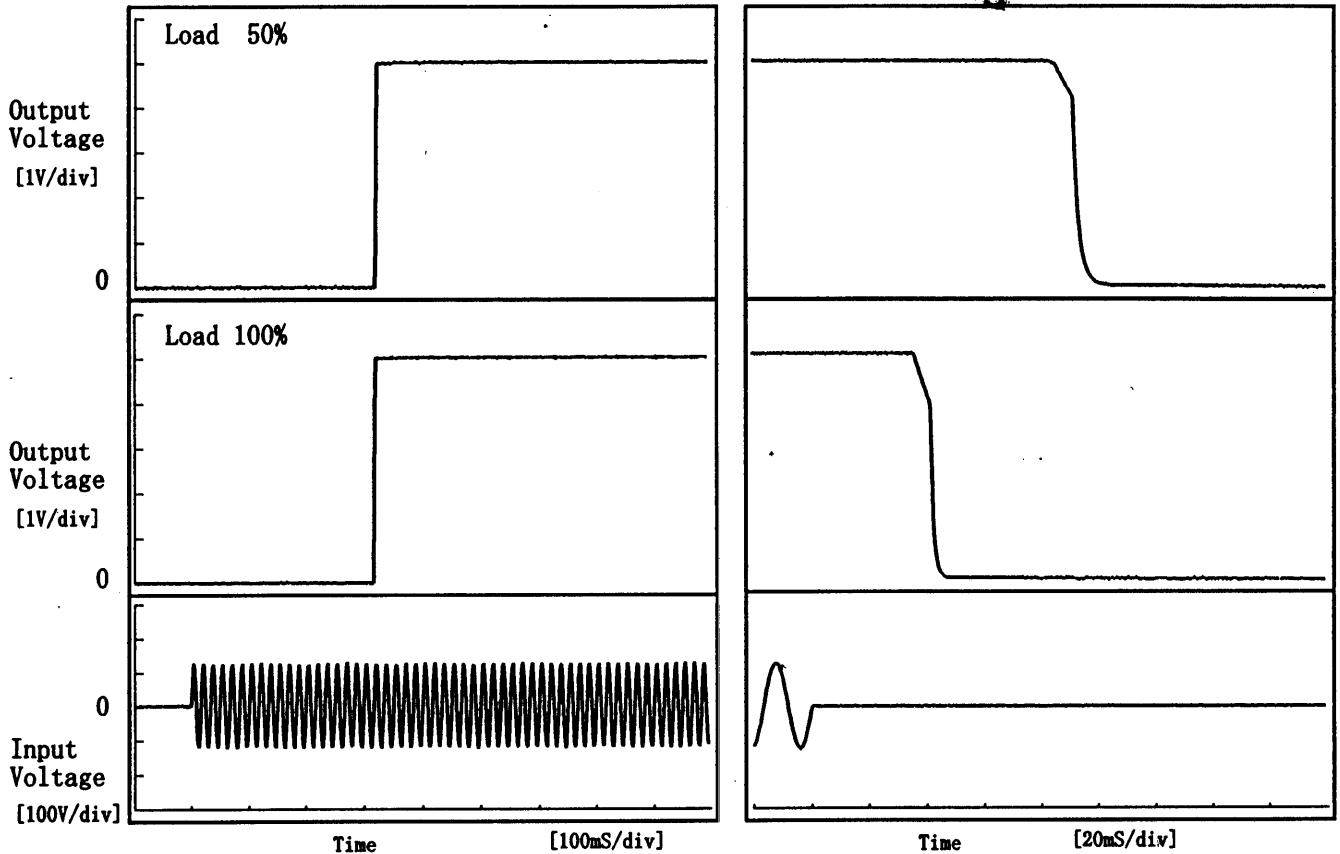

2. Values

[mS]

Load \ Time	T _d	T _r	T _s	T _h	T _f
50 %	319.0	1.0	320.0	88.7	7.0
100 %	318.0	1.5	319.5	38.5	5.4

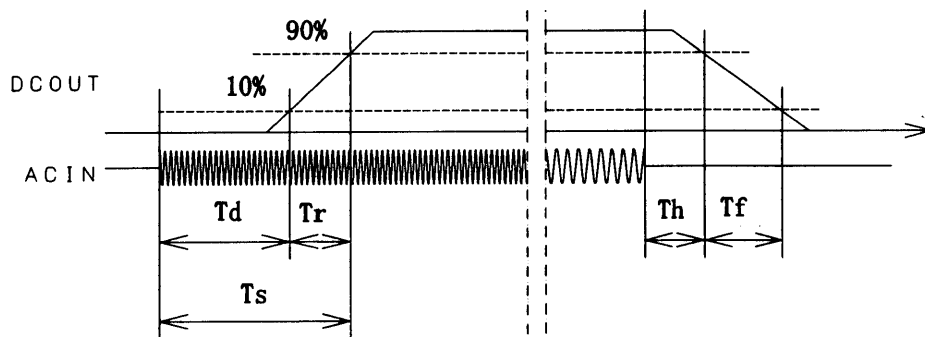


COSEL

Model	PAA600F-5
Item	Ambient Temperature Drift 周囲温度変動
Object	+5V120A

Testing Circuitry Figure A

1. Graph

- △— Input Volt. 85V
- - -□- - - Input Volt. 100V
- Input Volt. 132V

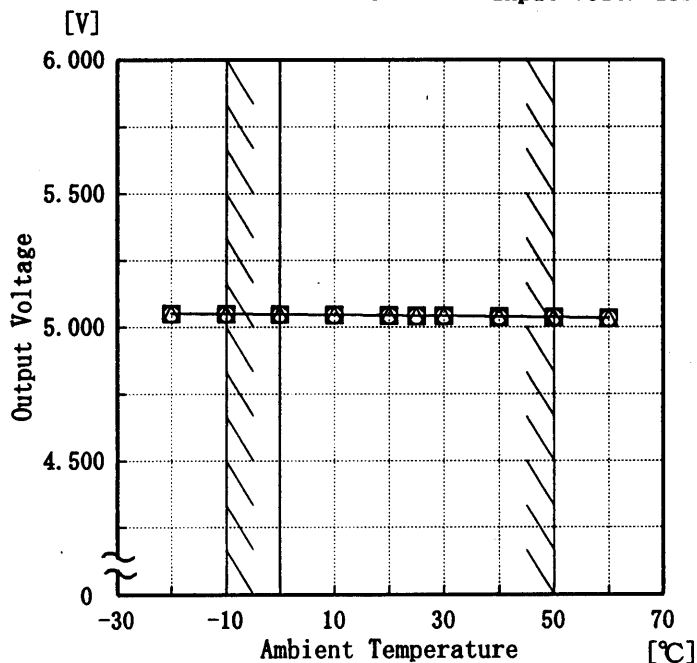

Load 100%

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

2. Values


Temperature [°C]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
-20	5.050	5.050	5.050
-10	5.049	5.049	5.049
0	5.048	5.048	5.048
10	5.046	5.046	5.045
20	5.043	5.043	5.043
25	5.042	5.042	5.042
30	5.042	5.042	5.042
40	5.037	5.037	5.037
50	5.037	5.036	5.036
60	5.033	5.033	5.033

COSEL

Model	PAA600F-5
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧
Object	+5V120A

Testing Circuitry Figure A

1. Graph

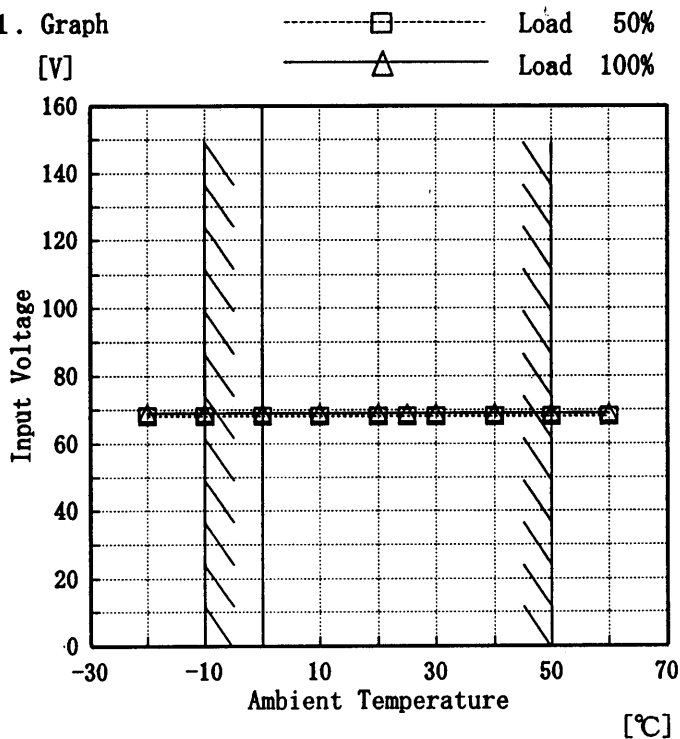

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

2. Values


Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]
-20	68	69
-10	68	69
0	68	69
10	68	69
20	68	69
25	68	69
30	68	69
40	68	69
50	68	69
60	68	69
—	—	—



Model	PAA600F-5
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)
Object	+5V120A

Testing Circuitry Figure A

1. Graph

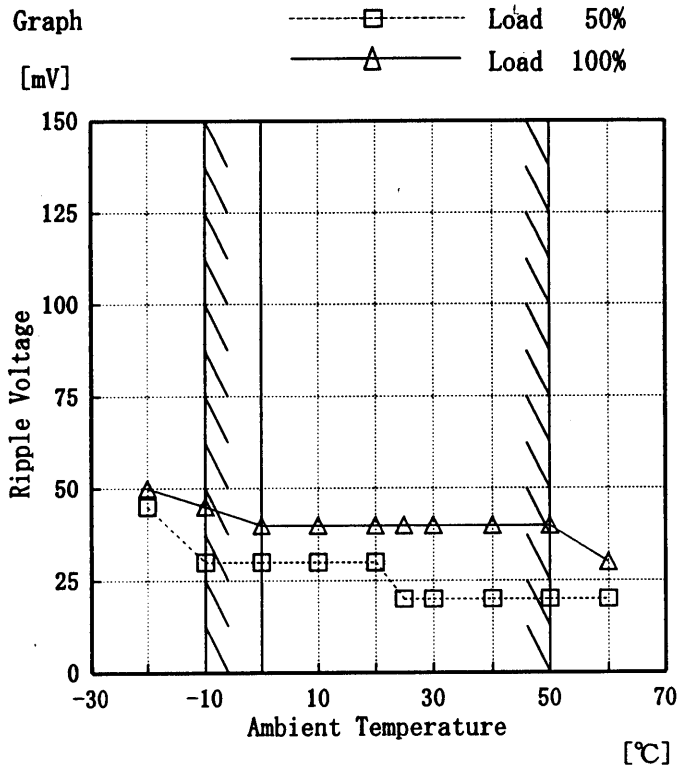

Input Volt. 100 V

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
-20	45	50
-10	30	45
0	30	40
10	30	40
20	30	40
25	20	40
30	20	40
40	20	40
50	20	40
60	20	30
-	-	-



Model PAA600F-5		Temperature 25 °C Testing Circuitry Figure A																						
Item	Time Lapse Drift 経時ドリフト																							
Object	+5V120A																							
<p>1. Graph</p> <p>[V]</p> <p>Output Voltage [V]</p> <p>Time [H]</p> <p>Input Volt. 100V Load 100%</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5.023</td></tr> <tr><td>0.5</td><td>5.022</td></tr> <tr><td>1.0</td><td>5.022</td></tr> <tr><td>2.0</td><td>5.022</td></tr> <tr><td>3.0</td><td>5.022</td></tr> <tr><td>4.0</td><td>5.022</td></tr> <tr><td>5.0</td><td>5.022</td></tr> <tr><td>6.0</td><td>5.022</td></tr> <tr><td>7.0</td><td>5.022</td></tr> <tr><td>8.0</td><td>5.022</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	5.023	0.5	5.022	1.0	5.022	2.0	5.022	3.0	5.022	4.0	5.022	5.0	5.022	6.0	5.022	7.0	5.022	8.0	5.022
Time since start [H]	Output Voltage [V]																							
0.0	5.023																							
0.5	5.022																							
1.0	5.022																							
2.0	5.022																							
3.0	5.022																							
4.0	5.022																							
5.0	5.022																							
6.0	5.022																							
7.0	5.022																							
8.0	5.022																							



Model		PAA600F-5	Testing Circuitry Figure A
Item		Output Voltage Accuracy 定電圧精度	
Object		+5V120A	

Output Voltage Accuracy

This is defined as the maximum value of the output voltage regulation load, temperature and input voltage vary at random in the range as specified below.

Temperature : -10~50 °C

Input Voltage : 85~132 V

Load Current : 0~120 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

$$* \text{ Output Voltage Accuracy (Ration)} = \frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

定電圧精度

温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -10~50 °C

入力電圧 85~132 V

負過電流 0~120 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$


$$* \text{ 定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy (Ration) [%]
Maximum Voltage	-10	132	0	5.057	±11	±0.221
Minimum Voltage	50	85	120	5.035		

COSEL


Model	PAA600F-5	Temperature	25°C
Item	Harmonic Current 高調波電流	Testing Circuitry	Figure E
Object			

1. Input Current Waveform

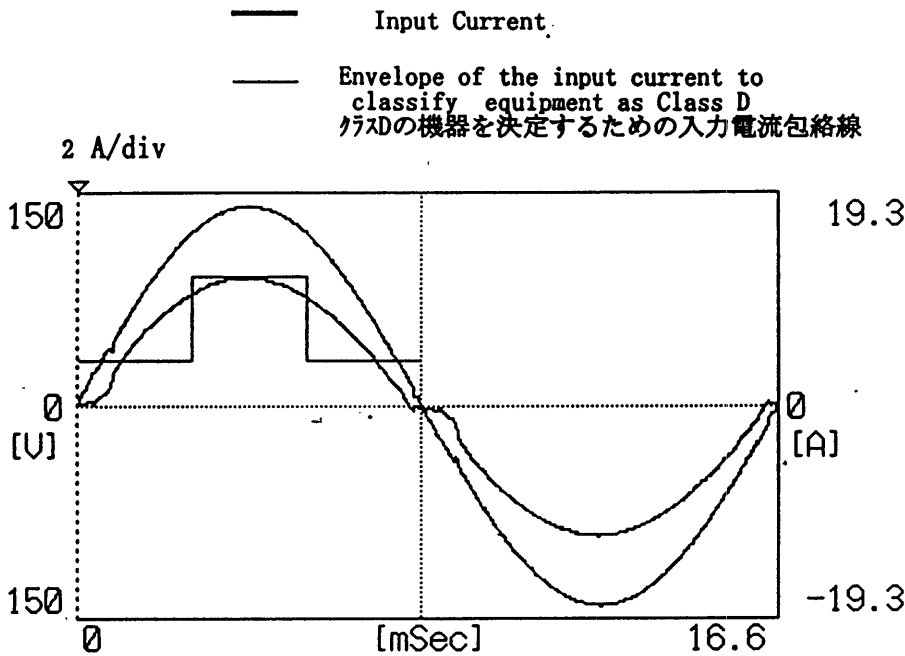

Conditions	Values
Input Voltage [V]	100
Input Current [A]	8.29
Active Power [W]	804.4
Apparent Power [VA]	807.8
Frequency [Hz]	60
Power Factor	0.996
Output Power [W]	600

2. Harmonic Current

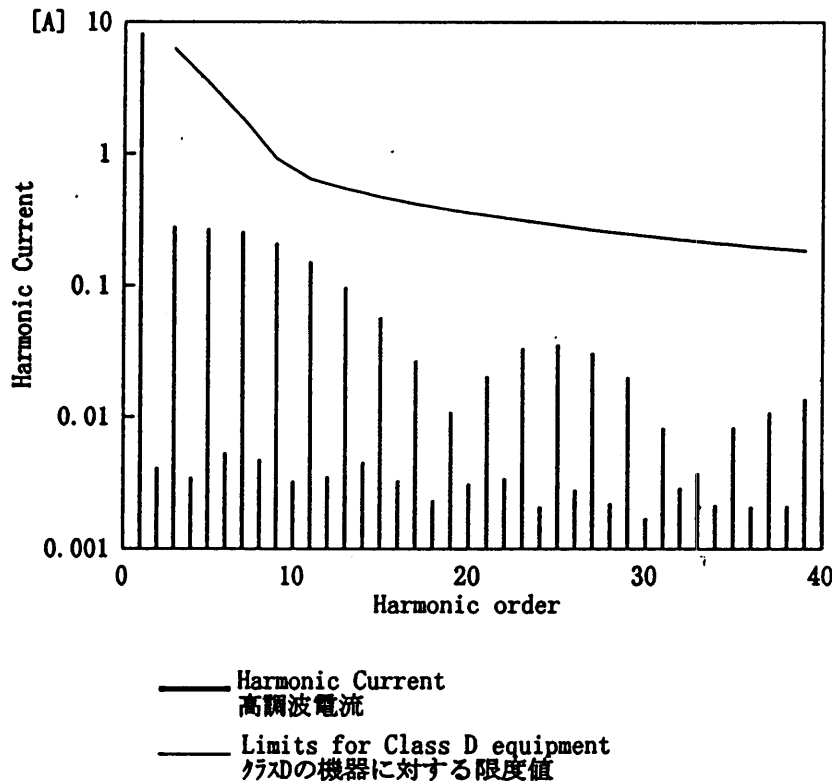

Harmonics order 高調波次数	Limits 限度値 [A]	Values 測定値 [A]
1	—	8.27100
2	—	0.00414
3	6.29041	0.28206
4	—	0.00348
5	3.51523	0.27003
6	—	0.00537
7	1.85012	0.25515
8	—	0.00477
9	0.92506	0.20945
10	—	0.00328
11	0.64754	0.15176
12	—	0.00353
13	0.54792	0.09812
14	—	0.00459
15	0.47486	0.05699
16	—	0.00330
17	0.41900	0.02723
18	—	0.00235
19	0.37489	0.01099
20	—	0.00311
21	0.33919	0.02035
22	—	0.00341
23	0.30969	0.03344
24	—	0.00210
25	0.28492	0.03554
26	—	0.00282
27	0.26381	0.03074
28	—	0.00223
29	0.24562	0.01999
30	—	0.00170
31	0.22977	0.00828
32	—	0.00292
33	0.21585	0.00376
34	—	0.00217
35	0.20351	0.00835
36	—	0.00210
37	0.19251	0.01093
38	—	0.00212
39	0.18264	0.01382
40	—	0.00284


COSEL

Model	PAA600F-5	Temperature	25°C
Item	Harmonic Current 高調波電流	Testing Circuitry	Figure E
Object	...		

1. Input Current Waveform


— Input Current
 — Envelope of the input current to classify equipment as Class D
 クラスDの機器を決定するための入力電流包絡線

2 A/div

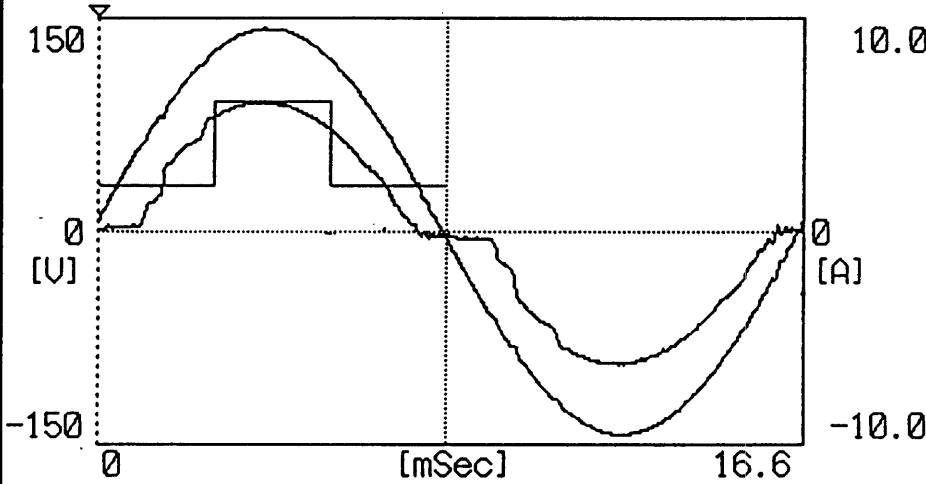

Conditions	Values
Input Voltage [V]	100
Input Current [A]	4.09
Active Power [W]	398.3
Apparent Power [VA]	405.9
Frequency [Hz]	50
Power Factor	0.981
Output Power [W]	300

Harmonics order 高調波次数	Limits 限度値 [A]	Values 測定値 [A]
1	—	4.02900
2	—	0.00092
3	3.11471	0.60912
4	—	0.00114
5	1.74057	0.35420
6	—	0.00059
7	0.91609	0.15082
8	—	0.00067
9	0.45805	0.05423
10	—	0.00068
11	0.32063	0.04244
12	—	0.00070
13	0.27130	0.07828
14	—	0.00089
15	0.23513	0.03951
16	—	0.00066
17	0.20747	0.03045
18	—	0.00090
19	0.18563	0.01409
20	—	0.00121
21	0.16795	0.03584
22	—	0.00077
23	0.15335	0.02283
24	—	0.00058
25	0.14108	0.01400
26	—	0.00092
27	0.13063	0.01527
28	—	0.00085
29	0.12162	0.01573
30	—	0.00101
31	0.11377	0.01803
32	—	0.00091
33	0.10688	0.02746
34	—	0.00081
35	0.10077	0.03543
36	—	0.00108
37	0.09532	0.02792
38	—	0.00081
39	0.09043	0.01852
40	—	0.00065

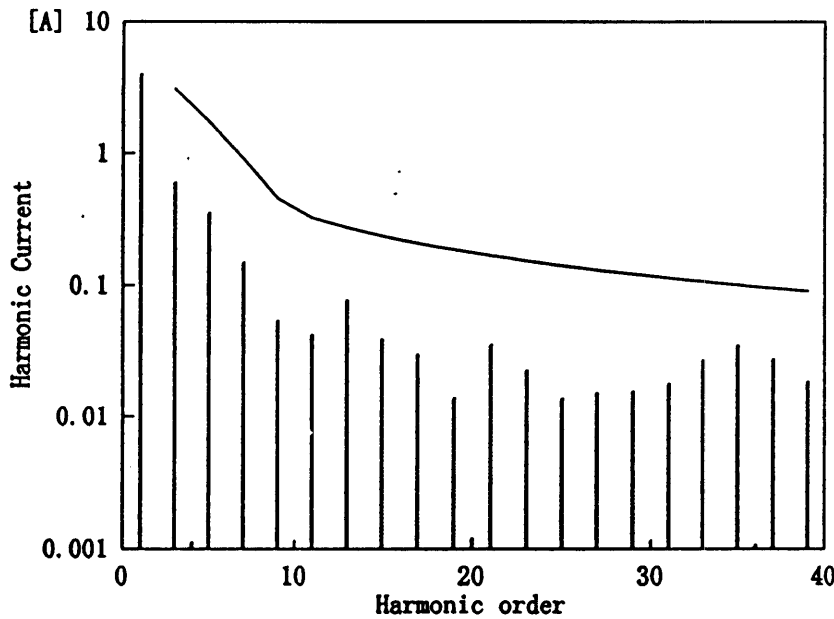

— Harmonic Current
 高調波電流
 — Limits for Class D equipment
 クラスDの機器に対する限度値

COSEL

Model		PAA600F-5	Testing Circuitry	Figure A
Item		Condensation 結露特性		
Object		+5V 120A		

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で-10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を3度行い、異常のないことを確認する。

2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50 %	1	5.040	50	60
	2	5.040	50	60
	3	5.040	50	60
Load 100 %	1	5.040	50	70
	2	5.040	50	70
	3	5.040	50	70

Input Volt. 100 V



Model		PAA600F-5	Testing Circuitry	Figure A
Item	Leakage Current 漏洩電流			
Object	_____			

1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DENTORI	0.19	0.19	0.20
(B) UL	0.19	0.19	0.20
(C) CSA	0.19	0.19	0.20

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 220 [V]	Input Volt. 264 [V]
(D) VDE	—	—	—

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力の両相について測定し、その大きい方を漏洩電流測定値とする。

Load 100 %



Model		PAA600F-5	Testing Circuitry Figure C
Item	Line Noise Tolerance 入力雑音耐量		
Object	+5V120A		

1. Results

Pulse Width [n S]	MODE	Operating Point of Overvoltage Protection [V] 過電圧保護動作値	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	6.53	no regulation
	NORMAL	6.53	no regulation
1000	COMMON	6.53	no regulation
	NORMAL	6.53	no regulation

Conditions

Input Voltage :100 V
 Pulse Voltage :2000 V
 Pulse Cycle :10 mS
 Pulse Input Duration:1 min. or more
 Load :100 %

COSEL

Model	PAA600F-5	Testing Circuitry Figure D
Item	Conducted Emission 雑音端子電圧	
Object		

1. Graph

Remarks


Input Volt. 120 V
Load 100 %

Note: Slanted line shows the range of Tolerance.


(注) 斜線は許容値を示す。

NO	Standards	Standards Complied	Frequency [MHz]	Tolerance [dB/μV]
1	FCC Class A		0.45~1.6	60
			1.6~30	69.5
2	FCC Class B	○	0.45~30	48
3	VCCI -1		0.15~0.5	79
			0.5~30	73
4	VCCI -2	○	0.15~0.5	66-56
			0.5~5	56
			5~30	60
5	VDE Class A		0.01~0.15	91-69.5
			0.15~0.5	66
			0.5~30	60
6	CISPR22 Class B		0.15~0.5	66-56
			0.5~5	56
			5~30	60

[dB μV]

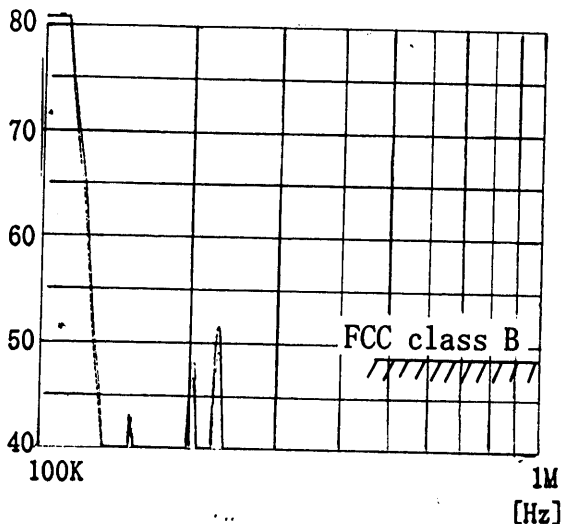

[dB μV]

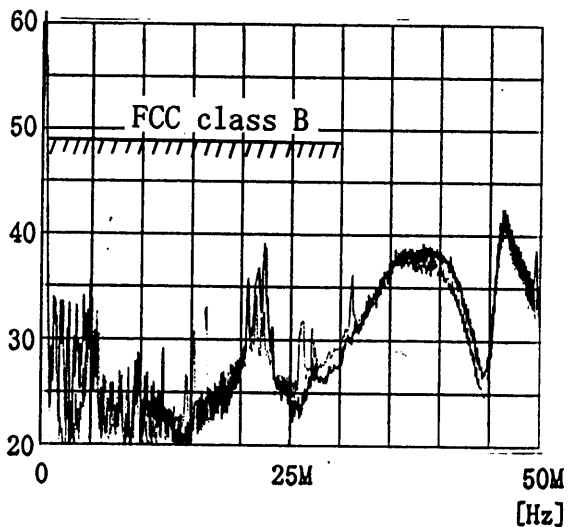

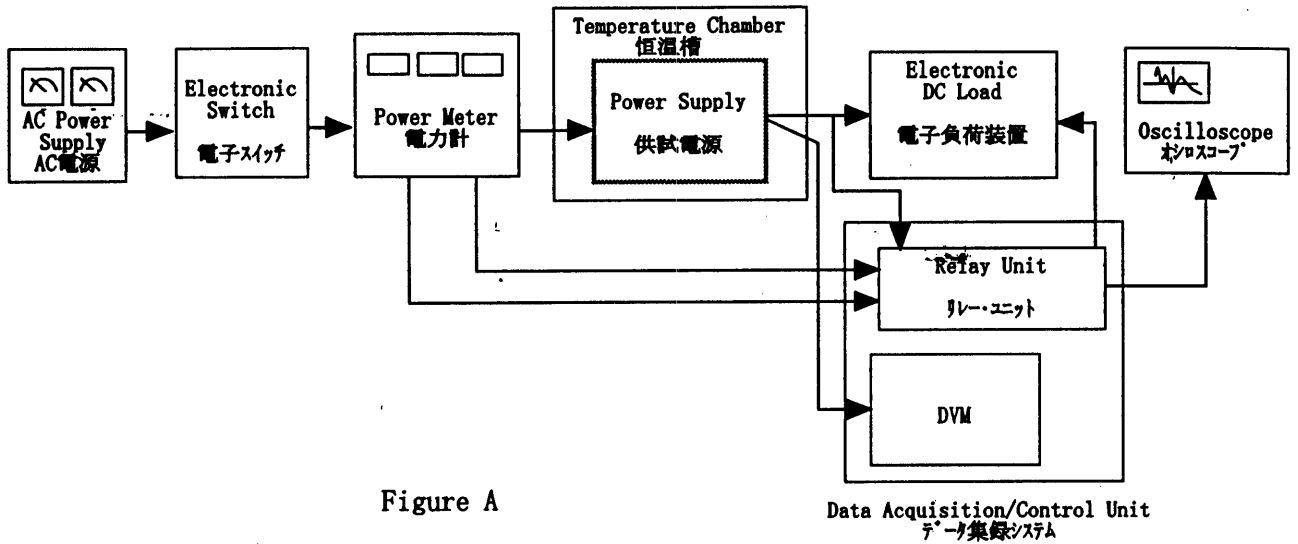


Figure A

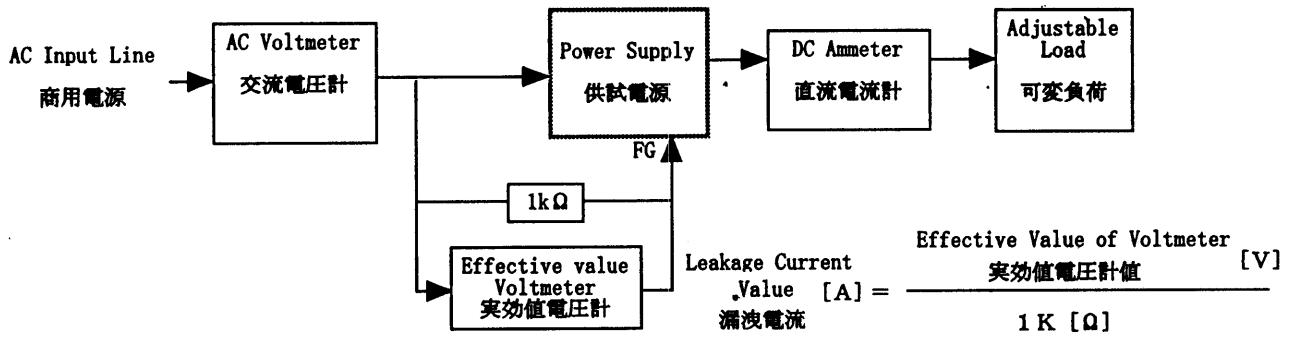


Figure B (DENTORI)

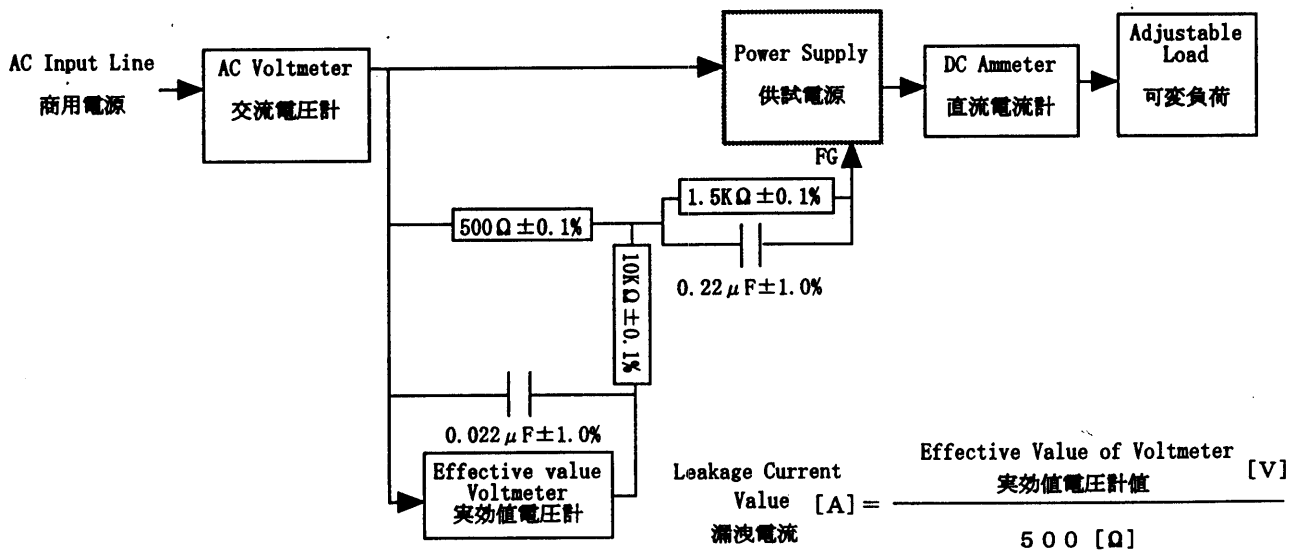


Figure B (UL, CSA, VDE)

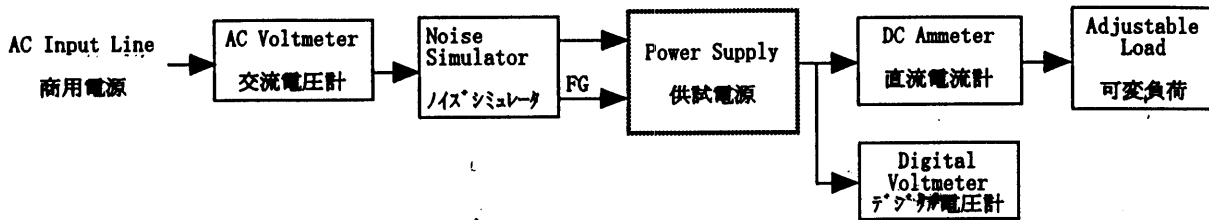


Figure C

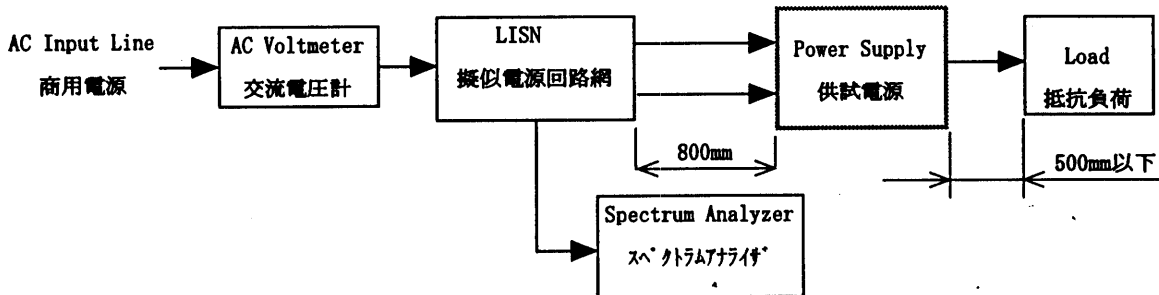


Figure D

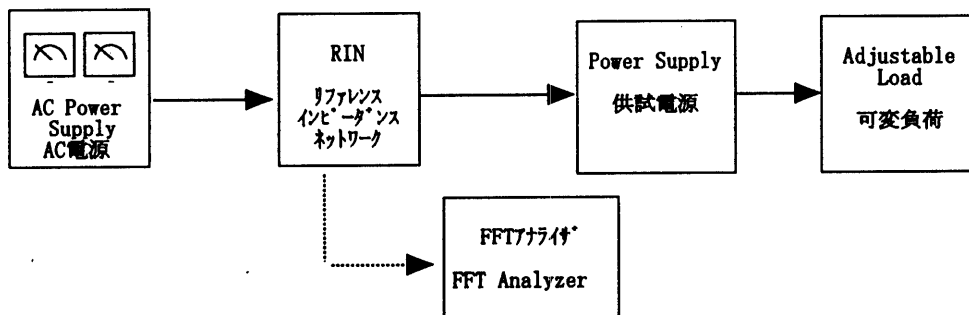


Figure E