



TEST DATA OF PAA75F-15 (200V INPUT)

Regulated DC Power Supply

Date : Feb. 17. 1997

Approved by : *M. Tanikawa*
Design Manager

Prepared by : *T. Amei*
Design Engineer

コーセル株式会社

COSEL CO.,LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Efficiency	2
効率	
3. Power Factor	3
力率	
4. Hold-Up Time	4
出力保持時間	
5. Instantaneous Interruption Compensation	5
瞬時停電保障	
6. Load Regulation	6
静的負荷変動	
7. Ripple Voltage (by Load Current)	7
リップル電圧(負荷電流特性)	
8. Ripple-Noise	8
リップルノイズ	
9. Overcurrent Protection	9
過電流保護	
10. Overvoltage Protection	10
過電圧保護	
11. Inrush Current	11
突入電流	
12. Dynamic Load Responce	12
動的負荷変動	
13. Rise and Fall Time	13
立上り、立下がり時間	
14. Ambient Temperature Drift	14
周囲温度変動	
15. Minimum Input Voltage for Regulated Output Voltage	15
最低レギュレーション電圧	
16. Ripple Voltage (by Ambient Temperature)	16
リップル電圧(周囲温度特性)	
17. Time Lapse Drift	17
経時ドリフト	
18. Output Voltage Accuracy	18
定電圧精度	
19. Harmonic Current	19
高調波電流	
20. Condensation	21
結露特性	
21. Leakage Current	22
漏洩電流	
22. Line Noise Tolerance	23
入力雑音耐量	
23. Conducted Emission	24
雑音端子電圧	
24. Figure of Testing Circuitry	25
測定回路図	

(Final Page 26)




Model	PAA75F-15
Item	Line Regulation 静的入力変動
Object	+15V5.0A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

-----□----- Load 50%
-----△----- Load 100%

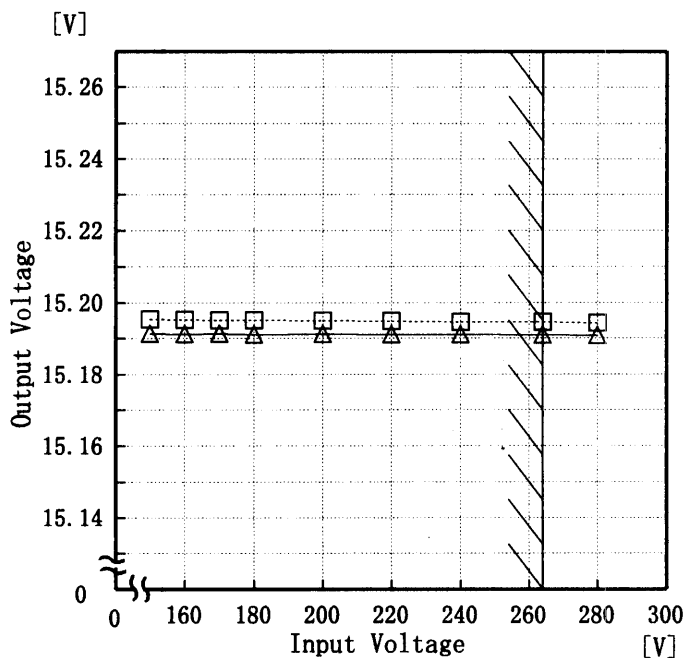

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

2. Values

Input Voltage [V]	Load 50%	Load 100%
	Output Volt. [V]	Output Volt. [V]
150	15.195	15.191
160	15.195	15.191
170	15.195	15.191
180	15.195	15.191
200	15.195	15.191
220	15.195	15.191
240	15.195	15.191
264	15.195	15.191
280	15.194	15.191




Model		PAA75F-15		Temperature		25°C																																	
Item		Efficiency 効率		Testing Circuitry		Figure A																																	
Object		+15V5.0A																																					
1. Graph				2. Values																																			
<p>-----□----- Load 50%</p> <p>-----△----- Load 100%</p> <p>Efficiency [%]</p> <p>Input Voltage [V]</p>				<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th>Load 50%</th> <th>Load 100%</th> </tr> <tr> <th>Efficiency [%]</th> <th>Efficiency [%]</th> </tr> </thead> <tbody> <tr><td>150</td><td>75.5</td><td>80.2</td></tr> <tr><td>160</td><td>74.9</td><td>80.1</td></tr> <tr><td>170</td><td>74.0</td><td>79.9</td></tr> <tr><td>180</td><td>73.6</td><td>79.7</td></tr> <tr><td>200</td><td>72.2</td><td>79.0</td></tr> <tr><td>220</td><td>70.2</td><td>77.9</td></tr> <tr><td>240</td><td>67.5</td><td>76.7</td></tr> <tr><td>264</td><td>64.1</td><td>75.1</td></tr> <tr><td>280</td><td>61.5</td><td>73.5</td></tr> </tbody> </table>				Input Voltage [V]	Load 50%	Load 100%	Efficiency [%]	Efficiency [%]	150	75.5	80.2	160	74.9	80.1	170	74.0	79.9	180	73.6	79.7	200	72.2	79.0	220	70.2	77.9	240	67.5	76.7	264	64.1	75.1	280	61.5	73.5
Input Voltage [V]	Load 50%	Load 100%																																					
	Efficiency [%]	Efficiency [%]																																					
150	75.5	80.2																																					
160	74.9	80.1																																					
170	74.0	79.9																																					
180	73.6	79.7																																					
200	72.2	79.0																																					
220	70.2	77.9																																					
240	67.5	76.7																																					
264	64.1	75.1																																					
280	61.5	73.5																																					
<p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>																																							



Model	PAA75F-15
Item	Power Factor 力率
Object	+15V5.0A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

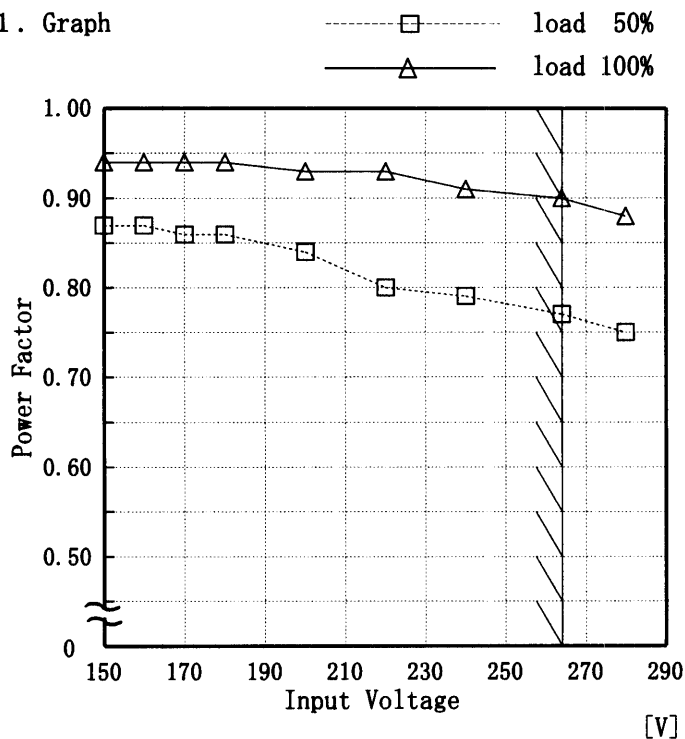

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

2. Values

Input Voltage [V]	load 50%	load 100%
	Power Factor	Power Factor
150	0.87	0.94
160	0.87	0.94
170	0.86	0.94
180	0.86	0.94
200	0.84	0.93
220	0.80	0.93
240	0.79	0.91
264	0.77	0.90
280	0.75	0.88



Model		PAA75F-15		Temperature		25°C																																	
Item		Hold-Up Time 出力保持時間		Testing Circuitry		Figure A																																	
Object		+15V5.0A																																					
<p>1. Graph</p> <p>—△— Load 50%</p> <p>- -□- - Load 100%</p> <p>Hold-Up Time [mS]</p> <p>Input Voltage [V]</p>				<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th>Load 50%</th> <th>Load 100%</th> </tr> <tr> <th>Hold-Up Time [mS]</th> <th>Hold-Up Time [mS]</th> </tr> </thead> <tbody> <tr><td>150</td><td>171</td><td>64</td></tr> <tr><td>160</td><td>251</td><td>73</td></tr> <tr><td>170</td><td>357</td><td>81</td></tr> <tr><td>180</td><td>432</td><td>92</td></tr> <tr><td>200</td><td>580</td><td>111</td></tr> <tr><td>220</td><td>671</td><td>138</td></tr> <tr><td>240</td><td>687</td><td>160</td></tr> <tr><td>264</td><td>701</td><td>170</td></tr> <tr><td>280</td><td>708</td><td>171</td></tr> </tbody> </table>				Input Voltage [V]	Load 50%	Load 100%	Hold-Up Time [mS]	Hold-Up Time [mS]	150	171	64	160	251	73	170	357	81	180	432	92	200	580	111	220	671	138	240	687	160	264	701	170	280	708	171
Input Voltage [V]	Load 50%	Load 100%																																					
	Hold-Up Time [mS]	Hold-Up Time [mS]																																					
150	171	64																																					
160	251	73																																					
170	357	81																																					
180	432	92																																					
200	580	111																																					
220	671	138																																					
240	687	160																																					
264	701	170																																					
280	708	171																																					
<p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</p> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。 (注)斜線は定格入力電圧範囲を示す。</p>																																							



Model PAA75F-15 Item Instantaneous Interruption Compensation 瞬時停電保障 Object +15V5.0A		Temperature 25°C Testing Circuitry Figure A																																																			
1. Graph <div style="display: flex; justify-content: space-between; align-items: flex-start;"> <div style="width: 60%;"> </div> <div style="width: 35%;"> <p>—△— Input Volt. 170V - - -□- - Input Volt. 200V - - -○- - Input Volt. 264V</p> </div> </div>		2. Values <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> <tr> <th colspan="3">Time [mS]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>1.0</td><td>635</td><td>786</td><td>843</td></tr> <tr><td>2.0</td><td>260</td><td>385</td><td>410</td></tr> <tr><td>3.0</td><td>170</td><td>227</td><td>265</td></tr> <tr><td>4.0</td><td>115</td><td>153</td><td>203</td></tr> <tr><td>5.0</td><td>75</td><td>110</td><td>151</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Load Current [A]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	Time [mS]			0.0	—	—	—	1.0	635	786	843	2.0	260	385	410	3.0	170	227	265	4.0	115	153	203	5.0	75	110	151	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Volt. 170[V]	Input Volt. 200[V]		Input Volt. 264[V]																																																	
	Time [mS]																																																				
0.0	—	—	—																																																		
1.0	635	786	843																																																		
2.0	260	385	410																																																		
3.0	170	227	265																																																		
4.0	115	153	203																																																		
5.0	75	110	151																																																		
—	—	—	—																																																		
—	—	—	—																																																		
—	—	—	—																																																		
—	—	—	—																																																		
—	—	—	—																																																		
<p>This duration counts between Shut-off and on of input voltage automatically. Note: Slanted line shows the range of the rated load current.</p> <p>瞬時停電保障時間とは、出力電圧が定格値の95%になる時の瞬時停電時間をいう。 (注)斜線は定格負荷電流範囲を示す。</p>																																																					



Model		PAA75F-15		Temperature		25°C																																																
Item		Load Regulation 静的負荷変動		Testing Circuitry		Figure A																																																
Object		+15V5.0A																																																				
1. Graph				2. Values																																																		
<p> Δ Input Volt. 170V \square Input Volt. 200V \circ Input Volt. 264V </p>				<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> <tr> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>15.198</td><td>15.198</td><td>15.197</td></tr> <tr><td>0.8</td><td>15.197</td><td>15.196</td><td>15.196</td></tr> <tr><td>1.6</td><td>15.196</td><td>15.195</td><td>15.194</td></tr> <tr><td>2.4</td><td>15.195</td><td>15.194</td><td>15.193</td></tr> <tr><td>3.2</td><td>15.194</td><td>15.193</td><td>15.193</td></tr> <tr><td>4.0</td><td>15.192</td><td>15.192</td><td>15.191</td></tr> <tr><td>4.8</td><td>15.191</td><td>15.191</td><td>15.191</td></tr> <tr><td>5.0</td><td>15.191</td><td>15.190</td><td>15.190</td></tr> <tr><td>5.5</td><td>15.191</td><td>15.190</td><td>15.190</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Load Current [A]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.0	15.198	15.198	15.197	0.8	15.197	15.196	15.196	1.6	15.196	15.195	15.194	2.4	15.195	15.194	15.193	3.2	15.194	15.193	15.193	4.0	15.192	15.192	15.191	4.8	15.191	15.191	15.191	5.0	15.191	15.190	15.190	5.5	15.191	15.190	15.190	—	—	—	—
Load Current [A]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																			
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																			
0.0	15.198	15.198	15.197																																																			
0.8	15.197	15.196	15.196																																																			
1.6	15.196	15.195	15.194																																																			
2.4	15.195	15.194	15.193																																																			
3.2	15.194	15.193	15.193																																																			
4.0	15.192	15.192	15.191																																																			
4.8	15.191	15.191	15.191																																																			
5.0	15.191	15.190	15.190																																																			
5.5	15.191	15.190	15.190																																																			
—	—	—	—																																																			
<p>Note: Slanted line shows the range of the rated load current.</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>																																																						



<p>Model PAA75F-15</p> <p>Item Ripple Voltage (by Load Current) リップル電圧 (負荷電流特性)</p> <p>Object +15V5.0A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																						
<p>1. Graph</p> <p>[mV]</p> <p>-----□----- Input Volt. 170V</p> <p>-----△----- Input Volt. 264V</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 170 [V]</th> <th>Input Volt. 264 [V]</th> </tr> <tr> <th>Ripple Output Volt. [mV]</th> <th>Ripple Output Volt. [mV]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>10</td><td>10</td></tr> <tr><td>1.0</td><td>30</td><td>30</td></tr> <tr><td>2.0</td><td>30</td><td>30</td></tr> <tr><td>3.0</td><td>30</td><td>30</td></tr> <tr><td>4.0</td><td>40</td><td>40</td></tr> <tr><td>5.0</td><td>40</td><td>40</td></tr> <tr><td>5.5</td><td>40</td><td>40</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Load Current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	0.0	10	10	1.0	30	30	2.0	30	30	3.0	30	30	4.0	40	40	5.0	40	40	5.5	40	40	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]																																						
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																						
0.0	10	10																																						
1.0	30	30																																						
2.0	30	30																																						
3.0	30	30																																						
4.0	40	40																																						
5.0	40	40																																						
5.5	40	40																																						
—	—	—																																						
—	—	—																																						
—	—	—																																						
—	—	—																																						
<p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップル電圧は、下図 p-p 値で示される。 (注) 斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line 入力商用周期</p> <p>T2: Due to Switching スイッチング周期</p>																																								
<p>Fig. Complex Ripple Wave Form</p> <p>図 リップル波形詳細図</p>																																								




<p>Model PAA75F-15</p> <p>Item Ripple-Noise リップルノイズ</p> <p>Object +15V5.0A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																						
<p>1. Graph</p> <p>[mV]</p> <p>-----□----- Input Volt. 170V</p> <p>—————△———— Input Volt. 264V</p> <p>Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p> <p>リップルノイズは、下図 p-p 値で示される。 (注) 斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line 入力商用周期 T2: Due to Switching スイッチング周期</p> <p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load current [A]</th> <th>Input Volt. 170 [V]</th> <th>Input Volt. 264 [V]</th> </tr> <tr> <th>Ripple-Noise [mV]</th> <th>Ripple-Noise [mV]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>10</td><td>10</td></tr> <tr><td>1.0</td><td>30</td><td>30</td></tr> <tr><td>2.0</td><td>30</td><td>30</td></tr> <tr><td>3.0</td><td>40</td><td>40</td></tr> <tr><td>4.0</td><td>50</td><td>50</td></tr> <tr><td>5.0</td><td>60</td><td>60</td></tr> <tr><td>5.5</td><td>60</td><td>60</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Load current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]	Ripple-Noise [mV]	Ripple-Noise [mV]	0.0	10	10	1.0	30	30	2.0	30	30	3.0	40	40	4.0	50	50	5.0	60	60	5.5	60	60	—	—	—	—	—	—	—	—	—	—	—	—
Load current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]																																						
	Ripple-Noise [mV]	Ripple-Noise [mV]																																						
0.0	10	10																																						
1.0	30	30																																						
2.0	30	30																																						
3.0	40	40																																						
4.0	50	50																																						
5.0	60	60																																						
5.5	60	60																																						
—	—	—																																						
—	—	—																																						
—	—	—																																						
—	—	—																																						



Model	PAA75F-15	Temperature 25°C Testing Circuitry Figure A
Item	Overcurrent Protection 過電流保護	
Object	+15V5.0A	

1. Graph

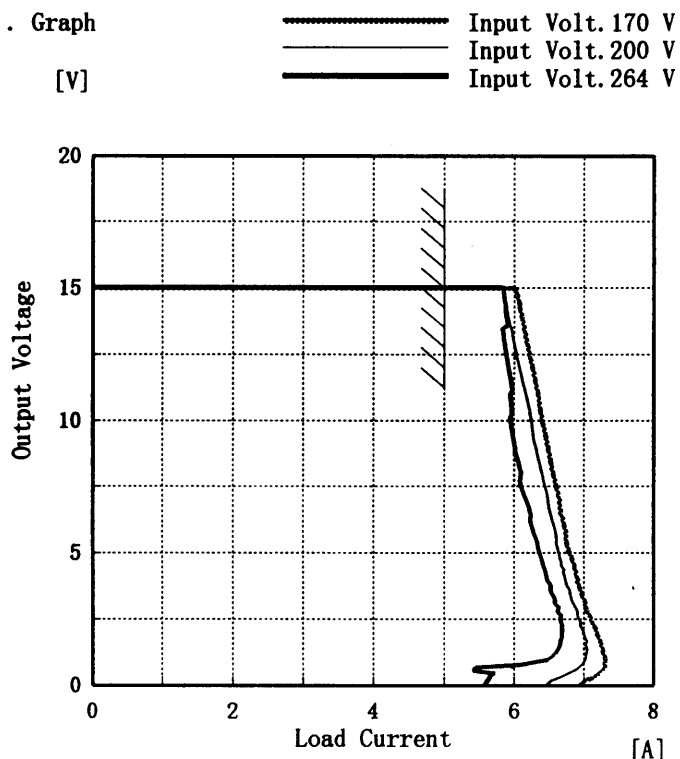

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

2. Values

Output Voltage [V]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
	Load Current [A]	Load Current [A]	Load Current [A]
15.00	6.03	5.84	5.85
14.25	6.08	5.89	5.88
13.50	6.14	5.95	5.84
12.00	6.26	6.08	5.93
10.50	6.37	6.21	5.97
9.00	6.48	6.32	6.02
7.50	6.61	6.45	6.11
6.00	6.73	6.58	6.27
4.50	6.87	6.68	6.42
3.00	7.02	6.86	6.63
1.50	7.25	7.03	6.65
0.00	6.99	6.51	5.60




Model	PAA75F-15
Item	Overvoltage Protection 過電圧保護
Object	+15V5.0A

Testing Circuitry Figure A

1. Graph

Input Volt. 170 V
 Input Volt. 200 V
 Input Volt. 264 V

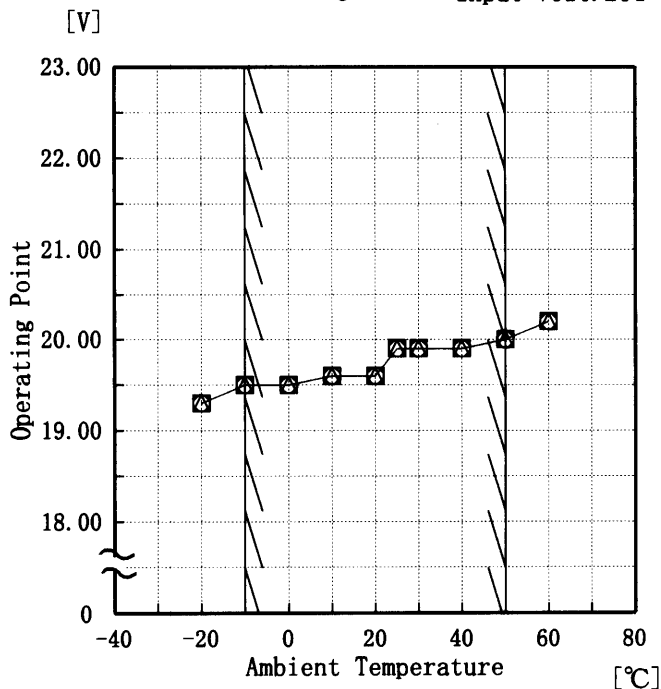

Note: Slanted line shows the range of the rated ambient temperature.


(注) 斜線は定格周囲温度範囲を示す。

2. Values


Ambient Temp. [°C]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
	Operating Point [V]		
-20	19.30	19.30	19.30
-10	19.50	19.50	19.50
0	19.50	19.50	19.50
10	19.60	19.60	19.60
20	19.60	19.60	19.60
25	19.90	19.90	19.90
30	19.90	19.90	19.90
40	19.90	19.90	19.90
50	20.00	20.00	20.00
60	20.20	20.20	20.20
—	—	—	—

COSEL

Model	PAA75F-15	Temperature 25°C Testing Circuitry Figure A
Item	Inrush Current 突入電流	
Object	+15V 5.0A	

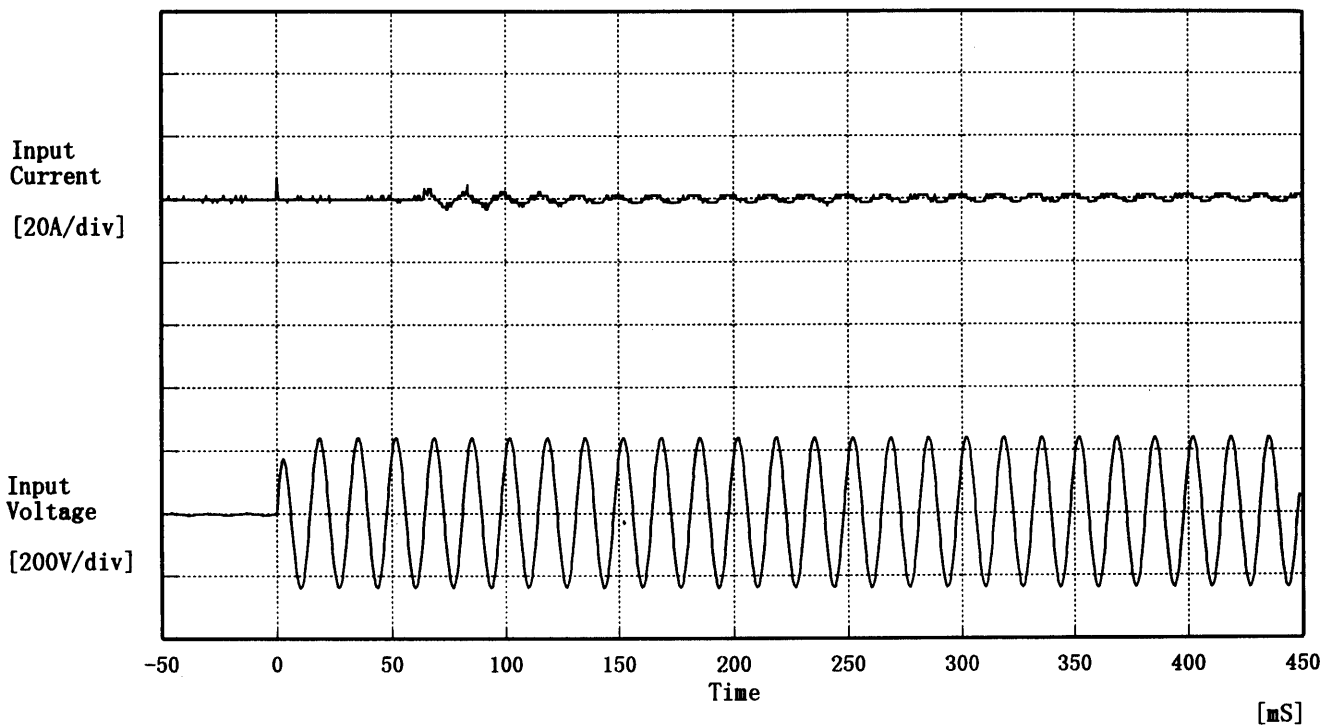

Input Voltage 200 V
 Frequency 60 Hz
 Load 100 %
 Inrush Current
 ① 6.68 [A]
 ② 4.43 [A]

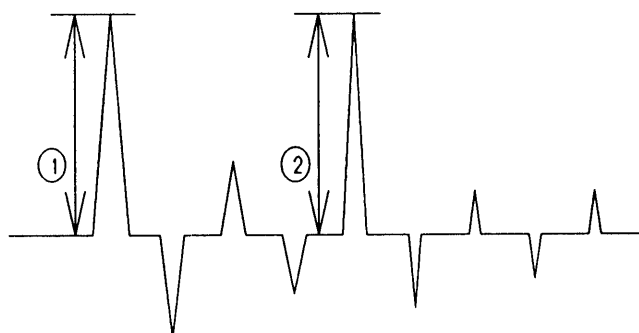





Model		PAA75F-15	Temperature		25°C
Item		Dynamic Load Responce 動的負荷変動	Testing Circuitry		Figure A
Object		+15V5.0A			

Input Volt. 200 V
Cycle 200 mS





Min. Load ↔
Load 100 %

t 10 mS/div
Vo 100 mV/div

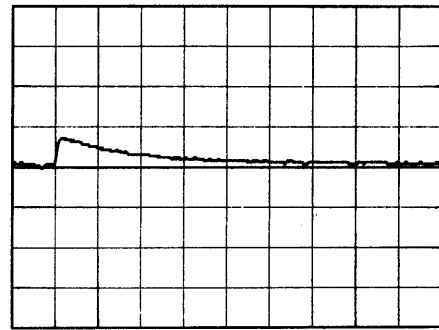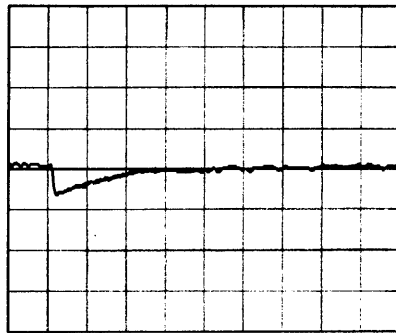

Min. Load ↔
Load 50 %

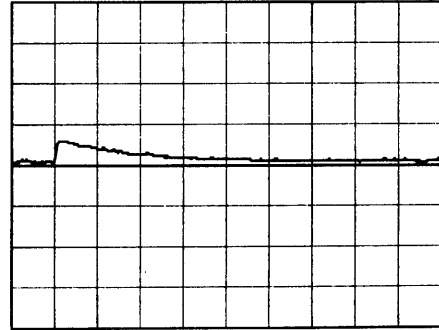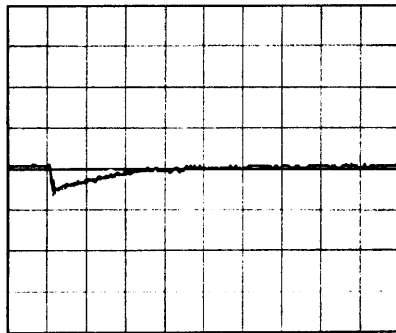




Model	PAA75F-15	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+15V5.0A		

1. Graph


Input Volt. 170 V

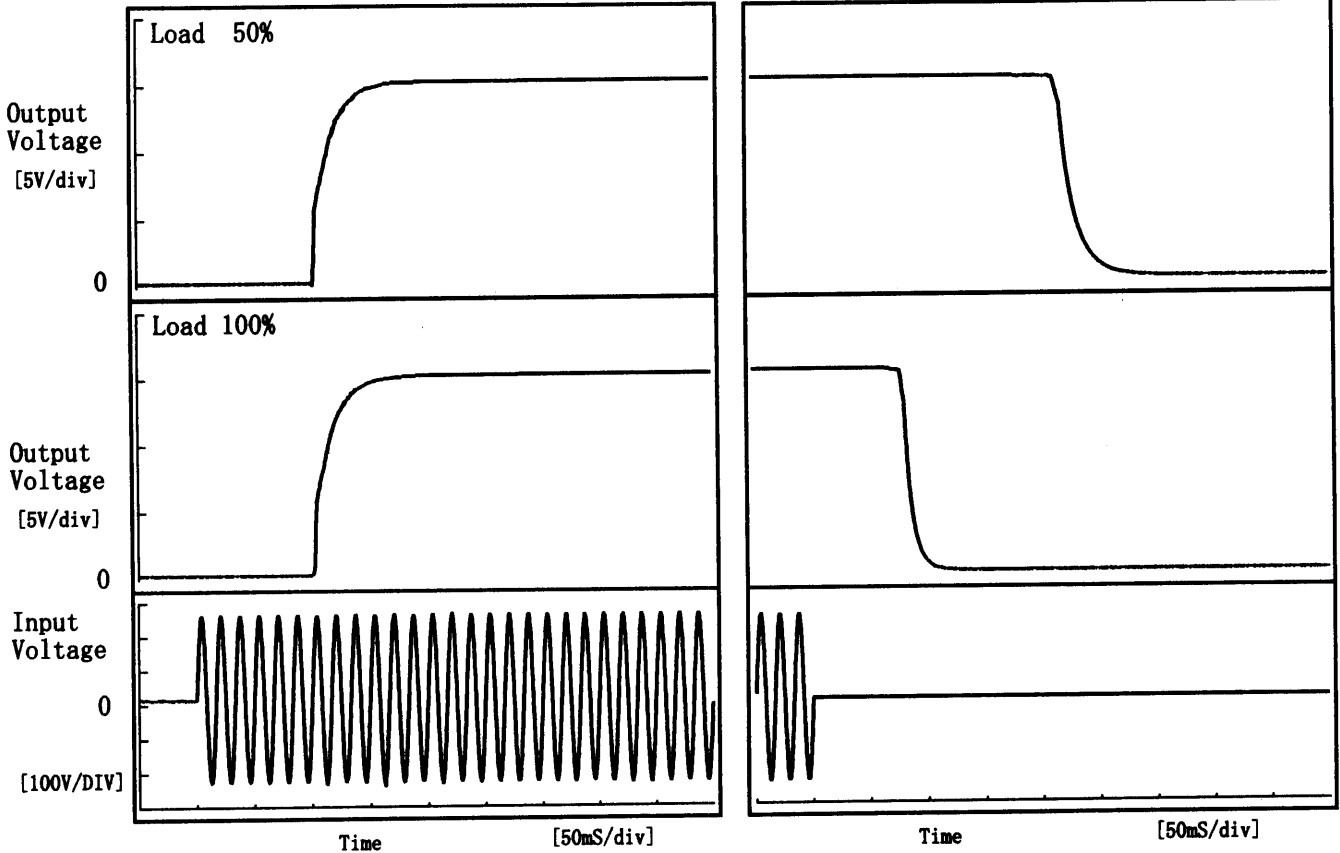

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	103.0	31.0	134.0	215.3	31.5
100 %	103.0	31.5	134.5	79.8	16.5

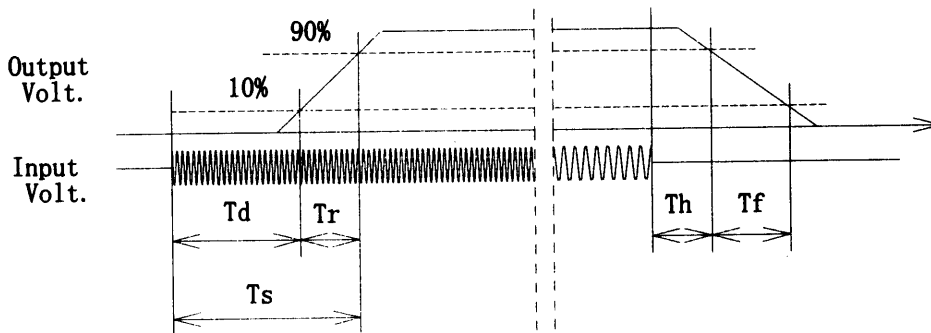




Model		PAA75F-15		Testing Circuitry Figure A																																																				
Item		Ambient Temperature Drift 周囲温度変動																																																						
Object		+15V5.0A																																																						
1. Graph		<p> —△— Input Volt. 170V - - -□- - - Input Volt. 200V - - -○- - - Input Volt. 264V </p>		2. Values																																																				
<p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p>		<table border="1"> <thead> <tr> <th rowspan="2">Temperature [°C]</th> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> <tr> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> </tr> </thead> <tbody> <tr><td>-20</td><td>15.207</td><td>15.207</td><td>15.207</td></tr> <tr><td>-10</td><td>15.206</td><td>15.206</td><td>15.206</td></tr> <tr><td>0</td><td>15.203</td><td>15.203</td><td>15.202</td></tr> <tr><td>10</td><td>15.199</td><td>15.199</td><td>15.199</td></tr> <tr><td>20</td><td>15.195</td><td>15.195</td><td>15.195</td></tr> <tr><td>25</td><td>15.192</td><td>15.192</td><td>15.192</td></tr> <tr><td>30</td><td>15.190</td><td>15.190</td><td>15.190</td></tr> <tr><td>40</td><td>15.182</td><td>15.182</td><td>15.182</td></tr> <tr><td>50</td><td>15.172</td><td>15.172</td><td>15.172</td></tr> <tr><td>60</td><td>15.161</td><td>15.161</td><td>15.161</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Temperature [°C]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	-20	15.207	15.207	15.207	-10	15.206	15.206	15.206	0	15.203	15.203	15.202	10	15.199	15.199	15.199	20	15.195	15.195	15.195	25	15.192	15.192	15.192	30	15.190	15.190	15.190	40	15.182	15.182	15.182	50	15.172	15.172	15.172	60	15.161	15.161	15.161	-	-	-	-		
Temperature [°C]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																					
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																					
-20	15.207	15.207	15.207																																																					
-10	15.206	15.206	15.206																																																					
0	15.203	15.203	15.202																																																					
10	15.199	15.199	15.199																																																					
20	15.195	15.195	15.195																																																					
25	15.192	15.192	15.192																																																					
30	15.190	15.190	15.190																																																					
40	15.182	15.182	15.182																																																					
50	15.172	15.172	15.172																																																					
60	15.161	15.161	15.161																																																					
-	-	-	-																																																					
<p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注)斜線は定格周囲温度範囲を示す。</p>																																																								



Model	PAA75F-15
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧
Object	+15V5.0A

Testing Circuitry Figure A

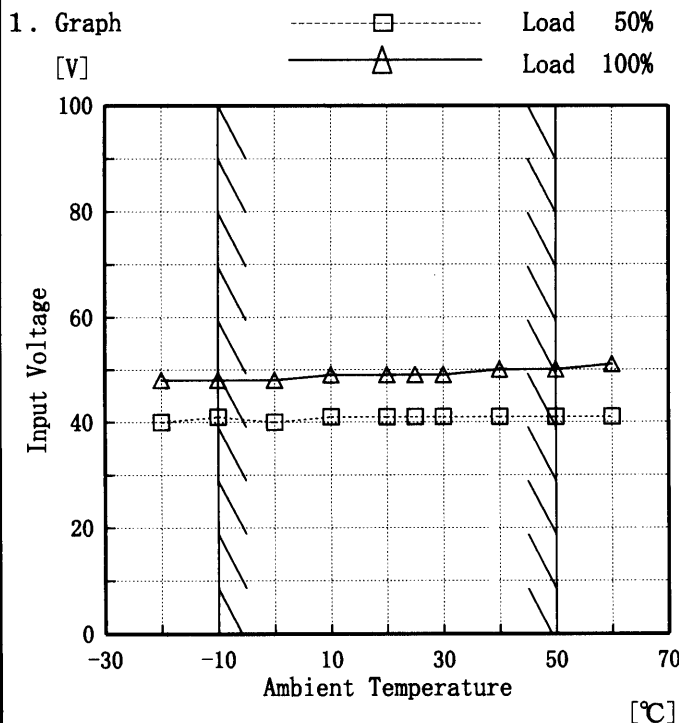

2. Values

Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]
-20	40	48
-10	41	48
0	40	48
10	41	49
20	41	49
25	41	49
30	41	49
40	41	50
50	41	50
60	41	51
—	—	—

Note: Slanted line shows the range of the rated ambient temperature.


(注)斜線は定格周囲温度範囲を示す。



Model	PAA75F-15
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)
Object	+15V 5.0A

Testing Circuitry Figure A

1. Graph

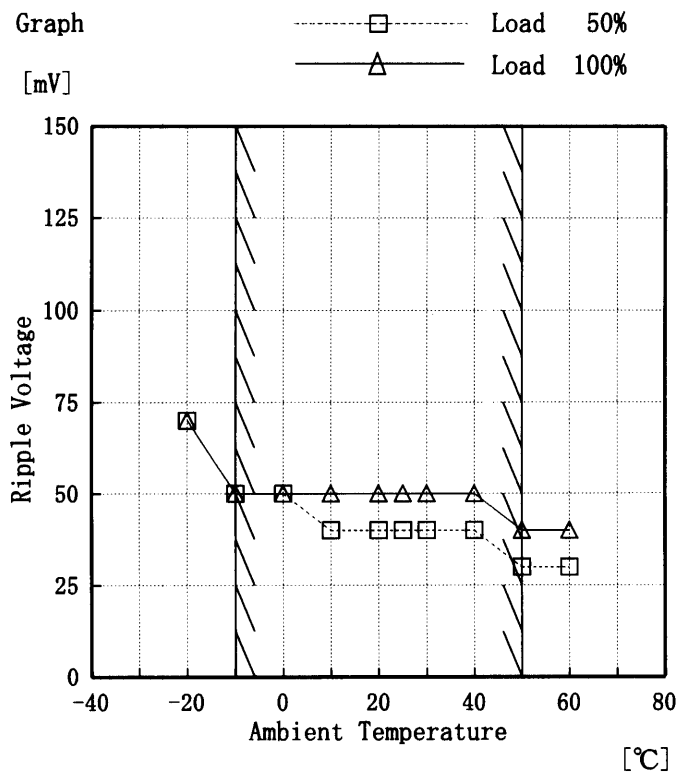


Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
-20	70	70
-10	50	50
0	50	50
10	40	50
20	40	50
25	40	50
30	40	50
40	40	50
50	30	40
60	30	40
—	—	—

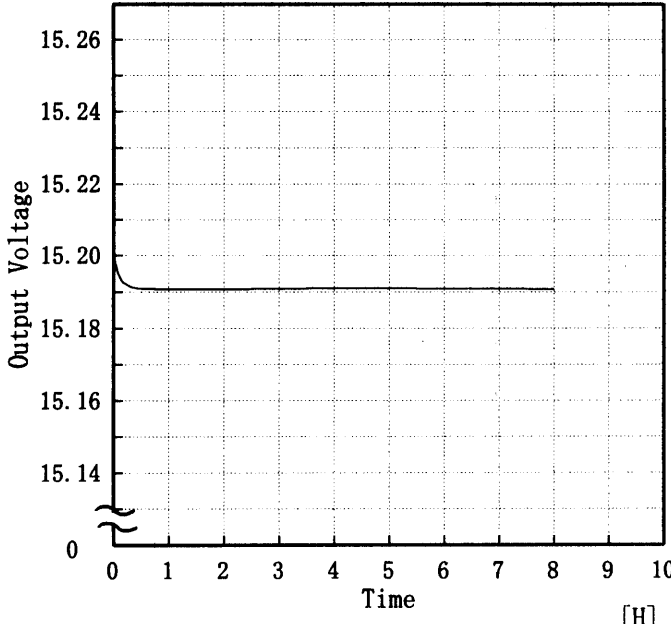

Model		PAA75F-15		Temperature 25 °C Testing Circuitry Figure A																							
Item		Time Lapse Drift 経時ドリフト																									
Object		+15V5.0A																									
1. Graph [V]  <p style="text-align: center;">Time [H]</p> <p style="text-align: center;">Input Volt. 200V Load 100%</p>			2. Values <table border="1" data-bbox="917 526 1308 1086"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>15.202</td></tr> <tr><td>0.5</td><td>15.191</td></tr> <tr><td>1.0</td><td>15.191</td></tr> <tr><td>2.0</td><td>15.191</td></tr> <tr><td>3.0</td><td>15.191</td></tr> <tr><td>4.0</td><td>15.191</td></tr> <tr><td>5.0</td><td>15.191</td></tr> <tr><td>6.0</td><td>15.191</td></tr> <tr><td>7.0</td><td>15.191</td></tr> <tr><td>8.0</td><td>15.191</td></tr> </tbody> </table>			Time since start [H]	Output Voltage [V]	0.0	15.202	0.5	15.191	1.0	15.191	2.0	15.191	3.0	15.191	4.0	15.191	5.0	15.191	6.0	15.191	7.0	15.191	8.0	15.191
Time since start [H]	Output Voltage [V]																										
0.0	15.202																										
0.5	15.191																										
1.0	15.191																										
2.0	15.191																										
3.0	15.191																										
4.0	15.191																										
5.0	15.191																										
6.0	15.191																										
7.0	15.191																										
8.0	15.191																										



Model		PAA75F-15	Testing Circuitry Figure A
Item		Output Voltage Accuracy 定電圧精度	
Object		+15V5.0A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -10~50 °C

Input Voltage : 170~264 V

Load Current : 0.0~5.0 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -10~50 °C

入力電圧 170~264 V

負荷電流 0.0~5.0 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$


* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	-10	170	0.0	24.214	±22	±0.2
Minimum Voltage	50	264	5.0	24.170		




Model	PAA75F-15	Temperature	25°C
Item	Harmonic Current 高調波電流	Testing Circuitry	Figure E
Object	+15V 5.0A		

Conditions	Values
Input Voltage [V]	230
Input Current [A]	0.45
Active Power [W]	93.2
Apparent Power [VA]	103.8
Frequency [Hz]	50
Power Factor	0.898
Output Power [W]	75

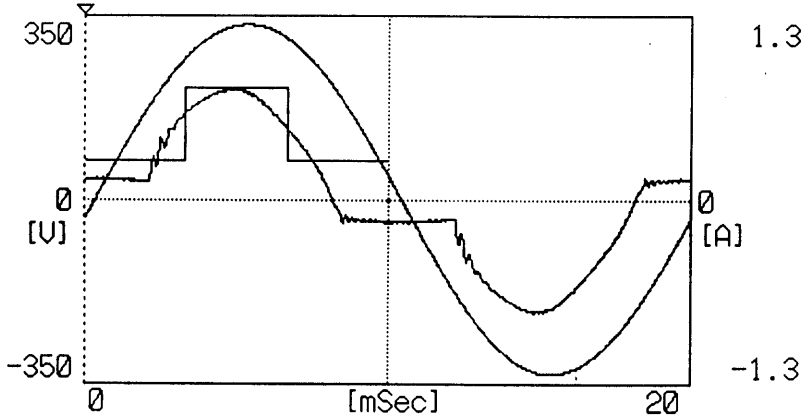

2. Harmonic Current

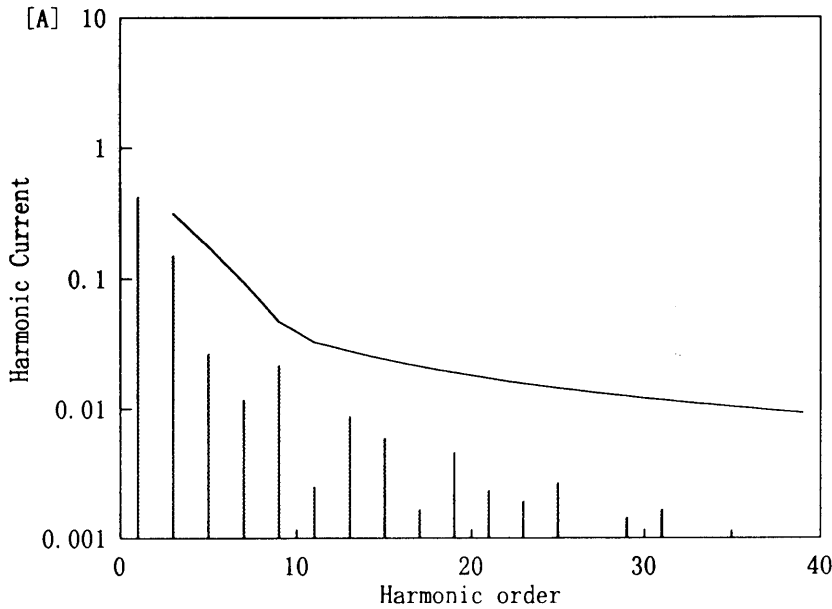


— Harmonic Current
 高調波電流
 - - - Limits for Class D equipment
 クラスDの機器に対する限度値

Harmonics order 高調波次数	Limits 限度値 [A]	Values 測定値 [A]
1	—	0.426
2	—	0.000
3	0.317	0.152
4	—	0.000
5	0.177	0.027
6	—	0.000
7	0.093	0.012
8	—	0.000
9	0.047	0.022
10	—	0.000
11	0.033	0.003
12	—	0.000
13	0.028	0.009
14	—	0.000
15	0.024	0.006
16	—	0.000
17	0.021	0.002
18	—	0.000
19	0.019	0.005
20	—	0.000
21	0.017	0.002
22	—	0.000
23	0.016	0.002
24	—	0.000
25	0.014	0.003
26	—	0.000
27	0.013	0.001
28	—	0.000
29	0.012	0.001
30	—	0.000
31	0.012	0.002
32	—	0.000
33	0.011	0.000
34	—	0.000
35	0.010	0.001
36	—	0.000
37	0.010	0.001
38	—	0.000
39	0.009	0.000
40	—	0.000

COSEL


Model	PAA75F-15	Temperature	25°C
Item	Harmonic Current 高調波電流	Testing Circuitry	Figure E
Object	+15V5.0A		

Conditions	Values
Input Voltage [V]	230
Input Current [A]	0.28
Active Power [W]	50.1
Apparent Power [VA]	64.1
Frequency [Hz]	50
Power Factor	0.782
Output Power [W]	37.5

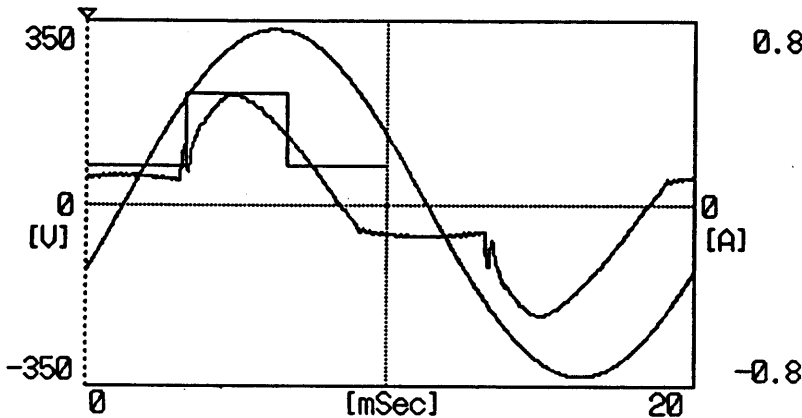

Harmonics order 高調波次数	Limits 限度値 [A]	Values 測定値 [A]
1	—	0.258
2	—	0.000
3	0.170	0.100
4	—	0.000
5	0.095	0.024
6	—	0.000
7	0.050	0.019
8	—	0.000
9	0.025	0.007
10	—	0.000
11	0.018	0.003
12	—	0.000
13	0.015	0.004
14	—	0.000
15	0.013	0.001
16	—	0.000
17	0.011	0.002
18	—	0.000
19	0.010	0.001
20	—	0.000
21	0.009	0.001
22	—	0.000
23	0.008	0.000
24	—	0.000
25	0.008	0.002
26	—	0.000
27	0.007	0.001
28	—	0.000
29	0.007	0.002
30	—	0.000
31	0.006	0.002
32	—	0.000
33	0.006	0.002
34	—	0.000
35	0.006	0.002
36	—	0.000
37	0.005	0.002
38	—	0.000
39	0.005	0.003
40	—	0.000

2. Harmonic Current

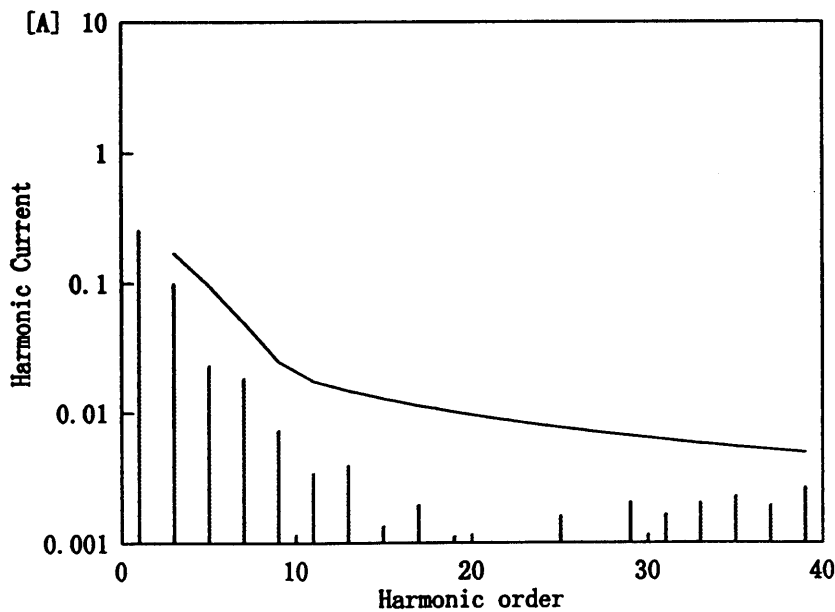

— Harmonic Current
高調波電流

- - - Limits for Class D equipment
クラスDの機器に対する限度値



COSEL		
Model	PAA75F-15	
Item	Condensation 結露特性	Testing Circuitry Figure A
Object	+15V5.0A	

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics (Output Voltage, Ripple Voltage, Ripple noise) of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性（出力電圧、リップル、リップルノイズ）の測定を3度行い、異常のないことを確認する。

2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50 %	1	15.167	40	50
	2	15.167	40	50
	3	15.165	40	50
Load 100 %	1	15.162	40	50
	2	15.161	40	50
	3	15.161	40	50

Input Volt. 200 V



Model		PAA75F-15	Testing Circuitry	Figure A
Item		Leakage Current 漏洩電流		
Object		+15V5.0A		

1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132[V]
(A) DENTORI	-	-	-
(B) UL	-	-	-
(C) CSA	-	-	-

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 220 [V]	Input Volt. 264 [V]
(D) VDE	0.25	0.32	0.40

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力 of 両相について測定し、その大きい方を漏洩電流測定値とする。

Load 100 %

- (A) Input Resistance : 1K Ω
- (B) Input Resistance : 1.5K Ω
Input Capacitance : 0.15 μ F
- (C) Input Resistance : 1.5K Ω
Input Capacitance : 0.15 μ F
- (D) Input Resistance : 2K Ω
Input Capacitance : 0.1 μ F



Model		PAA75F-15	Testing Circuitry Figure C
Item		Line Noise Tolerance 入力雑音耐量	
Object		+15V5.0A	

1. Results

Pulse Width [n S]	MODE	Operating Point of Overvoltage Protection [V] 過電圧保護動作値	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	19.80	no regulation
	NORMAL	19.80	no regulation
1000	COMMON	19.80	no regulation
	NORMAL	19.80	no regulation

Conditions

Input Voltage : 200 V
 Pulse Voltage : 2000 V
 Pulse Cycle : 10 mS
 Pulse Input Duration: 1 min. or more
 Load : 100 %



Model	PAA75F-15	Testing Circuitry Figure D
Item	Conducted Emission 雑音端子電圧	
Object	+15V5.0A	

1. Graph

Remarks



Input Volt. 230 V

Load 100 %

Note: Slanted line shows the range of Tolerance.

(注) 斜線は許容値を示す。

NO	Standards	Standards Complied	Frequency [MHz]	Tolerance [dB/ μ V]
1	FCC class A		0.45~1.6	60
			1.6~30	69.5
2	FCC class B		0.45~30	48
3	VCCI -1		0.15~0.5	79
			0.5~30	73
4	VCCI -2		0.15~0.5	66-56
			0.5~5	56
			5~30	60
5	CISPR22-A		0.01~0.15	91-69.5
			0.15~0.5	66
			0.5~30	60
6	CISPR22-B	○	0.01~0.05	110
			0.05~0.15	90-80
			0.15~0.5	66-56
			0.5~5	56
			5~30	60

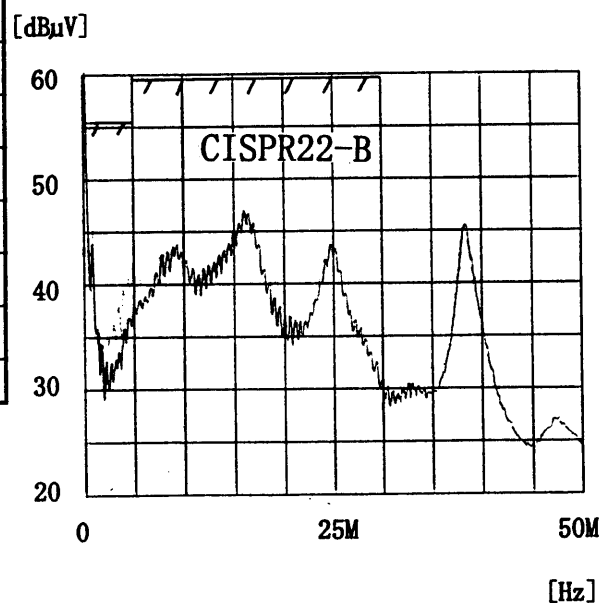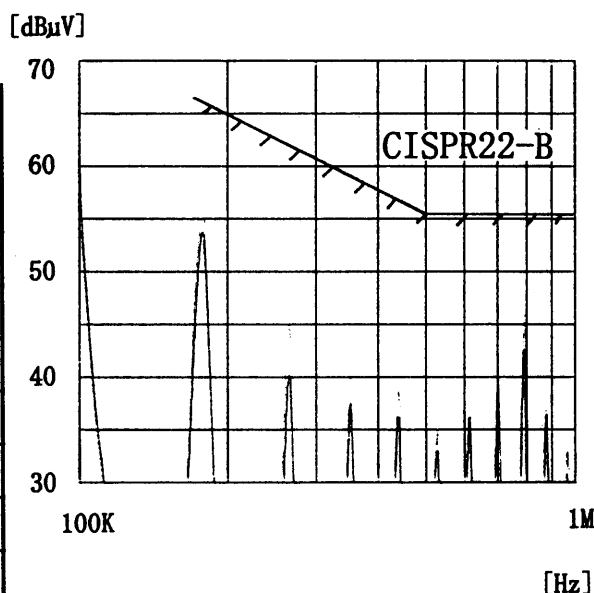

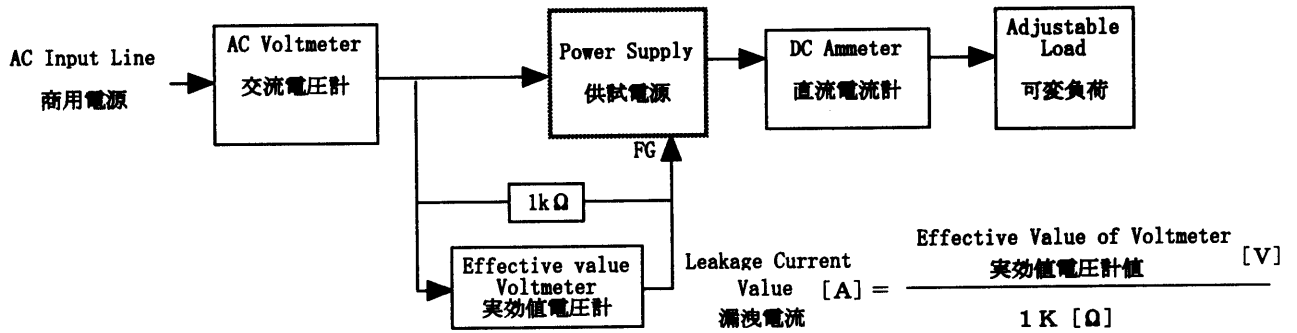
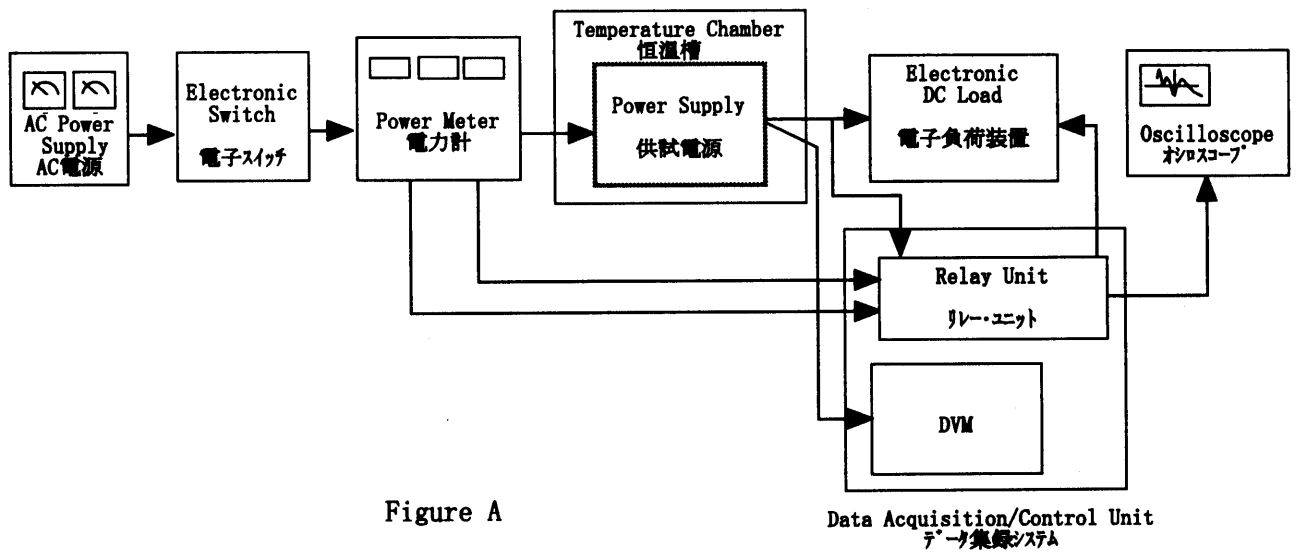


Figure B (DENTORI)

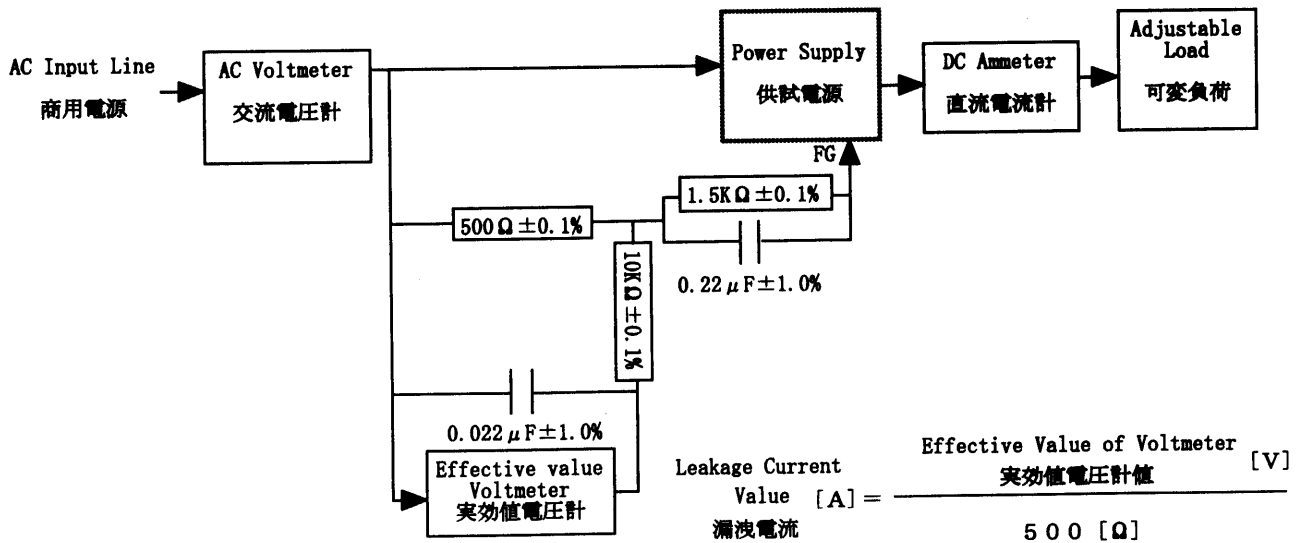


Figure B (UL, CSA, VDE)

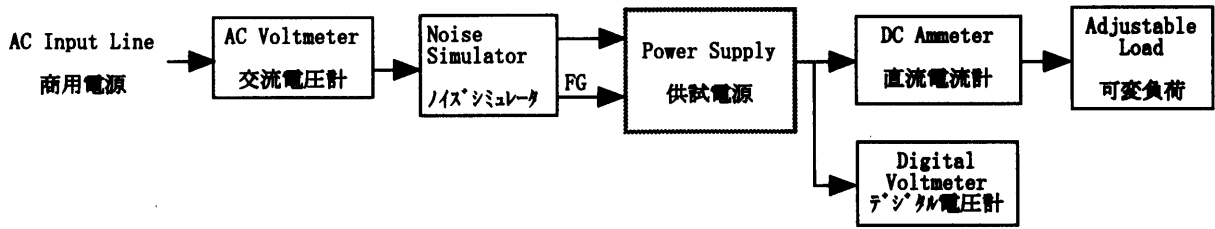


Figure C

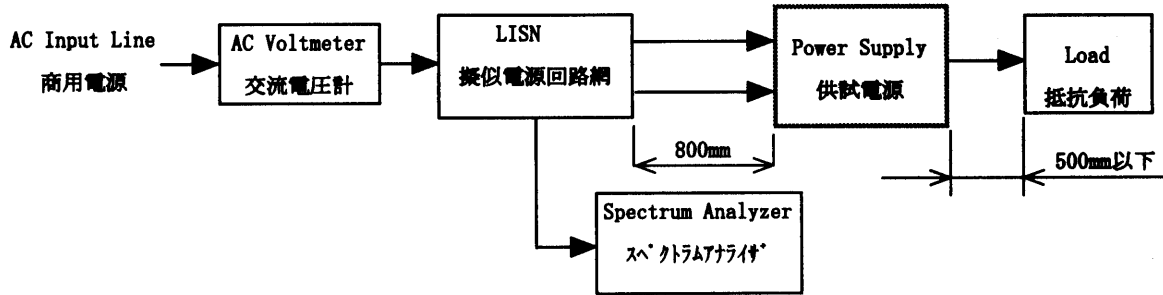


Figure D

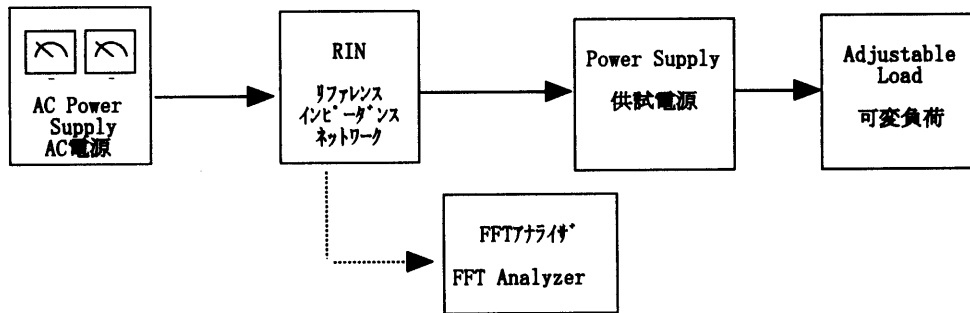


Figure E