



# TEST DATA OF MODULE J

(RB series)

Regulated DC Power Supply  
November 5, 2018

Approved by : Jun Uchida  
Jun Uchida Design Manager

Prepared by : Hideaki Douguchi  
Hideaki Douguchi Design Engineer

**COSEL CO.,LTD.**



## CONTENTS

1.Line Regulation . . . . .	1
2.Load Regulation . . . . .	2
3.Dynamic Load Response . . . . .	3
4.Ripple Voltage (by Load Current) . . . . .	4
5.Ripple-Noise . . . . .	5
6.Ripple Voltage (by Ambient Temperature) . . . . .	6
7.Ambient Temperature Drift . . . . .	7
8.Output Voltage Accuracy . . . . .	8
9.Time Lapse Drift . . . . .	9
10.Overcurrent Protection . . . . .	10
11.Overvoltage Protection . . . . .	11
12.Figure of Testing Circuitry . . . . .	12

(Final Page 12)



<b>COSEL</b>																																			
Model	MODULE J	Temperature	25°C																																
Item	Line Regulation	Testing Circuitry	Figure A																																
Object	+12V2.5A																																		
<p>1.Graph</p> <div style="text-align: right;"> <p>---□--- Load 50%</p> <p>—△— Load 100%</p> </div> <p>Note: Slanted line shows the range of the rated input voltage.</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>85</td><td>12.159</td><td>12.155</td></tr> <tr><td>90</td><td>12.159</td><td>12.155</td></tr> <tr><td>100</td><td>12.159</td><td>12.155</td></tr> <tr><td>120</td><td>12.159</td><td>12.155</td></tr> <tr><td>200</td><td>12.159</td><td>12.155</td></tr> <tr><td>230</td><td>12.159</td><td>12.155</td></tr> <tr><td>264</td><td>12.159</td><td>12.155</td></tr> <tr><td>280</td><td>12.159</td><td>12.155</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>		Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	85	12.159	12.155	90	12.159	12.155	100	12.159	12.155	120	12.159	12.155	200	12.159	12.155	230	12.159	12.155	264	12.159	12.155	280	12.159	12.155	--	-	-
Input Voltage [V]	Output Voltage [V]																																		
	Load 50%	Load 100%																																	
85	12.159	12.155																																	
90	12.159	12.155																																	
100	12.159	12.155																																	
120	12.159	12.155																																	
200	12.159	12.155																																	
230	12.159	12.155																																	
264	12.159	12.155																																	
280	12.159	12.155																																	
--	-	-																																	




<p>Model MODULE J</p>		<p>Temperature 25°C Testing Circuitry Figure A</p>																																																			
<p>Item Load Regulation</p>																																																					
<p>Object +12V2.5A</p>																																																					
<p>1.Graph</p> <p>                     —△— Input Volt. 100V                      ---□--- Input Volt. 200V                      -·-○-·- Input Volt. 230V                 </p> <p>Output Voltage [V]</p> <p>Load Current [A]</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>12.163</td><td>12.163</td><td>12.163</td></tr> <tr><td>0.40</td><td>12.161</td><td>12.161</td><td>12.161</td></tr> <tr><td>0.80</td><td>12.160</td><td>12.160</td><td>12.160</td></tr> <tr><td>1.20</td><td>12.159</td><td>12.159</td><td>12.159</td></tr> <tr><td>1.60</td><td>12.158</td><td>12.158</td><td>12.158</td></tr> <tr><td>2.00</td><td>12.157</td><td>12.157</td><td>12.157</td></tr> <tr><td>2.40</td><td>12.156</td><td>12.156</td><td>12.155</td></tr> <tr><td>2.50</td><td>12.155</td><td>12.155</td><td>12.155</td></tr> <tr><td>2.75</td><td>12.154</td><td>12.154</td><td>12.155</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Output Voltage [V]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	12.163	12.163	12.163	0.40	12.161	12.161	12.161	0.80	12.160	12.160	12.160	1.20	12.159	12.159	12.159	1.60	12.158	12.158	12.158	2.00	12.157	12.157	12.157	2.40	12.156	12.156	12.155	2.50	12.155	12.155	12.155	2.75	12.154	12.154	12.155	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																				
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																		
0.00	12.163	12.163	12.163																																																		
0.40	12.161	12.161	12.161																																																		
0.80	12.160	12.160	12.160																																																		
1.20	12.159	12.159	12.159																																																		
1.60	12.158	12.158	12.158																																																		
2.00	12.157	12.157	12.157																																																		
2.40	12.156	12.156	12.155																																																		
2.50	12.155	12.155	12.155																																																		
2.75	12.154	12.154	12.155																																																		
--	-	-	-																																																		
--	-	-	-																																																		
<p>Note: Slanted line shows the range of the rated load current.</p>																																																					





Model	MODULE J	Temperature	25°C
Item	Dynamic Load Response	Testing Circuitry	Figure A
Object	+12V2.5A		

Input Volt. 100 V  
 Cycle 1000 ms

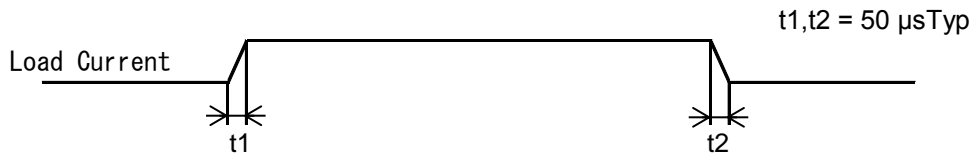



Min. Load (0A) ←→  
 Load 100% (2.5A)

200 mV/div

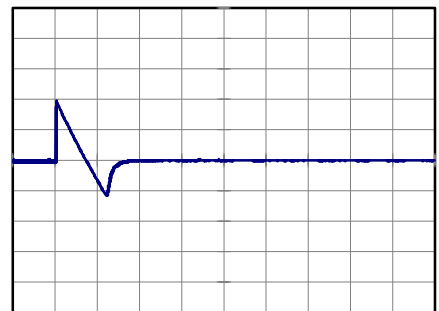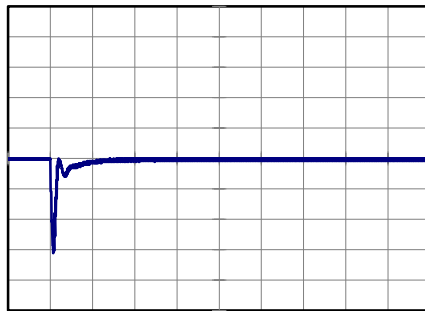

Min. Load (0A) ←→  
 Load 50% (1.25A)

200 mV/div

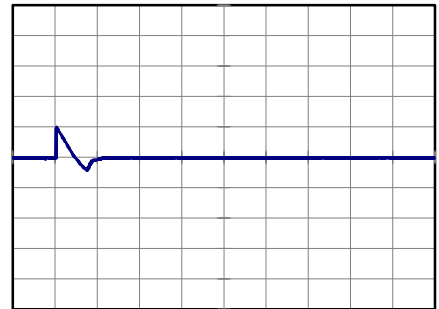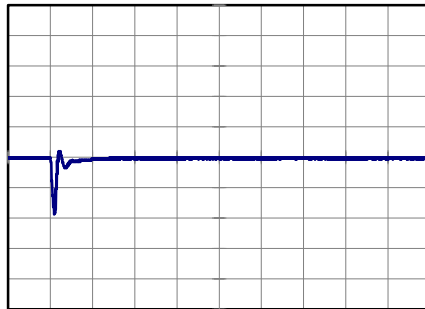




<p>Model MODULE J</p> <p>Item Ripple Voltage (by Load Current)</p> <p>Object +12V2.5A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure B</p>																																						
<p>1.Graph</p> <p>—△— Input Volt. 100V</p> <p>-·-○-·- Input Volt. 230V</p> <p>Measured by 20 MHz Oscilloscope. Ripple Voltage is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Input Volt. 100 [V]</th> <th>Input Volt. 230 [V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>5</td><td>5</td></tr> <tr><td>0.40</td><td>15</td><td>15</td></tr> <tr><td>0.80</td><td>15</td><td>15</td></tr> <tr><td>1.20</td><td>15</td><td>15</td></tr> <tr><td>1.60</td><td>20</td><td>20</td></tr> <tr><td>2.00</td><td>10</td><td>10</td></tr> <tr><td>2.40</td><td>20</td><td>20</td></tr> <tr><td>2.50</td><td>20</td><td>20</td></tr> <tr><td>2.75</td><td>20</td><td>20</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Ripple Voltage [mV]		Input Volt. 100 [V]	Input Volt. 230 [V]	0.00	5	5	0.40	15	15	0.80	15	15	1.20	15	15	1.60	20	20	2.00	10	10	2.40	20	20	2.50	20	20	2.75	20	20	--	-	-	--	-	-
Load Current [A]	Ripple Voltage [mV]																																							
	Input Volt. 100 [V]	Input Volt. 230 [V]																																						
0.00	5	5																																						
0.40	15	15																																						
0.80	15	15																																						
1.20	15	15																																						
1.60	20	20																																						
2.00	10	10																																						
2.40	20	20																																						
2.50	20	20																																						
2.75	20	20																																						
--	-	-																																						
--	-	-																																						
<p>T1: Due to AC Input Line</p> <p>T2: Due to Switching</p> <p>Fig. Complex Ripple Wave Form</p>																																								



Model	MODULE J	Temperature	25°C
Item	Ripple-Noise	Testing Circuitry	Figure B
Object	+12V2.5A		

1.Graph

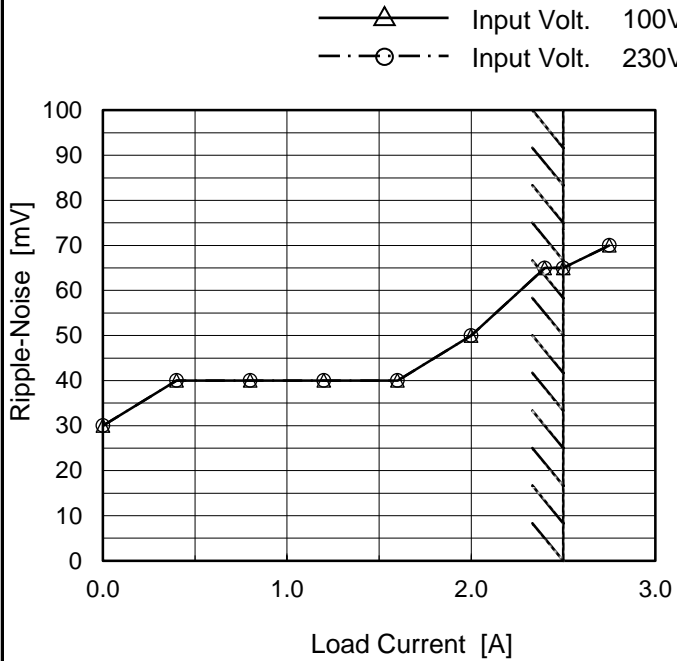

Measured by 20 MHz Oscilloscope.  
 Ripple-Noise is shown as p-p in the figure below.  
 Note: Slanted line shows the range of the rated load current.

2.Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 100 [V]	Input Volt. 230 [V]
0.00	30	30
0.40	40	40
0.80	40	40
1.20	40	40
1.60	40	40
2.00	50	50
2.40	65	65
2.50	65	65
2.75	70	70
--	-	-
--	-	-

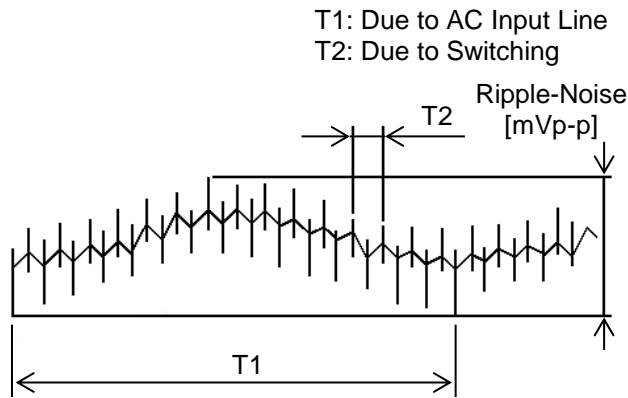


Fig. Complex Ripple Wave Form



<b>COSEL</b>																																											
Model	MODULE J																																										
Item	Ripple Voltage (by Ambient Temp.)	Testing Circuitry Figure B																																									
Object	+12V2.5A																																										
<p>1.Graph</p> <div style="text-align: right;"> <p>---□--- Input Volt. 100V</p> <p>—△— Input Volt. 230V</p> </div> <p style="text-align: center;">Ambient Temperature [°C] Load 100 %</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Input Volt. 100 [V]</th> <th>Input Volt. 230 [V]</th> </tr> </thead> <tbody> <tr><td>-30</td><td>100</td><td>100</td></tr> <tr><td>-20</td><td>65</td><td>65</td></tr> <tr><td>0</td><td>35</td><td>35</td></tr> <tr><td>25</td><td>30</td><td>30</td></tr> <tr><td>50</td><td>25</td><td>25</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Ambient Temperature [°C]	Ripple Voltage [mV]		Input Volt. 100 [V]	Input Volt. 230 [V]	-30	100	100	-20	65	65	0	35	35	25	30	30	50	25	25	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-
Ambient Temperature [°C]	Ripple Voltage [mV]																																										
	Input Volt. 100 [V]	Input Volt. 230 [V]																																									
-30	100	100																																									
-20	65	65																																									
0	35	35																																									
25	30	30																																									
50	25	25																																									
--	-	-																																									
--	-	-																																									
--	-	-																																									
--	-	-																																									
--	-	-																																									
--	-	-																																									
--	-	-																																									
<p>Measured by 20 MHz Oscilloscope. Note: Slanted line shows the range of the rated ambient temperature.</p>																																											





<b>COSEL</b>																																																						
Model	MODULE J																																																					
Item	Ambient Temperature Drift	Testing Circuitry Figure A																																																				
Object	+12V2.5A																																																					
<p>1.Graph</p> <p> <span style="display: inline-block; width: 20px; border-bottom: 1px solid black; margin-right: 5px;"></span> <span style="display: inline-block; width: 10px; border-left: 1px solid black; border-right: 1px solid black; height: 10px; margin-right: 5px;"></span> Input Volt. 100V  <span style="display: inline-block; width: 20px; border-bottom: 1px dashed black; margin-right: 5px;"></span> <span style="display: inline-block; width: 10px; border-left: 1px dashed black; border-right: 1px dashed black; height: 10px; margin-right: 5px;"></span> Input Volt. 200V  <span style="display: inline-block; width: 20px; border-bottom: 1px dash-dot black; margin-right: 5px;"></span> <span style="display: inline-block; width: 10px; border-left: 1px dash-dot black; border-right: 1px dash-dot black; height: 10px; margin-right: 5px;"></span> Input Volt. 230V                 </p> <p style="text-align: center;">Ambient Temperature [°C] Load 100%</p>		<p>2.Values</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>-30</td><td>12.125</td><td>12.126</td><td>12.125</td></tr> <tr><td>-20</td><td>12.133</td><td>12.134</td><td>12.134</td></tr> <tr><td>-10</td><td>12.140</td><td>12.140</td><td>12.140</td></tr> <tr><td>0</td><td>12.145</td><td>12.145</td><td>12.145</td></tr> <tr><td>10</td><td>12.151</td><td>12.150</td><td>12.150</td></tr> <tr><td>25</td><td>12.155</td><td>12.155</td><td>12.155</td></tr> <tr><td>30</td><td>12.155</td><td>12.155</td><td>12.155</td></tr> <tr><td>40</td><td>12.157</td><td>12.156</td><td>12.157</td></tr> <tr><td>50</td><td>12.158</td><td>12.158</td><td>12.158</td></tr> <tr><td>60</td><td>12.158</td><td>12.158</td><td>12.158</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	-30	12.125	12.126	12.125	-20	12.133	12.134	12.134	-10	12.140	12.140	12.140	0	12.145	12.145	12.145	10	12.151	12.150	12.150	25	12.155	12.155	12.155	30	12.155	12.155	12.155	40	12.157	12.156	12.157	50	12.158	12.158	12.158	60	12.158	12.158	12.158	--	-	-	-
Ambient Temperature [°C]	Output Voltage [V]																																																					
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																			
-30	12.125	12.126	12.125																																																			
-20	12.133	12.134	12.134																																																			
-10	12.140	12.140	12.140																																																			
0	12.145	12.145	12.145																																																			
10	12.151	12.150	12.150																																																			
25	12.155	12.155	12.155																																																			
30	12.155	12.155	12.155																																																			
40	12.157	12.156	12.157																																																			
50	12.158	12.158	12.158																																																			
60	12.158	12.158	12.158																																																			
--	-	-	-																																																			
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																																						



<b>COSEL</b>		Testing Circuitry Figure A
Model	MODULE J	
Item	Output Voltage Accuracy	
Object	+12V2.5A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20 - 50°C

Input Voltage : 85 - 264V

Load Current : 0 - 2.5A

\* Output Voltage Accuracy =  $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

\* Output Voltage Accuracy (Ratio) =  $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ratio [%]
Maximum Voltage	50	200	0	12.168	±15	±0.1
Minimum Voltage	-20	85	2.5	12.138		



<b>COSEL</b>																								
Model	MODULE J																							
Item	Time Lapse Drift	Temperature 25°C Testing Circuitry Figure A																						
Object	+12V2.5A																							
<p>1.Graph</p> <p style="text-align: center;">Time [H]</p> <p>Input Volt. 100V Load 100%</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>12.154</td></tr> <tr><td>0.5</td><td>12.157</td></tr> <tr><td>1.0</td><td>12.157</td></tr> <tr><td>2.0</td><td>12.157</td></tr> <tr><td>3.0</td><td>12.157</td></tr> <tr><td>4.0</td><td>12.157</td></tr> <tr><td>5.0</td><td>12.157</td></tr> <tr><td>6.0</td><td>12.157</td></tr> <tr><td>7.0</td><td>12.157</td></tr> <tr><td>8.0</td><td>12.157</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	12.154	0.5	12.157	1.0	12.157	2.0	12.157	3.0	12.157	4.0	12.157	5.0	12.157	6.0	12.157	7.0	12.157	8.0	12.157
Time since start [H]	Output Voltage [V]																							
0.0	12.154																							
0.5	12.157																							
1.0	12.157																							
2.0	12.157																							
3.0	12.157																							
4.0	12.157																							
5.0	12.157																							
6.0	12.157																							
7.0	12.157																							
8.0	12.157																							
<p>* The characteristic of AC230V is equal.</p>																								



<p>Model MODULE J</p>		<p>Temperature 25°C Testing Circuitry Figure A</p>																																																											
<p>Item Overcurrent Protection</p>																																																													
<p>Object +12V2.5A</p>																																																													
<p>1.Graph</p> <div style="display: flex; align-items: flex-start;"> <div style="margin-right: 20px;"> <p>—△ Input Volt. 100V</p> <p>—□ Input Volt. 200V</p> <p>—○ Input Volt. 230V</p> </div> </div> <p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>Intermittent operation occurs when overcurrent protection is activated.</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr> <td>12</td> <td>2.93</td> <td>2.99</td> <td>2.99</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Output Voltage [V]	Load Current [A]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	12	2.93	2.99	2.99	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Output Voltage [V]	Load Current [A]																																																												
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																										
12	2.93	2.99	2.99																																																										
--	-	-	-																																																										
--	-	-	-																																																										
--	-	-	-																																																										
--	-	-	-																																																										
--	-	-	-																																																										
--	-	-	-																																																										
--	-	-	-																																																										
--	-	-	-																																																										
--	-	-	-																																																										
--	-	-	-																																																										
--	-	-	-																																																										
--	-	-	-																																																										



<b>COSEL</b>																																								
Model	MODULE J																																							
Item	Overvoltage Protection	Testing Circuitry Figure A																																						
Object	+12V2.5A																																							
<p>1.Graph</p> <div style="text-align: right;"> <p>—△— Input Volt. 100V</p> <p>- - -□- - Input Volt. 230V</p> </div> <p style="text-align: center;">Ambient Temperature [°C]</p> <p style="text-align: right;">Load 0%</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Operating Point [V]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>-30</td><td>14.91</td><td>14.91</td></tr> <tr><td>-20</td><td>14.98</td><td>14.98</td></tr> <tr><td>-10</td><td>14.98</td><td>14.97</td></tr> <tr><td>0</td><td>15.04</td><td>15.04</td></tr> <tr><td>10</td><td>15.11</td><td>15.11</td></tr> <tr><td>25</td><td>15.18</td><td>15.18</td></tr> <tr><td>30</td><td>15.18</td><td>15.18</td></tr> <tr><td>40</td><td>15.25</td><td>15.18</td></tr> <tr><td>50</td><td>15.26</td><td>15.25</td></tr> <tr><td>60</td><td>15.32</td><td>15.32</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Ambient Temperature [°C]	Operating Point [V]		Input Volt. 100[V]	Input Volt. 230[V]	-30	14.91	14.91	-20	14.98	14.98	-10	14.98	14.97	0	15.04	15.04	10	15.11	15.11	25	15.18	15.18	30	15.18	15.18	40	15.25	15.18	50	15.26	15.25	60	15.32	15.32	--	-	-
Ambient Temperature [°C]	Operating Point [V]																																							
	Input Volt. 100[V]	Input Volt. 230[V]																																						
-30	14.91	14.91																																						
-20	14.98	14.98																																						
-10	14.98	14.97																																						
0	15.04	15.04																																						
10	15.11	15.11																																						
25	15.18	15.18																																						
30	15.18	15.18																																						
40	15.25	15.18																																						
50	15.26	15.25																																						
60	15.32	15.32																																						
--	-	-																																						

