

TEST DATA OF MGFS6243R3

Regulated DC Power Supply
December 16, 2016

Approved by : Takayuki Fukuda
Takayuki Fukuda Design Manager

Prepared by : Takaaki Sekiguchi
Takaaki Sekiguchi Design Engineer

COSEL CO.,LTD.

CONTENTS

1.Input Current (by Input Voltage) 1
 2.Input Current (by Load Current) 2
 3.Input Power (by Load Current) 3
 4.Efficiency (by Input Voltage) 4
 5.Efficiency (by Load Current) 5
 6.Line Regulation 6
 7.Load Regulation 7
 8.Dynamic Load Response 8
 9.Ripple Voltage (by Load Current) 9
 10.Ripple-Noise 10
 11.Ripple Voltage (by Ambient Temperature) 11
 12.Ambient Temperature Drift 12
 13.Output Voltage Accuracy 13
 14.Time Lapse Drift 14
 15.Rise and Fall Time 15
 16.Minimum Input Voltage for Regulated Output Voltage 16
 17.Overcurrent Protection 17
 18.Switching frequency (by Load Current) 18
 19.Figure of Testing Circuitry 19

(Final Page 19)



Model		MGFS6243R3		Temperature	25°C																																																																															
Item		Input Current (by Input Voltage)		Testing Circuitry	Figure A																																																																															
Object		_____																																																																																		
1.Graph			—△— Load 100% - - - □ - - Load 50% - · - ○ - · - Load 0%	2.Values																																																																																
			<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>6.0</td><td>0.003</td><td>0.002</td><td>0.003</td></tr> <tr><td>8.0</td><td>0.003</td><td>0.003</td><td>0.003</td></tr> <tr><td>8.2</td><td>0.025</td><td>0.407</td><td>0.840</td></tr> <tr><td>8.4</td><td>0.024</td><td>0.397</td><td>0.804</td></tr> <tr><td>8.6</td><td>0.025</td><td>0.387</td><td>0.784</td></tr> <tr><td>8.8</td><td>0.024</td><td>0.378</td><td>0.762</td></tr> <tr><td>9.0</td><td>0.023</td><td>0.370</td><td>0.745</td></tr> <tr><td>12.0</td><td>0.020</td><td>0.278</td><td>0.550</td></tr> <tr><td>18.0</td><td>0.015</td><td>0.186</td><td>0.364</td></tr> <tr><td>24.0</td><td>0.011</td><td>0.141</td><td>0.272</td></tr> <tr><td>30.0</td><td>0.005</td><td>0.113</td><td>0.219</td></tr> <tr><td>36.0</td><td>0.004</td><td>0.097</td><td>0.184</td></tr> <tr><td>40.0</td><td>0.004</td><td>0.088</td><td>0.166</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0.0	0.000	0.000	0.000	6.0	0.003	0.002	0.003	8.0	0.003	0.003	0.003	8.2	0.025	0.407	0.840	8.4	0.024	0.397	0.804	8.6	0.025	0.387	0.784	8.8	0.024	0.378	0.762	9.0	0.023	0.370	0.745	12.0	0.020	0.278	0.550	18.0	0.015	0.186	0.364	24.0	0.011	0.141	0.272	30.0	0.005	0.113	0.219	36.0	0.004	0.097	0.184	40.0	0.004	0.088	0.166	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Input Voltage [V]	Input Current [A]																																																																																			
	Load 0%	Load 50%	Load 100%																																																																																	
0.0	0.000	0.000	0.000																																																																																	
6.0	0.003	0.002	0.003																																																																																	
8.0	0.003	0.003	0.003																																																																																	
8.2	0.025	0.407	0.840																																																																																	
8.4	0.024	0.397	0.804																																																																																	
8.6	0.025	0.387	0.784																																																																																	
8.8	0.024	0.378	0.762																																																																																	
9.0	0.023	0.370	0.745																																																																																	
12.0	0.020	0.278	0.550																																																																																	
18.0	0.015	0.186	0.364																																																																																	
24.0	0.011	0.141	0.272																																																																																	
30.0	0.005	0.113	0.219																																																																																	
36.0	0.004	0.097	0.184																																																																																	
40.0	0.004	0.088	0.166																																																																																	
--	-	-	-																																																																																	
--	-	-	-																																																																																	
--	-	-	-																																																																																	
--	-	-	-																																																																																	
Note: Slanted line shows the range of the rated input voltage.																																																																																				



Model		MGFS6243R3		Temperature	25°C																																																																													
Item		Input Current (by Load Current)		Testing Circuitry	Figure A																																																																													
Object		_____																																																																																
1.Graph		<ul style="list-style-type: none"> —△— Input Volt. 9V ---□--- Input Volt. 12V -·-·*·-·-·- Input Volt. 18V -·-·○-·-·- Input Volt. 24V -·-·◇-·-·- Input Volt. 36V 		2.Values																																																																														
<p>Note: Slanted line shows the range of the rated load current.</p>		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="5">Input Current [A]</th> </tr> <tr> <th>Input Volt. 9[V]</th> <th>Input Volt. 12[V]</th> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.023</td><td>0.020</td><td>0.015</td><td>0.011</td><td>0.004</td></tr> <tr><td>0.32</td><td>0.159</td><td>0.122</td><td>0.084</td><td>0.064</td><td>0.045</td></tr> <tr><td>0.64</td><td>0.300</td><td>0.225</td><td>0.151</td><td>0.115</td><td>0.080</td></tr> <tr><td>0.96</td><td>0.445</td><td>0.332</td><td>0.221</td><td>0.168</td><td>0.114</td></tr> <tr><td>1.28</td><td>0.595</td><td>0.441</td><td>0.293</td><td>0.220</td><td>0.148</td></tr> <tr><td>1.60</td><td>0.745</td><td>0.550</td><td>0.364</td><td>0.272</td><td>0.184</td></tr> <tr><td>1.76</td><td>0.820</td><td>0.609</td><td>0.401</td><td>0.300</td><td>0.202</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Load Current [A]	Input Current [A]					Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	0.023	0.020	0.015	0.011	0.004	0.32	0.159	0.122	0.084	0.064	0.045	0.64	0.300	0.225	0.151	0.115	0.080	0.96	0.445	0.332	0.221	0.168	0.114	1.28	0.595	0.441	0.293	0.220	0.148	1.60	0.745	0.550	0.364	0.272	0.184	1.76	0.820	0.609	0.401	0.300	0.202	--	-	-	-	-	-	--	-	-	-	-	-	--	-	-	-	-	-	--	-	-	-	-	-
Load Current [A]	Input Current [A]																																																																																	
	Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																																													
0.00	0.023	0.020	0.015	0.011	0.004																																																																													
0.32	0.159	0.122	0.084	0.064	0.045																																																																													
0.64	0.300	0.225	0.151	0.115	0.080																																																																													
0.96	0.445	0.332	0.221	0.168	0.114																																																																													
1.28	0.595	0.441	0.293	0.220	0.148																																																																													
1.60	0.745	0.550	0.364	0.272	0.184																																																																													
1.76	0.820	0.609	0.401	0.300	0.202																																																																													
--	-	-	-	-	-																																																																													
--	-	-	-	-	-																																																																													
--	-	-	-	-	-																																																																													
--	-	-	-	-	-																																																																													



Model		MGFS6243R3		Temperature 25°C																																																																														
Item		Input Power (by Load Current)		Testing Circuitry Figure A																																																																														
Object		_____																																																																																
1.Graph		<p> —△— Input Volt. 9V ---□--- Input Volt. 12V -·-·*·-·-·- Input Volt. 18V -·-·○-·-·- Input Volt. 24V ---◇--- Input Volt. 36V </p>		2.Values																																																																														
				<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="5">Input Power [W]</th> </tr> <tr> <th>Input Volt. 9[V]</th> <th>Input Volt. 12[V]</th> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.21</td><td>0.24</td><td>0.27</td><td>0.25</td><td>0.17</td></tr> <tr><td>0.32</td><td>1.43</td><td>1.46</td><td>1.50</td><td>1.53</td><td>1.63</td></tr> <tr><td>0.64</td><td>2.68</td><td>2.69</td><td>2.71</td><td>2.77</td><td>2.90</td></tr> <tr><td>0.96</td><td>3.98</td><td>3.95</td><td>3.97</td><td>4.02</td><td>4.10</td></tr> <tr><td>1.28</td><td>5.30</td><td>5.26</td><td>5.25</td><td>5.26</td><td>5.35</td></tr> <tr><td>1.60</td><td>6.66</td><td>6.57</td><td>6.52</td><td>6.55</td><td>6.58</td></tr> <tr><td>1.76</td><td>7.35</td><td>7.24</td><td>7.19</td><td>7.19</td><td>7.28</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Input Power [W]					Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	0.21	0.24	0.27	0.25	0.17	0.32	1.43	1.46	1.50	1.53	1.63	0.64	2.68	2.69	2.71	2.77	2.90	0.96	3.98	3.95	3.97	4.02	4.10	1.28	5.30	5.26	5.25	5.26	5.35	1.60	6.66	6.57	6.52	6.55	6.58	1.76	7.35	7.24	7.19	7.19	7.28	--	-	-	-	-	-	--	-	-	-	-	-	--	-	-	-	-	-	--	-	-	-	-	-
Load Current [A]	Input Power [W]																																																																																	
	Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																																													
0.00	0.21	0.24	0.27	0.25	0.17																																																																													
0.32	1.43	1.46	1.50	1.53	1.63																																																																													
0.64	2.68	2.69	2.71	2.77	2.90																																																																													
0.96	3.98	3.95	3.97	4.02	4.10																																																																													
1.28	5.30	5.26	5.25	5.26	5.35																																																																													
1.60	6.66	6.57	6.52	6.55	6.58																																																																													
1.76	7.35	7.24	7.19	7.19	7.28																																																																													
--	-	-	-	-	-																																																																													
--	-	-	-	-	-																																																																													
--	-	-	-	-	-																																																																													
--	-	-	-	-	-																																																																													
<p>Note: Slanted line shows the range of the rated load current.</p>																																																																																		



<p>Model MGFS6243R3</p>		<p>Temperature 25°C Testing Circuitry Figure A</p>																																
<p>Item</p>	<p>Efficiency (by Input Voltage)</p>																																	
<p>Object</p>	<p>_____</p>																																	
<p>1.Graph</p>		<p>2.Values</p>																																
<p>---□--- Load 50% —△— Load 100%</p> <p>Efficiency [%]</p> <p>Input Voltage [V]</p> <p>Note: Slanted line shows the range of the rated input voltage.</p>		<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>8.6</td><td>80.2</td><td>79.9</td></tr> <tr><td>9.0</td><td>80.1</td><td>79.8</td></tr> <tr><td>12.0</td><td>79.9</td><td>80.9</td></tr> <tr><td>15.0</td><td>79.4</td><td>81.2</td></tr> <tr><td>18.0</td><td>79.3</td><td>81.6</td></tr> <tr><td>24.0</td><td>78.5</td><td>81.2</td></tr> <tr><td>30.0</td><td>77.4</td><td>81.1</td></tr> <tr><td>36.0</td><td>76.1</td><td>80.8</td></tr> <tr><td>40.0</td><td>75.2</td><td>79.8</td></tr> </tbody> </table>	Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	8.6	80.2	79.9	9.0	80.1	79.8	12.0	79.9	80.9	15.0	79.4	81.2	18.0	79.3	81.6	24.0	78.5	81.2	30.0	77.4	81.1	36.0	76.1	80.8	40.0	75.2	79.8
Input Voltage [V]	Efficiency [%]																																	
	Load 50%	Load 100%																																
8.6	80.2	79.9																																
9.0	80.1	79.8																																
12.0	79.9	80.9																																
15.0	79.4	81.2																																
18.0	79.3	81.6																																
24.0	78.5	81.2																																
30.0	77.4	81.1																																
36.0	76.1	80.8																																
40.0	75.2	79.8																																



Model		MGFS6243R3		Temperature	25°C																																																																													
Item		Efficiency (by Load Current)		Testing Circuitry	Figure A																																																																													
Object		_____																																																																																
1.Graph		<ul style="list-style-type: none"> —△— Input Volt. 9V ---□--- Input Volt. 12V -·-·*·-·-· Input Volt. 18V -·-·○-·-· Input Volt. 24V -·-·◇-·-· Input Volt. 36V 		2.Values																																																																														
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="5">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 9[V]</th> <th>Input Volt. 12[V]</th> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.32</td><td>74.2</td><td>72.8</td><td>70.7</td><td>69.5</td><td>65.3</td></tr> <tr><td>0.64</td><td>79.3</td><td>79.0</td><td>78.2</td><td>76.8</td><td>73.2</td></tr> <tr><td>0.96</td><td>80.2</td><td>80.7</td><td>80.4</td><td>79.3</td><td>77.8</td></tr> <tr><td>1.28</td><td>80.2</td><td>80.9</td><td>80.9</td><td>80.8</td><td>79.5</td></tr> <tr><td>1.60</td><td>79.8</td><td>80.9</td><td>81.6</td><td>81.2</td><td>80.8</td></tr> <tr><td>1.76</td><td>79.5</td><td>80.7</td><td>81.3</td><td>81.3</td><td>80.3</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Load Current [A]	Efficiency [%]					Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	-	-	-	-	-	0.32	74.2	72.8	70.7	69.5	65.3	0.64	79.3	79.0	78.2	76.8	73.2	0.96	80.2	80.7	80.4	79.3	77.8	1.28	80.2	80.9	80.9	80.8	79.5	1.60	79.8	80.9	81.6	81.2	80.8	1.76	79.5	80.7	81.3	81.3	80.3	--	-	-	-	-	-	--	-	-	-	-	-	--	-	-	-	-	-	--	-	-	-	-	-
Load Current [A]	Efficiency [%]																																																																																	
	Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																																													
0.00	-	-	-	-	-																																																																													
0.32	74.2	72.8	70.7	69.5	65.3																																																																													
0.64	79.3	79.0	78.2	76.8	73.2																																																																													
0.96	80.2	80.7	80.4	79.3	77.8																																																																													
1.28	80.2	80.9	80.9	80.8	79.5																																																																													
1.60	79.8	80.9	81.6	81.2	80.8																																																																													
1.76	79.5	80.7	81.3	81.3	80.3																																																																													
--	-	-	-	-	-																																																																													
--	-	-	-	-	-																																																																													
--	-	-	-	-	-																																																																													
--	-	-	-	-	-																																																																													
<p>Note: Slanted line shows the range of the rated load current.</p>																																																																																		



<p>Model MGFS6243R3</p>		<p>Temperature 25°C Testing Circuitry Figure A</p>																																
<p>Item Line Regulation</p>																																		
<p>Object +3.3V1.6A</p>																																		
<p>1.Graph</p> <p>---□--- Load 50% —△— Load 100%</p> <p>Output Voltage [V]</p> <p>Input Voltage [V]</p> <p>Note: Slanted line shows the range of the rated input voltage.</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>8.6</td><td>3.318</td><td>3.317</td></tr> <tr><td>9.0</td><td>3.318</td><td>3.317</td></tr> <tr><td>12.0</td><td>3.318</td><td>3.317</td></tr> <tr><td>15.0</td><td>3.318</td><td>3.317</td></tr> <tr><td>18.0</td><td>3.318</td><td>3.317</td></tr> <tr><td>24.0</td><td>3.318</td><td>3.317</td></tr> <tr><td>30.0</td><td>3.318</td><td>3.317</td></tr> <tr><td>36.0</td><td>3.318</td><td>3.317</td></tr> <tr><td>40.0</td><td>3.318</td><td>3.317</td></tr> </tbody> </table>	Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	8.6	3.318	3.317	9.0	3.318	3.317	12.0	3.318	3.317	15.0	3.318	3.317	18.0	3.318	3.317	24.0	3.318	3.317	30.0	3.318	3.317	36.0	3.318	3.317	40.0	3.318	3.317
Input Voltage [V]	Output Voltage [V]																																	
	Load 50%	Load 100%																																
8.6	3.318	3.317																																
9.0	3.318	3.317																																
12.0	3.318	3.317																																
15.0	3.318	3.317																																
18.0	3.318	3.317																																
24.0	3.318	3.317																																
30.0	3.318	3.317																																
36.0	3.318	3.317																																
40.0	3.318	3.317																																



Model		MGFS6243R3		Temperature 25°C																																																																														
Item		Load Regulation		Testing Circuitry Figure A																																																																														
Object		+3.3V1.6A																																																																																
1.Graph		<ul style="list-style-type: none"> —△— Input Volt. 9V ---□--- Input Volt. 12V -·-·*·-·-·- Input Volt. 18V -·-·○-·-·- Input Volt. 24V -·-·◇-·-·- Input Volt. 36V 		2.Values																																																																														
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="5">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 9[V]</th> <th>Input Volt. 12[V]</th> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>3.321</td><td>3.321</td><td>3.321</td><td>3.321</td><td>3.321</td></tr> <tr><td>0.32</td><td>3.320</td><td>3.320</td><td>3.320</td><td>3.320</td><td>3.320</td></tr> <tr><td>0.64</td><td>3.319</td><td>3.319</td><td>3.319</td><td>3.319</td><td>3.319</td></tr> <tr><td>0.96</td><td>3.319</td><td>3.319</td><td>3.319</td><td>3.319</td><td>3.319</td></tr> <tr><td>1.28</td><td>3.318</td><td>3.318</td><td>3.318</td><td>3.318</td><td>3.318</td></tr> <tr><td>1.60</td><td>3.317</td><td>3.317</td><td>3.317</td><td>3.317</td><td>3.317</td></tr> <tr><td>1.76</td><td>3.316</td><td>3.316</td><td>3.316</td><td>3.316</td><td>3.316</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Output Voltage [V]					Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	3.321	3.321	3.321	3.321	3.321	0.32	3.320	3.320	3.320	3.320	3.320	0.64	3.319	3.319	3.319	3.319	3.319	0.96	3.319	3.319	3.319	3.319	3.319	1.28	3.318	3.318	3.318	3.318	3.318	1.60	3.317	3.317	3.317	3.317	3.317	1.76	3.316	3.316	3.316	3.316	3.316	--	-	-	-	-	-	--	-	-	-	-	-	--	-	-	-	-	-	--	-	-	-	-	-		
Load Current [A]	Output Voltage [V]																																																																																	
	Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																																													
0.00	3.321	3.321	3.321	3.321	3.321																																																																													
0.32	3.320	3.320	3.320	3.320	3.320																																																																													
0.64	3.319	3.319	3.319	3.319	3.319																																																																													
0.96	3.319	3.319	3.319	3.319	3.319																																																																													
1.28	3.318	3.318	3.318	3.318	3.318																																																																													
1.60	3.317	3.317	3.317	3.317	3.317																																																																													
1.76	3.316	3.316	3.316	3.316	3.316																																																																													
--	-	-	-	-	-																																																																													
--	-	-	-	-	-																																																																													
--	-	-	-	-	-																																																																													
--	-	-	-	-	-																																																																													
Note: Slanted line shows the range of the rated load current.																																																																																		



Model	MGFS6243R3	Temperature	25°C
Item	Dynamic Load Response	Testing Circuitry	Figure A
Object	+3.3V1.6A		

Input Volt. 24 V
Cycle 100 ms



t1, t2 = 100 μs



Min. Load (0A) ←→
Load 100% (1.6A)

200 mV/div

100 μs/div

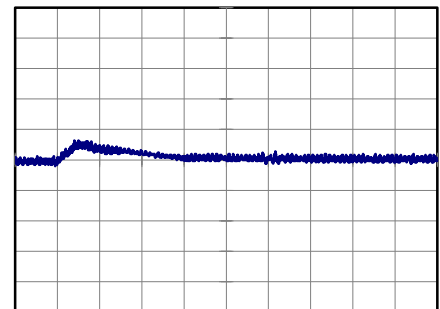
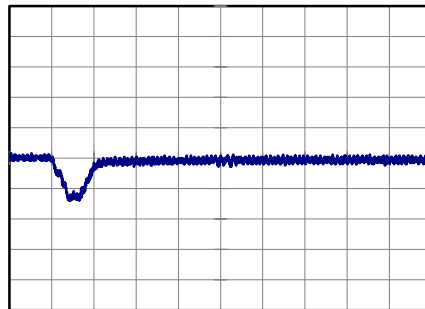


100 μs/div

Min. Load (0A) ←→
Load 50% (0.8A)

200 mV/div

100 μs/div

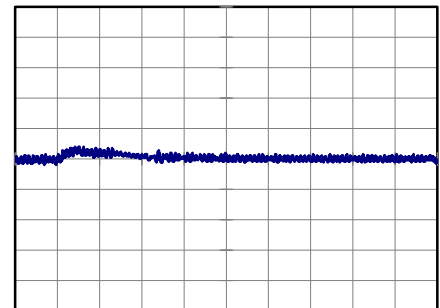
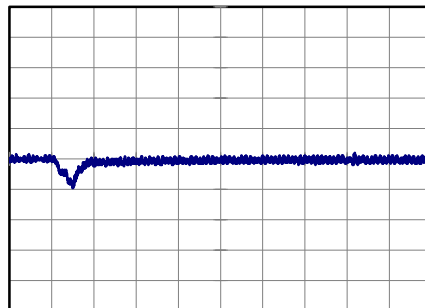


100 μs/div

Load 50% (0.8A) ←→
Load 100% (1.6A)

200 mV/div

100 μs/div

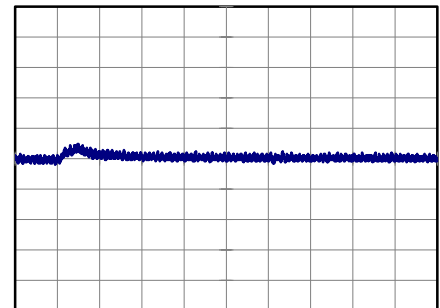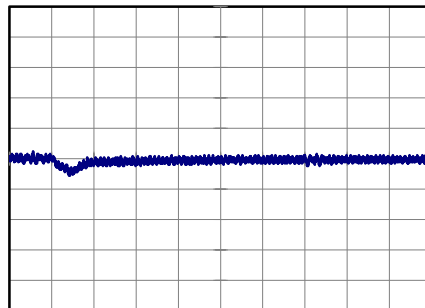

100 μs/div



COSEL																																								
Model	MGFS6243R3																																							
Item	Ripple Voltage (by Load Current)	Temperature 25°C Testing Circuitry Figure B																																						
Object	+3.3V1.6A																																							
<p>1.Graph</p> <p> —△— Input Volt. 9V - - ○ - - Input Volt. 36V </p> <p>Measured by 100 MHz Oscilloscope. Ripple Voltage is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p> <p>Ripple [mVp-p]</p> <p>Fig.Complex Ripple Wave Form</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Input Volt. 9 [V]</th> <th>Input Volt. 36 [V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>5</td><td>25</td></tr> <tr><td>0.32</td><td>5</td><td>10</td></tr> <tr><td>0.64</td><td>5</td><td>5</td></tr> <tr><td>0.96</td><td>10</td><td>5</td></tr> <tr><td>1.28</td><td>10</td><td>5</td></tr> <tr><td>1.60</td><td>20</td><td>10</td></tr> <tr><td>1.76</td><td>25</td><td>10</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Ripple Voltage [mV]		Input Volt. 9 [V]	Input Volt. 36 [V]	0.00	5	25	0.32	5	10	0.64	5	5	0.96	10	5	1.28	10	5	1.60	20	10	1.76	25	10	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple Voltage [mV]																																							
	Input Volt. 9 [V]	Input Volt. 36 [V]																																						
0.00	5	25																																						
0.32	5	10																																						
0.64	5	5																																						
0.96	10	5																																						
1.28	10	5																																						
1.60	20	10																																						
1.76	25	10																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						



<p>Model MGFS6243R3</p> <p>Item Ripple-Noise</p> <p>Object +3.3V1.6A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure B</p>																																						
<p>1.Graph</p> <p>Measured by 100 MHz Oscilloscope. Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p> <p>Ripple Noise[mVp-p]</p> <p>Fig.Complex Ripple Noise Wave Form</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple-Noise [mV]</th> </tr> <tr> <th>Input Volt. 9 [V]</th> <th>Input Volt. 36 [V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>5</td><td>25</td></tr> <tr><td>0.32</td><td>10</td><td>15</td></tr> <tr><td>0.64</td><td>10</td><td>10</td></tr> <tr><td>0.96</td><td>10</td><td>15</td></tr> <tr><td>1.28</td><td>15</td><td>15</td></tr> <tr><td>1.60</td><td>25</td><td>20</td></tr> <tr><td>1.76</td><td>30</td><td>20</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Ripple-Noise [mV]		Input Volt. 9 [V]	Input Volt. 36 [V]	0.00	5	25	0.32	10	15	0.64	10	10	0.96	10	15	1.28	15	15	1.60	25	20	1.76	30	20	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple-Noise [mV]																																							
	Input Volt. 9 [V]	Input Volt. 36 [V]																																						
0.00	5	25																																						
0.32	10	15																																						
0.64	10	10																																						
0.96	10	15																																						
1.28	15	15																																						
1.60	25	20																																						
1.76	30	20																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						




COSEL																																								
Model	MGFS6243R3																																							
Item	Ripple Voltage (by Ambient Temp.)	Testing Circuitry Figure B																																						
Object	+3.3V1.6A																																							
<p>1.Graph</p> <p style="text-align: center;">Ambient Temperature [°C] Input Volt. 24V</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>-60</td><td>5</td><td>10</td></tr> <tr><td>-40</td><td>5</td><td>10</td></tr> <tr><td>-20</td><td>5</td><td>10</td></tr> <tr><td>0</td><td>5</td><td>10</td></tr> <tr><td>25</td><td>5</td><td>10</td></tr> <tr><td>65</td><td>5</td><td>10</td></tr> <tr><td>75</td><td>5</td><td>5</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Ambient Temperature [°C]	Ripple Voltage [mV]		Load 50%	Load 100%	-60	5	10	-40	5	10	-20	5	10	0	5	10	25	5	10	65	5	10	75	5	5	--	-	-	--	-	-	--	-	-	--	-	-
Ambient Temperature [°C]	Ripple Voltage [mV]																																							
	Load 50%	Load 100%																																						
-60	5	10																																						
-40	5	10																																						
-20	5	10																																						
0	5	10																																						
25	5	10																																						
65	5	10																																						
75	5	5																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Measured by 100 MHz Oscilloscope. Note: Slanted line shows the range of the rated ambient temperature.</p>																																								



Model	MGFS6243R3
Item	Ambient Temperature Drift
Object	+3.3V1.6A

Testing Circuitry Figure A

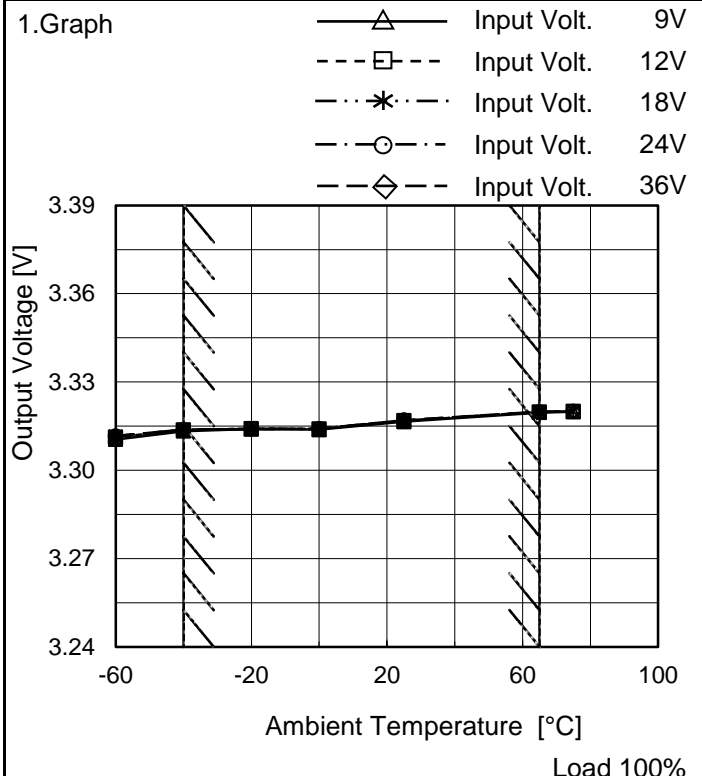

2.Values

Ambient Temperature [°C]	Output Voltage [V]				
	Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
-60	3.311	3.311	3.312	3.312	3.312
-40	3.313	3.314	3.314	3.314	3.314
-20	3.314	3.314	3.314	3.314	3.314
0	3.314	3.314	3.314	3.314	3.314
25	3.317	3.317	3.317	3.317	3.317
65	3.320	3.320	3.320	3.320	3.320
75	3.320	3.320	3.320	3.320	3.320
--	-	-	-	-	-
--	-	-	-	-	-
--	-	-	-	-	-
--	-	-	-	-	-

Note: Slanted line shows the range of the rated ambient temperature.



COSEL		
Model	MGFS6243R3	
Item	Output Voltage Accuracy	Testing Circuitry Figure A
Object	+3.3V1.6A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 65°C

Input Voltage : 9 - 36V

Load Current : 0 - 1.6A

* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ratio) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

2. Values


Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ratio [%]
Maximum Voltage	65	9	0	3.325	±6	±0.2
Minimum Voltage	-40	9	1.6	3.313		



COSEL																								
Model	MGFS6243R3																							
Item	Time Lapse Drift	Temperature 25°C Testing Circuitry Figure A																						
Object	+3.3V1.6A																							
<p>1.Graph</p> <p style="text-align: center;">Time [H]</p> <p>Input Volt. 24V Load 100%</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>3.315</td></tr> <tr><td>0.5</td><td>3.318</td></tr> <tr><td>1.0</td><td>3.318</td></tr> <tr><td>2.0</td><td>3.318</td></tr> <tr><td>3.0</td><td>3.318</td></tr> <tr><td>4.0</td><td>3.318</td></tr> <tr><td>5.0</td><td>3.318</td></tr> <tr><td>6.0</td><td>3.318</td></tr> <tr><td>7.0</td><td>3.318</td></tr> <tr><td>8.0</td><td>3.318</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	3.315	0.5	3.318	1.0	3.318	2.0	3.318	3.0	3.318	4.0	3.318	5.0	3.318	6.0	3.318	7.0	3.318	8.0	3.318
Time since start [H]	Output Voltage [V]																							
0.0	3.315																							
0.5	3.318																							
1.0	3.318																							
2.0	3.318																							
3.0	3.318																							
4.0	3.318																							
5.0	3.318																							
6.0	3.318																							
7.0	3.318																							
8.0	3.318																							




Model		MGFS6243R3	Temperature	25°C
Item		Rise and Fall Time	Testing Circuitry	Figure A
Object		+3.3V1.6A		

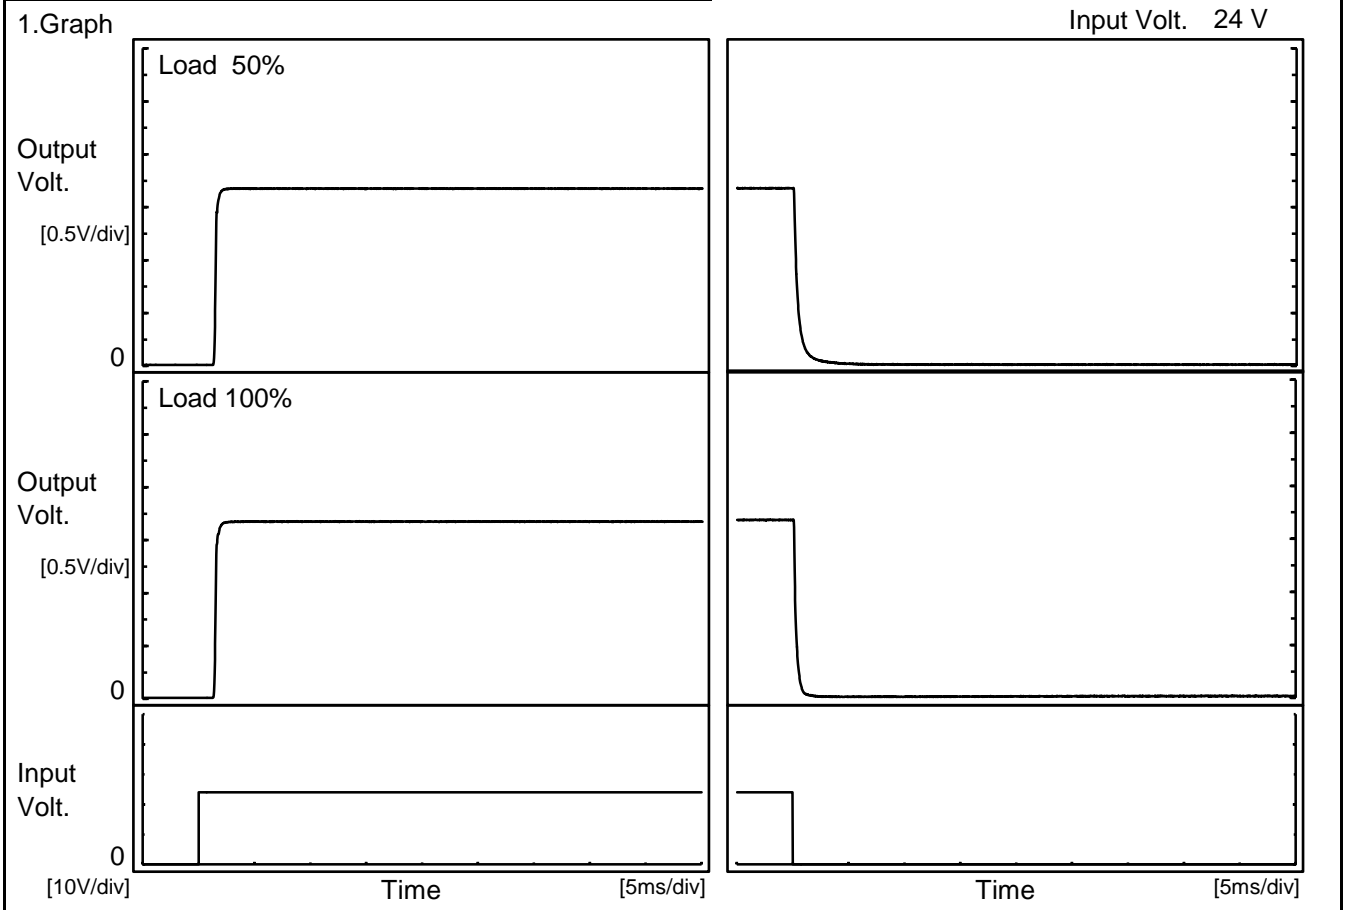

2. Values

Load	Time	Td	Tr	Ts	Th	Tf
50 %		1.4	0.3	1.7	0.2	0.9
100 %		1.4	0.3	1.7	0.1	0.5

[ms]

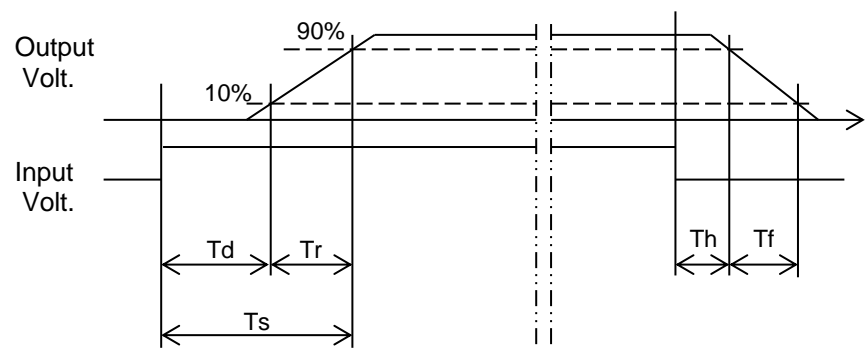



COSEL																																								
Model	MGFS6243R3																																							
Item	Minimum Input Voltage for Regulated Output Voltage	Testing Circuitry Figure A																																						
Object	+3.3V1.6A																																							
<p>1.Graph</p> <p style="text-align: right;"> ---□--- Load 50% —△— Load 100% </p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Input Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>-60</td><td>7.6</td><td>7.7</td></tr> <tr><td>-40</td><td>7.5</td><td>7.6</td></tr> <tr><td>-20</td><td>7.5</td><td>7.6</td></tr> <tr><td>0</td><td>7.5</td><td>7.6</td></tr> <tr><td>25</td><td>7.4</td><td>7.5</td></tr> <tr><td>65</td><td>7.3</td><td>7.4</td></tr> <tr><td>75</td><td>7.3</td><td>7.4</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Ambient Temperature [°C]	Input Voltage [V]		Load 50%	Load 100%	-60	7.6	7.7	-40	7.5	7.6	-20	7.5	7.6	0	7.5	7.6	25	7.4	7.5	65	7.3	7.4	75	7.3	7.4	--	-	-	--	-	-	--	-	-	--	-	-
Ambient Temperature [°C]	Input Voltage [V]																																							
	Load 50%	Load 100%																																						
-60	7.6	7.7																																						
-40	7.5	7.6																																						
-20	7.5	7.6																																						
0	7.5	7.6																																						
25	7.4	7.5																																						
65	7.3	7.4																																						
75	7.3	7.4																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																								



<p>Model MGFS6243R3</p>		<p>Temperature 25°C Testing Circuitry Figure A</p>																																																																																			
<p>Item</p>	<p>Overcurrent Protection</p>																																																																																				
<p>Object</p>	<p>+3.3V1.6A</p>																																																																																				
<p>1.Graph</p>		<p>2.Values</p>																																																																																			
<p> Input Volt. 9V Input Volt. 12V Input Volt. 18V Input Volt. 24V Input Volt. 36V </p> <p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>		<table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="5">Load Current [A]</th> </tr> <tr> <th>Input Volt. 9[V]</th> <th>Input Volt. 12[V]</th> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>3.14</td><td>2.015</td><td>2.091</td><td>2.053</td><td>2.052</td><td>2.080</td></tr> <tr><td>2.97</td><td>2.093</td><td>2.163</td><td>2.122</td><td>2.108</td><td>2.126</td></tr> <tr><td>2.64</td><td>2.257</td><td>2.321</td><td>2.269</td><td>2.231</td><td>2.214</td></tr> <tr><td>2.31</td><td>2.430</td><td>2.506</td><td>2.420</td><td>2.349</td><td>2.307</td></tr> <tr><td>1.98</td><td>2.650</td><td>2.705</td><td>2.568</td><td>2.474</td><td>2.419</td></tr> <tr><td>1.65</td><td>2.891</td><td>2.923</td><td>2.728</td><td>2.615</td><td>2.533</td></tr> <tr><td>1.32</td><td>3.174</td><td>3.146</td><td>2.893</td><td>2.761</td><td>2.653</td></tr> <tr><td>0.99</td><td>3.487</td><td>3.400</td><td>3.089</td><td>2.916</td><td>2.788</td></tr> <tr><td>0.66</td><td>3.867</td><td>3.690</td><td>3.297</td><td>3.085</td><td>2.925</td></tr> <tr><td>0.33</td><td>4.184</td><td>4.037</td><td>3.519</td><td>3.261</td><td>3.060</td></tr> <tr><td>0.00</td><td>4.563</td><td>4.076</td><td>3.428</td><td>3.126</td><td>2.892</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Output Voltage [V]	Load Current [A]					Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	3.14	2.015	2.091	2.053	2.052	2.080	2.97	2.093	2.163	2.122	2.108	2.126	2.64	2.257	2.321	2.269	2.231	2.214	2.31	2.430	2.506	2.420	2.349	2.307	1.98	2.650	2.705	2.568	2.474	2.419	1.65	2.891	2.923	2.728	2.615	2.533	1.32	3.174	3.146	2.893	2.761	2.653	0.99	3.487	3.400	3.089	2.916	2.788	0.66	3.867	3.690	3.297	3.085	2.925	0.33	4.184	4.037	3.519	3.261	3.060	0.00	4.563	4.076	3.428	3.126	2.892	--	-	-	-	-	-
Output Voltage [V]	Load Current [A]																																																																																				
	Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																																																
3.14	2.015	2.091	2.053	2.052	2.080																																																																																
2.97	2.093	2.163	2.122	2.108	2.126																																																																																
2.64	2.257	2.321	2.269	2.231	2.214																																																																																
2.31	2.430	2.506	2.420	2.349	2.307																																																																																
1.98	2.650	2.705	2.568	2.474	2.419																																																																																
1.65	2.891	2.923	2.728	2.615	2.533																																																																																
1.32	3.174	3.146	2.893	2.761	2.653																																																																																
0.99	3.487	3.400	3.089	2.916	2.788																																																																																
0.66	3.867	3.690	3.297	3.085	2.925																																																																																
0.33	4.184	4.037	3.519	3.261	3.060																																																																																
0.00	4.563	4.076	3.428	3.126	2.892																																																																																
--	-	-	-	-	-																																																																																



Model		MGFS6243R3		Temperature 25°C																																																																												
Item		Switching frequency (by Load Current)		Testing Circuitry Figure A																																																																												
Object		+3.3V1.6A																																																																														
1.Graph		<p>—△— Input Volt. 9V</p> <p>---□--- Input Volt. 12V</p> <p>-·-·*·-·- Input Volt. 18V</p> <p>-·-·○-·- Input Volt. 24V</p> <p>-·-·◇-·- Input Volt. 36V</p>		2.Values																																																																												
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="5">Input Current [A]</th> </tr> <tr> <th>Input Volt. 9[V]</th> <th>Input Volt. 12[V]</th> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>799</td><td>910</td><td>1056</td><td>1132</td><td>1266</td></tr> <tr><td>0.32</td><td>486</td><td>601</td><td>755</td><td>850</td><td>946</td></tr> <tr><td>0.64</td><td>352</td><td>449</td><td>590</td><td>681</td><td>782</td></tr> <tr><td>0.96</td><td>273</td><td>358</td><td>485</td><td>569</td><td>666</td></tr> <tr><td>1.28</td><td>223</td><td>297</td><td>410</td><td>488</td><td>581</td></tr> <tr><td>1.60</td><td>189</td><td>254</td><td>355</td><td>427</td><td>514</td></tr> <tr><td>1.76</td><td>175</td><td>237</td><td>333</td><td>401</td><td>486</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Input Current [A]					Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	799	910	1056	1132	1266	0.32	486	601	755	850	946	0.64	352	449	590	681	782	0.96	273	358	485	569	666	1.28	223	297	410	488	581	1.60	189	254	355	427	514	1.76	175	237	333	401	486	--	-	-	-	-	-	--	-	-	-	-	-	--	-	-	-	-	-	--	-	-	-	-	-
Load Current [A]	Input Current [A]																																																																															
	Input Volt. 9[V]	Input Volt. 12[V]	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																																											
0.00	799	910	1056	1132	1266																																																																											
0.32	486	601	755	850	946																																																																											
0.64	352	449	590	681	782																																																																											
0.96	273	358	485	569	666																																																																											
1.28	223	297	410	488	581																																																																											
1.60	189	254	355	427	514																																																																											
1.76	175	237	333	401	486																																																																											
--	-	-	-	-	-																																																																											
--	-	-	-	-	-																																																																											
--	-	-	-	-	-																																																																											
--	-	-	-	-	-																																																																											
<p>Note: Slanted line shows the range of the rated load current.</p> <p>When load current is low, MG operates intermittently, so switching frequency would not become constant.</p>																																																																																

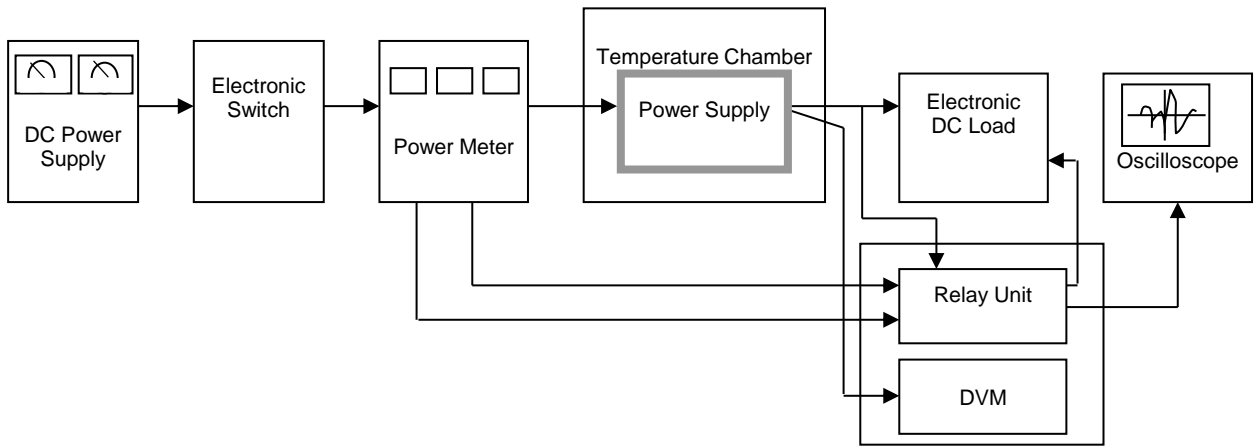


Figure A

Data Acquisition/Control Unit

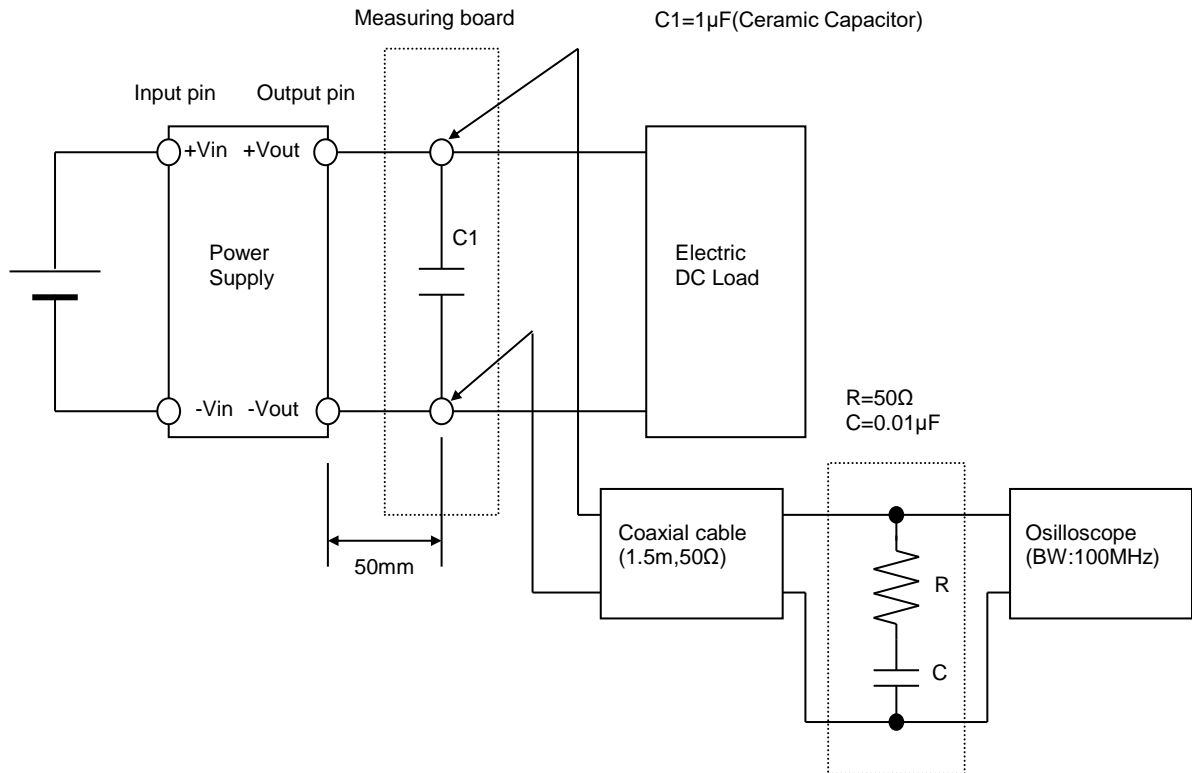


Figure B (Ripple and Ripple noise Characteristic)