

TEST DATA OF SUTW62412

Regulated DC Power Supply
March 17, 2009

Approved by : Kazunari Asano
Kazunari Asano Design Manager

Prepared by : Sho Saito
Sho Saito Design Engineer

COSEL CO.,LTD.

CONTENTS

1. Input Current (by Input Voltage)	1
2. Input Current (by Load Current)	2
3. Input Power (by Load Current)	3
4. Efficiency (by Input Voltage)	4
5. Efficiency (by Load Current)	5
6. Line Regulation	6
7. Load Regulation	7
8. Dynamic Load Response	8
9. Ripple Voltage (by Load Current)	10
10. Ripple-Noise	12
11. Ripple Voltage (by Ambient Temperature)	14
12. Ambient Temperature Drift	15
13. Output Voltage Accuracy	16
14. Time Lapse Drift	17
15. Rise and Fall Time	18
16. Minimum Input Voltage for Regulated Output Voltage	20
17. Overcurrent Protection	21
18. Figure of Testing Circuitry	22

(Final Page 22)



<p>Model SUTW62412</p>		<p>Temperature 25°C Testing Circuitry Figure A</p>																																																																															
Item	Input Current (by Input Voltage)																																																																																
Object	_____																																																																																
<p>1.Graph</p> <div style="display: flex; justify-content: space-between;"> <div style="width: 60%;"> </div> <div style="width: 35%;"> <p>—△— Load 100%</p> <p>- - -□- - Load 50%</p> <p>- · -○- · - Load 0%</p> </div> </div>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>4.0</td><td>0.009</td><td>0.009</td><td>0.009</td></tr> <tr><td>8.0</td><td>0.008</td><td>0.008</td><td>0.008</td></tr> <tr><td>12.0</td><td>0.009</td><td>0.009</td><td>0.009</td></tr> <tr><td>14.0</td><td>0.008</td><td>0.008</td><td>0.008</td></tr> <tr><td>14.8</td><td>0.007</td><td>0.007</td><td>0.007</td></tr> <tr><td>15.6</td><td>0.029</td><td>0.238</td><td>0.466</td></tr> <tr><td>16.0</td><td>0.028</td><td>0.233</td><td>0.453</td></tr> <tr><td>18.0</td><td>0.026</td><td>0.206</td><td>0.401</td></tr> <tr><td>20.0</td><td>0.025</td><td>0.187</td><td>0.359</td></tr> <tr><td>24.0</td><td>0.023</td><td>0.158</td><td>0.300</td></tr> <tr><td>28.0</td><td>0.023</td><td>0.139</td><td>0.259</td></tr> <tr><td>32.0</td><td>0.024</td><td>0.124</td><td>0.229</td></tr> <tr><td>36.0</td><td>0.025</td><td>0.114</td><td>0.205</td></tr> <tr><td>40.0</td><td>0.026</td><td>0.105</td><td>0.188</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0.0	0.000	0.000	0.000	4.0	0.009	0.009	0.009	8.0	0.008	0.008	0.008	12.0	0.009	0.009	0.009	14.0	0.008	0.008	0.008	14.8	0.007	0.007	0.007	15.6	0.029	0.238	0.466	16.0	0.028	0.233	0.453	18.0	0.026	0.206	0.401	20.0	0.025	0.187	0.359	24.0	0.023	0.158	0.300	28.0	0.023	0.139	0.259	32.0	0.024	0.124	0.229	36.0	0.025	0.114	0.205	40.0	0.026	0.105	0.188	--	-	-	-	--	-	-	-	--	-	-	-
Input Voltage [V]	Input Current [A]																																																																																
	Load 0%	Load 50%	Load 100%																																																																														
0.0	0.000	0.000	0.000																																																																														
4.0	0.009	0.009	0.009																																																																														
8.0	0.008	0.008	0.008																																																																														
12.0	0.009	0.009	0.009																																																																														
14.0	0.008	0.008	0.008																																																																														
14.8	0.007	0.007	0.007																																																																														
15.6	0.029	0.238	0.466																																																																														
16.0	0.028	0.233	0.453																																																																														
18.0	0.026	0.206	0.401																																																																														
20.0	0.025	0.187	0.359																																																																														
24.0	0.023	0.158	0.300																																																																														
28.0	0.023	0.139	0.259																																																																														
32.0	0.024	0.124	0.229																																																																														
36.0	0.025	0.114	0.205																																																																														
40.0	0.026	0.105	0.188																																																																														
--	-	-	-																																																																														
--	-	-	-																																																																														
--	-	-	-																																																																														
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																																																																	



COSEL																																																						
Model	SUTW62412	Temperature	25°C																																																			
Item	Input Current (by Load Current)	Testing Circuitry	Figure A																																																			
Object	_____																																																					
<p>1.Graph</p> <p> Input Volt. 18V Input Volt. 24V Input Volt. 36V </p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Ration [%]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.026</td><td>0.023</td><td>0.024</td></tr> <tr><td>20</td><td>0.098</td><td>0.077</td><td>0.061</td></tr> <tr><td>40</td><td>0.171</td><td>0.130</td><td>0.096</td></tr> <tr><td>60</td><td>0.245</td><td>0.185</td><td>0.132</td></tr> <tr><td>80</td><td>0.319</td><td>0.241</td><td>0.168</td></tr> <tr><td>100</td><td>0.395</td><td>0.296</td><td>0.204</td></tr> <tr><td>110</td><td>0.434</td><td>0.326</td><td>0.222</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Ration [%]	Input Current [A]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0	0.026	0.023	0.024	20	0.098	0.077	0.061	40	0.171	0.130	0.096	60	0.245	0.185	0.132	80	0.319	0.241	0.168	100	0.395	0.296	0.204	110	0.434	0.326	0.222	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Ration [%]	Input Current [A]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
0	0.026	0.023	0.024																																																			
20	0.098	0.077	0.061																																																			
40	0.171	0.130	0.096																																																			
60	0.245	0.185	0.132																																																			
80	0.319	0.241	0.168																																																			
100	0.395	0.296	0.204																																																			
110	0.434	0.326	0.222																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			



COSEL																																																						
Model	SUTW62412	Temperature	25°C																																																			
Item	Input Power (by Load Current)	Testing Circuitry	Figure A																																																			
Object	_____																																																					
<p>1.Graph</p> <p> </p> <p> △ Input Volt. 18V □ Input Volt. 24V ○ Input Volt. 36V </p>		<p>2.Values</p>																																																				
<p style="text-align: center;">Input Power [W]</p> <p style="text-align: center;">Load Ration [%]</p>		<table border="1"> <thead> <tr> <th rowspan="2">Load Ration [%]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.46</td><td>0.53</td><td>0.85</td></tr> <tr><td>20</td><td>1.76</td><td>1.86</td><td>2.20</td></tr> <tr><td>40</td><td>3.07</td><td>3.18</td><td>3.41</td></tr> <tr><td>60</td><td>4.40</td><td>4.44</td><td>4.78</td></tr> <tr><td>80</td><td>5.74</td><td>5.81</td><td>6.01</td></tr> <tr><td>100</td><td>7.12</td><td>7.14</td><td>7.31</td></tr> <tr><td>110</td><td>7.80</td><td>7.78</td><td>7.99</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Ration [%]	Input Power [W]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0	0.46	0.53	0.85	20	1.76	1.86	2.20	40	3.07	3.18	3.41	60	4.40	4.44	4.78	80	5.74	5.81	6.01	100	7.12	7.14	7.31	110	7.80	7.78	7.99	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Ration [%]	Input Power [W]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
0	0.46	0.53	0.85																																																			
20	1.76	1.86	2.20																																																			
40	3.07	3.18	3.41																																																			
60	4.40	4.44	4.78																																																			
80	5.74	5.81	6.01																																																			
100	7.12	7.14	7.31																																																			
110	7.80	7.78	7.99																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			



<p>Model SUTW62412</p>		<p>Temperature 25°C Testing Circuitry Figure A</p>																																
Item	Efficiency (by Input Voltage)																																	
Object																																		
<p>1.Graph</p> <p>---□--- Load 50% —△— Load 100%</p> <p>Efficiency [%]</p> <p>Input Voltage [V]</p> <p>Note: Slanted line shows the range of the rated input voltage.</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>16</td><td>82.2</td><td>84.9</td></tr> <tr><td>18</td><td>82.3</td><td>86.4</td></tr> <tr><td>20</td><td>81.4</td><td>85.8</td></tr> <tr><td>24</td><td>80.6</td><td>85.0</td></tr> <tr><td>30</td><td>78.1</td><td>84.4</td></tr> <tr><td>36</td><td>74.6</td><td>83.9</td></tr> <tr><td>40</td><td>72.5</td><td>81.5</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	16	82.2	84.9	18	82.3	86.4	20	81.4	85.8	24	80.6	85.0	30	78.1	84.4	36	74.6	83.9	40	72.5	81.5	--	-	-	--	-	-
Input Voltage [V]	Efficiency [%]																																	
	Load 50%	Load 100%																																
16	82.2	84.9																																
18	82.3	86.4																																
20	81.4	85.8																																
24	80.6	85.0																																
30	78.1	84.4																																
36	74.6	83.9																																
40	72.5	81.5																																
--	-	-																																
--	-	-																																




Model		SUTW62412		Temperature 25°C																																																				
Item		Efficiency (by Load Current)		Testing Circuitry Figure A																																																				
Object		_____																																																						
1.Graph			—△— Input Volt. 18V	2.Values																																																				
			- - -□- - - Input Volt. 24V																																																					
			- · -○- · - Input Volt. 36V																																																					
			<table border="1"> <thead> <tr> <th rowspan="2">Load Ration [%]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>20</td><td>69.3</td><td>65.7</td><td>55.4</td></tr> <tr><td>40</td><td>79.6</td><td>76.7</td><td>71.6</td></tr> <tr><td>60</td><td>83.2</td><td>82.5</td><td>76.6</td></tr> <tr><td>80</td><td>85.1</td><td>84.0</td><td>81.2</td></tr> <tr><td>100</td><td>85.7</td><td>85.5</td><td>83.5</td></tr> <tr><td>110</td><td>86.1</td><td>86.3</td><td>84.0</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Ration [%]	Efficiency [%]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0	-	-	-	20	69.3	65.7	55.4	40	79.6	76.7	71.6	60	83.2	82.5	76.6	80	85.1	84.0	81.2	100	85.7	85.5	83.5	110	86.1	86.3	84.0	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Ration [%]	Efficiency [%]																																																							
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																					
0	-	-	-																																																					
20	69.3	65.7	55.4																																																					
40	79.6	76.7	71.6																																																					
60	83.2	82.5	76.6																																																					
80	85.1	84.0	81.2																																																					
100	85.7	85.5	83.5																																																					
110	86.1	86.3	84.0																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					



Model	SUTW62412
Item	Line Regulation
Object	+12V0.25A


Temperature 25°C
Testing Circuitry Figure A

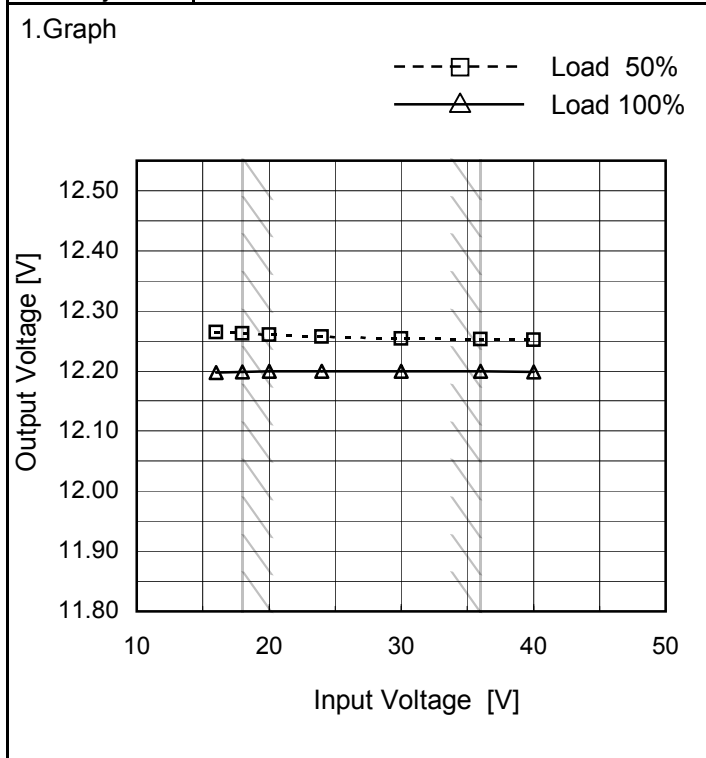

2.Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
16	12.264	12.198
18	12.262	12.199
20	12.261	12.199
24	12.258	12.199
30	12.254	12.199
36	12.253	12.199
40	12.252	12.199
--	-	-
--	-	-

Object	-12V0.25A
--------	-----------

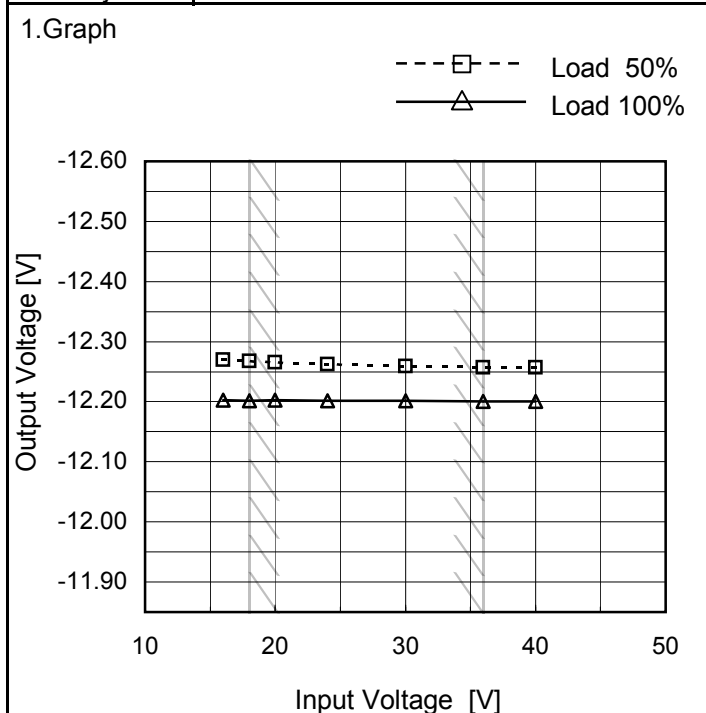

2.Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
16	-12.270	-12.202
18	-12.268	-12.202
20	-12.265	-12.202
24	-12.262	-12.202
30	-12.259	-12.201
36	-12.257	-12.201
40	-12.257	-12.201
--	-	-
--	-	-


Note: Slanted line shows the range of the rated input voltage.



Model	SUTW62412
Item	Load Regulation
Object	+12V0.25A

Temperature 25°C
Testing Circuitry Figure A

1.Graph
 —△— Input Volt. 18V
 ---□--- Input Volt. 24V
 -·-○-·- Input Volt. 36V

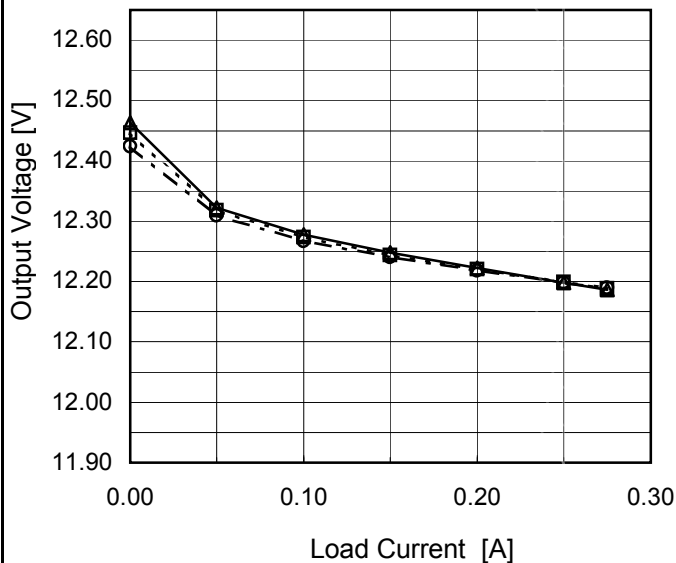


2.Values

Load Current [A]	Output Voltage [V]		
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
0.000	12.463	12.447	12.424
0.050	12.322	12.318	12.310
0.100	12.278	12.273	12.267
0.150	12.248	12.244	12.241
0.200	12.222	12.220	12.218
0.250	12.198	12.199	12.199
0.275	12.186	12.188	12.189
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

Object	-12V0.25A
--------	-----------

1.Graph
 —△— Input Volt. 18V
 ---□--- Input Volt. 24V
 -·-○-·- Input Volt. 36V

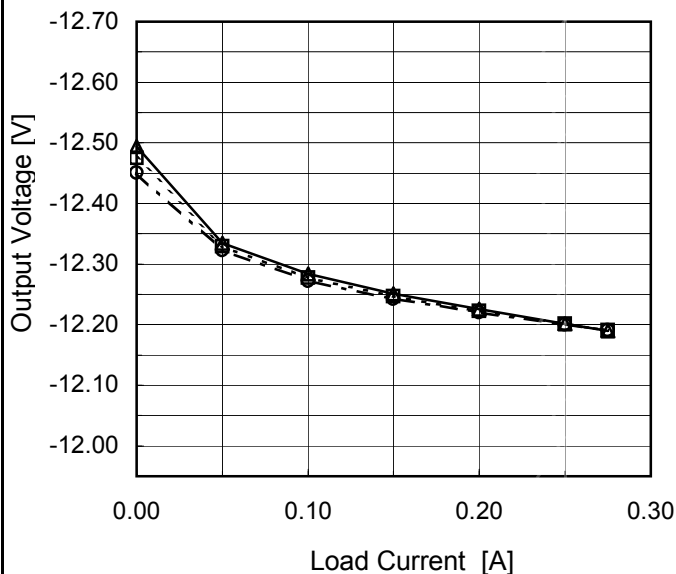

2.Values


Load Current [A]	Output Voltage [V]		
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
0.000	-12.494	-12.476	-12.451
0.050	-12.334	-12.329	-12.323
0.100	-12.284	-12.278	-12.272
0.150	-12.251	-12.247	-12.243
0.200	-12.225	-12.223	-12.220
0.250	-12.202	-12.201	-12.200
0.275	-12.190	-12.191	-12.191
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

Note: Slanted line shows the range of the rated load current.





Model	SUTW62412	Temperature	25°C
Item	Dynamic Load Response	Testing Circuitry	Figure A
Object	+12V0.25A		



Input Volt. 12 V
 Cycle 100 mS

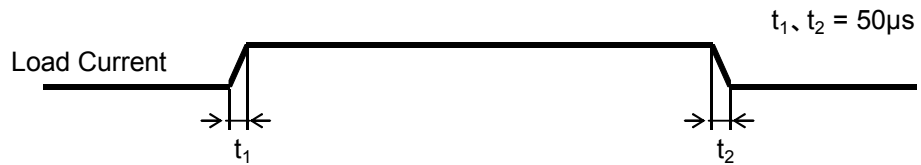



Min. Load (0A) \longleftrightarrow
 Load 100% (0.25A)

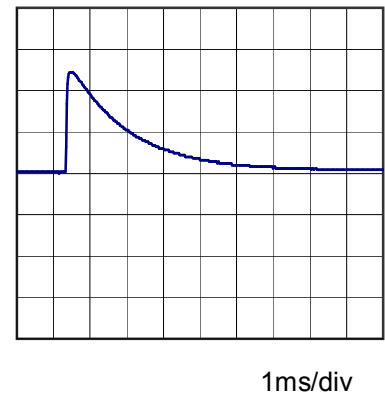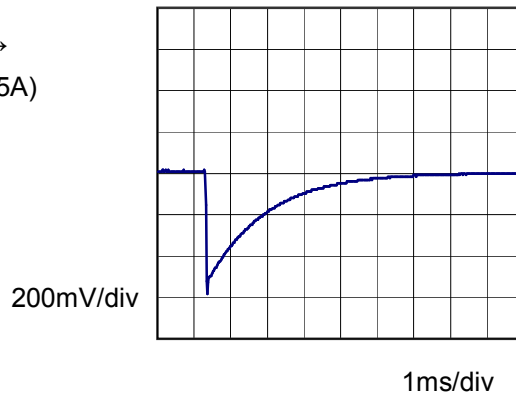

Min. Load (0A) \longleftrightarrow
 Load 50% (0.125A)

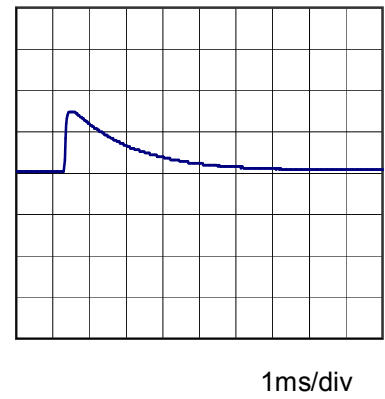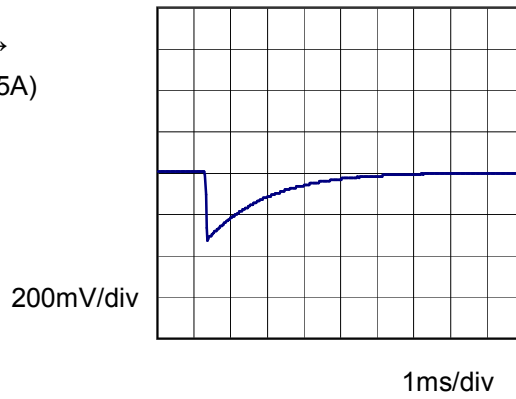


Load 50% (0.125A) \longleftrightarrow
 Load 100% (0.25A)

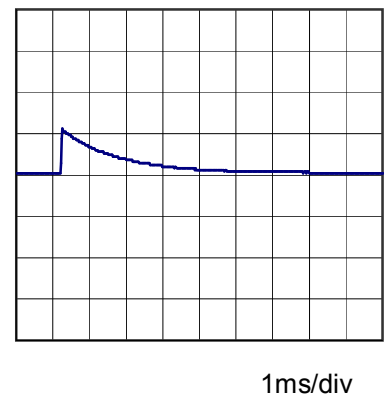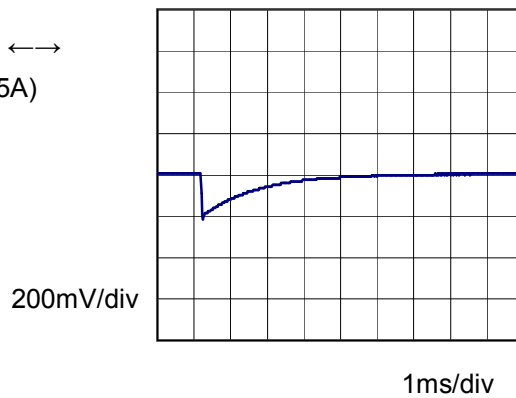




Model	SUTW62412	Temperature	25°C
Item	Dynamic Load Response	Testing Circuitry	Figure A
Object	-12V0.25A		

Input Volt. 12 V
 Cycle 100 mS

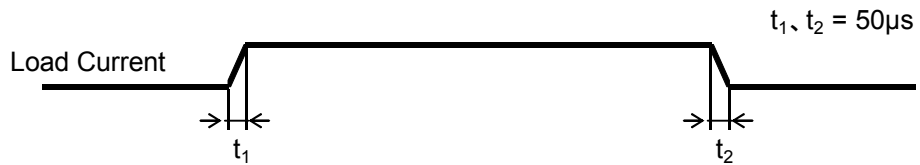


Min. Load (0A) \longleftrightarrow
 Load 100% (0.25A)

200mV/div

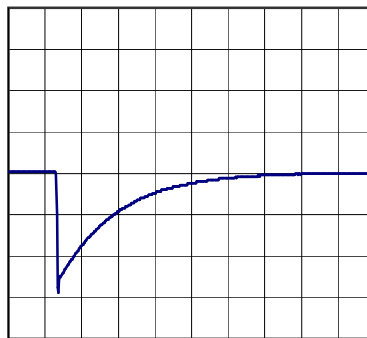


1ms/div

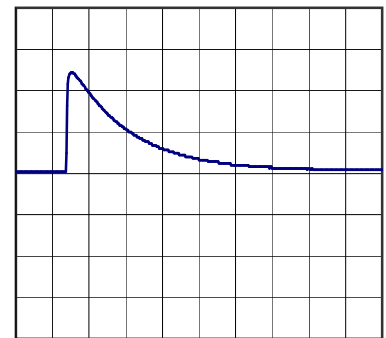


1ms/div

Min. Load (0A) \longleftrightarrow
 Load 50% (0.125A)

200mV/div

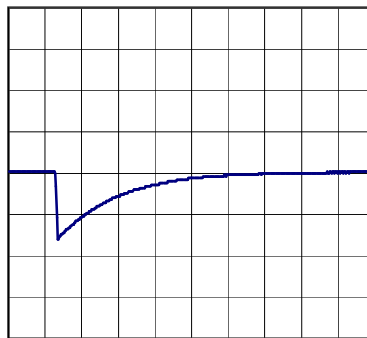


1ms/div

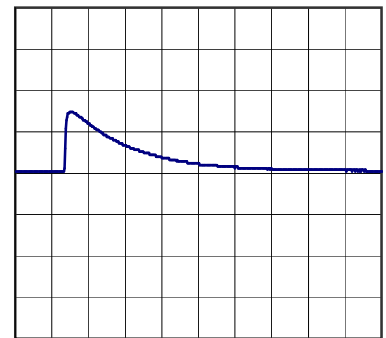


1ms/div

Load 50% (0.125A) \longleftrightarrow
 Load 100% (0.25A)

200mV/div

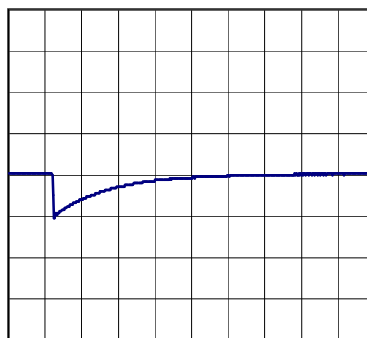

1ms/div

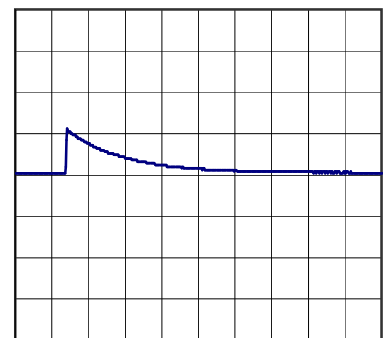

1ms/div

COSEL																																									
Model	SUTW62412	Temperature	25°C																																						
Item	Ripple Voltage (by Load Current)	Testing Circuitry	Figure B																																						
Object	+12V0.25A																																								
<p>1.Graph</p> <div style="text-align: right;"> <p>—△— Input Volt. 18V</p> <p>-·-○-·- Input Volt. 36V</p> </div> <p>Ripple Voltage [mV]</p> <p>Load Current [A]</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Input Volt. 18 [V]</th> <th>Input Volt. 36 [V]</th> </tr> </thead> <tbody> <tr><td>0.000</td><td>3</td><td>4</td></tr> <tr><td>0.050</td><td>3</td><td>4</td></tr> <tr><td>0.100</td><td>4</td><td>4</td></tr> <tr><td>0.150</td><td>7</td><td>4</td></tr> <tr><td>0.200</td><td>8</td><td>5</td></tr> <tr><td>0.250</td><td>12</td><td>5</td></tr> <tr><td>0.275</td><td>13</td><td>6</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Ripple Voltage [mV]		Input Volt. 18 [V]	Input Volt. 36 [V]	0.000	3	4	0.050	3	4	0.100	4	4	0.150	7	4	0.200	8	5	0.250	12	5	0.275	13	6	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple Voltage [mV]																																								
	Input Volt. 18 [V]	Input Volt. 36 [V]																																							
0.000	3	4																																							
0.050	3	4																																							
0.100	4	4																																							
0.150	7	4																																							
0.200	8	5																																							
0.250	12	5																																							
0.275	13	6																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
<p>Ripple Voltage is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p>																																									
<p>Ripple [mVp-p]</p> <p>Fig.Complex Ripple Wave Form</p>																																									

<p>Model SUTW62412</p>		<p>Temperature 25°C Testing Circuitry Figure B</p>																																						
Item	Ripple Voltage (by Load Current)																																							
Object	-12V0.25A																																							
<p>1.Graph</p> <div style="text-align: right;"> <p>—△— Input Volt. 18V</p> <p>- - -○- - - Input Volt. 36V</p> </div>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Input Volt. 18 [V]</th> <th>Input Volt. 36 [V]</th> </tr> </thead> <tbody> <tr><td>0.000</td><td>5</td><td>3</td></tr> <tr><td>0.050</td><td>5</td><td>3</td></tr> <tr><td>0.100</td><td>5</td><td>3</td></tr> <tr><td>0.150</td><td>8</td><td>5</td></tr> <tr><td>0.200</td><td>8</td><td>5</td></tr> <tr><td>0.250</td><td>11</td><td>5</td></tr> <tr><td>0.275</td><td>14</td><td>6</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Ripple Voltage [mV]		Input Volt. 18 [V]	Input Volt. 36 [V]	0.000	5	3	0.050	5	3	0.100	5	3	0.150	8	5	0.200	8	5	0.250	11	5	0.275	14	6	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple Voltage [mV]																																							
	Input Volt. 18 [V]	Input Volt. 36 [V]																																						
0.000	5	3																																						
0.050	5	3																																						
0.100	5	3																																						
0.150	8	5																																						
0.200	8	5																																						
0.250	11	5																																						
0.275	14	6																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Measured by 100 MHz Oscilloscope. Ripple Voltage is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p>																																								
<p>Ripple [mVp-p]</p> <p>Fig.Complex Ripple Wave Form</p>																																								

<p>Model SUTW62412</p>		<p>Temperature 25°C Testing Circuitry Figure B</p>																																						
Item	Ripple-Noise																																							
Object	+12V0.25A																																							
<p>1.Graph</p> <p> —△— Input Volt. 18V - - ○ - - Input Volt. 36V </p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple-Noise [mV]</th> </tr> <tr> <th>Input Volt. 18 [V]</th> <th>Input Volt. 36 [V]</th> </tr> </thead> <tbody> <tr><td>0.000</td><td>4</td><td>5</td></tr> <tr><td>0.050</td><td>4</td><td>5</td></tr> <tr><td>0.100</td><td>5</td><td>5</td></tr> <tr><td>0.150</td><td>7</td><td>5</td></tr> <tr><td>0.200</td><td>9</td><td>7</td></tr> <tr><td>0.250</td><td>13</td><td>8</td></tr> <tr><td>0.275</td><td>15</td><td>8</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Ripple-Noise [mV]		Input Volt. 18 [V]	Input Volt. 36 [V]	0.000	4	5	0.050	4	5	0.100	5	5	0.150	7	5	0.200	9	7	0.250	13	8	0.275	15	8	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple-Noise [mV]																																							
	Input Volt. 18 [V]	Input Volt. 36 [V]																																						
0.000	4	5																																						
0.050	4	5																																						
0.100	5	5																																						
0.150	7	5																																						
0.200	9	7																																						
0.250	13	8																																						
0.275	15	8																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Measured by 100 MHz Oscilloscope. Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p> <p>Ripple Noise[mVp-p]</p>																																								
<p>Fig.Complex Ripple Noise Wave Form</p>																																								

COSEL																																									
Model	SUTW62412	Temperature	25°C																																						
Item	Ripple-Noise	Testing Circuitry	Figure B																																						
Object	-12V0.25A																																								
<p>1.Graph</p> <p style="text-align: right;"> —△— Input Volt. 18V - - ○ - - Input Volt. 36V </p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple-Noise [mV]</th> </tr> <tr> <th>Input Volt. 18 [V]</th> <th>Input Volt. 36 [V]</th> </tr> </thead> <tbody> <tr><td>0.000</td><td>5</td><td>8</td></tr> <tr><td>0.050</td><td>5</td><td>8</td></tr> <tr><td>0.100</td><td>5</td><td>8</td></tr> <tr><td>0.150</td><td>8</td><td>8</td></tr> <tr><td>0.200</td><td>8</td><td>10</td></tr> <tr><td>0.250</td><td>12</td><td>10</td></tr> <tr><td>0.275</td><td>14</td><td>10</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Ripple-Noise [mV]		Input Volt. 18 [V]	Input Volt. 36 [V]	0.000	5	8	0.050	5	8	0.100	5	8	0.150	8	8	0.200	8	10	0.250	12	10	0.275	14	10	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple-Noise [mV]																																								
	Input Volt. 18 [V]	Input Volt. 36 [V]																																							
0.000	5	8																																							
0.050	5	8																																							
0.100	5	8																																							
0.150	8	8																																							
0.200	8	10																																							
0.250	12	10																																							
0.275	14	10																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
<p>Measured by 100 MHz Oscilloscope. Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p>																																									
<p style="text-align: center;">Ripple Noise[mVp-p]</p>																																									
<p>Fig.Complex Ripple Noise Wave Form</p>																																									



Model		SUTW62412		Testing Circuitry Figure B																																							
Item		Ripple Voltage (by Ambient Temp.)																																									
Object		+12V0.25A																																									
<p>1.Graph</p> <p style="text-align: center;">Input Volt. 24V</p>				<p>2.Values</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>-60</td><td>5</td><td>10</td></tr> <tr><td>-40</td><td>5</td><td>9</td></tr> <tr><td>-20</td><td>5</td><td>9</td></tr> <tr><td>0</td><td>4</td><td>8</td></tr> <tr><td>25</td><td>4</td><td>7</td></tr> <tr><td>55</td><td>3</td><td>6</td></tr> <tr><td>60</td><td>3</td><td>6</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>		Ambient Temperature [°C]	Ripple Voltage [mV]		Load 50%	Load 100%	-60	5	10	-40	5	9	-20	5	9	0	4	8	25	4	7	55	3	6	60	3	6	--	-	-	--	-	-	--	-	-	--	-	-
Ambient Temperature [°C]	Ripple Voltage [mV]																																										
	Load 50%	Load 100%																																									
-60	5	10																																									
-40	5	9																																									
-20	5	9																																									
0	4	8																																									
25	4	7																																									
55	3	6																																									
60	3	6																																									
--	-	-																																									
--	-	-																																									
--	-	-																																									
--	-	-																																									
Object		-12V0.25A		Testing Circuitry Figure B																																							
Item		Ripple Voltage (by Ambient Temp.)																																									
Object		-12V0.25A																																									
<p>1.Graph</p> <p style="text-align: center;">Input Volt. 24V</p> <p>Measured by 100 MHz Oscilloscope.</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p>				<p>2.Values</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>-60</td><td>3</td><td>5</td></tr> <tr><td>-40</td><td>3</td><td>5</td></tr> <tr><td>-20</td><td>3</td><td>5</td></tr> <tr><td>0</td><td>3</td><td>5</td></tr> <tr><td>25</td><td>2</td><td>4</td></tr> <tr><td>55</td><td>2</td><td>3</td></tr> <tr><td>60</td><td>2</td><td>3</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>		Ambient Temperature [°C]	Ripple Voltage [mV]		Load 50%	Load 100%	-60	3	5	-40	3	5	-20	3	5	0	3	5	25	2	4	55	2	3	60	2	3	--	-	-	--	-	-	--	-	-	--	-	-
Ambient Temperature [°C]	Ripple Voltage [mV]																																										
	Load 50%	Load 100%																																									
-60	3	5																																									
-40	3	5																																									
-20	3	5																																									
0	3	5																																									
25	2	4																																									
55	2	3																																									
60	2	3																																									
--	-	-																																									
--	-	-																																									
--	-	-																																									
--	-	-																																									



COSEL																																																						
Model	SUTW62412																																																					
Item	Ambient Temperature Drift	Testing Circuitry Figure A																																																				
Object	+12V0.25A																																																					
1.Graph	<p>—△— Input Volt. 18V ---□--- Input Volt. 24V ···○··· Input Volt. 36V</p> <p style="text-align: center;">Ambient Temperature [°C] Load 100%</p>	2.Values																																																				
		<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>-60</td><td>12.121</td><td>12.122</td><td>12.121</td></tr> <tr><td>-40</td><td>12.146</td><td>12.146</td><td>12.146</td></tr> <tr><td>-20</td><td>12.167</td><td>12.167</td><td>12.167</td></tr> <tr><td>0</td><td>12.183</td><td>12.184</td><td>12.183</td></tr> <tr><td>25</td><td>12.197</td><td>12.198</td><td>12.197</td></tr> <tr><td>55</td><td>12.205</td><td>12.206</td><td>12.205</td></tr> <tr><td>60</td><td>12.206</td><td>12.206</td><td>12.206</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	-60	12.121	12.122	12.121	-40	12.146	12.146	12.146	-20	12.167	12.167	12.167	0	12.183	12.184	12.183	25	12.197	12.198	12.197	55	12.205	12.206	12.205	60	12.206	12.206	12.206	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Ambient Temperature [°C]	Output Voltage [V]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
-60	12.121	12.122	12.121																																																			
-40	12.146	12.146	12.146																																																			
-20	12.167	12.167	12.167																																																			
0	12.183	12.184	12.183																																																			
25	12.197	12.198	12.197																																																			
55	12.205	12.206	12.205																																																			
60	12.206	12.206	12.206																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Object	-12V0.25A																																																					
1.Graph	<p>—△— Input Volt. 18V ---□--- Input Volt. 24V ···○··· Input Volt. 36V</p> <p style="text-align: center;">Ambient Temperature [°C] Load 100%</p>	2.Values																																																				
		<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>-60</td><td>-12.122</td><td>-12.122</td><td>-12.122</td></tr> <tr><td>-40</td><td>-12.147</td><td>-12.147</td><td>-12.147</td></tr> <tr><td>-20</td><td>-12.168</td><td>-12.168</td><td>-12.168</td></tr> <tr><td>0</td><td>-12.185</td><td>-12.185</td><td>-12.185</td></tr> <tr><td>25</td><td>-12.200</td><td>-12.199</td><td>-12.199</td></tr> <tr><td>55</td><td>-12.208</td><td>-12.207</td><td>-12.207</td></tr> <tr><td>60</td><td>-12.209</td><td>-12.208</td><td>-12.207</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	-60	-12.122	-12.122	-12.122	-40	-12.147	-12.147	-12.147	-20	-12.168	-12.168	-12.168	0	-12.185	-12.185	-12.185	25	-12.200	-12.199	-12.199	55	-12.208	-12.207	-12.207	60	-12.209	-12.208	-12.207	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Ambient Temperature [°C]	Output Voltage [V]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
-60	-12.122	-12.122	-12.122																																																			
-40	-12.147	-12.147	-12.147																																																			
-20	-12.168	-12.168	-12.168																																																			
0	-12.185	-12.185	-12.185																																																			
25	-12.200	-12.199	-12.199																																																			
55	-12.208	-12.207	-12.207																																																			
60	-12.209	-12.208	-12.207																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																																						



COSEL		
Model	SUTW62412	
Item	Output Voltage Accuracy	Testing Circuitry Figure A

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 55°C

Input Voltage : 18 - 36V

Load Current (AVR 1) : 0 - 0.25A (AVR 2) : 0 - 0.25A

* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

2. Values

Object		+12V0.25A				
Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	55	18	0	12.480	±295	±2.5
Minimum Voltage	-40	18	0.25	11.890		

Object		-12V0.25A				
Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	55	18	0	-12.509	±293	±2.4
Minimum Voltage	-40	18	0.25	-11.924		




COSEL																								
Model	SUTW62412																							
Item	Time Lapse Drift	Temperature 25°C Testing Circuitry Figure A																						
Object	+12V0.25A																							
<p>1.Graph</p> <p style="text-align: center;">Time [H]</p> <p style="text-align: center;">Input Volt. 24V Load 100%</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>12.192</td></tr> <tr><td>0.5</td><td>12.198</td></tr> <tr><td>1.0</td><td>12.198</td></tr> <tr><td>2.0</td><td>12.198</td></tr> <tr><td>3.0</td><td>12.198</td></tr> <tr><td>4.0</td><td>12.198</td></tr> <tr><td>5.0</td><td>12.198</td></tr> <tr><td>6.0</td><td>12.198</td></tr> <tr><td>7.0</td><td>12.198</td></tr> <tr><td>8.0</td><td>12.198</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	12.192	0.5	12.198	1.0	12.198	2.0	12.198	3.0	12.198	4.0	12.198	5.0	12.198	6.0	12.198	7.0	12.198	8.0	12.198
Time since start [H]	Output Voltage [V]																							
0.0	12.192																							
0.5	12.198																							
1.0	12.198																							
2.0	12.198																							
3.0	12.198																							
4.0	12.198																							
5.0	12.198																							
6.0	12.198																							
7.0	12.198																							
8.0	12.198																							
Object	-12V0.25A																							
<p>1.Graph</p> <p style="text-align: center;">Time [H]</p> <p style="text-align: center;">Input Volt. 24V Load 100%</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>-12.198</td></tr> <tr><td>0.5</td><td>-12.204</td></tr> <tr><td>1.0</td><td>-12.204</td></tr> <tr><td>2.0</td><td>-12.204</td></tr> <tr><td>3.0</td><td>-12.204</td></tr> <tr><td>4.0</td><td>-12.204</td></tr> <tr><td>5.0</td><td>-12.204</td></tr> <tr><td>6.0</td><td>-12.204</td></tr> <tr><td>7.0</td><td>-12.205</td></tr> <tr><td>8.0</td><td>-12.205</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	-12.198	0.5	-12.204	1.0	-12.204	2.0	-12.204	3.0	-12.204	4.0	-12.204	5.0	-12.204	6.0	-12.204	7.0	-12.205	8.0	-12.205
Time since start [H]	Output Voltage [V]																							
0.0	-12.198																							
0.5	-12.204																							
1.0	-12.204																							
2.0	-12.204																							
3.0	-12.204																							
4.0	-12.204																							
5.0	-12.204																							
6.0	-12.204																							
7.0	-12.205																							
8.0	-12.205																							



Model		SUTW62412	Temperature 25°C Testing Circuitry Figure A
Item		Rise and Fall Time	
Object		+12V0.25A	

1. Graph


Input Volt. 24 V

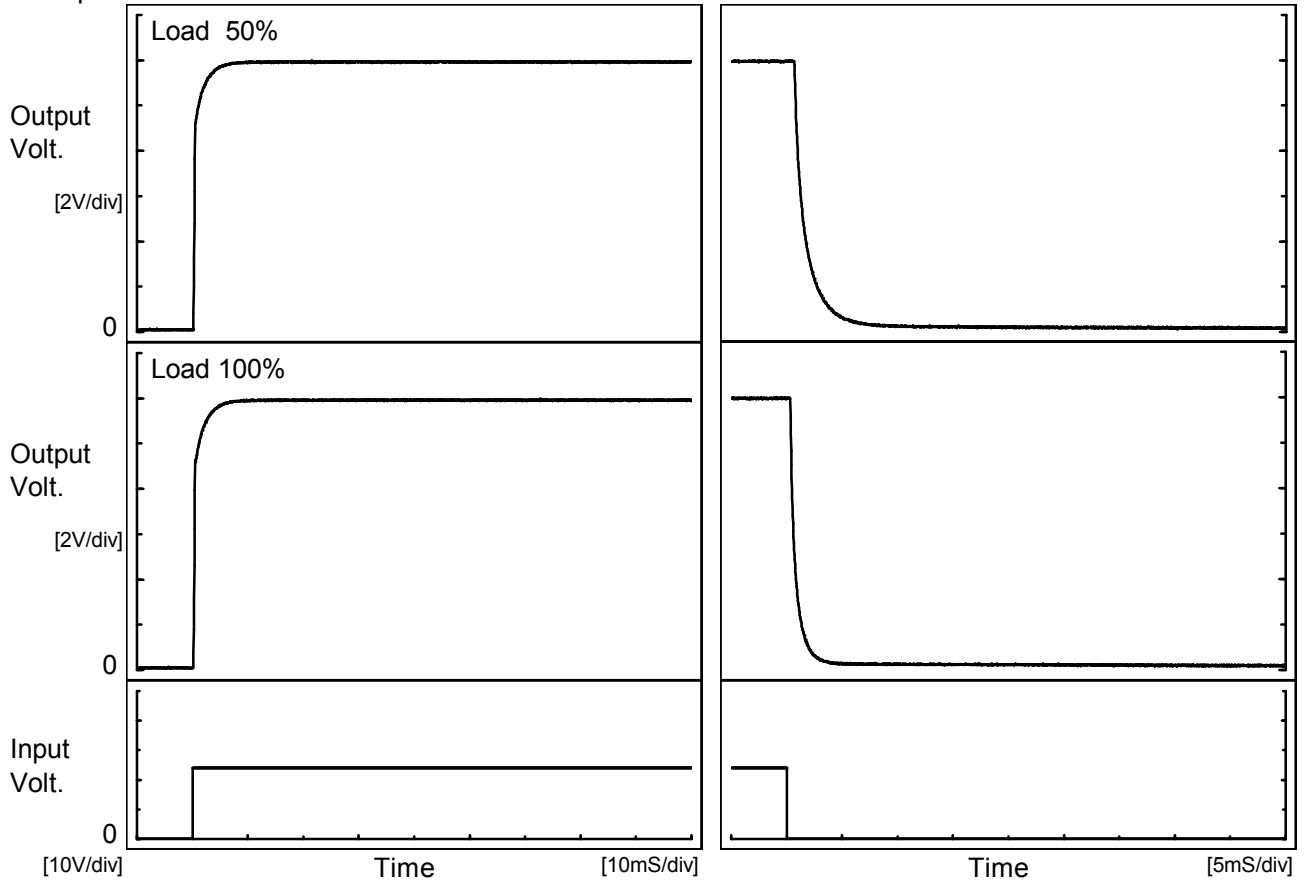

2. Values

[mS]


Load \ Time	Td	Tr	Ts	Th	Tf
50 %	0.3	1.9	2.2	0.7	2.8
100 %	0.3	2.1	2.4	0.4	1.4

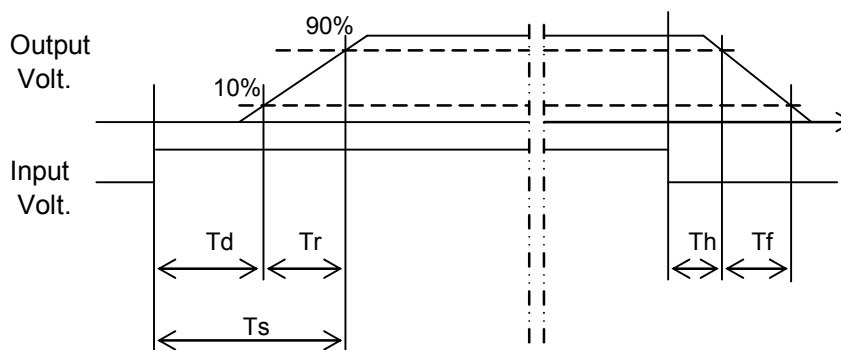




Model		SUTW62412	Temperature	25°C
Item		Rise and Fall Time	Testing Circuitry	Figure A
Object		-12V0.25A	Input Volt. 24 V	

1. Graph

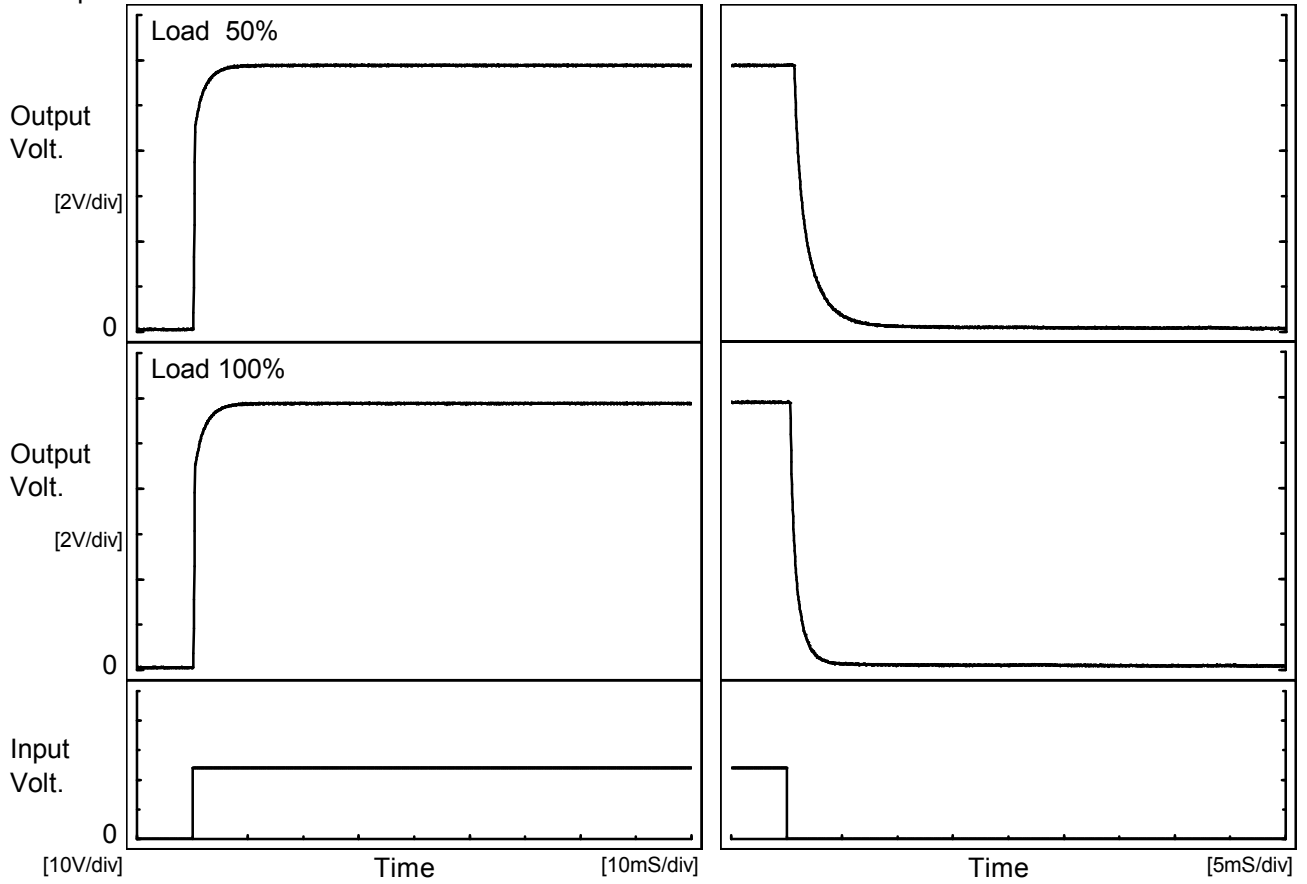

2. Values

		[mS]				
Load	Time	Td	Tr	Ts	Th	Tf
50 %		0.3	2.2	2.5	0.7	3.0
100 %		0.3	2.3	2.6	0.4	1.5

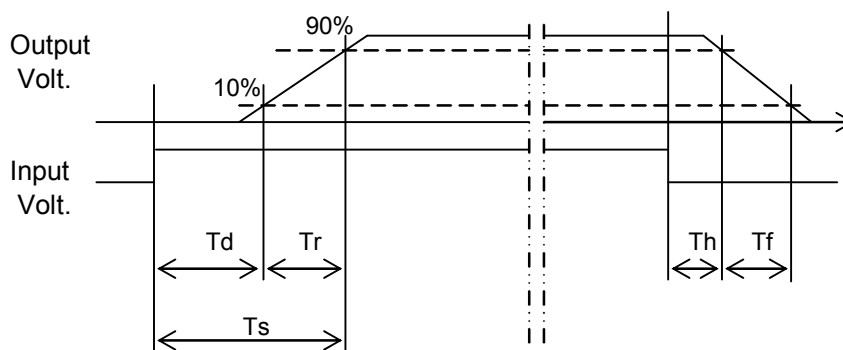




Model	SUTW62412
Item	Minimum Input Voltage for Regulated Output Voltage
Object	+12V0.25A

Testing Circuitry Figure A

1.Graph

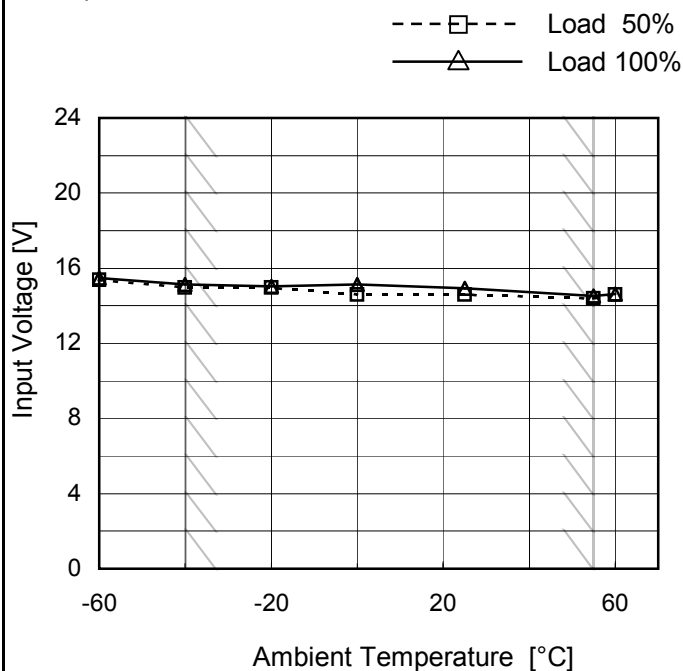


2.Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-60	15.4	15.5
-40	15.0	15.2
-20	15.0	15.1
0	14.6	15.2
25	14.6	15.0
55	14.4	14.6
60	14.6	14.7
--	-	-
--	-	-
--	-	-
--	-	-

Object	-12V0.25A
--------	-----------

1.Graph

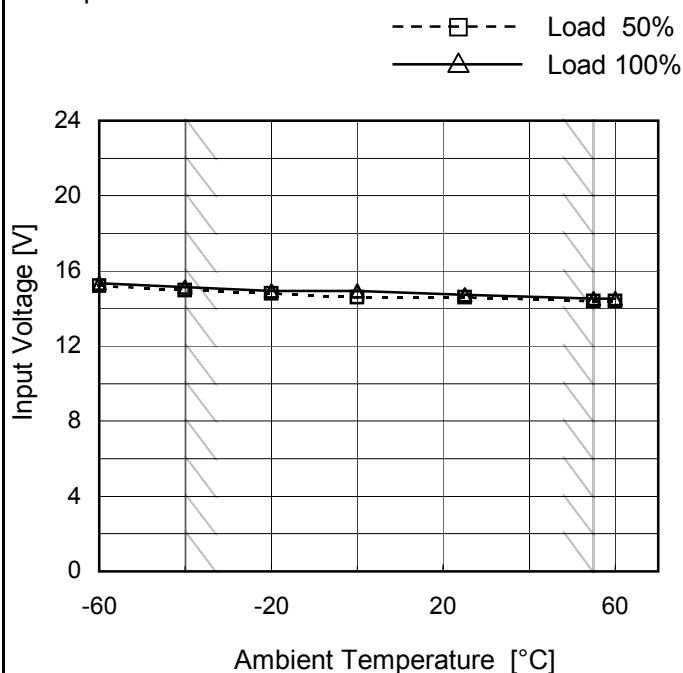

2.Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-60	15.2	15.4
-40	15.0	15.2
-20	14.8	15.0
0	14.6	15.0
25	14.6	14.8
55	14.4	14.6
60	14.4	14.6
--	-	-
--	-	-
--	-	-
--	-	-

Note: Slanted line shows the range of the rated ambient temperature.



COSEL																																																										
Model	SUTW62412	Temperature	25°C																																																							
Item	Overcurrent Protection	Testing Circuitry	Figure A																																																							
Object	+12V0.25A																																																									
1.Graph	<p> — Input Volt. 18V — Input Volt. 24V — Input Volt. 36V </p> <p style="text-align: center;">Load Current [A]</p>	2.Values																																																								
		<table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>12.0</td><td>0.26</td><td>0.26</td><td>0.26</td></tr> <tr><td>11.4</td><td>0.49</td><td>0.52</td><td>0.50</td></tr> <tr><td>10.8</td><td>0.51</td><td>0.54</td><td>0.51</td></tr> <tr><td>9.6</td><td>0.59</td><td>0.60</td><td>0.55</td></tr> <tr><td>8.4</td><td>0.66</td><td>0.67</td><td>0.61</td></tr> <tr><td>7.2</td><td>0.73</td><td>0.72</td><td>0.65</td></tr> <tr><td>6.0</td><td>0.78</td><td>0.77</td><td>0.69</td></tr> <tr><td>4.8</td><td>0.82</td><td>0.80</td><td>0.72</td></tr> <tr><td>3.6</td><td>0.85</td><td>0.81</td><td>0.74</td></tr> <tr><td>2.4</td><td>0.84</td><td>0.79</td><td>0.73</td></tr> <tr><td>1.2</td><td>0.79</td><td>0.73</td><td>0.69</td></tr> <tr><td>0.0</td><td>0.97</td><td>0.91</td><td>0.88</td></tr> </tbody> </table>	Output Voltage [V]	Load Current [A]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	12.0	0.26	0.26	0.26	11.4	0.49	0.52	0.50	10.8	0.51	0.54	0.51	9.6	0.59	0.60	0.55	8.4	0.66	0.67	0.61	7.2	0.73	0.72	0.65	6.0	0.78	0.77	0.69	4.8	0.82	0.80	0.72	3.6	0.85	0.81	0.74	2.4	0.84	0.79	0.73	1.2	0.79	0.73	0.69	0.0	0.97	0.91	0.88	
Output Voltage [V]	Load Current [A]																																																									
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																							
12.0	0.26	0.26	0.26																																																							
11.4	0.49	0.52	0.50																																																							
10.8	0.51	0.54	0.51																																																							
9.6	0.59	0.60	0.55																																																							
8.4	0.66	0.67	0.61																																																							
7.2	0.73	0.72	0.65																																																							
6.0	0.78	0.77	0.69																																																							
4.8	0.82	0.80	0.72																																																							
3.6	0.85	0.81	0.74																																																							
2.4	0.84	0.79	0.73																																																							
1.2	0.79	0.73	0.69																																																							
0.0	0.97	0.91	0.88																																																							
Object	-12V0.25A																																																									
1.Graph	<p> — Input Volt. 18V — Input Volt. 24V — Input Volt. 36V </p> <p style="text-align: center;">Load Current [A]</p>	2.Values																																																								
		<table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>-12.0</td><td>0.26</td><td>0.26</td><td>0.26</td></tr> <tr><td>-11.4</td><td>0.49</td><td>0.52</td><td>0.50</td></tr> <tr><td>-10.8</td><td>0.51</td><td>0.54</td><td>0.51</td></tr> <tr><td>-9.6</td><td>0.59</td><td>0.60</td><td>0.55</td></tr> <tr><td>-8.4</td><td>0.66</td><td>0.67</td><td>0.61</td></tr> <tr><td>-7.2</td><td>0.73</td><td>0.73</td><td>0.66</td></tr> <tr><td>-6.0</td><td>0.78</td><td>0.77</td><td>0.70</td></tr> <tr><td>-4.8</td><td>0.82</td><td>0.80</td><td>0.73</td></tr> <tr><td>-3.6</td><td>0.85</td><td>0.81</td><td>0.74</td></tr> <tr><td>-2.4</td><td>0.85</td><td>0.79</td><td>0.73</td></tr> <tr><td>-1.2</td><td>0.79</td><td>0.74</td><td>0.69</td></tr> <tr><td>0.0</td><td>0.91</td><td>0.85</td><td>0.83</td></tr> </tbody> </table>	Output Voltage [V]	Load Current [A]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	-12.0	0.26	0.26	0.26	-11.4	0.49	0.52	0.50	-10.8	0.51	0.54	0.51	-9.6	0.59	0.60	0.55	-8.4	0.66	0.67	0.61	-7.2	0.73	0.73	0.66	-6.0	0.78	0.77	0.70	-4.8	0.82	0.80	0.73	-3.6	0.85	0.81	0.74	-2.4	0.85	0.79	0.73	-1.2	0.79	0.74	0.69	0.0	0.91	0.85	0.83	
Output Voltage [V]	Load Current [A]																																																									
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																							
-12.0	0.26	0.26	0.26																																																							
-11.4	0.49	0.52	0.50																																																							
-10.8	0.51	0.54	0.51																																																							
-9.6	0.59	0.60	0.55																																																							
-8.4	0.66	0.67	0.61																																																							
-7.2	0.73	0.73	0.66																																																							
-6.0	0.78	0.77	0.70																																																							
-4.8	0.82	0.80	0.73																																																							
-3.6	0.85	0.81	0.74																																																							
-2.4	0.85	0.79	0.73																																																							
-1.2	0.79	0.74	0.69																																																							
0.0	0.91	0.85	0.83																																																							
	Note: Slanted line shows the range of the rated load current.																																																									

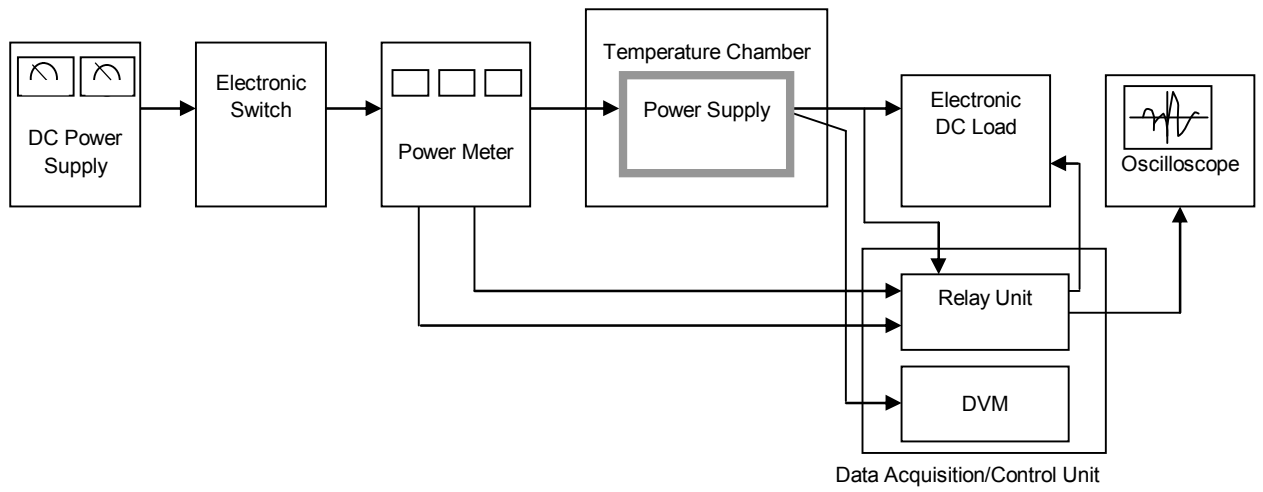


Figure A

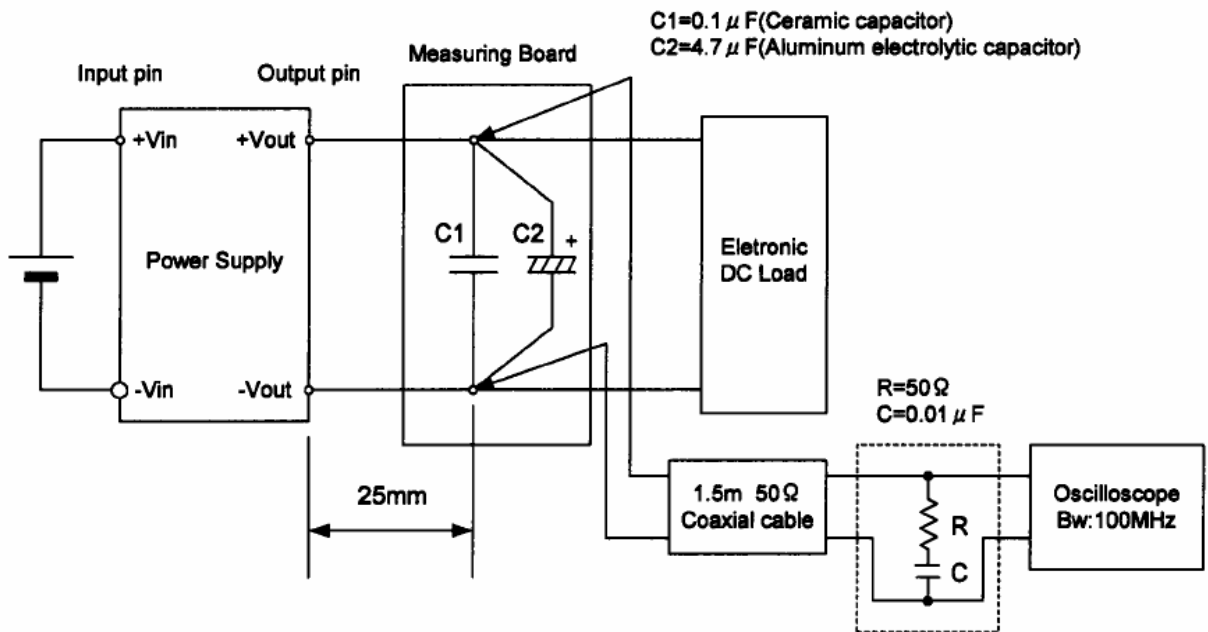


Figure B (Ripple and Ripple noise Characteristic)