

# TEST DATA OF TUHS25F12

Regulated DC Power Supply  
February 28, 2014

Approved by : Nobuyuki Shiraishi  
Nobuyuki Shiraishi Design Manager

Prepared by : Sakae Minamide  
Sakae Minamide Design Engineer

**COSEL CO.,LTD.**

## CONTENTS

1.Input Current (by Load Current) . . . . .	1
2.Input Power (by Load Current) . . . . .	2
3.Efficiency (by Input Voltage) . . . . .	3
4.Efficiency (by Load Current) . . . . .	4
5.Power Factor (by Input Voltage) . . . . .	5
6.Power Factor (by Load Current) . . . . .	6
7.Inrush Current . . . . .	7
8.Leakage Current . . . . .	8
9.Line Regulation . . . . .	9
10.Load Regulation . . . . .	10
11.Dynamic Load Response . . . . .	11
12.Ripple Voltage (by Load Current) . . . . .	12
13.Ripple-Noise . . . . .	13
14.Ripple Voltage (by Ambient Temperature) . . . . .	14
15.Ambient Temperature Drift . . . . .	15
16.Output Voltage Accuracy . . . . .	16
17.Time Lapse Drift . . . . .	17
18.Rise and Fall Time . . . . .	18
19.Hold-Up Time . . . . .	19
20.Instantaneous Interruption Compensation . . . . .	20
21.Minimum Input Voltage for Regulated Output Voltage . . . . .	21
22.Overcurrent Protection . . . . .	22
23.Overvoltage Protection . . . . .	23
24.Figure of Testing Circuitry . . . . .	24

(Final Page 25)



<b>COSEL</b>																																																						
Model	TUHS25F12	Temperature	25°C																																																			
Item	Input Current (by Load Current)	Testing Circuitry	Figure A																																																			
Object	_____																																																					
<p>1.Graph</p> <p> <span style="display: inline-block; width: 20px; border-bottom: 1px solid black; margin-right: 5px;"></span> <span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; margin-right: 5px;"></span> <span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span>           Input Volt. 100V            Input Volt. 200V            Input Volt. 230V         </p>		<p>2.Values</p>																																																				
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.004</td><td>0.003</td><td>0.003</td></tr> <tr><td>0.40</td><td>0.122</td><td>0.080</td><td>0.073</td></tr> <tr><td>0.80</td><td>0.211</td><td>0.133</td><td>0.120</td></tr> <tr><td>1.20</td><td>0.298</td><td>0.185</td><td>0.168</td></tr> <tr><td>1.60</td><td>0.388</td><td>0.235</td><td>0.212</td></tr> <tr><td>2.00</td><td>0.479</td><td>0.284</td><td>0.257</td></tr> <tr><td>2.10</td><td>0.493</td><td>0.295</td><td>0.266</td></tr> <tr><td>2.31</td><td>0.535</td><td>0.317</td><td>0.288</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Input Current [A]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	0.004	0.003	0.003	0.40	0.122	0.080	0.073	0.80	0.211	0.133	0.120	1.20	0.298	0.185	0.168	1.60	0.388	0.235	0.212	2.00	0.479	0.284	0.257	2.10	0.493	0.295	0.266	2.31	0.535	0.317	0.288	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Current [A]																																																					
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																			
0.00	0.004	0.003	0.003																																																			
0.40	0.122	0.080	0.073																																																			
0.80	0.211	0.133	0.120																																																			
1.20	0.298	0.185	0.168																																																			
1.60	0.388	0.235	0.212																																																			
2.00	0.479	0.284	0.257																																																			
2.10	0.493	0.295	0.266																																																			
2.31	0.535	0.317	0.288																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
<p>Note: Slanted line shows the range of the rated load current.</p>																																																						



<b>COSEL</b>																																																						
Model	TUHS25F12	Temperature	25°C																																																			
Item	Input Power (by Load Current)	Testing Circuitry	Figure A																																																			
Object	_____																																																					
<p>1.Graph</p> <p> <span style="display: inline-block; width: 100px; border-bottom: 1px solid black; margin-right: 5px;"></span>△<span style="margin-left: 5px;">Input Volt. 100V</span>  <span style="display: inline-block; width: 100px; border-bottom: 1px dashed black; margin-right: 5px;"></span>□<span style="margin-left: 5px;">Input Volt. 200V</span>  <span style="display: inline-block; width: 100px; border-bottom: 1px dash-dot black; margin-right: 5px;"></span>○<span style="margin-left: 5px;">Input Volt. 230V</span> </p> <p style="text-align: center;">Input Power [W]</p> <p style="text-align: center;">Load Current [A]</p>		<p>2.Values</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.13</td><td>0.17</td><td>0.19</td></tr> <tr><td>0.40</td><td>6.12</td><td>6.34</td><td>6.44</td></tr> <tr><td>0.80</td><td>11.36</td><td>11.61</td><td>11.70</td></tr> <tr><td>1.20</td><td>16.67</td><td>16.98</td><td>17.10</td></tr> <tr><td>1.60</td><td>22.05</td><td>22.23</td><td>22.34</td></tr> <tr><td>2.00</td><td>27.49</td><td>27.51</td><td>27.64</td></tr> <tr><td>2.10</td><td>28.86</td><td>28.85</td><td>28.96</td></tr> <tr><td>2.31</td><td>31.75</td><td>31.64</td><td>31.76</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Input Power [W]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	0.13	0.17	0.19	0.40	6.12	6.34	6.44	0.80	11.36	11.61	11.70	1.20	16.67	16.98	17.10	1.60	22.05	22.23	22.34	2.00	27.49	27.51	27.64	2.10	28.86	28.85	28.96	2.31	31.75	31.64	31.76	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Power [W]																																																					
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																			
0.00	0.13	0.17	0.19																																																			
0.40	6.12	6.34	6.44																																																			
0.80	11.36	11.61	11.70																																																			
1.20	16.67	16.98	17.10																																																			
1.60	22.05	22.23	22.34																																																			
2.00	27.49	27.51	27.64																																																			
2.10	28.86	28.85	28.96																																																			
2.31	31.75	31.64	31.76																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
<p>Note: Slanted line shows the range of the rated load current.</p>																																																						



Model		TUHS25F12																																	
Item		Efficiency (by Input Voltage)																																	
Object		Temperature 25°C Testing Circuitry Figure A																																	
1.Graph		2.Values																																	
<p>---□--- Load 50% —△— Load 100%</p>		<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>75</td><td>86.5</td><td>86.8</td></tr> <tr><td>85</td><td>86.6</td><td>87.5</td></tr> <tr><td>100</td><td>86.5</td><td>88.0</td></tr> <tr><td>120</td><td>86.3</td><td>88.3</td></tr> <tr><td>200</td><td>84.6</td><td>87.9</td></tr> <tr><td>230</td><td>83.7</td><td>87.6</td></tr> <tr><td>264</td><td>82.8</td><td>87.1</td></tr> <tr><td>280</td><td>82.3</td><td>86.9</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>		Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	75	86.5	86.8	85	86.6	87.5	100	86.5	88.0	120	86.3	88.3	200	84.6	87.9	230	83.7	87.6	264	82.8	87.1	280	82.3	86.9	--	-	-
Input Voltage [V]	Efficiency [%]																																		
	Load 50%	Load 100%																																	
75	86.5	86.8																																	
85	86.6	87.5																																	
100	86.5	88.0																																	
120	86.3	88.3																																	
200	84.6	87.9																																	
230	83.7	87.6																																	
264	82.8	87.1																																	
280	82.3	86.9																																	
--	-	-																																	
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																			



<p>Model TUHS25F12</p>		<p>Temperature 25°C Testing Circuitry Figure A</p>																																																			
Item	Efficiency (by Load Current)																																																				
Object	_____																																																				
<p>1.Graph</p> <p>                     —△— Input Volt. 100V                      - - - □ - - Input Volt. 200V                      - · - ○ - · - Input Volt. 230V                 </p> <p>Efficiency [%]</p> <p>Load Current [A]</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.40</td><td>79.1</td><td>76.2</td><td>75.0</td></tr> <tr><td>0.80</td><td>85.2</td><td>83.4</td><td>82.5</td></tr> <tr><td>1.20</td><td>87.1</td><td>85.5</td><td>84.8</td></tr> <tr><td>1.60</td><td>87.8</td><td>87.0</td><td>86.6</td></tr> <tr><td>2.00</td><td>88.0</td><td>87.8</td><td>87.4</td></tr> <tr><td>2.10</td><td>88.0</td><td>87.9</td><td>87.6</td></tr> <tr><td>2.31</td><td>87.9</td><td>88.2</td><td>87.9</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Efficiency [%]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	-	-	-	0.40	79.1	76.2	75.0	0.80	85.2	83.4	82.5	1.20	87.1	85.5	84.8	1.60	87.8	87.0	86.6	2.00	88.0	87.8	87.4	2.10	88.0	87.9	87.6	2.31	87.9	88.2	87.9	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Efficiency [%]																																																				
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																		
0.00	-	-	-																																																		
0.40	79.1	76.2	75.0																																																		
0.80	85.2	83.4	82.5																																																		
1.20	87.1	85.5	84.8																																																		
1.60	87.8	87.0	86.6																																																		
2.00	88.0	87.8	87.4																																																		
2.10	88.0	87.9	87.6																																																		
2.31	87.9	88.2	87.9																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
<p>Note: Slanted line shows the range of the rated load current.</p>																																																					



<b>COSEL</b>																																		
Model	TUHS25F12																																	
Item	Power Factor (by Input Voltage)	Temperature 25°C Testing Circuitry Figure A																																
Object																																		
<p>1.Graph</p> <p style="text-align: right;">             ---□--- Load 50%              —△— Load 100%         </p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Power Factor</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>75</td><td>0.576</td><td>0.592</td></tr> <tr><td>85</td><td>0.558</td><td>0.576</td></tr> <tr><td>100</td><td>0.534</td><td>0.559</td></tr> <tr><td>120</td><td>0.510</td><td>0.534</td></tr> <tr><td>200</td><td>0.440</td><td>0.476</td></tr> <tr><td>230</td><td>0.425</td><td>0.459</td></tr> <tr><td>264</td><td>0.409</td><td>0.441</td></tr> <tr><td>280</td><td>0.403</td><td>0.435</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Input Voltage [V]	Power Factor		Load 50%	Load 100%	75	0.576	0.592	85	0.558	0.576	100	0.534	0.559	120	0.510	0.534	200	0.440	0.476	230	0.425	0.459	264	0.409	0.441	280	0.403	0.435	--	-	-
Input Voltage [V]	Power Factor																																	
	Load 50%	Load 100%																																
75	0.576	0.592																																
85	0.558	0.576																																
100	0.534	0.559																																
120	0.510	0.534																																
200	0.440	0.476																																
230	0.425	0.459																																
264	0.409	0.441																																
280	0.403	0.435																																
--	-	-																																
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																		






<p>Model TUHS25F12</p>		<p>Temperature 25°C</p>																																																				
<p>Item Power Factor (by Load Current)</p>		<p>Testing Circuitry Figure A</p>																																																				
<p>Object _____</p>																																																						
<p>1.Graph</p> <p>                     —△— Input Volt. 100V                      - - - □ - - Input Volt. 200V                      · · · ○ · · · Input Volt. 230V                 </p> <p>Power Factor</p> <p>Load Current [A]</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Power Factor</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.286</td><td>0.246</td><td>0.243</td></tr> <tr><td>0.40</td><td>0.486</td><td>0.391</td><td>0.377</td></tr> <tr><td>0.80</td><td>0.526</td><td>0.429</td><td>0.413</td></tr> <tr><td>1.20</td><td>0.544</td><td>0.452</td><td>0.435</td></tr> <tr><td>1.60</td><td>0.553</td><td>0.466</td><td>0.449</td></tr> <tr><td>2.00</td><td>0.559</td><td>0.475</td><td>0.458</td></tr> <tr><td>2.10</td><td>0.559</td><td>0.476</td><td>0.459</td></tr> <tr><td>2.31</td><td>0.560</td><td>0.480</td><td>0.463</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Power Factor			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	0.286	0.246	0.243	0.40	0.486	0.391	0.377	0.80	0.526	0.429	0.413	1.20	0.544	0.452	0.435	1.60	0.553	0.466	0.449	2.00	0.559	0.475	0.458	2.10	0.559	0.476	0.459	2.31	0.560	0.480	0.463	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Power Factor																																																					
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																			
0.00	0.286	0.246	0.243																																																			
0.40	0.486	0.391	0.377																																																			
0.80	0.526	0.429	0.413																																																			
1.20	0.544	0.452	0.435																																																			
1.60	0.553	0.466	0.449																																																			
2.00	0.559	0.475	0.458																																																			
2.10	0.559	0.476	0.459																																																			
2.31	0.560	0.480	0.463																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
<p>Note: Slanted line shows the range of the rated load current.</p>																																																						





<b>COSEL</b>			
Model	TUHS25F12	Temperature	25°C
Item	Inrush Current	Testing Circuitry	Figure A
Object	_____		

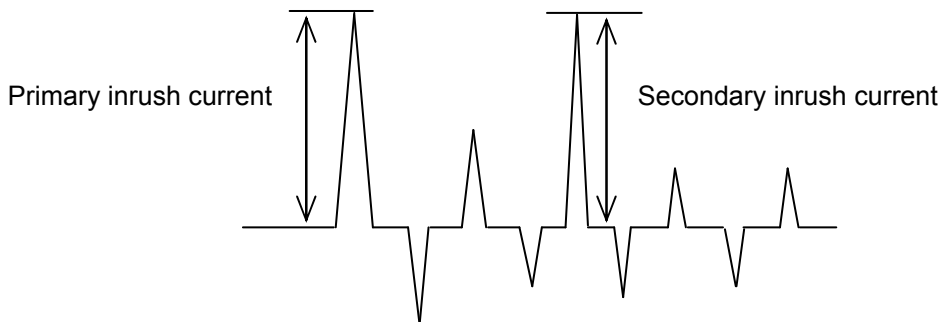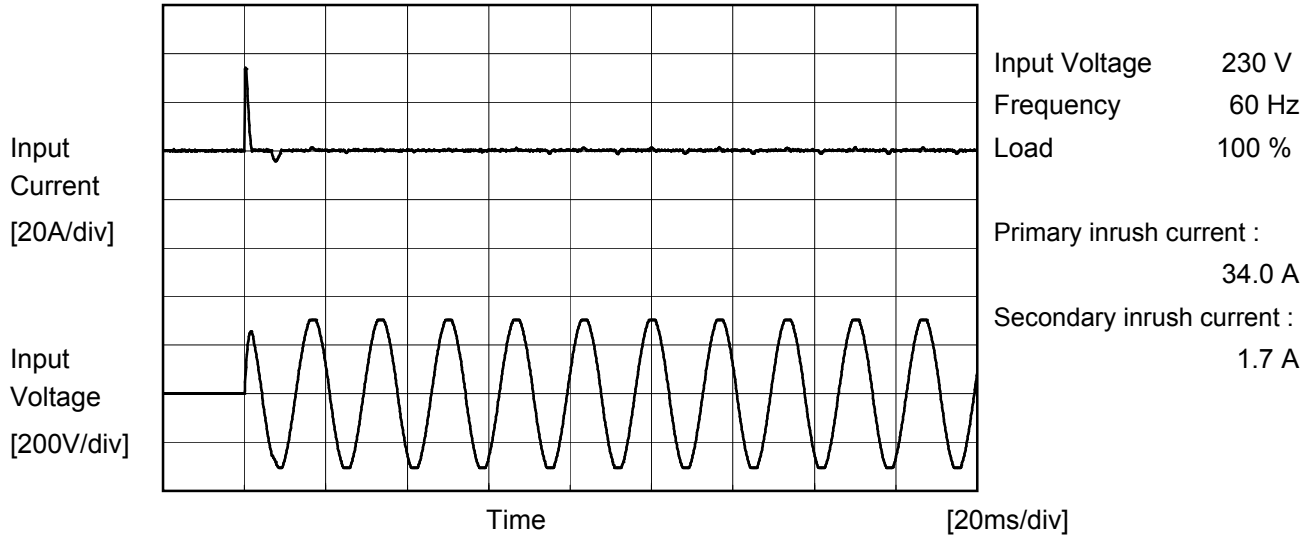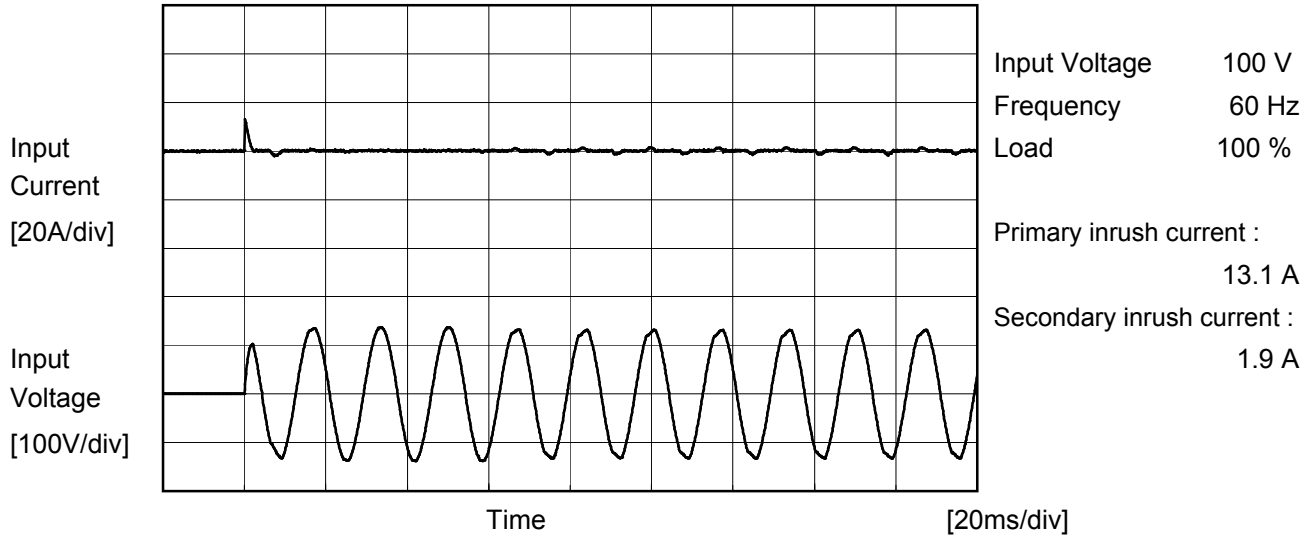



<b>COSEL</b>		
Model	TUHS25F12	Temperature 25°C Testing Circuitry Figure B
Item	Leakage Current	
Object	_____	

1.Results

Standards		Input Volt.			Note
		100 [V]	200 [V]	230 [V]	
DEN-AN	Both phases	0.008	0.009	0.010	Operation
	One of phases	0.008	0.017	0.020	Stand by
IEC60950-1	Both phases	0.006	0.011	0.014	Operation
	One of phases	0.008	0.016	0.020	Stand by

The value for "One of phases" is the reference value only.

2.Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.  
There is no FG in TUHS series and it is a reinforced insulation power supply of the class 2.



<b>COSEL</b>																																			
Model	TUHS25F12	Temperature	25°C																																
Item	Line Regulation	Testing Circuitry	Figure A																																
Object	+12V2.1A																																		
<p>1.Graph</p> <p style="text-align: right;">             ---□--- Load 50%              —△— Load 100%         </p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>75</td><td>12.202</td><td>12.190</td></tr> <tr><td>85</td><td>12.202</td><td>12.192</td></tr> <tr><td>100</td><td>12.202</td><td>12.194</td></tr> <tr><td>120</td><td>12.202</td><td>12.194</td></tr> <tr><td>200</td><td>12.202</td><td>12.197</td></tr> <tr><td>230</td><td>12.201</td><td>12.197</td></tr> <tr><td>264</td><td>12.201</td><td>12.197</td></tr> <tr><td>280</td><td>12.201</td><td>12.197</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>		Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	75	12.202	12.190	85	12.202	12.192	100	12.202	12.194	120	12.202	12.194	200	12.202	12.197	230	12.201	12.197	264	12.201	12.197	280	12.201	12.197	--	-	-
Input Voltage [V]	Output Voltage [V]																																		
	Load 50%	Load 100%																																	
75	12.202	12.190																																	
85	12.202	12.192																																	
100	12.202	12.194																																	
120	12.202	12.194																																	
200	12.202	12.197																																	
230	12.201	12.197																																	
264	12.201	12.197																																	
280	12.201	12.197																																	
--	-	-																																	
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																			




<b>COSEL</b>																																																						
Model	TUHS25F12	Temperature	25°C																																																			
Item	Load Regulation	Testing Circuitry	Figure A																																																			
Object	+12V2.1A																																																					
<p>1.Graph</p> <p>                     —△— Input Volt. 100V                      - - - □ - - - Input Volt. 200V                      - · - ○ - · - - Input Volt. 230V                 </p> <p>Output Voltage [V]</p> <p>Load Current [A]</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>12.208</td><td>12.206</td><td>12.205</td></tr> <tr><td>0.40</td><td>12.204</td><td>12.203</td><td>12.202</td></tr> <tr><td>0.80</td><td>12.204</td><td>12.203</td><td>12.200</td></tr> <tr><td>1.20</td><td>12.202</td><td>12.202</td><td>12.201</td></tr> <tr><td>1.60</td><td>12.200</td><td>12.201</td><td>12.199</td></tr> <tr><td>2.00</td><td>12.196</td><td>12.198</td><td>12.197</td></tr> <tr><td>2.10</td><td>12.194</td><td>12.197</td><td>12.197</td></tr> <tr><td>2.31</td><td>12.191</td><td>12.195</td><td>12.195</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Output Voltage [V]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	12.208	12.206	12.205	0.40	12.204	12.203	12.202	0.80	12.204	12.203	12.200	1.20	12.202	12.202	12.201	1.60	12.200	12.201	12.199	2.00	12.196	12.198	12.197	2.10	12.194	12.197	12.197	2.31	12.191	12.195	12.195	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																					
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																			
0.00	12.208	12.206	12.205																																																			
0.40	12.204	12.203	12.202																																																			
0.80	12.204	12.203	12.200																																																			
1.20	12.202	12.202	12.201																																																			
1.60	12.200	12.201	12.199																																																			
2.00	12.196	12.198	12.197																																																			
2.10	12.194	12.197	12.197																																																			
2.31	12.191	12.195	12.195																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
<p>Note: Slanted line shows the range of the rated load current.</p>																																																						




Model		TUHS25F12	
Item	Dynamic Load Response	Temperature	25°C
Object	+12V 2.1A	Testing Circuitry	Figure A

Input Volt. 230V  
Cycle 500ms


Load Current  2.1A / 100us

Min.Load (0A) ←→  
Load 100%(2.1A)

1 V/div

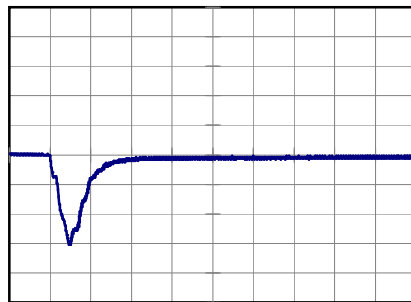


200 us/div

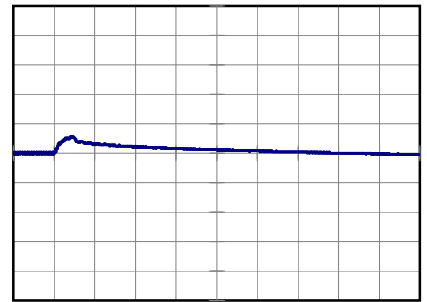


200 us/div

Load 20% (0.42A) ←→  
Load 100%(2.1A)

1 V/div

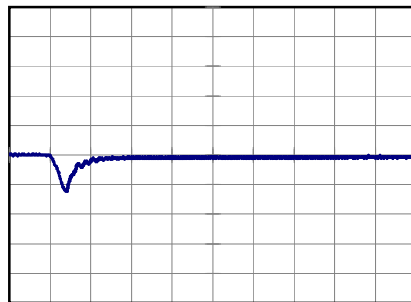


200 us/div

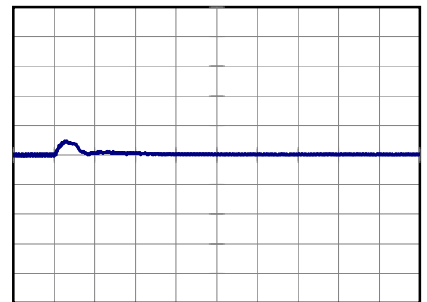


200 us/div

Load 50% (1.05A) ←→  
Load 100% (2.1A)

1 V/div

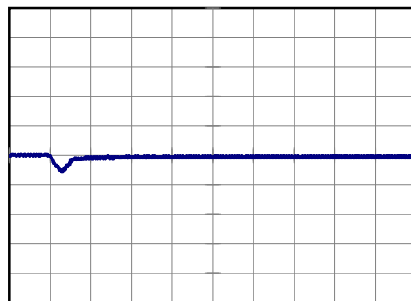

200 us/div

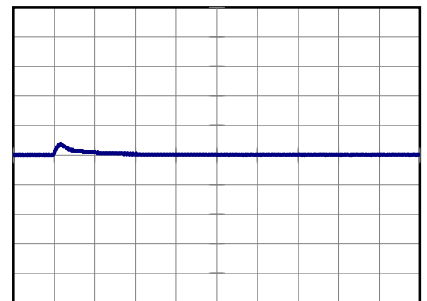

200 us/div



<p>Model TUHS25F12</p>		<p>Temperature 25°C Testing Circuitry Figure C</p>																																						
Item	Ripple Voltage (by Load Current)																																							
Object	+12V2.1A																																							
<p>1.Graph</p> <p>             —△— Input Volt. 100V              -.-○-.- Input Volt. 230V         </p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Input Volt. 100 [V]</th> <th>Input Volt. 230 [V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>90</td><td>140</td></tr> <tr><td>0.40</td><td>10</td><td>10</td></tr> <tr><td>0.80</td><td>10</td><td>10</td></tr> <tr><td>1.20</td><td>10</td><td>10</td></tr> <tr><td>1.60</td><td>25</td><td>10</td></tr> <tr><td>2.00</td><td>35</td><td>10</td></tr> <tr><td>2.10</td><td>35</td><td>10</td></tr> <tr><td>2.31</td><td>40</td><td>10</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Ripple Voltage [mV]		Input Volt. 100 [V]	Input Volt. 230 [V]	0.00	90	140	0.40	10	10	0.80	10	10	1.20	10	10	1.60	25	10	2.00	35	10	2.10	35	10	2.31	40	10	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple Voltage [mV]																																							
	Input Volt. 100 [V]	Input Volt. 230 [V]																																						
0.00	90	140																																						
0.40	10	10																																						
0.80	10	10																																						
1.20	10	10																																						
1.60	25	10																																						
2.00	35	10																																						
2.10	35	10																																						
2.31	40	10																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Measured by 100 MHz Oscilloscope. Ripple Voltage is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p>																																								
<p>             T1: Due to AC Input Line              T2: Due to Switching         </p> <p>Ripple [mVp-p]</p>																																								
<p>Fig. Complex Ripple Wave Form</p>																																								



<p>Model TUHS25F12</p>		<p>Temperature 25°C</p>																																							
<p>Item Ripple-Noise</p>		<p>Testing Circuitry Figure C</p>																																							
<p>Object +12V2.1A</p>																																									
<p>1.Graph</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple-Noise [mV]</th> </tr> <tr> <th>Input Volt. 100 [V]</th> <th>Input Volt. 230 [V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>100</td><td>150</td></tr> <tr><td>0.40</td><td>10</td><td>10</td></tr> <tr><td>0.80</td><td>10</td><td>15</td></tr> <tr><td>1.20</td><td>15</td><td>15</td></tr> <tr><td>1.60</td><td>30</td><td>15</td></tr> <tr><td>2.00</td><td>40</td><td>15</td></tr> <tr><td>2.10</td><td>40</td><td>15</td></tr> <tr><td>2.31</td><td>45</td><td>15</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Ripple-Noise [mV]		Input Volt. 100 [V]	Input Volt. 230 [V]	0.00	100	150	0.40	10	10	0.80	10	15	1.20	15	15	1.60	30	15	2.00	40	15	2.10	40	15	2.31	45	15	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple-Noise [mV]																																								
	Input Volt. 100 [V]	Input Volt. 230 [V]																																							
0.00	100	150																																							
0.40	10	10																																							
0.80	10	15																																							
1.20	15	15																																							
1.60	30	15																																							
2.00	40	15																																							
2.10	40	15																																							
2.31	45	15																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
<p>Measured by 100 MHz Oscilloscope.                  Ripple-Noise is shown as p-p in the figure below.                  Note: Slanted line shows the range of the rated load current.</p>																																									
<p>T1: Due to AC Input Line                  T2: Due to Switching                  Ripple-Noise [mVp-p]</p>																																									
<p>Fig. Complex Ripple Wave Form</p>																																									



<b>COSEL</b>																																								
Model	TUHS25F12																																							
Item	Ripple Voltage (by Ambient Temp.)	Testing Circuitry Figure C																																						
Object	+12V2.1A																																							
<p>1. Graph</p> <p style="text-align: center;">Load 100 %</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Input Volt. 100V</th> <th>Input Volt. 230V</th> </tr> </thead> <tbody> <tr><td>-45</td><td>55</td><td>10</td></tr> <tr><td>-40</td><td>55</td><td>10</td></tr> <tr><td>-20</td><td>20</td><td>5</td></tr> <tr><td>0</td><td>20</td><td>5</td></tr> <tr><td>25</td><td>35</td><td>10</td></tr> <tr><td>50</td><td>35</td><td>10</td></tr> <tr><td>55</td><td>35</td><td>10</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Ambient Temperature [°C]	Ripple Voltage [mV]		Input Volt. 100V	Input Volt. 230V	-45	55	10	-40	55	10	-20	20	5	0	20	5	25	35	10	50	35	10	55	35	10	--	-	-	--	-	-	--	-	-	--	-	-
Ambient Temperature [°C]	Ripple Voltage [mV]																																							
	Input Volt. 100V	Input Volt. 230V																																						
-45	55	10																																						
-40	55	10																																						
-20	20	5																																						
0	20	5																																						
25	35	10																																						
50	35	10																																						
55	35	10																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Measured by 100 MHz Oscilloscope.                  Note: Slanted line shows the range of the rated ambient temperature.</p>																																								





<b>COSEL</b>																																																					
Model	TUHS25F12																																																				
Item	Ambient Temperature Drift	Testing Circuitry Figure A																																																			
Object	+12V2.1A																																																				
<p>1.Graph</p> <p> <span style="display: inline-block; width: 20px; border-bottom: 1px solid black; margin-right: 5px;"></span> <span style="font-size: 1.2em;">△</span> Input Volt. 100V  <span style="display: inline-block; width: 20px; border-bottom: 1px dashed black; margin-right: 5px;"></span> <span style="font-size: 1.2em;">□</span> Input Volt. 200V  <span style="display: inline-block; width: 20px; border-bottom: 1px dash-dot black; margin-right: 5px;"></span> <span style="font-size: 1.2em;">○</span> Input Volt. 230V                 </p> <p style="text-align: center;">Ambient Temperature [°C] Load 100%</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>-45</td><td>12.220</td><td>12.224</td><td>12.225</td></tr> <tr><td>-40</td><td>12.222</td><td>12.225</td><td>12.226</td></tr> <tr><td>-20</td><td>12.224</td><td>12.227</td><td>12.227</td></tr> <tr><td>0</td><td>12.216</td><td>12.219</td><td>12.219</td></tr> <tr><td>25</td><td>12.194</td><td>12.197</td><td>12.197</td></tr> <tr><td>50</td><td>12.161</td><td>12.165</td><td>12.164</td></tr> <tr><td>55</td><td>12.154</td><td>12.157</td><td>12.157</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	-45	12.220	12.224	12.225	-40	12.222	12.225	12.226	-20	12.224	12.227	12.227	0	12.216	12.219	12.219	25	12.194	12.197	12.197	50	12.161	12.165	12.164	55	12.154	12.157	12.157	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Ambient Temperature [°C]	Output Voltage [V]																																																				
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																		
-45	12.220	12.224	12.225																																																		
-40	12.222	12.225	12.226																																																		
-20	12.224	12.227	12.227																																																		
0	12.216	12.219	12.219																																																		
25	12.194	12.197	12.197																																																		
50	12.161	12.165	12.164																																																		
55	12.154	12.157	12.157																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																																					



<b>COSEL</b>		
Model	TUHS25F12	
Item	Output Voltage Accuracy	Testing Circuitry Figure A
Object	+12V2.1A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 50°C

Input Voltage : 85 - 264V

Load Current : 0 - 2.1A

\* Output Voltage Accuracy =  $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

\* Output Voltage Accuracy (Ration) =  $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	-20	85	0	12.235	±37	±0.3
Minimum Voltage	50	85	2.1	12.161		




<b>COSEL</b>																								
Model	TUHS25F12																							
Item	Time Lapse Drift	Temperature 25°C Testing Circuitry Figure A																						
Object	+12V2.1A																							
<p>1.Graph</p> <p style="text-align: center;">Time [H]</p> <p>Input Volt. 100V Load 100%</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>12.194</td></tr> <tr><td>0.5</td><td>12.186</td></tr> <tr><td>1.0</td><td>12.186</td></tr> <tr><td>2.0</td><td>12.185</td></tr> <tr><td>3.0</td><td>12.184</td></tr> <tr><td>4.0</td><td>12.184</td></tr> <tr><td>5.0</td><td>12.184</td></tr> <tr><td>6.0</td><td>12.184</td></tr> <tr><td>7.0</td><td>12.183</td></tr> <tr><td>8.0</td><td>12.183</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	12.194	0.5	12.186	1.0	12.186	2.0	12.185	3.0	12.184	4.0	12.184	5.0	12.184	6.0	12.184	7.0	12.183	8.0	12.183
Time since start [H]	Output Voltage [V]																							
0.0	12.194																							
0.5	12.186																							
1.0	12.186																							
2.0	12.185																							
3.0	12.184																							
4.0	12.184																							
5.0	12.184																							
6.0	12.184																							
7.0	12.183																							
8.0	12.183																							
<p>* The characteristic of AC230V is equal.</p>																								




Model		TUHS25F12	Temperature 25°C Testing Circuitry Figure A
Item		Rise and Fall Time	
Object		+12V2.1A	

1. Graph

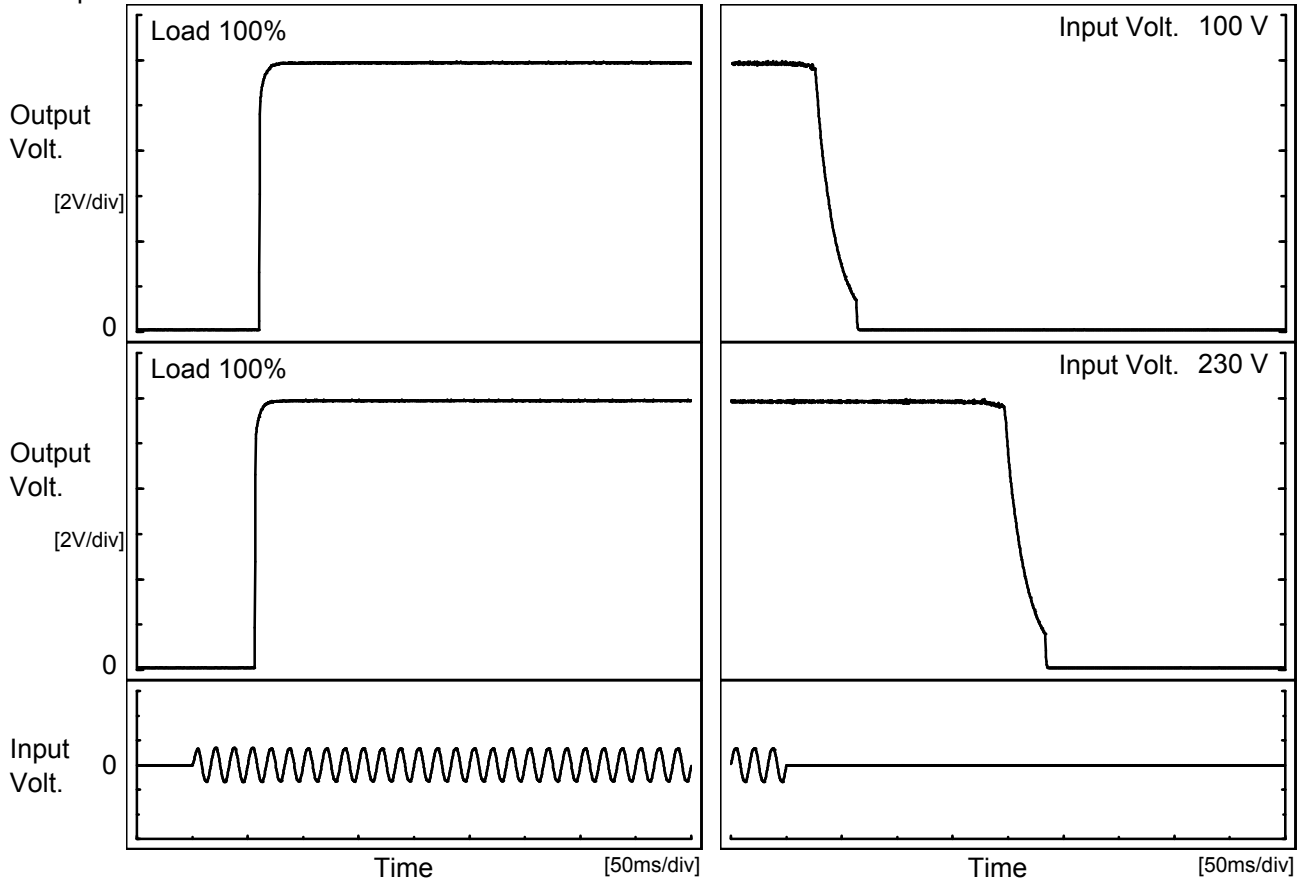

2. Values

		[ms]				
Input Volt.	Time	Td	Tr	Ts	Th	Tf
100 V		57.3	2.8	60.1	24.8	35.8
230 V		59.0	2.3	61.3	195.0	35.8

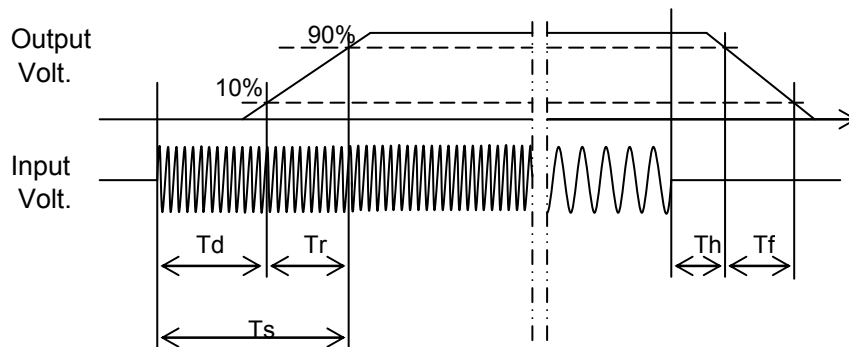



<b>COSEL</b>																																			
Model	TUHS25F12	Temperature	25°C																																
Item	Hold-Up Time	Testing Circuitry	Figure A																																
Object	+12V2.1A																																		
<p>1.Graph</p> <p style="text-align: right;">             ---□--- Load 50%              —△— Load 100%         </p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Hold-Up Time [ms]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>75</td><td>28</td><td>9</td></tr> <tr><td>85</td><td>40</td><td>15</td></tr> <tr><td>100</td><td>61</td><td>25</td></tr> <tr><td>120</td><td>94</td><td>42</td></tr> <tr><td>200</td><td>294</td><td>143</td></tr> <tr><td>230</td><td>397</td><td>195</td></tr> <tr><td>264</td><td>533</td><td>264</td></tr> <tr><td>280</td><td>603</td><td>305</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>		Input Voltage [V]	Hold-Up Time [ms]		Load 50%	Load 100%	75	28	9	85	40	15	100	61	25	120	94	42	200	294	143	230	397	195	264	533	264	280	603	305	--	-	-
Input Voltage [V]	Hold-Up Time [ms]																																		
	Load 50%	Load 100%																																	
75	28	9																																	
85	40	15																																	
100	61	25																																	
120	94	42																																	
200	294	143																																	
230	397	195																																	
264	533	264																																	
280	603	305																																	
--	-	-																																	
<p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.                  Note: Slanted line shows the range of the rated input voltage.</p>																																			



<p>Model TUHS25F12</p>		<p>Temperature 25°C Testing Circuitry Figure A</p>																																																			
Item	Instantaneous Interruption Compensation																																																				
Object	+12V2.1A																																																				
<p>1.Graph</p> <p>                     —△— Input Volt. 100V                      - - - □ - - - Input Volt. 200V                      ···○··· Input Volt. 230V                 </p> <p>Instantaneous Compensation Time [ms]</p> <p>Load Current [A]</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Time [ms]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.40</td><td>83</td><td>387</td><td>530</td></tr> <tr><td>0.80</td><td>69</td><td>330</td><td>448</td></tr> <tr><td>1.20</td><td>56</td><td>272</td><td>366</td></tr> <tr><td>1.60</td><td>42</td><td>215</td><td>283</td></tr> <tr><td>2.00</td><td>28</td><td>158</td><td>201</td></tr> <tr><td>2.10</td><td>25</td><td>143</td><td>180</td></tr> <tr><td>2.31</td><td>18</td><td>113</td><td>137</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Time [ms]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	-	-	-	0.40	83	387	530	0.80	69	330	448	1.20	56	272	366	1.60	42	215	283	2.00	28	158	201	2.10	25	143	180	2.31	18	113	137	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Time [ms]																																																				
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																		
0.00	-	-	-																																																		
0.40	83	387	530																																																		
0.80	69	330	448																																																		
1.20	56	272	366																																																		
1.60	42	215	283																																																		
2.00	28	158	201																																																		
2.10	25	143	180																																																		
2.31	18	113	137																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
<p>Note: Slanted line shows the range of the rated load current.</p>																																																					



<b>COSEL</b>																																								
Model	TUHS25F12																																							
Item	Minimum Input Voltage for Regulated Output Voltage	Testing Circuitry Figure A																																						
Object	+12V2.1A																																							
<p>1.Graph</p> <p style="text-align: right;">             ---□--- Load 50%              —△— Load 100%         </p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Input Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>-45</td><td>48</td><td>67</td></tr> <tr><td>-40</td><td>45</td><td>62</td></tr> <tr><td>-20</td><td>40</td><td>55</td></tr> <tr><td>0</td><td>39</td><td>53</td></tr> <tr><td>25</td><td>39</td><td>53</td></tr> <tr><td>50</td><td>38</td><td>52</td></tr> <tr><td>55</td><td>38</td><td>52</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Ambient Temperature [°C]	Input Voltage [V]		Load 50%	Load 100%	-45	48	67	-40	45	62	-20	40	55	0	39	53	25	39	53	50	38	52	55	38	52	--	-	-	--	-	-	--	-	-	--	-	-
Ambient Temperature [°C]	Input Voltage [V]																																							
	Load 50%	Load 100%																																						
-45	48	67																																						
-40	45	62																																						
-20	40	55																																						
0	39	53																																						
25	39	53																																						
50	38	52																																						
55	38	52																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																								



<b>COSEL</b>																																															
Model	TUHS25F12	Temperature	25°C																																												
Item	Overcurrent Protection	Testing Circuitry	Figure A																																												
Object	+12V2.1A																																														
<p>1. Graph</p> <p>—△ Input Volt. 100V —○ Input Volt. 230V</p> <p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="2">Load Current [A]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr> <td>12.0</td> <td>2.84</td> <td>2.69</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> </tbody> </table>		Output Voltage [V]	Load Current [A]		Input Volt. 100[V]	Input Volt. 230[V]	12.0	2.84	2.69	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-	--	-	-
Output Voltage [V]	Load Current [A]																																														
	Input Volt. 100[V]	Input Volt. 230[V]																																													
12.0	2.84	2.69																																													
--	-	-																																													
--	-	-																																													
--	-	-																																													
--	-	-																																													
--	-	-																																													
--	-	-																																													
--	-	-																																													
--	-	-																																													
--	-	-																																													
--	-	-																																													
--	-	-																																													
--	-	-																																													





<b>COSEL</b>																																								
Model	TUHS25F12																																							
Item	Overvoltage Protection	Testing Circuitry Figure A																																						
Object	+12V2.1A																																							
<p>1.Graph</p> <div style="text-align: right;"> <p>—△— Input Volt. 100V</p> <p>---□--- Input Volt. 230V</p> </div> <p style="text-align: center;">Ambient Temperature [°C] Load 30%</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Operating Point [V]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>-45</td><td>15.05</td><td>15.00</td></tr> <tr><td>-40</td><td>15.10</td><td>15.05</td></tr> <tr><td>-20</td><td>15.28</td><td>15.23</td></tr> <tr><td>0</td><td>15.51</td><td>15.54</td></tr> <tr><td>25</td><td>15.71</td><td>15.69</td></tr> <tr><td>50</td><td>15.84</td><td>15.79</td></tr> <tr><td>55</td><td>15.88</td><td>15.83</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Ambient Temperature [°C]	Operating Point [V]		Input Volt. 100[V]	Input Volt. 230[V]	-45	15.05	15.00	-40	15.10	15.05	-20	15.28	15.23	0	15.51	15.54	25	15.71	15.69	50	15.84	15.79	55	15.88	15.83	--	-	-	--	-	-	--	-	-	--	-	-
Ambient Temperature [°C]	Operating Point [V]																																							
	Input Volt. 100[V]	Input Volt. 230[V]																																						
-45	15.05	15.00																																						
-40	15.10	15.05																																						
-20	15.28	15.23																																						
0	15.51	15.54																																						
25	15.71	15.69																																						
50	15.84	15.79																																						
55	15.88	15.83																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																								

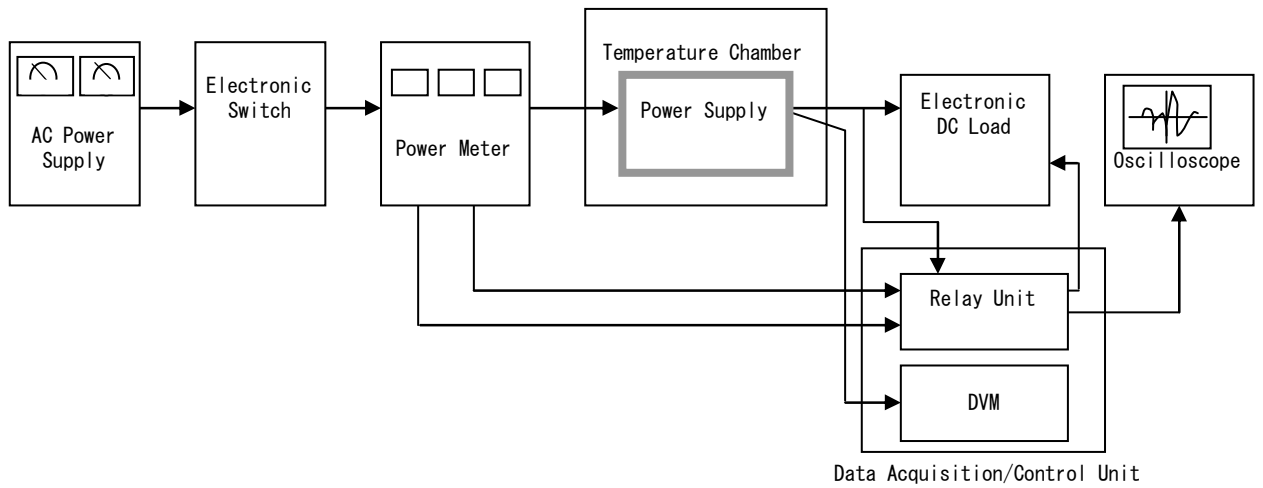


Figure A

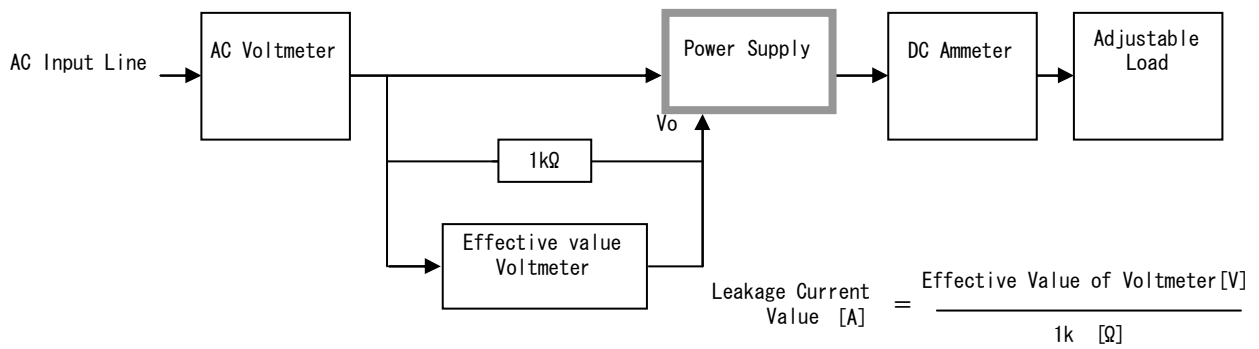


Figure B ( DEN-AN )

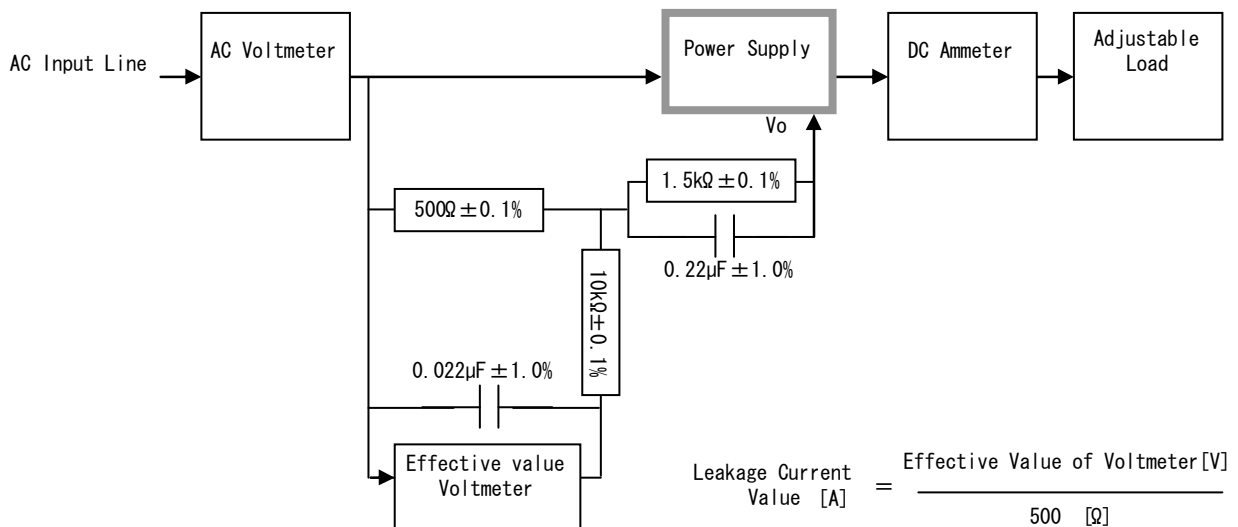


Figure B ( IEC60950-1 )

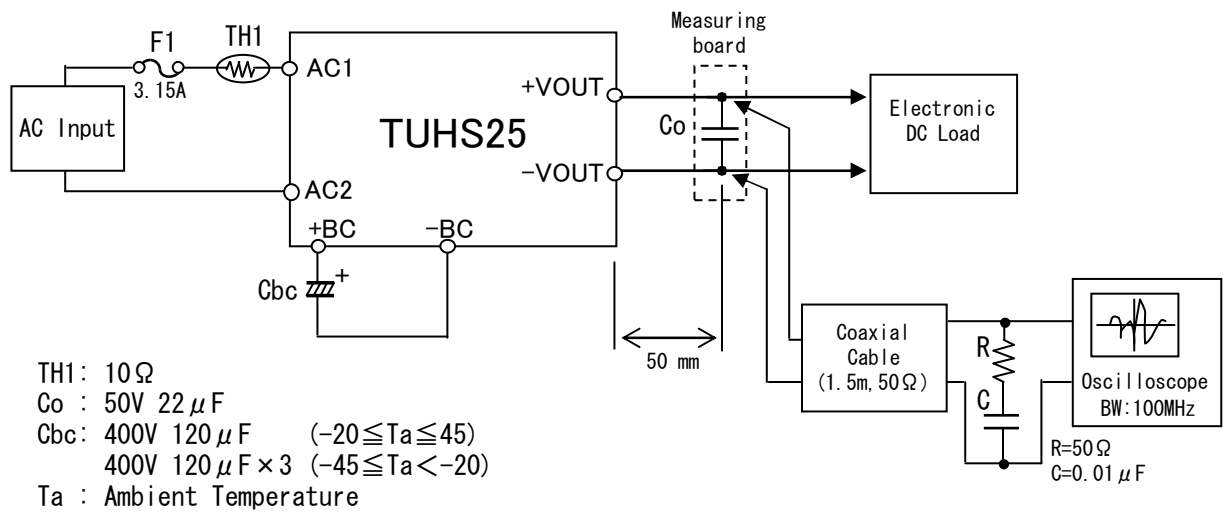


Figure C