

# TEST DATA OF TUXS200F32

Regulated DC Power Supply  
October 21, 2016

Approved by : Junichi Hatagishi  
Junichi Hatagishi Design Manager

Prepared by : Hiroyuki Shoji  
Hiroyuki Shoji Design Engineer

**COSEL CO.,LTD.**

## CONTENTS

1.Input Current (by Load Current) . . . . .	1
2.Input Power (by Load Current) . . . . .	2
3.Efficiency (by Input Voltage) . . . . .	3
4.Efficiency (by Load Current) . . . . .	4
5.Power Factor (by Input Voltage) . . . . .	5
6.Power Factor (by Load Current) . . . . .	6
7.Inrush Current . . . . .	7
8.Leakage Current . . . . .	8
9.Line Regulation . . . . .	9
10.Load Regulation . . . . .	10
11.Dynamic Load Response . . . . .	11
12.Ripple Voltage (by Load Current) . . . . .	12
13.Ripple-Noise . . . . .	13
14.Ripple Voltage (by Ambient Temperature) . . . . .	14
15.Ambient Temperature Drift . . . . .	15
16.Output Voltage Accuracy . . . . .	16
17.Time Lapse Drift . . . . .	17
18.Rise and Fall Time . . . . .	18
19.Hold-Up Time . . . . .	19
20.Instantaneous Interruption Compensation . . . . .	20
21.Minimum Input Voltage for Regulated Output Voltage . . . . .	21
22.Overcurrent Protection . . . . .	22
23.Overvoltage Protection . . . . .	23
24.Figure of Testing Circuitry . . . . .	24 25

(Final Page 25)



Model		TUXS200F32		Temperature 25°C																																																				
Item		Input Current (by Load Current)		Testing Circuitry Figure A																																																				
Object		_____																																																						
1.Graph			2.Values																																																					
<p>                 —△— Input Volt. 100V                  - - □ - - Input Volt. 200V                  - · - ○ - · - Input Volt. 230V             </p> <p>Input Current [A]</p> <p>Load Current [A]</p>			<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.125</td><td>0.224</td><td>0.253</td></tr> <tr><td>1.24</td><td>0.508</td><td>0.343</td><td>0.340</td></tr> <tr><td>2.48</td><td>0.906</td><td>0.518</td><td>0.484</td></tr> <tr><td>3.72</td><td>1.319</td><td>0.711</td><td>0.642</td></tr> <tr><td>4.96</td><td>1.739</td><td>0.906</td><td>0.806</td></tr> <tr><td>6.20</td><td>2.170</td><td>1.107</td><td>0.982</td></tr> <tr><td>6.82</td><td>2.389</td><td>1.209</td><td>1.075</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Input Current [A]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	0.125	0.224	0.253	1.24	0.508	0.343	0.340	2.48	0.906	0.518	0.484	3.72	1.319	0.711	0.642	4.96	1.739	0.906	0.806	6.20	2.170	1.107	0.982	6.82	2.389	1.209	1.075	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Current [A]																																																							
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																					
0.00	0.125	0.224	0.253																																																					
1.24	0.508	0.343	0.340																																																					
2.48	0.906	0.518	0.484																																																					
3.72	1.319	0.711	0.642																																																					
4.96	1.739	0.906	0.806																																																					
6.20	2.170	1.107	0.982																																																					
6.82	2.389	1.209	1.075																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
<p>Note: Slanted line shows the range of the rated load current.</p>																																																								



Model		TUXS200F32		Temperature 25°C																																																				
Item		Input Power (by Load Current)		Testing Circuitry Figure A																																																				
Object		_____																																																						
1.Graph		—△— Input Volt. 100V - - - □ - - - Input Volt. 200V · · · ○ · · · Input Volt. 230V		2.Values																																																				
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>5.1</td><td>5.5</td><td>5.4</td></tr> <tr><td>1.24</td><td>46.2</td><td>46.8</td><td>47.6</td></tr> <tr><td>2.48</td><td>87.6</td><td>87.6</td><td>87.9</td></tr> <tr><td>3.72</td><td>129.3</td><td>128.3</td><td>128.5</td></tr> <tr><td>4.96</td><td>171.5</td><td>169.5</td><td>169.5</td></tr> <tr><td>6.20</td><td>214.6</td><td>211.2</td><td>211.1</td></tr> <tr><td>6.82</td><td>236.4</td><td>232.4</td><td>232.0</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Load Current [A]	Input Power [W]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	5.1	5.5	5.4	1.24	46.2	46.8	47.6	2.48	87.6	87.6	87.9	3.72	129.3	128.3	128.5	4.96	171.5	169.5	169.5	6.20	214.6	211.2	211.1	6.82	236.4	232.4	232.0	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Power [W]																																																							
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																					
0.00	5.1	5.5	5.4																																																					
1.24	46.2	46.8	47.6																																																					
2.48	87.6	87.6	87.9																																																					
3.72	129.3	128.3	128.5																																																					
4.96	171.5	169.5	169.5																																																					
6.20	214.6	211.2	211.1																																																					
6.82	236.4	232.4	232.0																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
Note: Slanted line shows the range of the rated load current.																																																								



<p>Model TUXS200F32</p>		<p>Temperature 25°C Testing Circuitry Figure A</p>																																
Item	Efficiency (by Input Voltage)																																	
Object	_____																																	
<p>1.Graph</p> <p>---□--- Load 50% —△— Load 100%</p> <p>Efficiency [%]</p> <p>Input Voltage [V]</p> <p>Note: Slanted line shows the range of the rated input voltage.</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr> <td>80</td> <td>91.0</td> <td>91.2</td> </tr> <tr> <td>85</td> <td>91.3</td> <td>91.7</td> </tr> <tr> <td>100</td> <td>91.7</td> <td>92.6</td> </tr> <tr> <td>120</td> <td>92.0</td> <td>93.3</td> </tr> <tr> <td>200</td> <td>92.0</td> <td>94.1</td> </tr> <tr> <td>230</td> <td>91.8</td> <td>94.2</td> </tr> <tr> <td>264</td> <td>91.8</td> <td>94.5</td> </tr> <tr> <td>280</td> <td>92.0</td> <td>94.4</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	80	91.0	91.2	85	91.3	91.7	100	91.7	92.6	120	92.0	93.3	200	92.0	94.1	230	91.8	94.2	264	91.8	94.5	280	92.0	94.4	--	-	-
Input Voltage [V]	Efficiency [%]																																	
	Load 50%	Load 100%																																
80	91.0	91.2																																
85	91.3	91.7																																
100	91.7	92.6																																
120	92.0	93.3																																
200	92.0	94.1																																
230	91.8	94.2																																
264	91.8	94.5																																
280	92.0	94.4																																
--	-	-																																



<p>Model TUXS200F32</p> <p>Item Efficiency (by Load Current)</p> <p>Object _____</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																																			
<p>1.Graph</p> <p>                     —△— Input Volt. 100V                      - - - □ - - - Input Volt. 200V                      - · - ○ - · - - Input Volt. 230V                 </p> <p>Efficiency [%]</p> <p>Load Current [A]</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>1.24</td><td>86.1</td><td>84.9</td><td>83.4</td></tr> <tr><td>2.48</td><td>90.7</td><td>90.7</td><td>90.4</td></tr> <tr><td>3.72</td><td>92.2</td><td>92.9</td><td>92.8</td></tr> <tr><td>4.96</td><td>92.7</td><td>93.8</td><td>93.8</td></tr> <tr><td>6.20</td><td>92.6</td><td>94.1</td><td>94.2</td></tr> <tr><td>6.82</td><td>92.5</td><td>94.0</td><td>94.2</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Efficiency [%]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	-	-	-	1.24	86.1	84.9	83.4	2.48	90.7	90.7	90.4	3.72	92.2	92.9	92.8	4.96	92.7	93.8	93.8	6.20	92.6	94.1	94.2	6.82	92.5	94.0	94.2	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Efficiency [%]																																																				
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																		
0.00	-	-	-																																																		
1.24	86.1	84.9	83.4																																																		
2.48	90.7	90.7	90.4																																																		
3.72	92.2	92.9	92.8																																																		
4.96	92.7	93.8	93.8																																																		
6.20	92.6	94.1	94.2																																																		
6.82	92.5	94.0	94.2																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
<p>Note: Slanted line shows the range of the rated load current.</p>																																																					



<p>Model TUXS200F32</p>		<p>Temperature 25°C Testing Circuitry Figure A</p>																																
<p>Item Power Factor (by Input Voltage)</p>																																		
<p>Object _____</p>																																		
<p>1.Graph</p> <p>---□--- Load 50% —△— Load 100%</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Power Factor</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr> <td>80</td> <td>0.984</td> <td>0.992</td> </tr> <tr> <td>85</td> <td>0.982</td> <td>0.992</td> </tr> <tr> <td>100</td> <td>0.973</td> <td>0.990</td> </tr> <tr> <td>120</td> <td>0.957</td> <td>0.987</td> </tr> <tr> <td>200</td> <td>0.882</td> <td>0.954</td> </tr> <tr> <td>230</td> <td>0.832</td> <td>0.934</td> </tr> <tr> <td>264</td> <td>0.781</td> <td>0.889</td> </tr> <tr> <td>280</td> <td>0.450</td> <td>0.628</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Input Voltage [V]	Power Factor		Load 50%	Load 100%	80	0.984	0.992	85	0.982	0.992	100	0.973	0.990	120	0.957	0.987	200	0.882	0.954	230	0.832	0.934	264	0.781	0.889	280	0.450	0.628	--	-	-
Input Voltage [V]	Power Factor																																	
	Load 50%	Load 100%																																
80	0.984	0.992																																
85	0.982	0.992																																
100	0.973	0.990																																
120	0.957	0.987																																
200	0.882	0.954																																
230	0.832	0.934																																
264	0.781	0.889																																
280	0.450	0.628																																
--	-	-																																
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																		




Model		TUXS200F32		Temperature 25°C																																																				
Item		Power Factor (by Load Current)		Testing Circuitry Figure A																																																				
Object		_____																																																						
1.Graph			2.Values																																																					
<p>                 —△— Input Volt. 100V                  - - - □ - - - Input Volt. 200V                  - · - ○ - · - - Input Volt. 230V             </p> <p>Power Factor</p> <p>Load Current [A]</p>			<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Power Factor</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td> <td>0.407</td> <td>0.123</td> <td>0.093</td> </tr> <tr> <td>1.24</td> <td>0.909</td> <td>0.682</td> <td>0.609</td> </tr> <tr> <td>2.48</td> <td>0.967</td> <td>0.845</td> <td>0.790</td> </tr> <tr> <td>3.72</td> <td>0.980</td> <td>0.902</td> <td>0.871</td> </tr> <tr> <td>4.96</td> <td>0.987</td> <td>0.935</td> <td>0.914</td> </tr> <tr> <td>6.20</td> <td>0.990</td> <td>0.954</td> <td>0.934</td> </tr> <tr> <td>6.82</td> <td>0.991</td> <td>0.962</td> <td>0.938</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> </tbody> </table>			Load Current [A]	Power Factor			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	0.407	0.123	0.093	1.24	0.909	0.682	0.609	2.48	0.967	0.845	0.790	3.72	0.980	0.902	0.871	4.96	0.987	0.935	0.914	6.20	0.990	0.954	0.934	6.82	0.991	0.962	0.938	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Power Factor																																																							
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																					
0.00	0.407	0.123	0.093																																																					
1.24	0.909	0.682	0.609																																																					
2.48	0.967	0.845	0.790																																																					
3.72	0.980	0.902	0.871																																																					
4.96	0.987	0.935	0.914																																																					
6.20	0.990	0.954	0.934																																																					
6.82	0.991	0.962	0.938																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
<p>Note: Slanted line shows the range of the rated load current.</p>																																																								






Model		TUXS200F32	Temperature 25°C Testing Circuitry Figure A
Item		Inrush Current	
Object		_____	

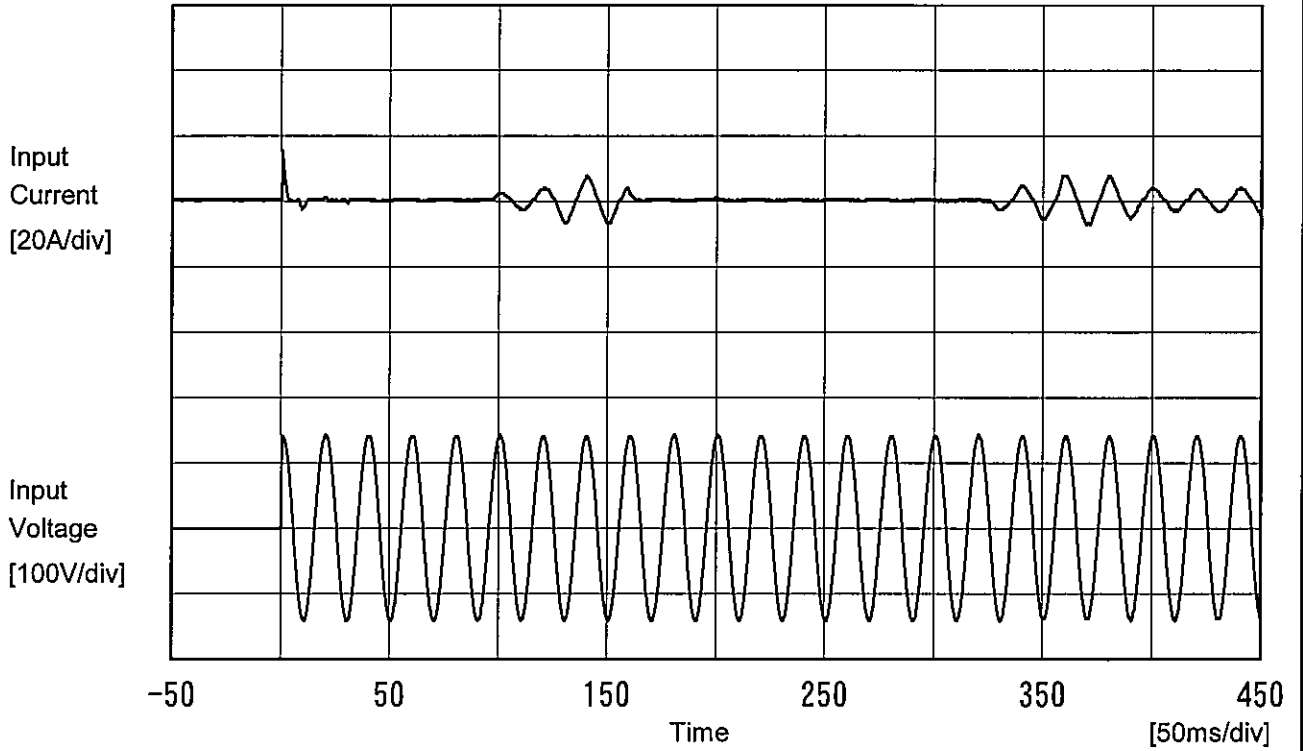

Input Voltage 100 V  
 Frequency 50 Hz  
 Load 100 %

Primary inrush current 15.4 A  
 Secondary inrush current 7.6 A

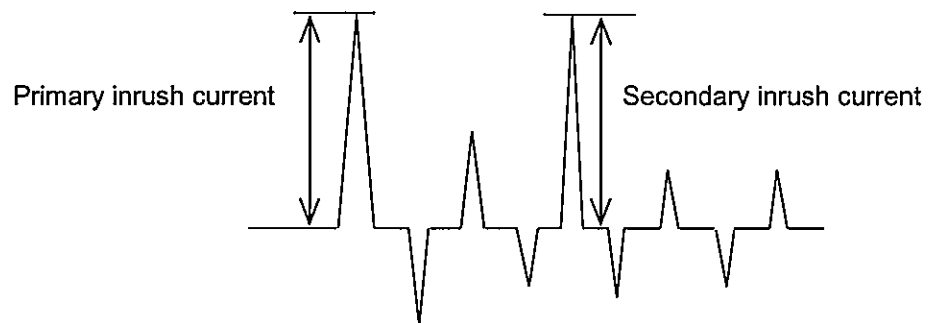



<b>COSEL</b>		
Model	TUXS200F32	
Item	Leakage Current	Temperature 25°C Testing Circuitry Figure B
Object	_____	

1.Results

[mA]

Standards		Input Volt.			Note
		100 [V]	200 [V]	240 [V]	
DEN-AN	Both phases	0.17	0.34	0.41	Operation
	One of phases	0.27	0.54	0.65	Stand by
IEC60950-1	Both phases	0.14	0.29	0.36	Operation
	One of phases	0.28	0.56	0.68	Stand by

The value for "One of phases" is the reference value only.

2.Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.



<b>COSEL</b>																																		
Model	TUXS200F32																																	
Item	Line Regulation	Temperature 25°C Testing Circuitry Figure A																																
Object	+32V6.2A																																	
<p>1.Graph</p> <div style="text-align: right;"> <p>---□--- Load 50%</p> <p>—△— Load 100%</p> </div> <p style="text-align: center;">Input Voltage [V]</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>80</td><td>32.042</td><td>32.044</td></tr> <tr><td>85</td><td>32.044</td><td>32.044</td></tr> <tr><td>100</td><td>32.045</td><td>32.045</td></tr> <tr><td>120</td><td>32.046</td><td>32.045</td></tr> <tr><td>200</td><td>32.046</td><td>32.045</td></tr> <tr><td>230</td><td>32.046</td><td>32.045</td></tr> <tr><td>264</td><td>32.047</td><td>32.045</td></tr> <tr><td>280</td><td>32.047</td><td>32.045</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	80	32.042	32.044	85	32.044	32.044	100	32.045	32.045	120	32.046	32.045	200	32.046	32.045	230	32.046	32.045	264	32.047	32.045	280	32.047	32.045	--	-	-
Input Voltage [V]	Output Voltage [V]																																	
	Load 50%	Load 100%																																
80	32.042	32.044																																
85	32.044	32.044																																
100	32.045	32.045																																
120	32.046	32.045																																
200	32.046	32.045																																
230	32.046	32.045																																
264	32.047	32.045																																
280	32.047	32.045																																
--	-	-																																
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																		




<p>Model TUXS200F32</p> <p>Item Load Regulation</p> <p>Object +32V6.2A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																																			
<p>1.Graph</p> <p>—△— Input Volt. 100V</p> <p>---□--- Input Volt. 200V</p> <p>-·-○-·- Input Volt. 230V</p> <p>Output Voltage [V]</p> <p>Load Current [A]</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>32.048</td><td>32.048</td><td>32.048</td></tr> <tr><td>1.24</td><td>32.047</td><td>32.047</td><td>32.047</td></tr> <tr><td>2.48</td><td>32.047</td><td>32.047</td><td>32.047</td></tr> <tr><td>3.72</td><td>32.046</td><td>32.046</td><td>32.046</td></tr> <tr><td>4.96</td><td>32.046</td><td>32.046</td><td>32.045</td></tr> <tr><td>6.20</td><td>32.045</td><td>32.045</td><td>32.045</td></tr> <tr><td>6.82</td><td>32.043</td><td>32.043</td><td>32.043</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Output Voltage [V]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	32.048	32.048	32.048	1.24	32.047	32.047	32.047	2.48	32.047	32.047	32.047	3.72	32.046	32.046	32.046	4.96	32.046	32.046	32.045	6.20	32.045	32.045	32.045	6.82	32.043	32.043	32.043	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																				
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																		
0.00	32.048	32.048	32.048																																																		
1.24	32.047	32.047	32.047																																																		
2.48	32.047	32.047	32.047																																																		
3.72	32.046	32.046	32.046																																																		
4.96	32.046	32.046	32.045																																																		
6.20	32.045	32.045	32.045																																																		
6.82	32.043	32.043	32.043																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
<p>Note: Slanted line shows the range of the rated load current.</p>																																																					



Model	TUXS200F32	Temperature	25°C
Item	Dynamic Load Response	Testing Circuitry	Figure A
Object	+32V6.2A		

Input Volt. 100 V  
Cycle 1000 ms

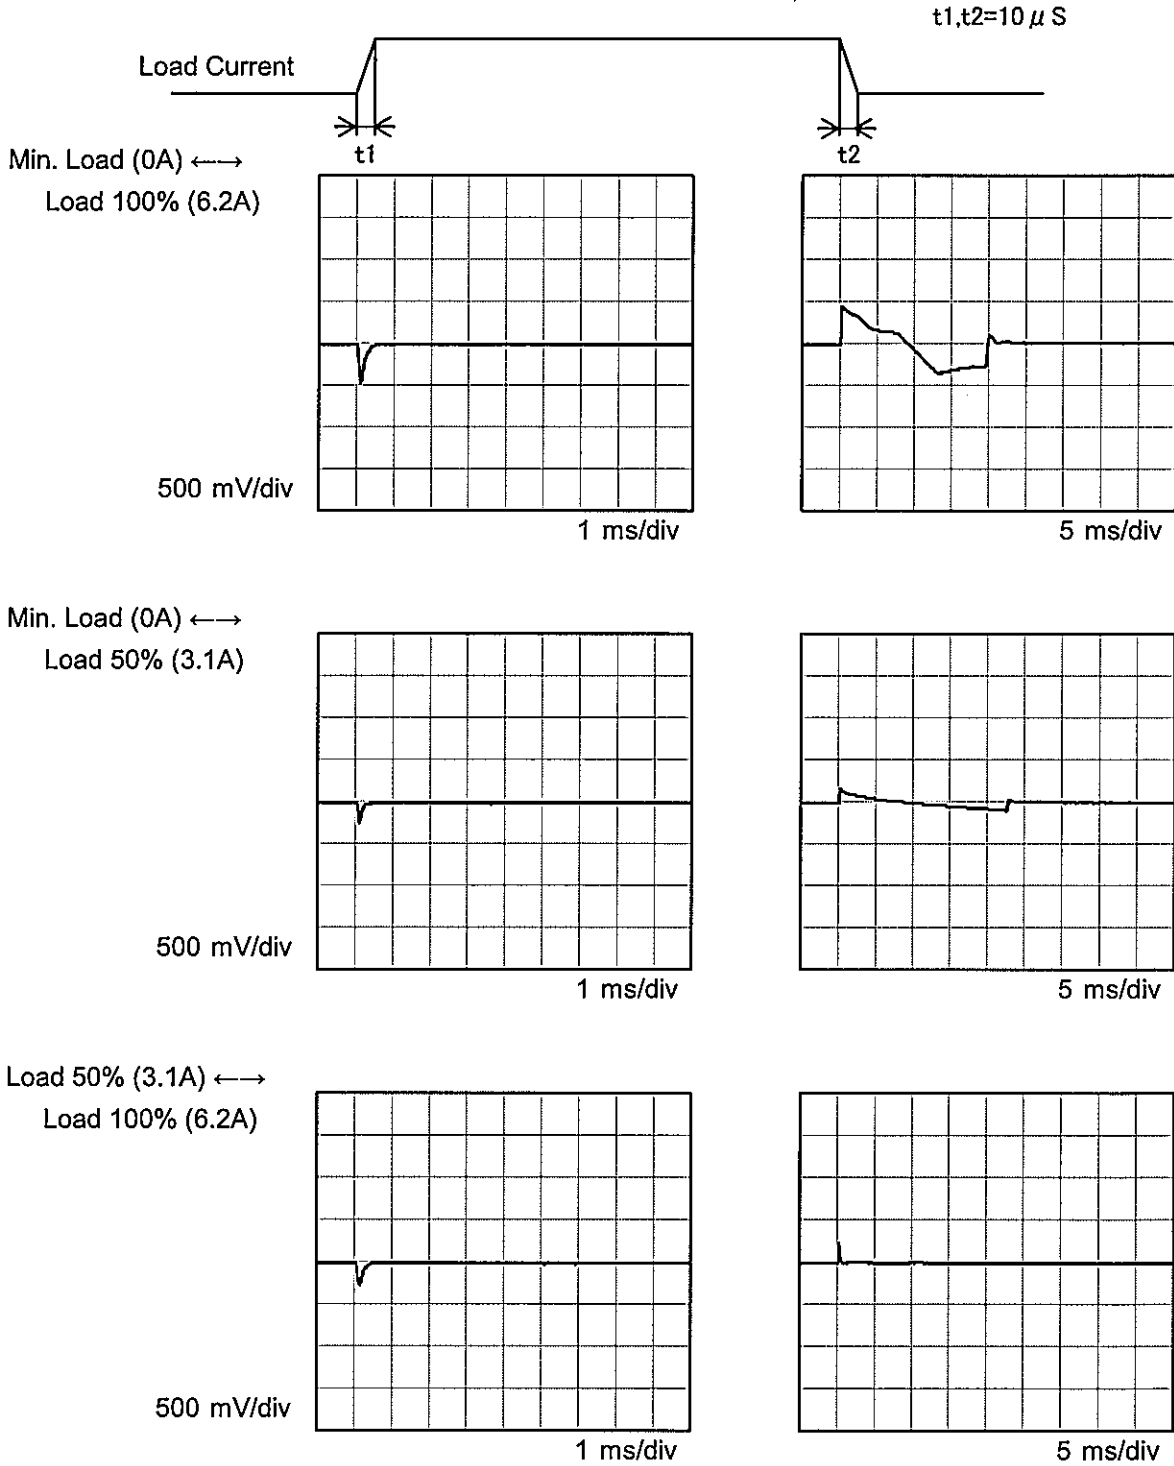



Model		TUXS200F32	Temperature 25°C																																							
Item		Ripple Voltage (by Load Current)	Testing Circuitry Figure A																																							
Object		+32V6.2A																																								
1.Graph		2.Values																																								
<p>                     —△— Input Volt. 100V                      - - ○ - - Input Volt. 200V                 </p> <p>                     Measured by 100 MHz Oscilloscope.                      Ripple Voltage is shown as p-p in the figure below.                      Note: Slanted line shows the range of the rated load current.                 </p>		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Input Volt. 100 [V]</th> <th>Input Volt. 200 [V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>30</td><td>24</td></tr> <tr><td>1.24</td><td>24</td><td>27</td></tr> <tr><td>2.48</td><td>29</td><td>37</td></tr> <tr><td>3.72</td><td>32</td><td>32</td></tr> <tr><td>4.96</td><td>39</td><td>40</td></tr> <tr><td>6.20</td><td>49</td><td>44</td></tr> <tr><td>6.82</td><td>51</td><td>47</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Ripple Voltage [mV]		Input Volt. 100 [V]	Input Volt. 200 [V]	0.00	30	24	1.24	24	27	2.48	29	37	3.72	32	32	4.96	39	40	6.20	49	44	6.82	51	47	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple Voltage [mV]																																									
	Input Volt. 100 [V]	Input Volt. 200 [V]																																								
0.00	30	24																																								
1.24	24	27																																								
2.48	29	37																																								
3.72	32	32																																								
4.96	39	40																																								
6.20	49	44																																								
6.82	51	47																																								
--	-	-																																								
--	-	-																																								
--	-	-																																								
--	-	-																																								
<p>                     T1: Due to AC Input Line                      T2: Due to Switching                 </p> <p>                     Ripple [mVp-p]                 </p>																																										
<p>Fig. Complex Ripple Wave Form</p>																																										


<p>Model TUXS200F32</p>		<p>Temperature 25°C Testing Circuitry Figure A</p>																																						
Item	Ripple-Noise																																							
Object	+32V6.2A																																							
<p>1.Graph</p> <p>                     —△— Input Volt. 100V                      - - -○- - - Input Volt. 200V                 </p> <p>                     300 270 240 210 180 150 120 90 60 30 0                 </p> <p>0 2 4 6</p> <p>Ripple-Noise [mV]</p> <p>Load Current [A]</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple-Noise [mV]</th> </tr> <tr> <th>Input Volt. 100 [V]</th> <th>Input Volt. 200 [V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>33</td><td>29</td></tr> <tr><td>1.24</td><td>34</td><td>34</td></tr> <tr><td>2.48</td><td>36</td><td>45</td></tr> <tr><td>3.72</td><td>42</td><td>41</td></tr> <tr><td>4.96</td><td>49</td><td>55</td></tr> <tr><td>6.20</td><td>60</td><td>49</td></tr> <tr><td>6.82</td><td>69</td><td>53</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Ripple-Noise [mV]		Input Volt. 100 [V]	Input Volt. 200 [V]	0.00	33	29	1.24	34	34	2.48	36	45	3.72	42	41	4.96	49	55	6.20	60	49	6.82	69	53	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple-Noise [mV]																																							
	Input Volt. 100 [V]	Input Volt. 200 [V]																																						
0.00	33	29																																						
1.24	34	34																																						
2.48	36	45																																						
3.72	42	41																																						
4.96	49	55																																						
6.20	60	49																																						
6.82	69	53																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Measured by 100 MHz Oscilloscope. Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p>																																								
<p>                     T1: Due to AC Input Line                      T2: Due to Switching                 </p> <p>                     T1 T2 Ripple-Noise [mVp-p]                 </p>																																								
<p>Fig. Complex Ripple Wave Form</p>																																								



Model	TUXS200F32
Item	Ripple Voltage (by Ambient Temp.)
Object	+32V6.2A

Testing Circuitry Figure A

1.Graph

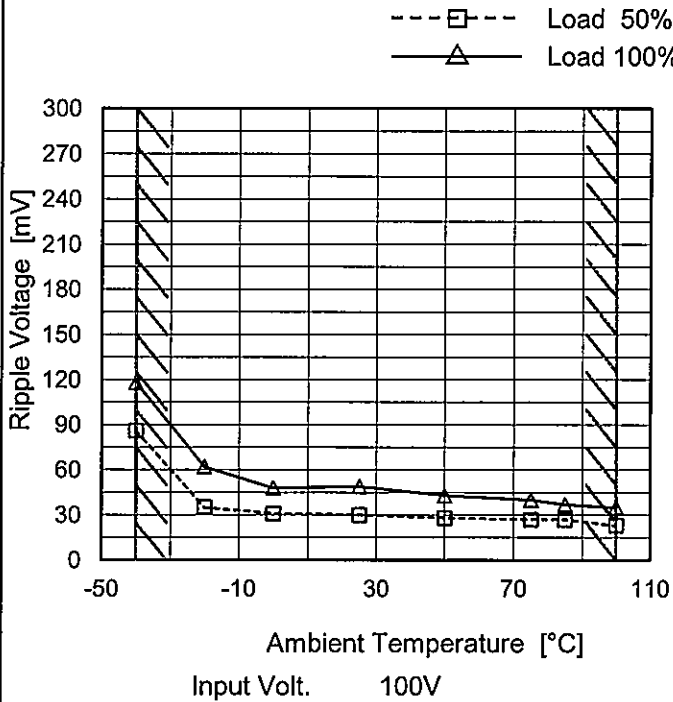

2.Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-40	86	118
-20	35	62
0	31	48
25	30	49
50	28	43
75	27	40
85	27	37
100	23	35
--	-	-
--	-	-
--	-	-

Measured by 100 MHz Oscilloscope.  
 Note: Slanted line shows the range of the rated ambient temperature.

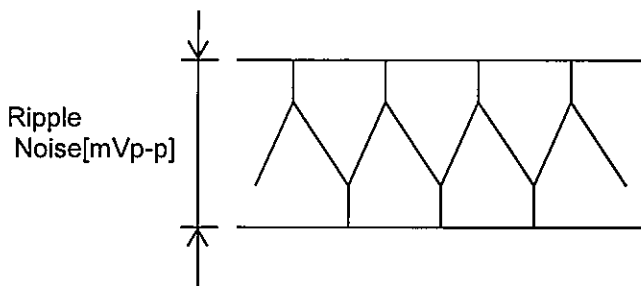


Fig.Complex Ripple Noise Wave Form





Model		TUXS200F32	Testing Circuitry Figure A																																																				
Item		Ambient Temperature Drift																																																					
Object		+32V6.2A																																																					
1.Graph		<p> <span style="display: inline-block; width: 100px; border-bottom: 1px solid black; margin-right: 5px;"></span>△<span style="margin-left: 5px;">Input Volt. 100V</span>  <span style="display: inline-block; width: 100px; border-bottom: 1px dashed black; margin-right: 5px;"></span>□<span style="margin-left: 5px;">Input Volt. 200V</span>  <span style="display: inline-block; width: 100px; border-bottom: 1px dash-dot black; margin-right: 5px;"></span>○<span style="margin-left: 5px;">Input Volt. 230V</span> </p> <p style="text-align: center;">Ambient Temperature [°C] Load 100%</p>																																																					
2.Values		<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>-50</td><td>31.930</td><td>31.931</td><td>31.929</td></tr> <tr><td>-40</td><td>31.954</td><td>31.963</td><td>31.967</td></tr> <tr><td>-20</td><td>31.989</td><td>31.995</td><td>31.999</td></tr> <tr><td>0</td><td>32.016</td><td>32.020</td><td>32.022</td></tr> <tr><td>25</td><td>32.045</td><td>32.045</td><td>32.045</td></tr> <tr><td>50</td><td>32.045</td><td>32.045</td><td>32.045</td></tr> <tr><td>75</td><td>32.043</td><td>32.041</td><td>32.040</td></tr> <tr><td>85</td><td>32.038</td><td>32.036</td><td>32.035</td></tr> <tr><td>100</td><td>32.030</td><td>32.028</td><td>32.028</td></tr> <tr><td>105</td><td>32.026</td><td>32.026</td><td>32.026</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	-50	31.930	31.931	31.929	-40	31.954	31.963	31.967	-20	31.989	31.995	31.999	0	32.016	32.020	32.022	25	32.045	32.045	32.045	50	32.045	32.045	32.045	75	32.043	32.041	32.040	85	32.038	32.036	32.035	100	32.030	32.028	32.028	105	32.026	32.026	32.026	--	-	-	-
Ambient Temperature [°C]	Output Voltage [V]																																																						
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																				
-50	31.930	31.931	31.929																																																				
-40	31.954	31.963	31.967																																																				
-20	31.989	31.995	31.999																																																				
0	32.016	32.020	32.022																																																				
25	32.045	32.045	32.045																																																				
50	32.045	32.045	32.045																																																				
75	32.043	32.041	32.040																																																				
85	32.038	32.036	32.035																																																				
100	32.030	32.028	32.028																																																				
105	32.026	32.026	32.026																																																				
--	-	-	-																																																				
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																																							



<b>COSEL</b>		Testing Circuitry Figure A
Model	TUXS200F32	
Item	Output Voltage Accuracy	
Object	+32V6.2A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 85°C

Input Voltage : 100 - 230V

Load Current : 0 - 6.2A

\* Output Voltage Accuracy =  $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

\* Output Voltage Accuracy (Ration) =  $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	50	230	6.2	32.045	±46	±0.1
Minimum Voltage	-40	100	6.2	31.954		




<b>COSEL</b>																									
Model	TUXS200F32	Temperature	25°C																						
Item	Time Lapse Drift	Testing Circuitry	Figure A																						
Object	+32V6.2A																								
<p>1.Graph</p> <p style="text-align: center;">Time [H]</p> <p>Input Volt.    100V Load            100%</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>32.025</td></tr> <tr><td>0.5</td><td>32.045</td></tr> <tr><td>1.0</td><td>32.045</td></tr> <tr><td>2.0</td><td>32.045</td></tr> <tr><td>3.0</td><td>32.045</td></tr> <tr><td>4.0</td><td>32.045</td></tr> <tr><td>5.0</td><td>32.045</td></tr> <tr><td>6.0</td><td>32.045</td></tr> <tr><td>7.0</td><td>32.045</td></tr> <tr><td>8.0</td><td>32.045</td></tr> </tbody> </table>		Time since start [H]	Output Voltage [V]	0.0	32.025	0.5	32.045	1.0	32.045	2.0	32.045	3.0	32.045	4.0	32.045	5.0	32.045	6.0	32.045	7.0	32.045	8.0	32.045
Time since start [H]	Output Voltage [V]																								
0.0	32.025																								
0.5	32.045																								
1.0	32.045																								
2.0	32.045																								
3.0	32.045																								
4.0	32.045																								
5.0	32.045																								
6.0	32.045																								
7.0	32.045																								
8.0	32.045																								



Model	TUXS200F32	Temperature	25°C
Item	Rise and Fall Time	Testing Circuitry	Figure A
Object	+32V6.2A		


1.Graph

Input Volt. 100 V

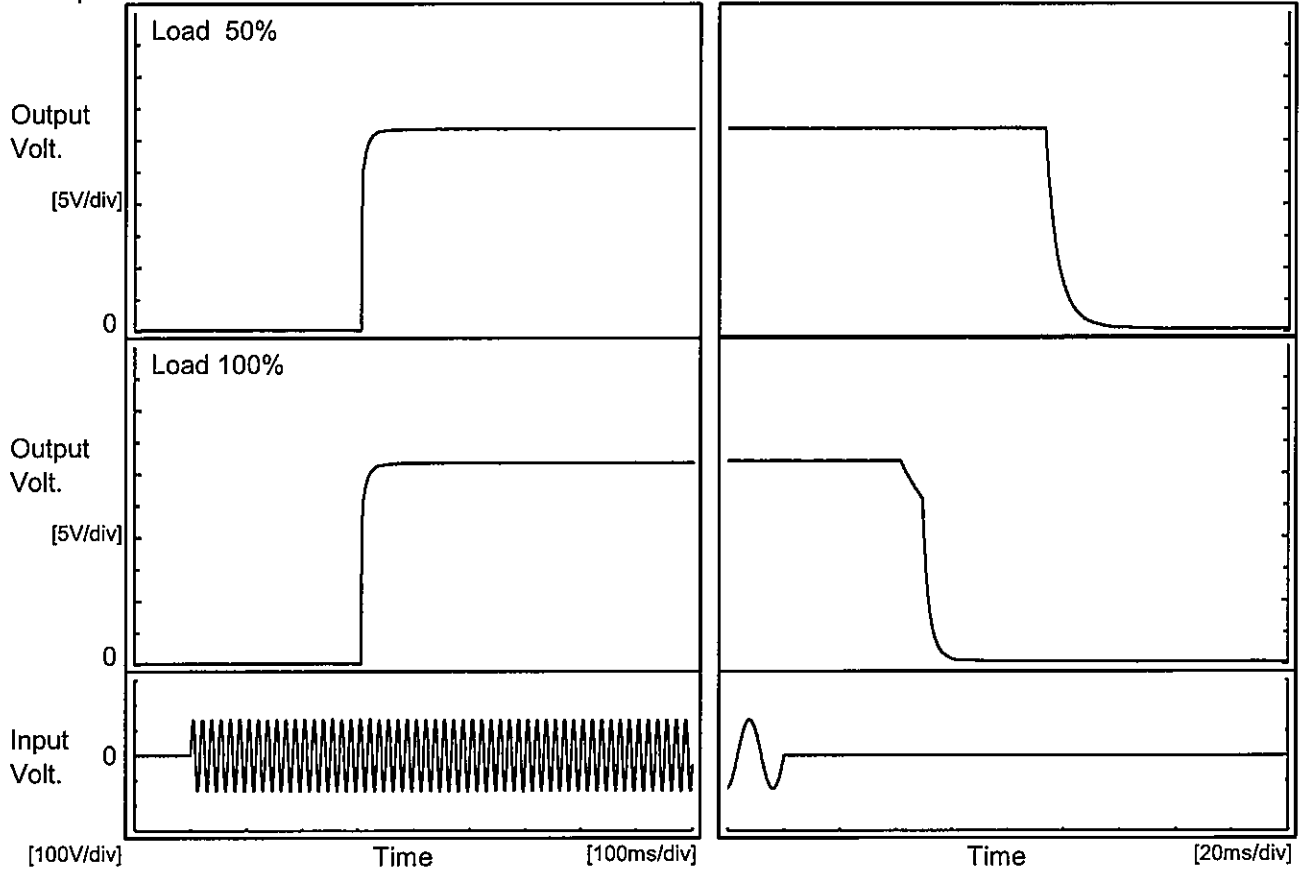

2.Values

		[ms]				
Load	Time	Td	Tr	Ts	Th	Tf
50 %		306.0	9.5	315.5	93.6	10.4
100 %		306.0	9.5	315.5	44.9	9.5

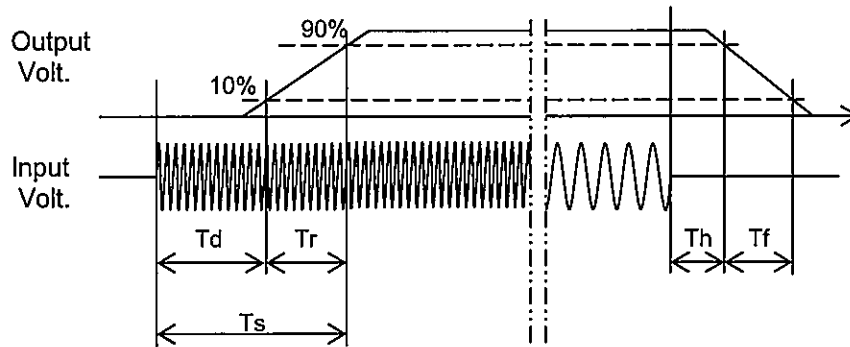



<p>Model TUXS200F32</p>		<p>Temperature 25°C Testing Circuitry Figure A</p>																																
<p>Item Hold-Up Time</p>																																		
<p>Object +32V6.2A</p>																																		
<p>1.Graph</p> <p>---□--- Load 50% —△— Load 100%</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Hold-Up Time [ms]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>80</td><td>94</td><td>42</td></tr> <tr><td>85</td><td>94</td><td>42</td></tr> <tr><td>100</td><td>94</td><td>42</td></tr> <tr><td>120</td><td>93</td><td>42</td></tr> <tr><td>200</td><td>94</td><td>42</td></tr> <tr><td>230</td><td>94</td><td>42</td></tr> <tr><td>264</td><td>94</td><td>42</td></tr> <tr><td>280</td><td>93</td><td>42</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Input Voltage [V]	Hold-Up Time [ms]		Load 50%	Load 100%	80	94	42	85	94	42	100	94	42	120	93	42	200	94	42	230	94	42	264	94	42	280	93	42	--	-	-
Input Voltage [V]	Hold-Up Time [ms]																																	
	Load 50%	Load 100%																																
80	94	42																																
85	94	42																																
100	94	42																																
120	93	42																																
200	94	42																																
230	94	42																																
264	94	42																																
280	93	42																																
--	-	-																																
<p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy. Note: Slanted line shows the range of the rated input voltage.</p>																																		




<p>Model TUXS200F32</p> <p>Item Instantaneous Interruption Compensation</p> <p>Object +32V6.2A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																																		
<p>1.Graph</p> <p>—△— Input Volt. 100V</p> <p>---□--- Input Volt. 200V</p> <p>-·-○-·- Input Volt. 230V</p> <p>Instantaneous Compensation Time [ms]</p> <p>Load Current [A]</p>	<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Time [ms]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>1.24</td><td>212</td><td>213</td><td>212</td></tr> <tr><td>2.48</td><td>111</td><td>112</td><td>112</td></tr> <tr><td>3.72</td><td>74</td><td>76</td><td>76</td></tr> <tr><td>4.96</td><td>56</td><td>56</td><td>56</td></tr> <tr><td>6.20</td><td>42</td><td>42</td><td>42</td></tr> <tr><td>6.82</td><td>16</td><td>16</td><td>16</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Time [ms]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	-	-	-	1.24	212	213	212	2.48	111	112	112	3.72	74	76	76	4.96	56	56	56	6.20	42	42	42	6.82	16	16	16	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Time [ms]																																																			
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																	
0.00	-	-	-																																																	
1.24	212	213	212																																																	
2.48	111	112	112																																																	
3.72	74	76	76																																																	
4.96	56	56	56																																																	
6.20	42	42	42																																																	
6.82	16	16	16																																																	
--	-	-	-																																																	
--	-	-	-																																																	
--	-	-	-																																																	
--	-	-	-																																																	
<p>Note: Slanted line shows the range of the rated load current.</p>																																																				



Model	TUXS200F32
Item	Minimum Input Voltage for Regulated Output Voltage
Object	+32V6.2A

Testing Circuitry Figure A

1.Graph

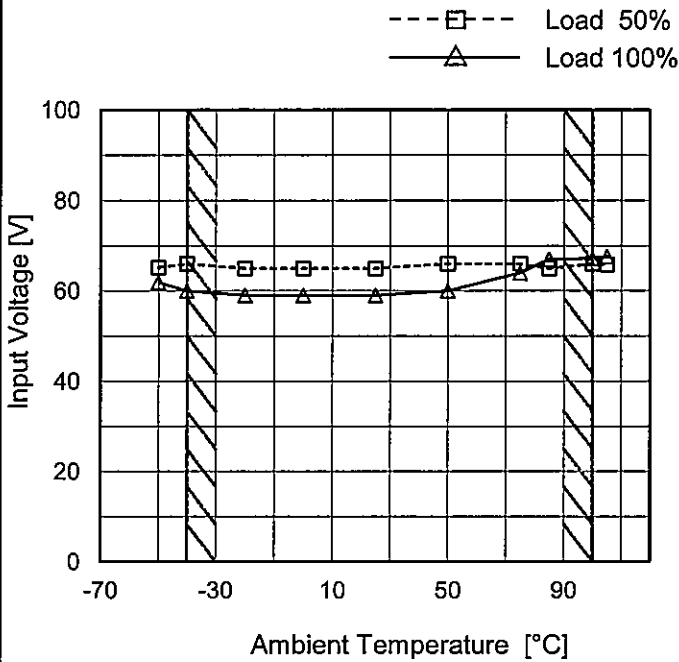

Note: Slanted line shows the range of the rated ambient temperature.

2.Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-50	66	62
-40	66	60
-20	65	59
0	65	59
25	65	59
50	66	60
75	66	64
85	65	67
100	66	68
105	66	68
--	-	-




<b>COSEL</b>																																																										
Model	TUXS200F32	Temperature	25°C																																																							
Item	Overcurrent Protection	Testing Circuitry	Figure A																																																							
Object	+32V6.2A																																																									
<p>1.Graph</p> <div style="display: flex; align-items: center;"> <div style="margin-right: 10px;"> <p>————— Input Volt. 100V</p> <p>————— Input Volt. 200V</p> <p>————— Input Volt. 230V</p> </div> </div> <p style="text-align: center;">Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>		<p>2.Values</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>32.0</td><td>7.34</td><td>7.30</td><td>7.22</td></tr> <tr><td>30.4</td><td>7.47</td><td>7.30</td><td>7.25</td></tr> <tr><td>28.8</td><td>7.47</td><td>7.30</td><td>7.25</td></tr> <tr><td>25.6</td><td>0.00</td><td>0.00</td><td>0.00</td></tr> <tr><td>22.4</td><td>0.00</td><td>0.00</td><td>0.00</td></tr> <tr><td>19.2</td><td>0.00</td><td>0.00</td><td>0.00</td></tr> <tr><td>16.0</td><td>0.00</td><td>0.00</td><td>0.00</td></tr> <tr><td>12.8</td><td>0.00</td><td>0.00</td><td>0.00</td></tr> <tr><td>9.6</td><td>0.00</td><td>0.00</td><td>0.00</td></tr> <tr><td>6.4</td><td>0.00</td><td>0.00</td><td>0.00</td></tr> <tr><td>3.2</td><td>0.00</td><td>0.00</td><td>0.00</td></tr> <tr><td>0.0</td><td>0.00</td><td>0.00</td><td>0.00</td></tr> </tbody> </table>		Output Voltage [V]	Load Current [A]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	32.0	7.34	7.30	7.22	30.4	7.47	7.30	7.25	28.8	7.47	7.30	7.25	25.6	0.00	0.00	0.00	22.4	0.00	0.00	0.00	19.2	0.00	0.00	0.00	16.0	0.00	0.00	0.00	12.8	0.00	0.00	0.00	9.6	0.00	0.00	0.00	6.4	0.00	0.00	0.00	3.2	0.00	0.00	0.00	0.0	0.00	0.00	0.00
Output Voltage [V]	Load Current [A]																																																									
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																							
32.0	7.34	7.30	7.22																																																							
30.4	7.47	7.30	7.25																																																							
28.8	7.47	7.30	7.25																																																							
25.6	0.00	0.00	0.00																																																							
22.4	0.00	0.00	0.00																																																							
19.2	0.00	0.00	0.00																																																							
16.0	0.00	0.00	0.00																																																							
12.8	0.00	0.00	0.00																																																							
9.6	0.00	0.00	0.00																																																							
6.4	0.00	0.00	0.00																																																							
3.2	0.00	0.00	0.00																																																							
0.0	0.00	0.00	0.00																																																							





Model	TUXS200F32
Item	Oversvoltage Protection
Object	+32V6.2A

Testing Circuitry Figure A

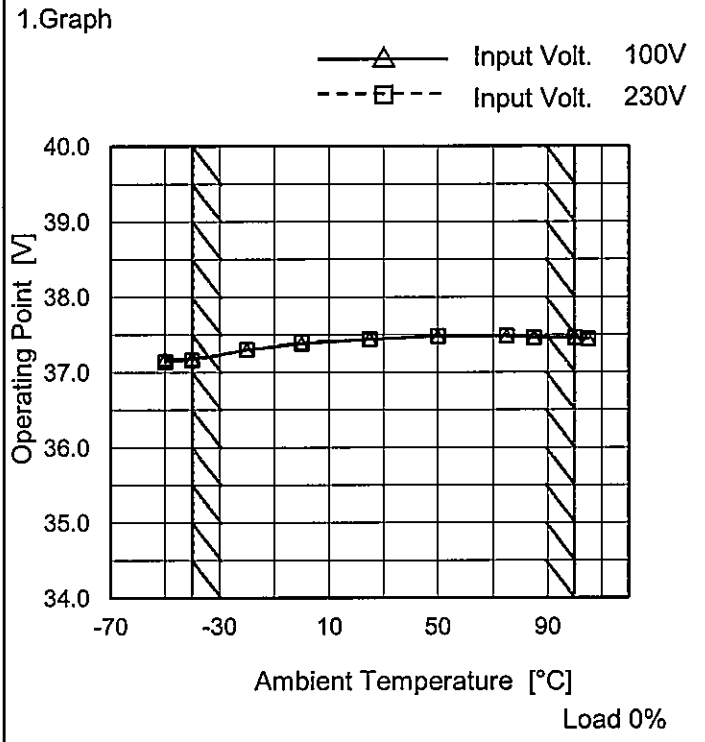

2.Values

Ambient Temperature [°C]	Operating Point [V]	
	Input Volt. 100[V]	Input Volt. 230[V]
-50	37.18	37.14
-40	37.18	37.16
-20	37.30	37.30
0	37.38	37.40
25	37.44	37.44
50	37.48	37.48
75	37.48	37.48
85	37.46	37.46
100	37.46	37.46
105	37.44	37.44
--	-	-

Note: Slanted line shows the range of the rated ambient temperature.


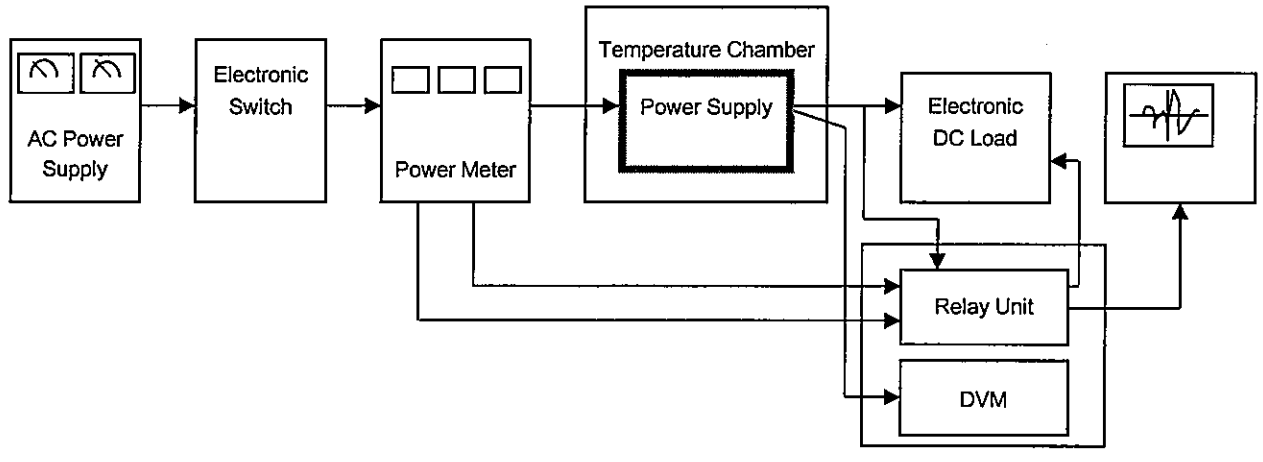



Figure A

Data Acquisition/Control Unit

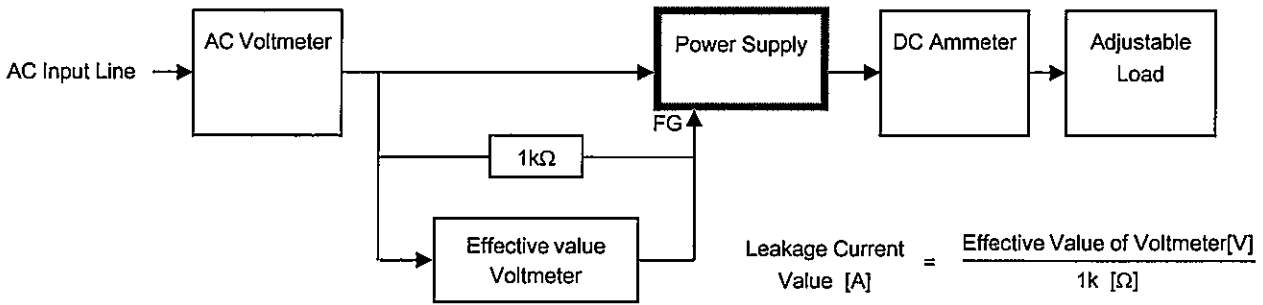


$$\text{Leakage Current Value [A]} = \frac{\text{Effective Value of Voltmeter [V]}}{1\text{k} [\Omega]}$$

Figure B ( DEN-AN )

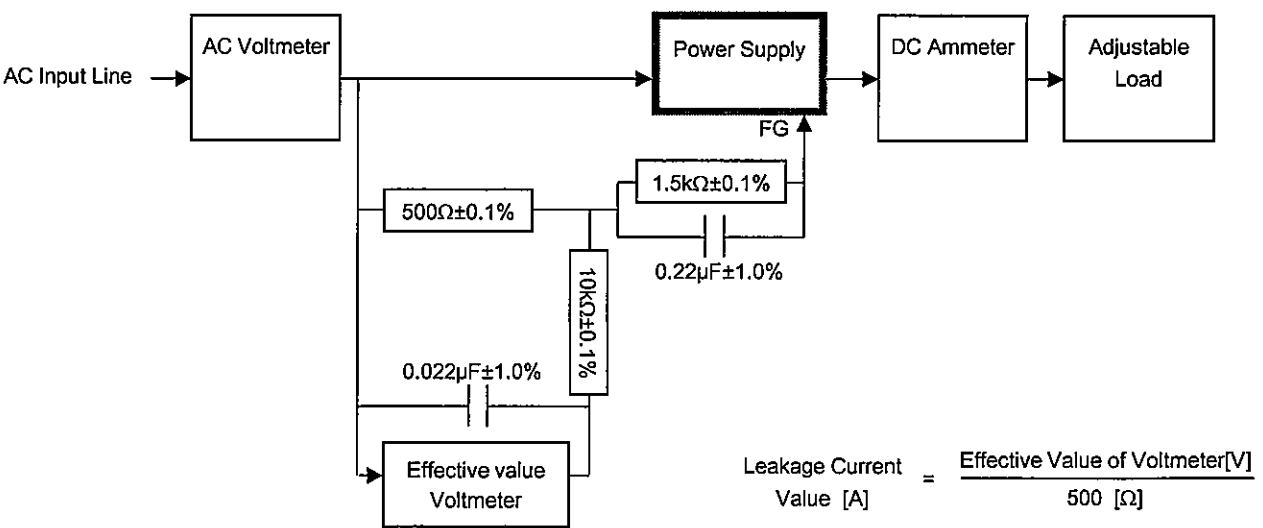

$$\text{Leakage Current Value [A]} = \frac{\text{Effective Value of Voltmeter [V]}}{500 [\Omega]}$$

Figure B ( IEC60950-1 )

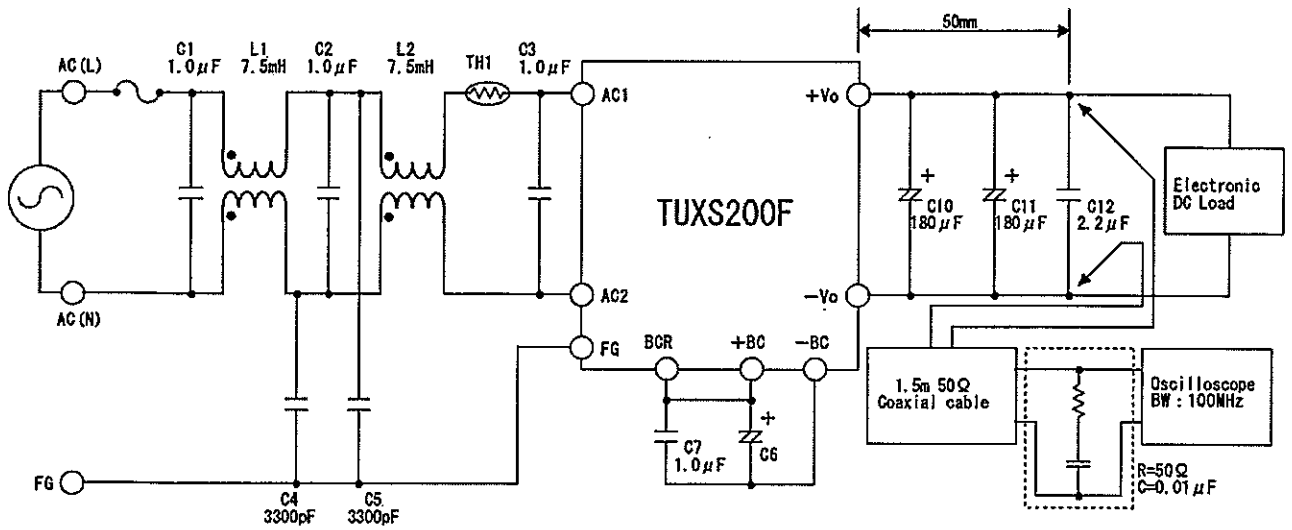

- L1,L2 : SCR22-060-1R0A075J(NEC TOKIN)
- TH1 : 12D2-15LCS(SEMITEC)
- C1,C2,C3 : LE105-MX(OKAYA)
- C4,C5 : DE1E3KX332M(MURATA)
- C6 : EKXJ421ELL151MM50S(Nippon Chemi-Con)
- C7 : AFS450V105K(OKAYA)
- C10,C11 : PCR1H181MCL1GS(NICHICON)
- C12 : GRM31CR72A225K(MURATA)

Figure C