

Temperature increase of main components: 主要部品温度上昇


Model: ZUS1024/ZUW1024

1. Conditions

- (1) Input :DC 18 ~ 36 [V]
- (2) Output :Rated output
- (3) Mounting method :Shown as Fig.1.1

2. Result

No.	Parts name	Symbol No.	Increase (ΔT)					Rated temp. [°C]	Reference
			[deg]						
			5V	12V	15V	$\pm 12V$	$\pm 15V$		
1	Transformer	T11	62	61	62	62	62	130	
2	Switching Transistor	TR23	50	52	48	48	49	150	Junction Temp.
3	Rectified Diode(Output)	D51	60	54	51	50	53	150	Junction Temp.
4	Power Control Ic	IC11	51	52	51	50	52	150	Junction Temp.
5	Photocoupler	PC11	47	44	43	45	44	125	Junction Temp.
6	Output Choke	L51	47	40	42	39	41	120	
7	Output Capacitor	C55	44	41	40	-	-	125	
8	Output Capacitor	C55,C56	-	-	-	39	41	125	
9									
10									
11									
12									
13									
14									
15									
16									
17									
18									
19									
20									

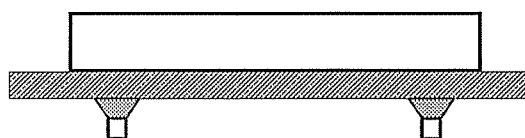

(Side view)

Fig.1.1 Mounting method
(Normal position)