



TEST DATA OF ZUW1R52412
(24.0V INPUT)

Regulated DC Power Supply

Date : June 14. 1996

Approved by : T. Sugimori
Design Manager

Prepared by : K. Shimano
Design Engineer

コーセル株式会社

COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Efficiency	2
効率	
3. Load Regulation	3
静的負荷変動	
4. Ripple Voltage (by Load Current)	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise	6
リップルノイズ	
6. Overcurrent Protection	8
過電流保護	
7. Dynamic Load Responce	9
動的負荷変動	
8. Rise and Fall Time	11
立上り、立下がり時間	
9. Ambient Temperature Drift	13
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage	14
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature)	15
リップル電圧(周囲温度特性)	
12. Time Lapse Drift	16
経時ドリフト	
13. Output Voltage Accuracy	17
定電圧精度	
14. Condensation	18
結露特性	
15. Figure of Testing Circuitry	20
測定回路図	

(Final Page 20)




Model ZUW1R52412		Temperature 25°C Testing Circuitry Figure A																																						
Item	Line Regulation 静的入力変動																																							
Object	+12V0.065A																																							
1. Graph [V] 	2. Values <table border="1" style="width:100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th style="border: none;">Input Voltage [V]</th> <th style="border: none;">Load 50% Output Volt. [V]</th> <th style="border: none;">Load 100% Output Volt. [V]</th> </tr> </thead> <tbody> <tr><td>16.0</td><td>11.943</td><td>11.822</td></tr> <tr><td>18.0</td><td>11.936</td><td>11.825</td></tr> <tr><td>20.0</td><td>11.932</td><td>11.827</td></tr> <tr><td>24.0</td><td>11.926</td><td>11.829</td></tr> <tr><td>30.0</td><td>11.919</td><td>11.829</td></tr> <tr><td>36.0</td><td>11.915</td><td>11.828</td></tr> <tr><td>40.0</td><td>11.913</td><td>11.828</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]	16.0	11.943	11.822	18.0	11.936	11.825	20.0	11.932	11.827	24.0	11.926	11.829	30.0	11.919	11.829	36.0	11.915	11.828	40.0	11.913	11.828	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]																																						
16.0	11.943	11.822																																						
18.0	11.936	11.825																																						
20.0	11.932	11.827																																						
24.0	11.926	11.829																																						
30.0	11.919	11.829																																						
36.0	11.915	11.828																																						
40.0	11.913	11.828																																						
—	—	—																																						
—	—	—																																						
—	—	—																																						
—	—	—																																						
—	—	—																																						
Object	-12V0.065A																																							
1. Graph [V] 	2. Values <table border="1" style="width:100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th style="border: none;">Input Voltage [V]</th> <th style="border: none;">Load 50% Output Volt. [V]</th> <th style="border: none;">Load 100% Output Volt. [V]</th> </tr> </thead> <tbody> <tr><td>16.0</td><td>-11.913</td><td>-11.793</td></tr> <tr><td>18.0</td><td>-11.906</td><td>-11.796</td></tr> <tr><td>20.0</td><td>-11.902</td><td>-11.798</td></tr> <tr><td>24.0</td><td>-11.896</td><td>-11.800</td></tr> <tr><td>30.0</td><td>-11.890</td><td>-11.799</td></tr> <tr><td>36.0</td><td>-11.885</td><td>-11.798</td></tr> <tr><td>40.0</td><td>-11.883</td><td>-11.798</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]	16.0	-11.913	-11.793	18.0	-11.906	-11.796	20.0	-11.902	-11.798	24.0	-11.896	-11.800	30.0	-11.890	-11.799	36.0	-11.885	-11.798	40.0	-11.883	-11.798	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]																																						
16.0	-11.913	-11.793																																						
18.0	-11.906	-11.796																																						
20.0	-11.902	-11.798																																						
24.0	-11.896	-11.800																																						
30.0	-11.890	-11.799																																						
36.0	-11.885	-11.798																																						
40.0	-11.883	-11.798																																						
—	—	—																																						
—	—	—																																						
—	—	—																																						
—	—	—																																						
—	—	—																																						
Note: Slanted line shows the range of the rated input voltage. (注) 斜線は定格入力電圧範囲を示す。																																								



Model	ZUW1R52412	Temperature	25°C
Item	Efficiency 効率	Testing Circuitry	Figure A

Object _____

1. Graph -----□----- Load 50%
-----△----- Load 100%

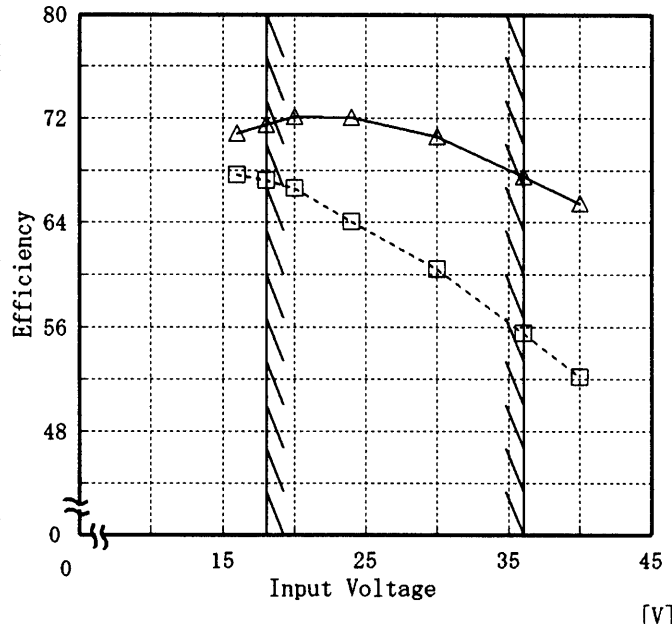

Note: Slanted line shows the range of the rated input voltage.


(注)斜線は定格入力電圧範囲を示す。

2. Values

Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
16.0	67.7	70.8
18.0	67.3	71.5
20.0	66.6	72.1
24.0	64.1	72.1
30.0	60.4	70.6
36.0	55.6	67.5
40.0	52.2	65.5
—	—	—
—	—	—
—	—	—
—	—	—
—	—	—




Model	ZUW1R52412	Temperature	25°C
Item	Load Regulation 静的負荷変動	Testing Circuitry	Figure A

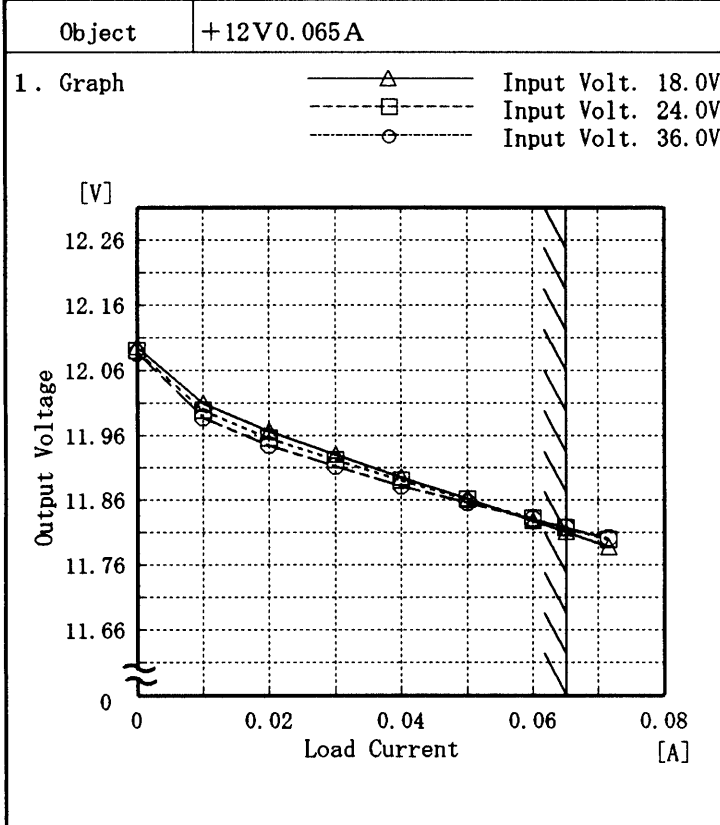

2. Values

Load Current [A]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
0.000	12.097	12.090	12.087
0.010	12.010	11.999	11.988
0.020	11.967	11.956	11.946
0.030	11.931	11.922	11.913
0.040	11.895	11.890	11.882
0.050	11.862	11.861	11.856
0.060	11.828	11.832	11.830
0.065	11.811	11.818	11.818
0.072	11.788	11.799	11.802
-	-	-	-

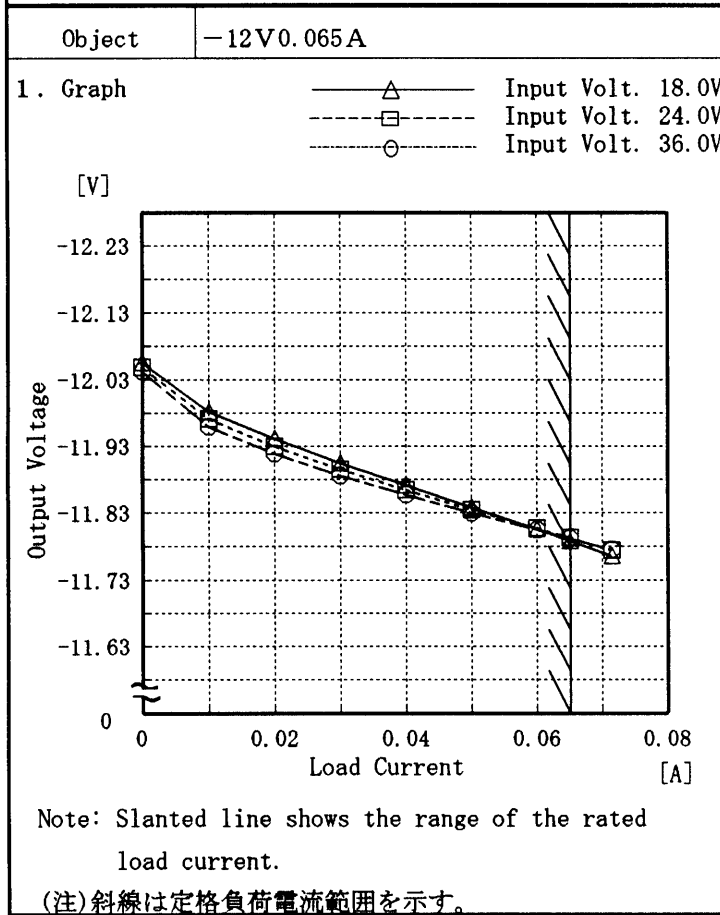

2. Values

Load Current [A]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
0.000	-12.057	-12.049	-12.044
0.010	-11.983	-11.972	-11.961
0.020	-11.942	-11.931	-11.920
0.030	-11.906	-11.897	-11.887
0.040	-11.872	-11.865	-11.857
0.050	-11.839	-11.836	-11.830
0.060	-11.806	-11.808	-11.805
0.065	-11.789	-11.794	-11.793
0.072	-11.766	-11.775	-11.776
-	-	-	-


COSEL

Model		ZUW1R52412	Temperature		25°C																																						
Item		Ripple Voltage (by Load Current) リップル電圧(負荷電流特性)	Testing Circuitry		Figure A																																						
Object		+12V 0.065A																																									
<p>1. Graph</p> <p>[mV]</p> <p>-----□----- Input Volt. 18.0V</p> <p>-----△----- Input Volt. 36.0V</p>			<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 18.0 [V]</th> <th>Input Volt. 36.0 [V]</th> </tr> <tr> <th>Ripple Output Volt. [mV]</th> <th>Ripple Output Volt. [mV]</th> </tr> </thead> <tbody> <tr><td>0.000</td><td>8</td><td>8</td></tr> <tr><td>0.010</td><td>8</td><td>8</td></tr> <tr><td>0.020</td><td>8</td><td>8</td></tr> <tr><td>0.030</td><td>10</td><td>8</td></tr> <tr><td>0.040</td><td>15</td><td>8</td></tr> <tr><td>0.060</td><td>18</td><td>8</td></tr> <tr><td>0.065</td><td>20</td><td>8</td></tr> <tr><td>0.072</td><td>25</td><td>10</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Input Volt. 18.0 [V]	Input Volt. 36.0 [V]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	0.000	8	8	0.010	8	8	0.020	8	8	0.030	10	8	0.040	15	8	0.060	18	8	0.065	20	8	0.072	25	10	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Volt. 18.0 [V]	Input Volt. 36.0 [V]																																									
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																									
0.000	8	8																																									
0.010	8	8																																									
0.020	8	8																																									
0.030	10	8																																									
0.040	15	8																																									
0.060	18	8																																									
0.065	20	8																																									
0.072	25	10																																									
—	—	—																																									
—	—	—																																									
—	—	—																																									
<p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップル電圧は、下図 p-p 値で示される。 (注)斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line 入力商用周期 T2: Due to Switching スイッチング周期</p> <p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																											



Model	ZUW1R52412	Temperature	25°C
Item	Ripple Voltage (by Load Current) リップル電圧(負荷電流特性)	Testing Circuitry	Figure A
Object	-12V 0.065A		

1. Graph

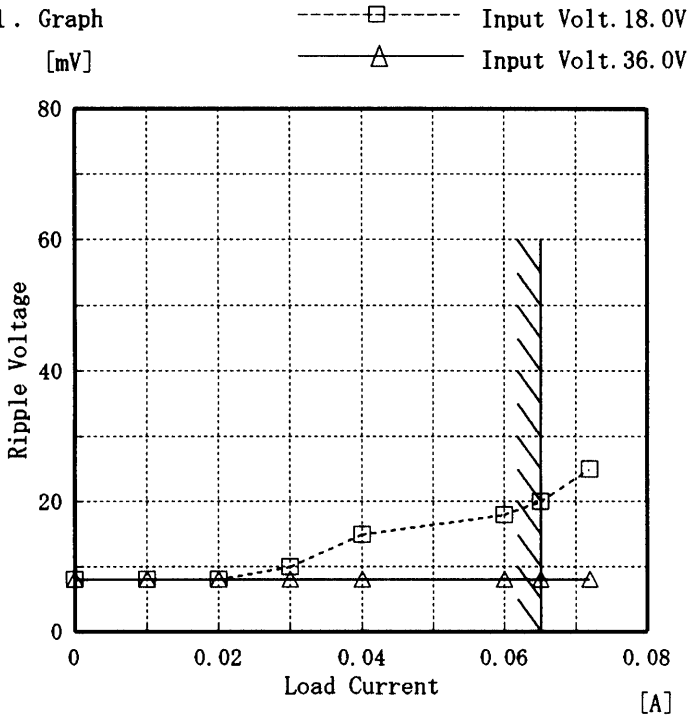

2. Values

Load Current [A]	Input Volt. 18.0 [V]	Input Volt. 36.0 [V]
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.000	8	8
0.010	8	8
0.020	8	8
0.030	10	8
0.040	15	8
0.060	18	8
0.065	20	8
0.072	25	8
—	—	—
—	—	—
—	—	—

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p-p 値で示される。
(注)斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
入力商用周期
T2: Due to Switching
スイッチング周期

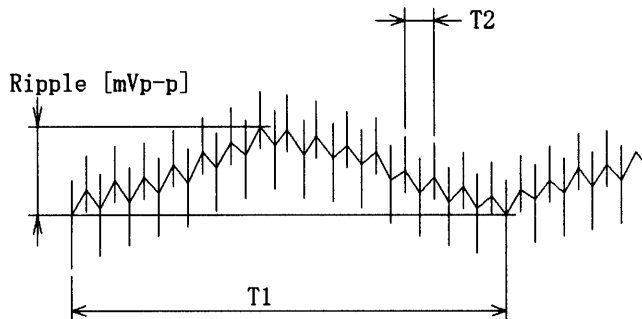



Fig. Complex Ripple Wave Form
図 リップル波形詳細図



Model	ZUW1R52412	Temperature	25°C
Item	Ripple-Noise リップルノイズ	Testing Circuitry	Figure A

Object +12V0.065A

1. Graph
 [mV]
 -----□----- Input Volt. 18.0V
 -----△----- Input Volt. 36.0V

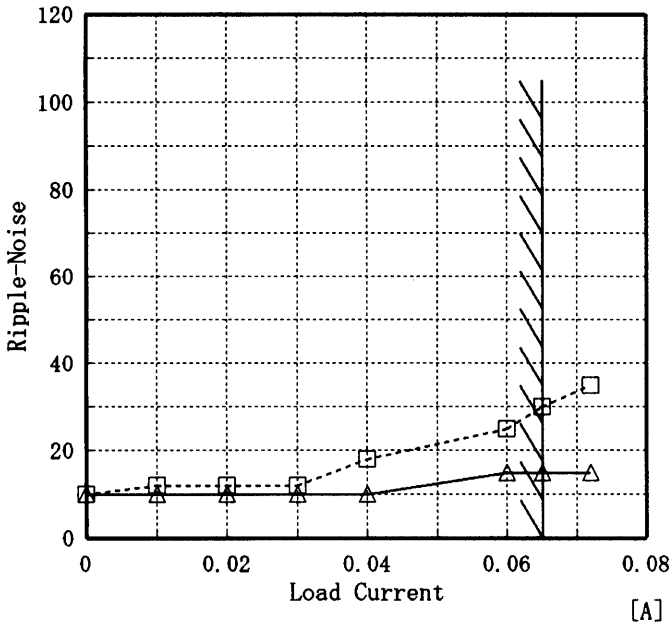

Ripple-Noise is shown as p-p in the figure below.
 Note: Slanted line shows the range of the rated load current.

リップルノイズは、下図 p-p 値で示される。
 (注) 斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
 入力商用周期
 T2: Due to Switching
 スイッチング周期

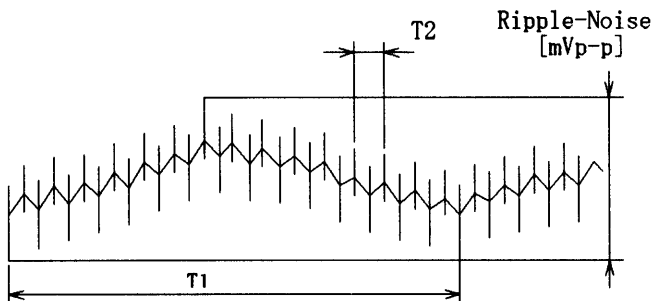


Fig. Complex Ripple Wave Form
 図 リップル波形詳細図


2. Values

Load current [A]	Input Volt. 18.0 [V]	Input Volt. 36.0 [V]
	Ripple-Noise [mV]	Ripple-Noise [mV]
0.000	10	10
0.010	12	10
0.020	12	10
0.030	12	10
0.040	18	10
0.060	25	15
0.065	30	15
0.072	35	15
—	—	—
—	—	—
—	—	—



Model	ZUW1R52412	Temperature	25°C
Item	Ripple-Noise リップルノイズ	Testing Circuitry	Figure A
Object	-12V0.065A		

1. Graph

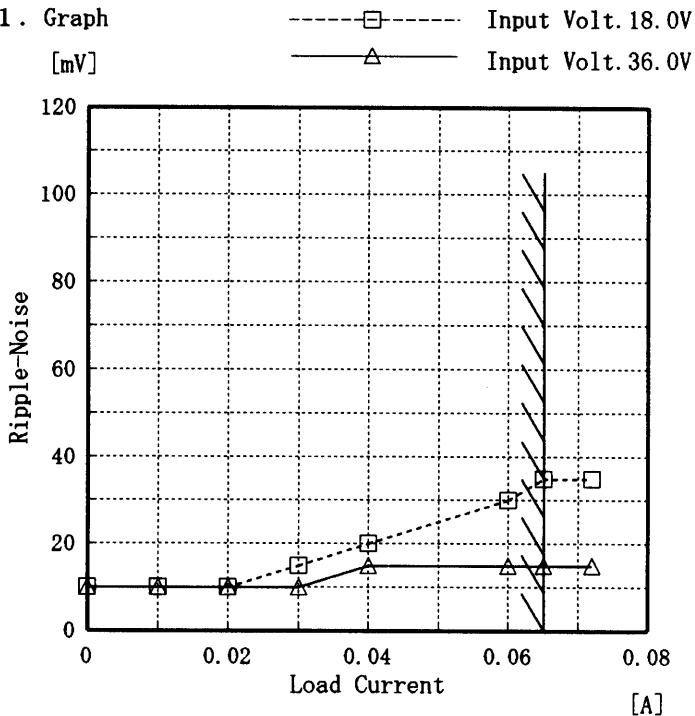

2. Values

Load current [A]	Input Volt. 18.0 [V]	Input Volt. 36.0 [V]
	Ripple-Noise [mV]	Ripple-Noise [mV]
0.000	10	10
0.010	10	10
0.020	10	10
0.030	15	10
0.040	20	15
0.060	30	15
0.065	35	15
0.072	35	15
—	—	—
—	—	—
—	—	—

Ripple-Noise is shown as p-p in the figure below.
 Note: Slanted line shows the range of the rated load current.

リップルノイズは、下図 p-p 値で示される。
 (注) 斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
 入力商用周期
 T2: Due to Switching
 スイッチング周期


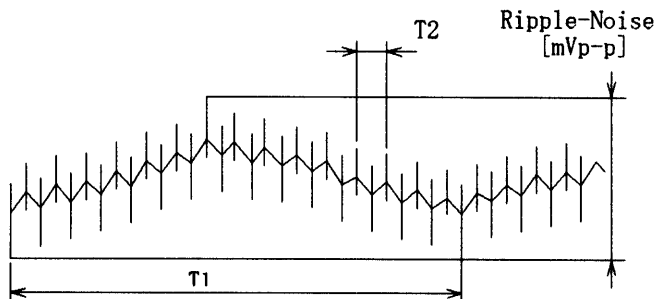


Fig. Complex Ripple Wave Form
 図 リップル波形詳細図



Model	ZUW1R52412	Temperature	25°C
Item	Overcurrent Protection 過電流保護	Testing Circuitry	Figure A
Object	+12V0.065A		

1. Graph

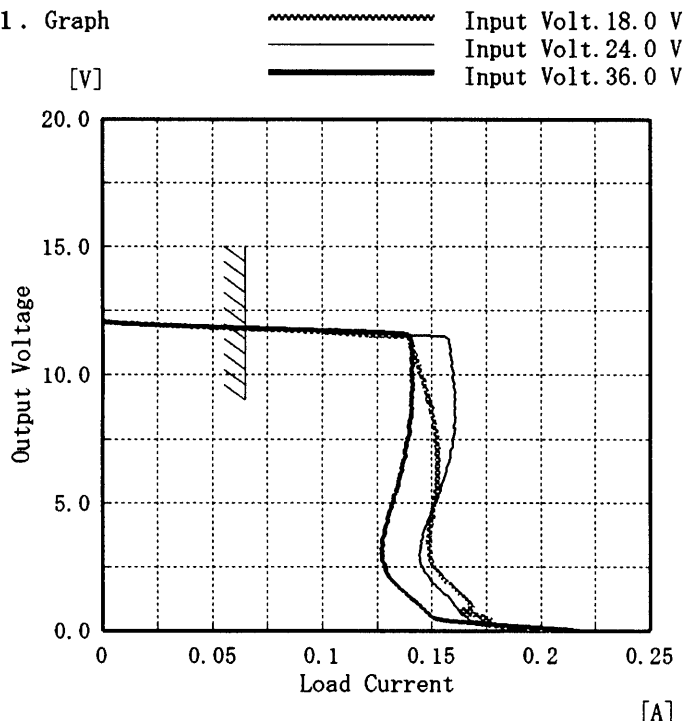


2. Values

Output Voltage [V]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]
	Load Current [A]	Load Current [A]	Load Current [A]
12.00	0.088	0.096	0.102
11.40	0.140	0.158	0.140
10.80	0.142	0.158	0.141
9.60	0.146	0.160	0.141
8.40	0.150	0.160	0.141
7.20	0.152	0.159	0.138
6.00	0.152	0.156	0.135
4.80	0.150	0.151	0.132
3.60	0.148	0.146	0.128
2.40	0.151	0.146	0.129
1.20	0.165	0.158	0.141
0.00	0.205	0.220	0.215

Object	-12V0.065A
--------	------------

1. Graph

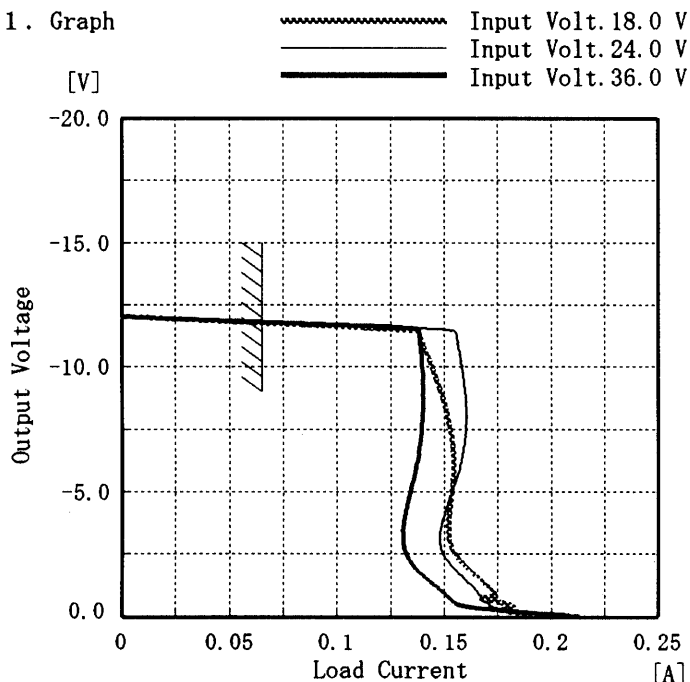

2. Values

Output Voltage [V]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]
	Load Current [A]	Load Current [A]	Load Current [A]
-12.00	0.102	0.114	0.123
-11.40	0.138	0.155	0.138
-10.80	0.140	0.156	0.139
-9.60	0.145	0.159	0.140
-8.40	0.150	0.160	0.140
-7.20	0.153	0.160	0.139
-6.00	0.154	0.157	0.137
-4.80	0.153	0.153	0.134
-3.60	0.152	0.149	0.131
-2.40	0.155	0.150	0.133
-1.20	0.170	0.162	0.145
0.00	0.199	0.213	0.207

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。



Model	ZUW1R52412	Temperature	25°C
Item	Dynamic Load Responce 動的負荷変動	Testing Circuitry	Figure A
Object	+12V0.065A		

Input Volt. 24.0 V



Cycle 100 mS

Load Current

Min. Load ←→

Load 100 %



200 mV/div

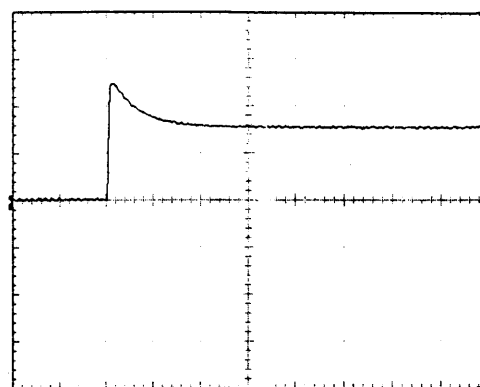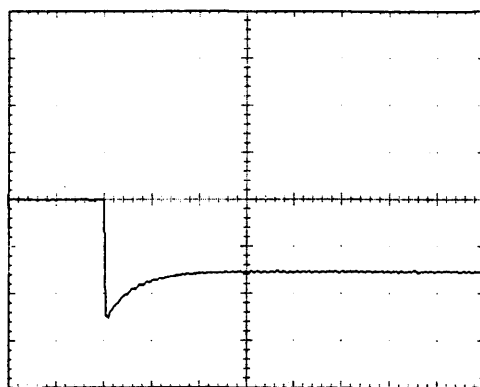

Min. Load ←→

Load 50 %



200 mV/div

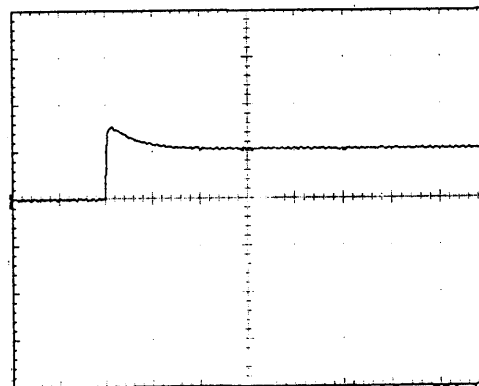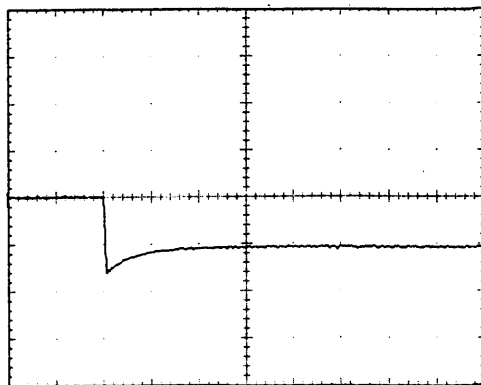

Load 50%←→

Load 100 %

200 mV/div

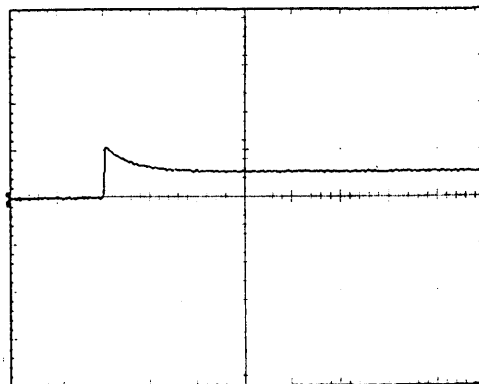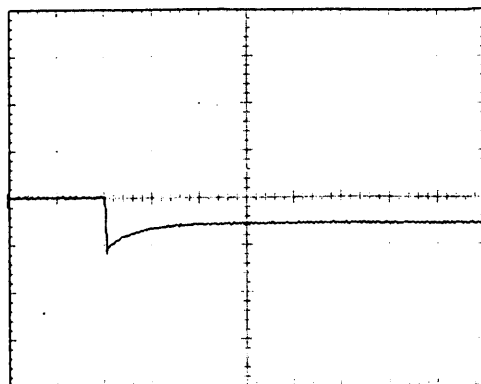

1 mS/div

COSEL

Model	ZUW1R52412	Temperature	25°C
Item	Dynamic Load Responce 動的負荷変動	Testing Circuitry	Figure A
Object	-12V0.065A		

Input Volt. 24.0 V


Cycle 100 mS

Load Current

Min. Load ←→

Load 100 %


200 mV/div

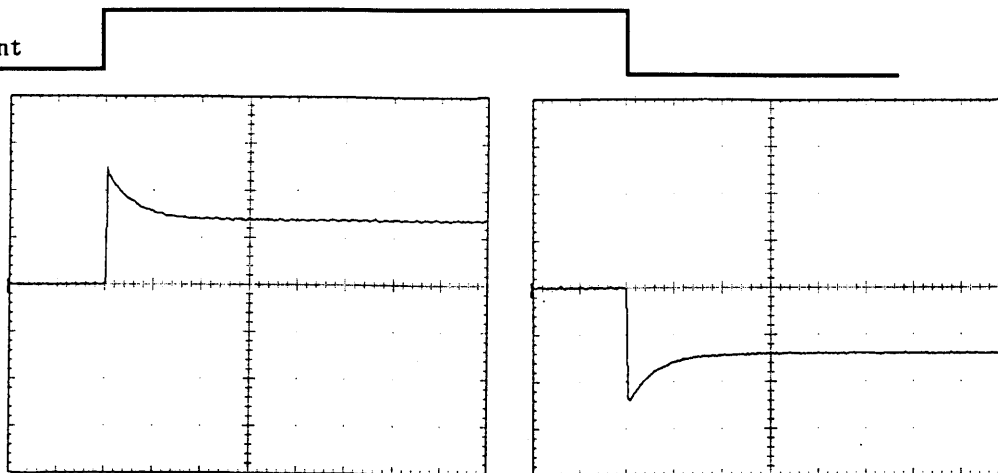

Min. Load ←→

Load 50 %


200 mV/div

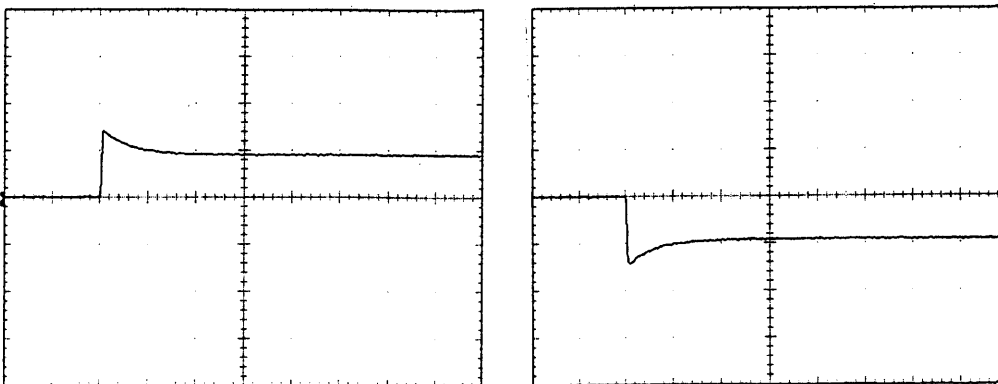

Load 50% ←→

Load 100 %

200 mV/div

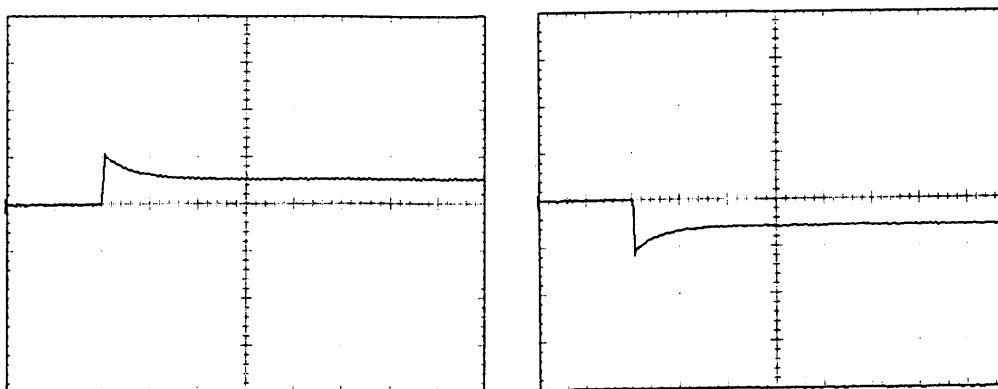


1 mS/div



Model	ZUW1R52412	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+12V0.065A		

1. Graph


Input Volt. 18.0 V

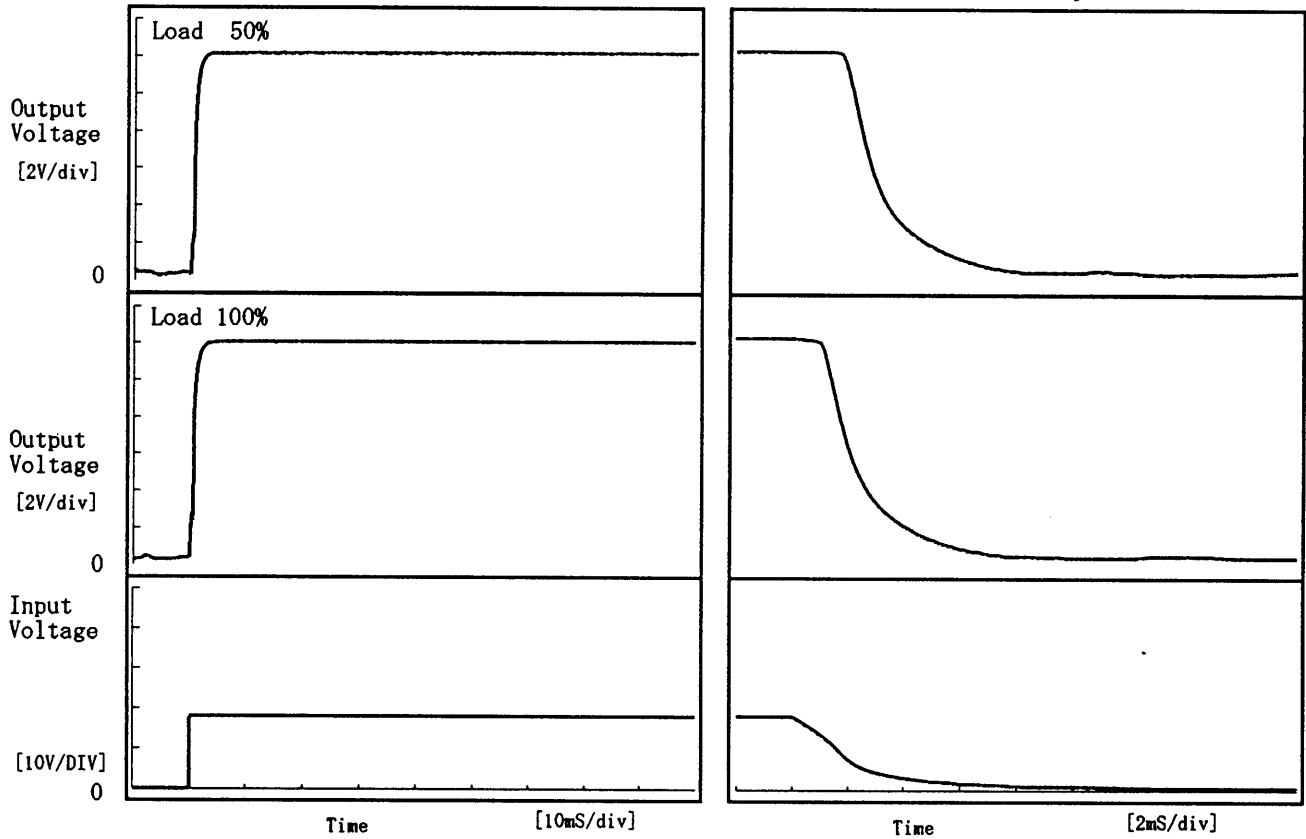

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.05	1.50	1.55	2.03	3.67
100 %	0.05	1.60	1.65	1.25	3.70

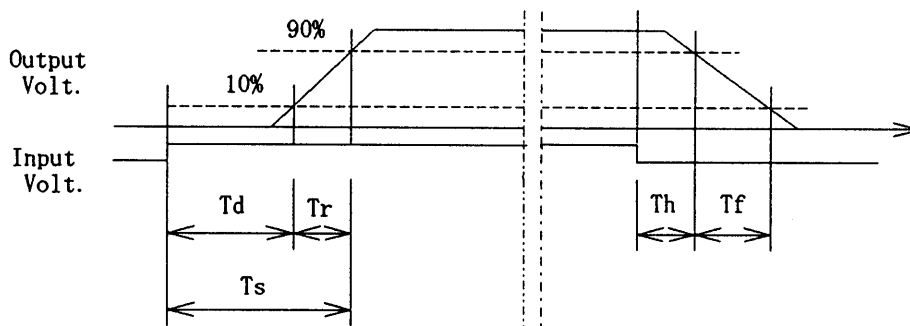




Model	ZUW1R52412	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	-12V0.065A		

1. Graph


Input Volt. 18.0 V

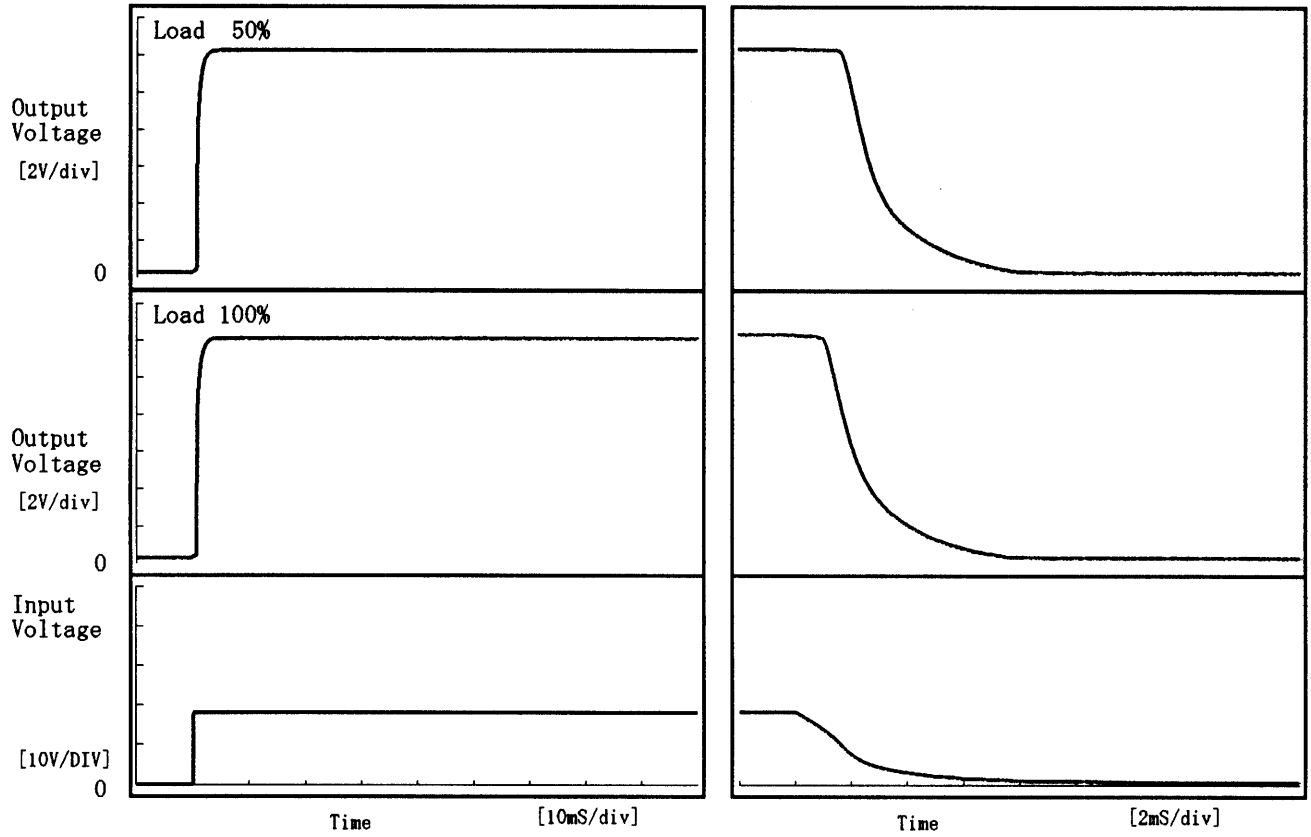

2. Values

[ms]

Load \ Time	T _d	T _r	T _s	T _h	T _f
50 %	0.55	0.95	1.50	1.89	3.52
100 %	0.55	1.00	1.55	1.25	3.60

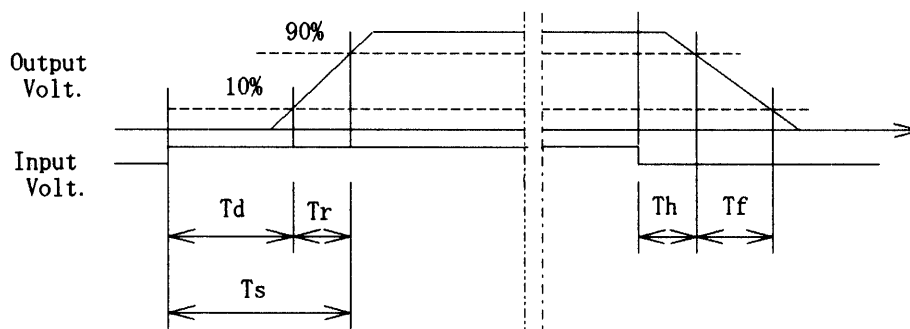



Model		ZUW1R52412																																																					
Item		Ambient Temperature Drift 周囲温度変動	Testing Circuitry Figure A																																																				
Object		+12V0.065A																																																					
1. Graph			2. Values																																																				
			<table border="1"> <thead> <tr> <th rowspan="2">Temperature [°C]</th> <th>Input Volt. 18.0[V]</th> <th>Input Volt. 24.0[V]</th> <th>Input Volt. 36.0[V]</th> </tr> <tr> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> </tr> </thead> <tbody> <tr><td>-30</td><td>11.828</td><td>11.831</td><td>11.830</td></tr> <tr><td>-20</td><td>11.827</td><td>11.830</td><td>11.829</td></tr> <tr><td>-10</td><td>11.826</td><td>11.830</td><td>11.828</td></tr> <tr><td>0</td><td>11.826</td><td>11.829</td><td>11.828</td></tr> <tr><td>10</td><td>11.826</td><td>11.830</td><td>11.828</td></tr> <tr><td>25</td><td>11.827</td><td>11.831</td><td>11.829</td></tr> <tr><td>30</td><td>11.827</td><td>11.831</td><td>11.830</td></tr> <tr><td>40</td><td>11.828</td><td>11.832</td><td>11.831</td></tr> <tr><td>55</td><td>11.828</td><td>11.832</td><td>11.832</td></tr> <tr><td>60</td><td>11.828</td><td>11.833</td><td>11.832</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Temperature [°C]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	-30	11.828	11.831	11.830	-20	11.827	11.830	11.829	-10	11.826	11.830	11.828	0	11.826	11.829	11.828	10	11.826	11.830	11.828	25	11.827	11.831	11.829	30	11.827	11.831	11.830	40	11.828	11.832	11.831	55	11.828	11.832	11.832	60	11.828	11.833	11.832	-	-	-	-
Temperature [°C]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]																																																				
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																				
-30	11.828	11.831	11.830																																																				
-20	11.827	11.830	11.829																																																				
-10	11.826	11.830	11.828																																																				
0	11.826	11.829	11.828																																																				
10	11.826	11.830	11.828																																																				
25	11.827	11.831	11.829																																																				
30	11.827	11.831	11.830																																																				
40	11.828	11.832	11.831																																																				
55	11.828	11.832	11.832																																																				
60	11.828	11.833	11.832																																																				
-	-	-	-																																																				


Object		-12V0.065A																																																					
1. Graph			2. Values																																																				
			<table border="1"> <thead> <tr> <th rowspan="2">Temperature [°C]</th> <th>Input Volt. 18.0[V]</th> <th>Input Volt. 24.0[V]</th> <th>Input Volt. 36.0[V]</th> </tr> <tr> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> </tr> </thead> <tbody> <tr><td>-30</td><td>-11.799</td><td>-11.802</td><td>-11.800</td></tr> <tr><td>-20</td><td>-11.799</td><td>-11.801</td><td>-11.800</td></tr> <tr><td>-10</td><td>-11.798</td><td>-11.801</td><td>-11.799</td></tr> <tr><td>0</td><td>-11.798</td><td>-11.800</td><td>-11.799</td></tr> <tr><td>10</td><td>-11.797</td><td>-11.800</td><td>-11.799</td></tr> <tr><td>25</td><td>-11.797</td><td>-11.801</td><td>-11.799</td></tr> <tr><td>30</td><td>-11.797</td><td>-11.801</td><td>-11.799</td></tr> <tr><td>40</td><td>-11.797</td><td>-11.801</td><td>-11.799</td></tr> <tr><td>55</td><td>-11.797</td><td>-11.801</td><td>-11.800</td></tr> <tr><td>60</td><td>-11.797</td><td>-11.801</td><td>-11.801</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Temperature [°C]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	-30	-11.799	-11.802	-11.800	-20	-11.799	-11.801	-11.800	-10	-11.798	-11.801	-11.799	0	-11.798	-11.800	-11.799	10	-11.797	-11.800	-11.799	25	-11.797	-11.801	-11.799	30	-11.797	-11.801	-11.799	40	-11.797	-11.801	-11.799	55	-11.797	-11.801	-11.800	60	-11.797	-11.801	-11.801	-	-	-	-
Temperature [°C]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]																																																				
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																				
-30	-11.799	-11.802	-11.800																																																				
-20	-11.799	-11.801	-11.800																																																				
-10	-11.798	-11.801	-11.799																																																				
0	-11.798	-11.800	-11.799																																																				
10	-11.797	-11.800	-11.799																																																				
25	-11.797	-11.801	-11.799																																																				
30	-11.797	-11.801	-11.799																																																				
40	-11.797	-11.801	-11.799																																																				
55	-11.797	-11.801	-11.800																																																				
60	-11.797	-11.801	-11.801																																																				
-	-	-	-																																																				
<p>Note: Slanted line shows the range of the rated ambient temperature. (注)斜線は定格周囲温度範囲を示す。</p>																																																							



Model	ZUW1R52412
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧
Object	+12V0.065A

Testing Circuitry Figure A


1. Graph
 [V]
 -----□----- Load 50%
 -----△----- Load 100%

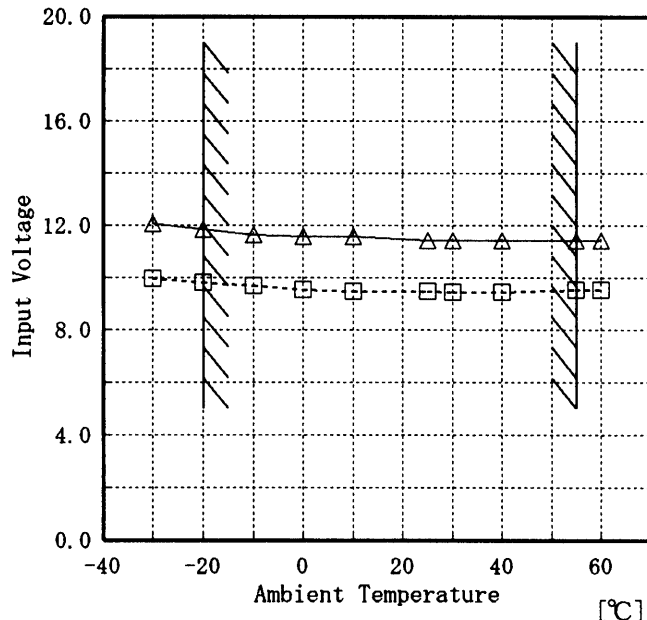

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Input Volt. [V]	Input Volt. [V]
-30	10.0	12.1
-20	9.8	11.9
-10	9.7	11.7
0	9.6	11.6
10	9.5	11.6
25	9.5	11.4
30	9.5	11.4
40	9.5	11.4
55	9.6	11.4
60	9.6	11.4
—	—	—

Object	-12V0.065A
--------	------------

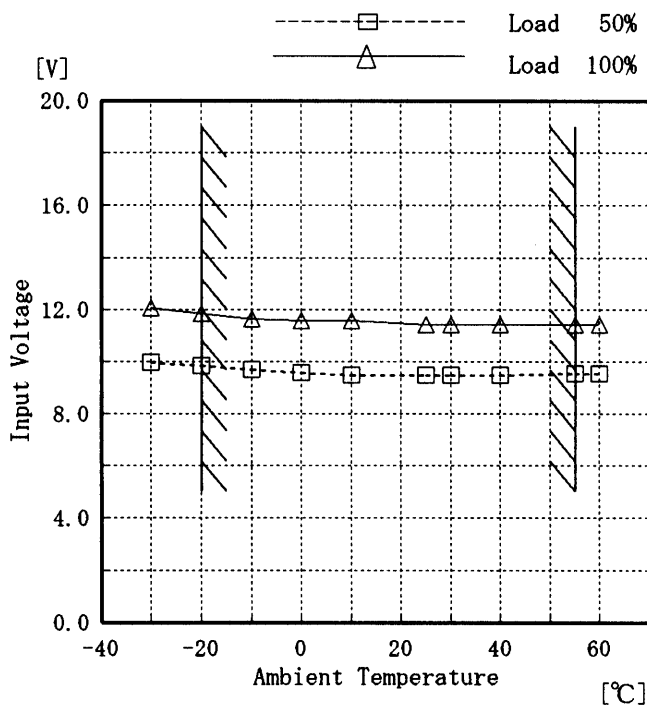


2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Input Volt. [V]	Input Volt. [V]
-30	10.0	12.1
-20	9.8	11.9
-10	9.7	11.7
0	9.6	11.6
10	9.5	11.6
25	9.5	11.4
30	9.5	11.4
40	9.5	11.4
55	9.6	11.4
60	9.6	11.4
—	—	—

Note: Slanted line shows the range of the rated ambient temperature.


(注)斜線は定格周囲温度範囲を示す。

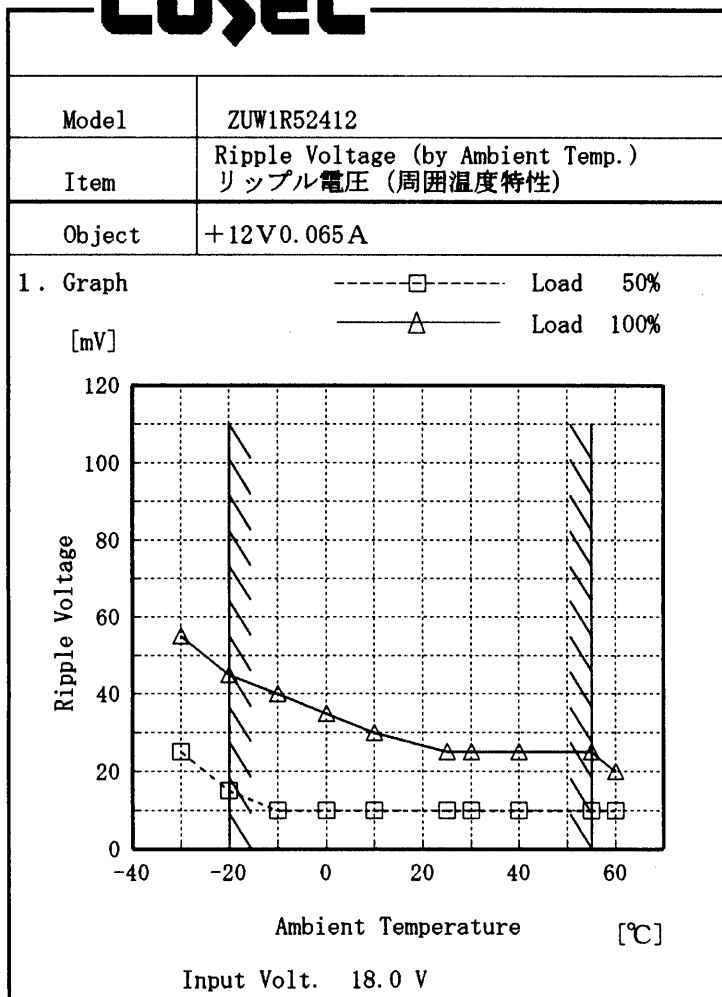

Testing Circuitry Figure A

2. Values

Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]
-30	25	55
-20	15	45
-10	10	40
0	10	35
10	10	30
25	10	25
30	10	25
40	10	25
55	10	25
60	10	20
—	—	—

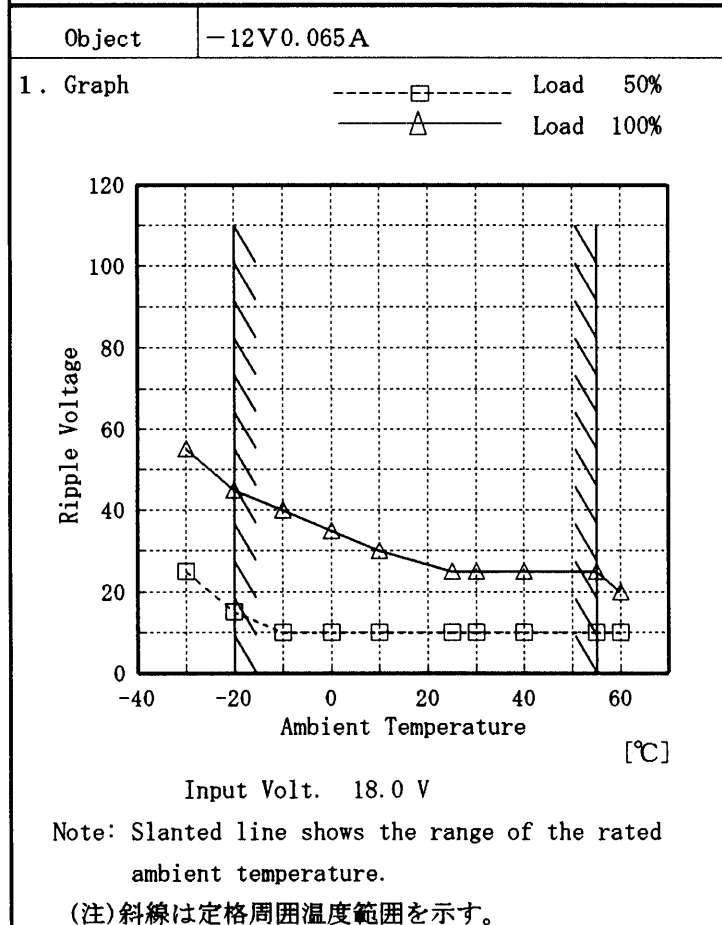


2. Values

Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]
-30	25	55
-20	15	45
-10	10	40
0	10	35
10	10	30
25	10	25
30	10	25
40	10	25
55	10	25
60	10	20
—	—	—




Model	ZUW1R52412	Temperature	25 °C
Item	Time Lapse Drift 経時ドリフト	Testing Circuitry	Figure A

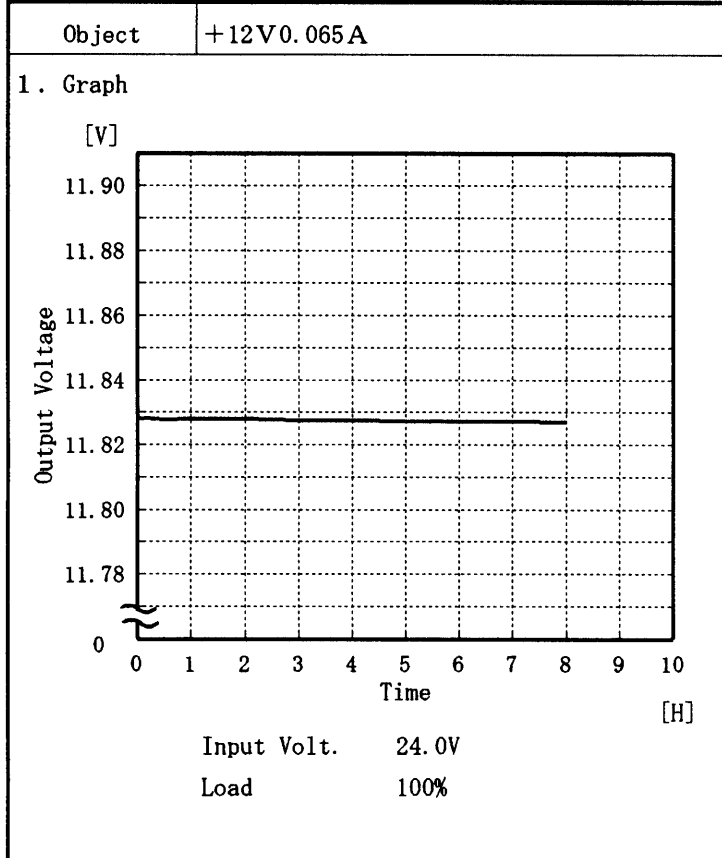

2. Values

Time since start [H]	Output Voltage [V]
0.0	11.829
0.5	11.828
1.0	11.828
2.0	11.828
3.0	11.828
4.0	11.828
5.0	11.827
6.0	11.827
7.0	11.827
8.0	11.827

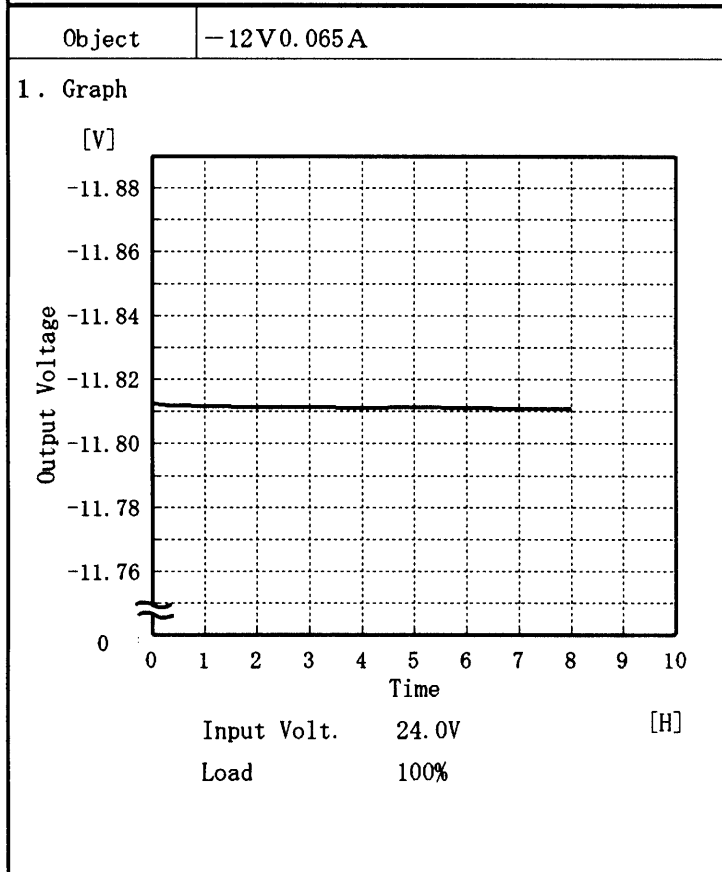

2. Values

Time since start [H]	Output Voltage [V]
0.0	-11.813
0.5	-11.812
1.0	-11.812
2.0	-11.812
3.0	-11.812
4.0	-11.811
5.0	-11.812
6.0	-11.811
7.0	-11.811
8.0	-11.811



Model		ZUW1R52412	Testing Circuitry Figure A
Item		Output Voltage Accuracy 定電圧精度	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20~55 °C

Input Voltage : 18.0~36.0 V

Load Current (AVR 1) : 0.000~0.065 A

(AVR 2) : 0.000~0.065 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -20~55 °C

入力電圧 18.0~36.0 V

負荷電流 (AVR 1) 0.000~0.065 A

(AVR 2) 0.000~0.065 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Object	+12V0.065A
--------	------------

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy (Ration) [%]
Maximum Voltage	55	24.0	0.065	11.832	±127	±1.1
Minimum Voltage	55	18.0	0.000	11.579		

Object	-12V0.065A
--------	------------

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy (Ration) [%]
Maximum Voltage	-20	24.0	0.065	-11.801	±135	±1.2
Minimum Voltage	55	18.0	0.000	-11.532		



Model		ZUW1R52412	Testing Circuitry Figure A
Item		Condensation 結露特性	
Object		+12V 0.065A	

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を3度行い、異常のないことを確認する。

2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50%	1	12.041	15	20
	2	11.968	15	20
	3	11.873	15	20
Load 100%	1	11.996	25	30
	2	11.923	25	30
	3	11.841	25	30

Input Volt. 24.0 V



Model		ZUW1R52412	Testing Circuitry	Figure A
Item		Condensation 結露特性		
Object		-12V 0.065A		

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.


1. 結露特性試験

入力を切った状態で、恒温槽で-10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を3度行い、異常のないことを確認する。

2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50%	1	-11.934	15	20
	2	-12.002	15	20
	3	-11.971	15	20
Load 100%	1	-11.896	20	35
	2	-11.945	20	35
	3	-11.936	20	35

Input Volt. 24.0 V

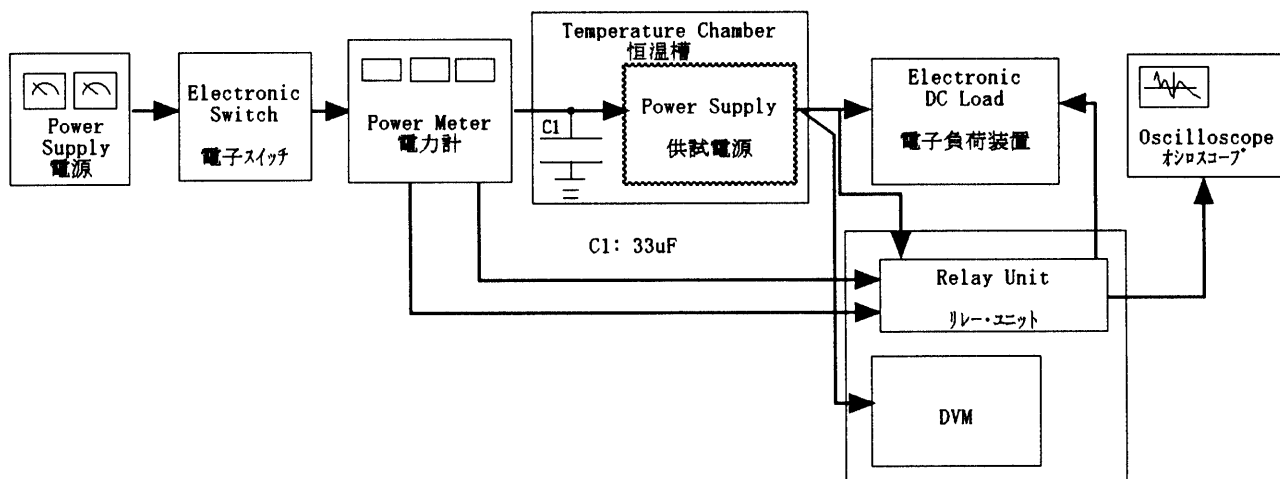

Data Acquisition/Control Unit
データ集録システム

Figure A