



# TEST DATA OF CBS1002403

(24V INPUT)

Regulated DC Power Supply  
Jul. 1, 2002

Approved by : Isao Yasuda \_\_\_\_\_  
Isao Yasuda Design Manager

Prepared by : Kouichi Kinoshita \_\_\_\_\_  
Kouichi Kinoshita Design Engineer

コーワセル株式会社  
**COSEL CO.,LTD.**



## C O N T E N T S

1. Line Regulation . . . . .	1
静的の入力変動	
2. Input Current (by Input Voltage) . . . . .	2
入力電流 (入力電圧特性)	
3. Input Current (by Load Current) . . . . .	3
入力電流 (負荷特性)	
4. Input Power (by Load Current) . . . . .	4
入力電力 (負荷特性)	
5. Efficiency (by Input Voltage) . . . . .	5
効率 (入力電圧特性)	
6. Efficiency (by Load Current) . . . . .	6
効率 (負荷特性)	
7. Load Regulation . . . . .	7
静的の負荷変動	
8. Ripple Voltage (by Load Current) . . . . .	8
リップル電圧 (負荷特性)	
9. Ripple-Noise . . . . .	9
リップルノイズ	
10. Overcurrent Protection . . . . .	10
過電流保護	
11. Overvoltage Protection . . . . .	11
過電圧保護	
12. Dynamic Load Response . . . . .	12
動的の負荷変動	
13. Rise and Fall Time . . . . .	13
立上り、立下り時間	
14. Ambient Temperature Drift . . . . .	14
周囲温度変動	
15. Minimum Input Voltage for Regulated Output Voltage . . . . .	15
最低レギュレーション電圧	
16. Ripple Voltage (by Ambient Temperature) . . . . .	16
リップル電圧 (周囲温度特性)	
17. Time Lapse Drift . . . . .	17
経時ドリフト	
18. Output Voltage Accuracy . . . . .	18
定電圧精度	
19. Condensation . . . . .	19
結露特性	
20. Line Noise Tolerance . . . . .	20
入力雑音耐量	
21. Figure of Testing Circuitry . . . . .	21
測定回路図	

(Final Page 21)

# COSEL

Model	CBS1002403	Temperature Testing Circuitry 25°C Figure A																																
Item	Line Regulation 静的入力変動																																	
Object	+3.3V23.4A																																	
1. Graph		2. Values																																
<p>Output Voltage [V]</p> <p>Input Voltage [V]</p> <p>Legend: ---□--- Load 50% —△— Load 100%</p>		<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>17</td><td>3.350</td><td>3.350</td></tr> <tr><td>18</td><td>3.350</td><td>3.350</td></tr> <tr><td>20</td><td>3.350</td><td>3.350</td></tr> <tr><td>24</td><td>3.350</td><td>3.350</td></tr> <tr><td>30</td><td>3.350</td><td>3.350</td></tr> <tr><td>36</td><td>3.350</td><td>3.350</td></tr> <tr><td>40</td><td>3.350</td><td>3.350</td></tr> <tr><td>---</td><td>—</td><td>—</td></tr> <tr><td>---</td><td>—</td><td>—</td></tr> </tbody> </table>	Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	17	3.350	3.350	18	3.350	3.350	20	3.350	3.350	24	3.350	3.350	30	3.350	3.350	36	3.350	3.350	40	3.350	3.350	---	—	—	---	—	—
Input Voltage [V]	Output Voltage [V]																																	
	Load 50%	Load 100%																																
17	3.350	3.350																																
18	3.350	3.350																																
20	3.350	3.350																																
24	3.350	3.350																																
30	3.350	3.350																																
36	3.350	3.350																																
40	3.350	3.350																																
---	—	—																																
---	—	—																																
<p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注) 斜線は定格入力電圧範囲を示す。</p>																																		

**COSSEL**

Model	CBS1002403																																																																									
Item	Input Current (by Input Voltage) 入力電流 (入力電圧特性)	Temperature Testing Circuitry	25°C Figure A																																																																							
Object																																																																										
1. Graph	<p>Input Current [A]</p> <p>Input Voltage [V]</p> <p>Legend: Load 100% (△), Load 50% (□), Load 0% (○)</p>																																																																									
	<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>4.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>8.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>12.0</td><td>0.016</td><td>0.016</td><td>0.016</td></tr> <tr><td>15.6</td><td>0.138</td><td>3.216</td><td>6.340</td></tr> <tr><td>16.0</td><td>0.135</td><td>3.132</td><td>6.190</td></tr> <tr><td>18.0</td><td>0.125</td><td>2.702</td><td>5.400</td></tr> <tr><td>20.0</td><td>0.116</td><td>2.422</td><td>4.840</td></tr> <tr><td>24.0</td><td>0.104</td><td>2.012</td><td>4.020</td></tr> <tr><td>28.0</td><td>0.096</td><td>1.736</td><td>3.448</td></tr> <tr><td>32.0</td><td>0.090</td><td>1.524</td><td>3.022</td></tr> <tr><td>36.0</td><td>0.086</td><td>1.356</td><td>2.694</td></tr> <tr><td>40.0</td><td>0.082</td><td>1.232</td><td>2.426</td></tr> <tr><td>---</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>---</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>---</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0	0.000	0.000	0.000	4.0	0.000	0.000	0.000	8.0	0.000	0.000	0.000	12.0	0.016	0.016	0.016	15.6	0.138	3.216	6.340	16.0	0.135	3.132	6.190	18.0	0.125	2.702	5.400	20.0	0.116	2.422	4.840	24.0	0.104	2.012	4.020	28.0	0.096	1.736	3.448	32.0	0.090	1.524	3.022	36.0	0.086	1.356	2.694	40.0	0.082	1.232	2.426	---	—	—	—	---	—	—	—	---	—	—	—
Input Voltage [V]	Input Current [A]																																																																									
	Load 0%	Load 50%	Load 100%																																																																							
0	0.000	0.000	0.000																																																																							
4.0	0.000	0.000	0.000																																																																							
8.0	0.000	0.000	0.000																																																																							
12.0	0.016	0.016	0.016																																																																							
15.6	0.138	3.216	6.340																																																																							
16.0	0.135	3.132	6.190																																																																							
18.0	0.125	2.702	5.400																																																																							
20.0	0.116	2.422	4.840																																																																							
24.0	0.104	2.012	4.020																																																																							
28.0	0.096	1.736	3.448																																																																							
32.0	0.090	1.524	3.022																																																																							
36.0	0.086	1.356	2.694																																																																							
40.0	0.082	1.232	2.426																																																																							
---	—	—	—																																																																							
---	—	—	—																																																																							
---	—	—	—																																																																							

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

COSEL

Model	CBS1002403																																																					
Item	Input Current (by Load Current) 入力電流 (負荷特性)	Temperature Testing Circuitry	25°C Figure A																																																			
Object	<hr/>																																																					
1. Graph	<p style="text-align: center;"> <span style="margin-right: 10px;">—△— Input Volt. 18V</span>  <span style="margin-right: 10px;">---□--- Input Volt. 24V</span>  <span style="margin-right: 10px;">---○--- Input Volt. 36V</span> </p> <p style="text-align: center;">Load Current [A]</p>																																																					
2. Values	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.125</td><td>0.104</td><td>0.085</td></tr> <tr><td>4.00</td><td>1.052</td><td>0.767</td><td>0.534</td></tr> <tr><td>8.00</td><td>1.950</td><td>1.420</td><td>0.965</td></tr> <tr><td>12.00</td><td>2.940</td><td>2.102</td><td>1.408</td></tr> <tr><td>16.00</td><td>3.946</td><td>2.808</td><td>1.882</td></tr> <tr><td>20.00</td><td>4.980</td><td>3.541</td><td>2.360</td></tr> <tr><td>23.40</td><td>5.910</td><td>4.242</td><td>2.773</td></tr> <tr><td>25.74</td><td>6.590</td><td>4.700</td><td>3.068</td></tr> <tr><td>---</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>---</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>---</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Input Current [A]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	0.125	0.104	0.085	4.00	1.052	0.767	0.534	8.00	1.950	1.420	0.965	12.00	2.940	2.102	1.408	16.00	3.946	2.808	1.882	20.00	4.980	3.541	2.360	23.40	5.910	4.242	2.773	25.74	6.590	4.700	3.068	---	—	—	—	---	—	—	—	---	—	—	—
Load Current [A]	Input Current [A]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
0.00	0.125	0.104	0.085																																																			
4.00	1.052	0.767	0.534																																																			
8.00	1.950	1.420	0.965																																																			
12.00	2.940	2.102	1.408																																																			
16.00	3.946	2.808	1.882																																																			
20.00	4.980	3.541	2.360																																																			
23.40	5.910	4.242	2.773																																																			
25.74	6.590	4.700	3.068																																																			
---	—	—	—																																																			
---	—	—	—																																																			
---	—	—	—																																																			
Note:	Slanted line shows the range of the rated load current.																																																					
(注)	斜線は定格負荷電流範囲を示す。																																																					

**COSSEL**

Model	CBS1002403																																																					
Item	Input Power (by Load Current) 入力電力 (負荷特性)	Temperature Testing Circuitry	25°C Figure A																																																			
Object	— △ — Input Volt. 18V --- □ --- Input Volt. 24V --- ○ --- Input Volt. 36V																																																					
1. Graph																																																						
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>2.3</td><td>2.5</td><td>3.1</td></tr> <tr><td>4.00</td><td>18.7</td><td>18.3</td><td>19.2</td></tr> <tr><td>8.00</td><td>34.3</td><td>33.7</td><td>34.6</td></tr> <tr><td>12.00</td><td>50.3</td><td>49.6</td><td>50.3</td></tr> <tr><td>16.00</td><td>66.7</td><td>65.8</td><td>66.6</td></tr> <tr><td>20.00</td><td>83.6</td><td>82.4</td><td>83.0</td></tr> <tr><td>23.40</td><td>98.3</td><td>96.8</td><td>97.3</td></tr> <tr><td>25.74</td><td>108.7</td><td>107.0</td><td>107.3</td></tr> <tr><td>---</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>---</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>---</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Input Power [W]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	2.3	2.5	3.1	4.00	18.7	18.3	19.2	8.00	34.3	33.7	34.6	12.00	50.3	49.6	50.3	16.00	66.7	65.8	66.6	20.00	83.6	82.4	83.0	23.40	98.3	96.8	97.3	25.74	108.7	107.0	107.3	---	—	—	—	---	—	—	—	---	—	—	—
Load Current [A]	Input Power [W]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
0.00	2.3	2.5	3.1																																																			
4.00	18.7	18.3	19.2																																																			
8.00	34.3	33.7	34.6																																																			
12.00	50.3	49.6	50.3																																																			
16.00	66.7	65.8	66.6																																																			
20.00	83.6	82.4	83.0																																																			
23.40	98.3	96.8	97.3																																																			
25.74	108.7	107.0	107.3																																																			
---	—	—	—																																																			
---	—	—	—																																																			
---	—	—	—																																																			


Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

**COSEL**

Model	CBS1002403	Temperature Testing Circuitry	25°C Figure A																															
Item	Efficiency (by Input Voltage) 効率(入力電圧特性)																																	
Object																																		
1. Graph																																		
			2. Values																															
<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr> <td>16</td><td>78.3</td><td>78.3</td></tr> <tr> <td>18</td><td>80.2</td><td>80.2</td></tr> <tr> <td>20</td><td>80.9</td><td>80.5</td></tr> <tr> <td>24</td><td>80.7</td><td>80.7</td></tr> <tr> <td>30</td><td>80.3</td><td>80.5</td></tr> <tr> <td>36</td><td>79.6</td><td>80.2</td></tr> <tr> <td>40</td><td>78.9</td><td>80.0</td></tr> <tr> <td>—</td><td>—</td><td>—</td></tr> <tr> <td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	16	78.3	78.3	18	80.2	80.2	20	80.9	80.5	24	80.7	80.7	30	80.3	80.5	36	79.6	80.2	40	78.9	80.0	—	—	—	—	—	—
Input Voltage [V]	Efficiency [%]																																	
	Load 50%	Load 100%																																
16	78.3	78.3																																
18	80.2	80.2																																
20	80.9	80.5																																
24	80.7	80.7																																
30	80.3	80.5																																
36	79.6	80.2																																
40	78.9	80.0																																
—	—	—																																
—	—	—																																
<p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注) 斜線は定格入力電圧範囲を示す。</p>																																		

**COSEL**

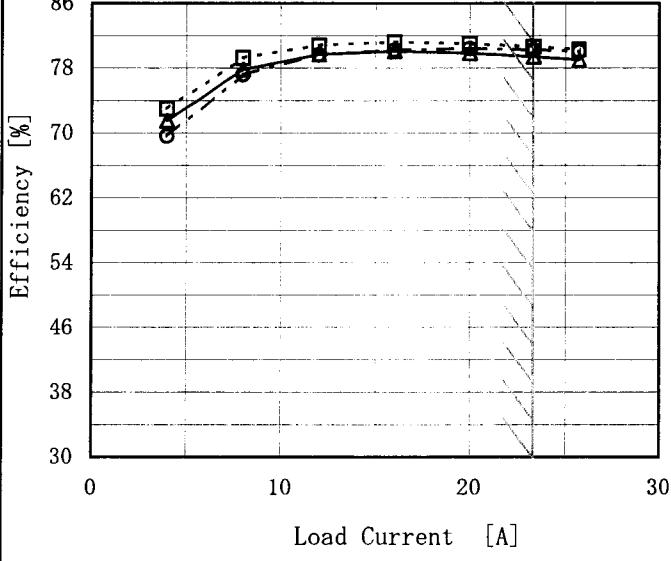Model	CBS1002403	Temperature	25°C																																																			
Item	Efficiency (by Load Current) 効率(負荷特性)	Testing Circuitry	Figure A																																																			
Object	<hr/>																																																					
1. Graph	<p>—△— Input Volt. 18V      - - - □ - - Input Volt. 24V      - - ○ - - Input Volt. 36V</p>  <p>The graph plots Efficiency [%] on the Y-axis (30 to 86) against Load Current [A] on the X-axis (0 to 30). Three data series are shown: 18V (solid line with triangle markers), 24V (dashed line with square markers), and 36V (dash-dot line with circle markers). All curves show efficiency increasing with load current. A slanted line on the graph indicates the rated load current range.</p>																																																					
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>4.00</td><td>71.5</td><td>73.0</td><td>69.6</td></tr> <tr><td>8.00</td><td>77.8</td><td>79.3</td><td>77.2</td></tr> <tr><td>12.00</td><td>79.7</td><td>80.8</td><td>79.7</td></tr> <tr><td>16.00</td><td>80.1</td><td>81.2</td><td>80.2</td></tr> <tr><td>20.00</td><td>79.8</td><td>81.0</td><td>80.4</td></tr> <tr><td>23.40</td><td>79.4</td><td>80.7</td><td>80.2</td></tr> <tr><td>25.74</td><td>79.0</td><td>80.3</td><td>80.0</td></tr> <tr><td>--</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>--</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>--</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Efficiency [%]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	—	—	—	4.00	71.5	73.0	69.6	8.00	77.8	79.3	77.2	12.00	79.7	80.8	79.7	16.00	80.1	81.2	80.2	20.00	79.8	81.0	80.4	23.40	79.4	80.7	80.2	25.74	79.0	80.3	80.0	--	—	—	—	--	—	—	—	--	—	—	—
Load Current [A]	Efficiency [%]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
0.00	—	—	—																																																			
4.00	71.5	73.0	69.6																																																			
8.00	77.8	79.3	77.2																																																			
12.00	79.7	80.8	79.7																																																			
16.00	80.1	81.2	80.2																																																			
20.00	79.8	81.0	80.4																																																			
23.40	79.4	80.7	80.2																																																			
25.74	79.0	80.3	80.0																																																			
--	—	—	—																																																			
--	—	—	—																																																			
--	—	—	—																																																			

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

**COSSEL**

Model	CBS1002403																																																	
Item	Load Regulation 静的負荷変動	Temperature Testing Circuitry	25°C Figure A																																															
Object	+3.3V 23.4A																																																	
1. Graph																																																		
			2. Values																																															
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td><td>3.350</td><td>3.350</td><td>3.350</td></tr> <tr> <td>4.00</td><td>3.350</td><td>3.350</td><td>3.350</td></tr> <tr> <td>8.00</td><td>3.350</td><td>3.350</td><td>3.350</td></tr> <tr> <td>12.00</td><td>3.350</td><td>3.350</td><td>3.350</td></tr> <tr> <td>16.00</td><td>3.350</td><td>3.350</td><td>3.350</td></tr> <tr> <td>20.00</td><td>3.350</td><td>3.350</td><td>3.350</td></tr> <tr> <td>23.40</td><td>3.350</td><td>3.350</td><td>3.350</td></tr> <tr> <td>25.74</td><td>3.350</td><td>3.350</td><td>3.350</td></tr> <tr> <td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr> <td>--</td><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>				Load Current [A]	Output Voltage [V]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	3.350	3.350	3.350	4.00	3.350	3.350	3.350	8.00	3.350	3.350	3.350	12.00	3.350	3.350	3.350	16.00	3.350	3.350	3.350	20.00	3.350	3.350	3.350	23.40	3.350	3.350	3.350	25.74	3.350	3.350	3.350	--	--	--	--	--	--	--	--
Load Current [A]	Output Voltage [V]																																																	
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																															
0.00	3.350	3.350	3.350																																															
4.00	3.350	3.350	3.350																																															
8.00	3.350	3.350	3.350																																															
12.00	3.350	3.350	3.350																																															
16.00	3.350	3.350	3.350																																															
20.00	3.350	3.350	3.350																																															
23.40	3.350	3.350	3.350																																															
25.74	3.350	3.350	3.350																																															
--	--	--	--																																															
--	--	--	--																																															
<p>Note: Slanted line shows the range of the rated load current.</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>																																																		


**COSEL**

Model	CBS1002403	Temperature	25°C																																						
Item	Ripple Voltage (by Load Current) リップル電圧 (負荷特性)	Testing Circuitry	Figure A																																						
Object	+3.3V 23.4A																																								
1. Graph																																									
			2. Values																																						
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Input Volt. 18 [V]</th> <th>Input Volt. 36 [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5</td><td>5</td></tr> <tr><td>4.7</td><td>5</td><td>10</td></tr> <tr><td>9.4</td><td>5</td><td>10</td></tr> <tr><td>14.0</td><td>5</td><td>10</td></tr> <tr><td>18.7</td><td>5</td><td>10</td></tr> <tr><td>23.4</td><td>5</td><td>10</td></tr> <tr><td>30.0</td><td>5</td><td>10</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>				Load Current [A]	Ripple Voltage [mV]		Input Volt. 18 [V]	Input Volt. 36 [V]	0.0	5	5	4.7	5	10	9.4	5	10	14.0	5	10	18.7	5	10	23.4	5	10	30.0	5	10	--	--	--	--	--	--	--	--	--	--	--	--
Load Current [A]	Ripple Voltage [mV]																																								
	Input Volt. 18 [V]	Input Volt. 36 [V]																																							
0.0	5	5																																							
4.7	5	10																																							
9.4	5	10																																							
14.0	5	10																																							
18.7	5	10																																							
23.4	5	10																																							
30.0	5	10																																							
--	--	--																																							
--	--	--																																							
--	--	--																																							
--	--	--																																							
<p>Ripple Voltage is shown as p-p in the figure below.  Note: Slanted line shows the range of the rated load current.</p> <p>リップル電圧は、下図 p-p 値で示される。  (注) 斜線は定格負荷電流範囲を示す。</p>																																									
<p>Ripple [mVp-p]</p>																																									
<p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																									

COSEL

Model	CBS1002403
Item	Ripple-Noise リップルノイズ
Object	+3.3V23.4A

## 1. Graph

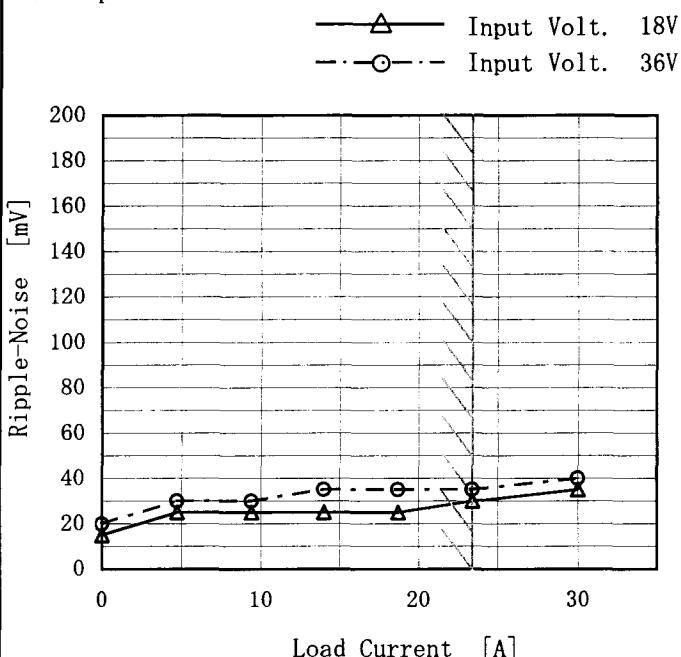

Ripple-Noise is shown as p-p in the figure below.  
Note: Slanted line shows the range of the rated load current.

リップルノイズは、下図 p - p 値で示される。  
(注) 斜線は定格負荷電流範囲を示す。

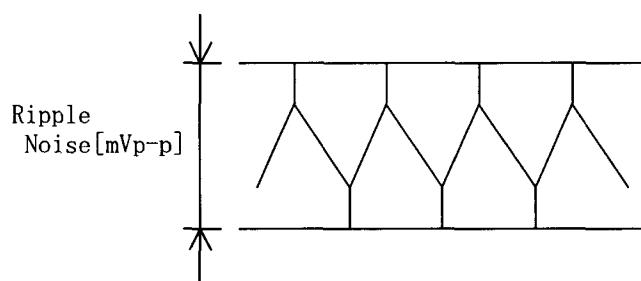



Fig. Complex Ripple Noise Wave Form  
図 リップルノイズ波形

Temperature 25°C  
Testing Circuitry Figure A

## 2. Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 18 [V]	Input Volt. 36 [V]
0.0	15	20
4.7	25	30
9.4	25	30
14.0	25	35
18.7	25	35
23.4	30	35
30.0	35	40
—	—	—
—	—	—
—	—	—
—	—	—

**COSEL**

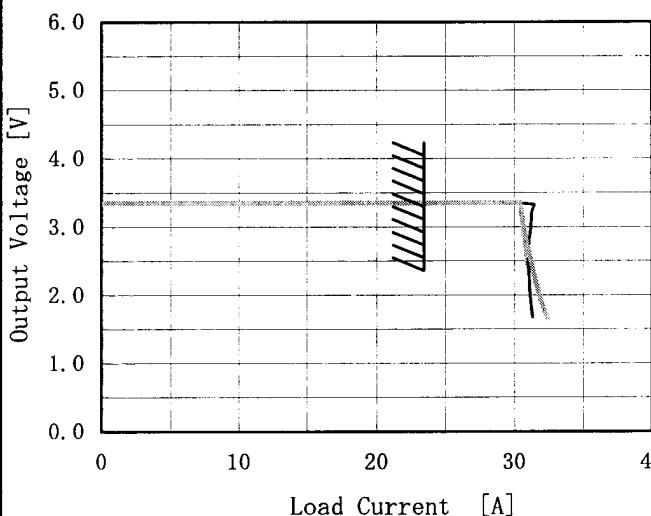Model	CBS1002403	Temperature Testing Circuitry	25°C Figure A																																																							
Item	Overcurrent Protection 過電流保護																																																									
Object	+3.3V 23.4A																																																									
1. Graph	<p>— Input Volt. 18V    - - - Input Volt. 24V    - - - Input Volt. 36V</p> 	2. Values																																																								
		<table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>3.300</td><td>27.99</td><td>27.97</td><td>27.95</td></tr> <tr><td>3.135</td><td>31.24</td><td>30.52</td><td>30.59</td></tr> <tr><td>2.970</td><td>31.19</td><td>30.59</td><td>30.71</td></tr> <tr><td>2.640</td><td>31.03</td><td>30.80</td><td>31.05</td></tr> <tr><td>2.310</td><td>31.06</td><td>31.00</td><td>31.37</td></tr> <tr><td>1.980</td><td>31.14</td><td>31.19</td><td>31.80</td></tr> <tr><td>1.650</td><td>31.32</td><td>31.40</td><td>32.42</td></tr> <tr><td>---</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>---</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>---</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>---</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>---</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Output Voltage [V]	Load Current [A]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	3.300	27.99	27.97	27.95	3.135	31.24	30.52	30.59	2.970	31.19	30.59	30.71	2.640	31.03	30.80	31.05	2.310	31.06	31.00	31.37	1.980	31.14	31.19	31.80	1.650	31.32	31.40	32.42	---	—	—	—	---	—	—	—	---	—	—	—	---	—	—	—	---	—	—	—	
Output Voltage [V]	Load Current [A]																																																									
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																							
3.300	27.99	27.97	27.95																																																							
3.135	31.24	30.52	30.59																																																							
2.970	31.19	30.59	30.71																																																							
2.640	31.03	30.80	31.05																																																							
2.310	31.06	31.00	31.37																																																							
1.980	31.14	31.19	31.80																																																							
1.650	31.32	31.40	32.42																																																							
---	—	—	—																																																							
---	—	—	—																																																							
---	—	—	—																																																							
---	—	—	—																																																							
---	—	—	—																																																							


Note: Slanted line shows the range of the rated load current.


(注) 斜線は定格負荷電流範囲を示す。

Intermittent operation occurs when the output voltage is from 1.65V to 0V.  
 1.65V～0V間は、間欠モードとなる。

# COSEL

Model	CBS1002403	Testing Circuitry Figure A																																																					
Item	Overvoltage Protection 過電圧保護																																																						
Object	+3.3V 23.4A																																																						
1. Graph	<p>—△— Input Volt. 18V      - - -□- Input Volt. 24V      - - ○- Input Volt. 36V</p> <p>Ambient Temperature [°C]</p> <p>Load 0%</p>																																																						
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Operating Point [V]</th> </tr> <tr> <th>18[V]</th> <th>24[V]</th> <th>36[V]</th> </tr> </thead> <tbody> <tr> <td>-50</td> <td>4.32</td> <td>4.32</td> <td>4.32</td> </tr> <tr> <td>-40</td> <td>4.32</td> <td>4.32</td> <td>4.32</td> </tr> <tr> <td>-20</td> <td>4.31</td> <td>4.31</td> <td>4.31</td> </tr> <tr> <td>0</td> <td>4.31</td> <td>4.31</td> <td>4.31</td> </tr> <tr> <td>25</td> <td>4.31</td> <td>4.31</td> <td>4.31</td> </tr> <tr> <td>40</td> <td>4.30</td> <td>4.30</td> <td>4.30</td> </tr> <tr> <td>60</td> <td>4.30</td> <td>4.30</td> <td>4.30</td> </tr> <tr> <td>85</td> <td>4.29</td> <td>4.29</td> <td>4.29</td> </tr> <tr> <td>100</td> <td>4.28</td> <td>4.29</td> <td>4.29</td> </tr> <tr> <td>105</td> <td>4.28</td> <td>4.28</td> <td>4.28</td> </tr> <tr> <td>--</td> <td>--</td> <td>--</td> <td>--</td> </tr> </tbody> </table>				Ambient Temperature [°C]	Operating Point [V]			18[V]	24[V]	36[V]	-50	4.32	4.32	4.32	-40	4.32	4.32	4.32	-20	4.31	4.31	4.31	0	4.31	4.31	4.31	25	4.31	4.31	4.31	40	4.30	4.30	4.30	60	4.30	4.30	4.30	85	4.29	4.29	4.29	100	4.28	4.29	4.29	105	4.28	4.28	4.28	--	--	--	--
Ambient Temperature [°C]	Operating Point [V]																																																						
	18[V]	24[V]	36[V]																																																				
-50	4.32	4.32	4.32																																																				
-40	4.32	4.32	4.32																																																				
-20	4.31	4.31	4.31																																																				
0	4.31	4.31	4.31																																																				
25	4.31	4.31	4.31																																																				
40	4.30	4.30	4.30																																																				
60	4.30	4.30	4.30																																																				
85	4.29	4.29	4.29																																																				
100	4.28	4.29	4.29																																																				
105	4.28	4.28	4.28																																																				
--	--	--	--																																																				
Note:	Slanted line shows the range of the rated ambient temperature.																																																						
(注)	斜線は定格周囲温度範囲を示す。																																																						

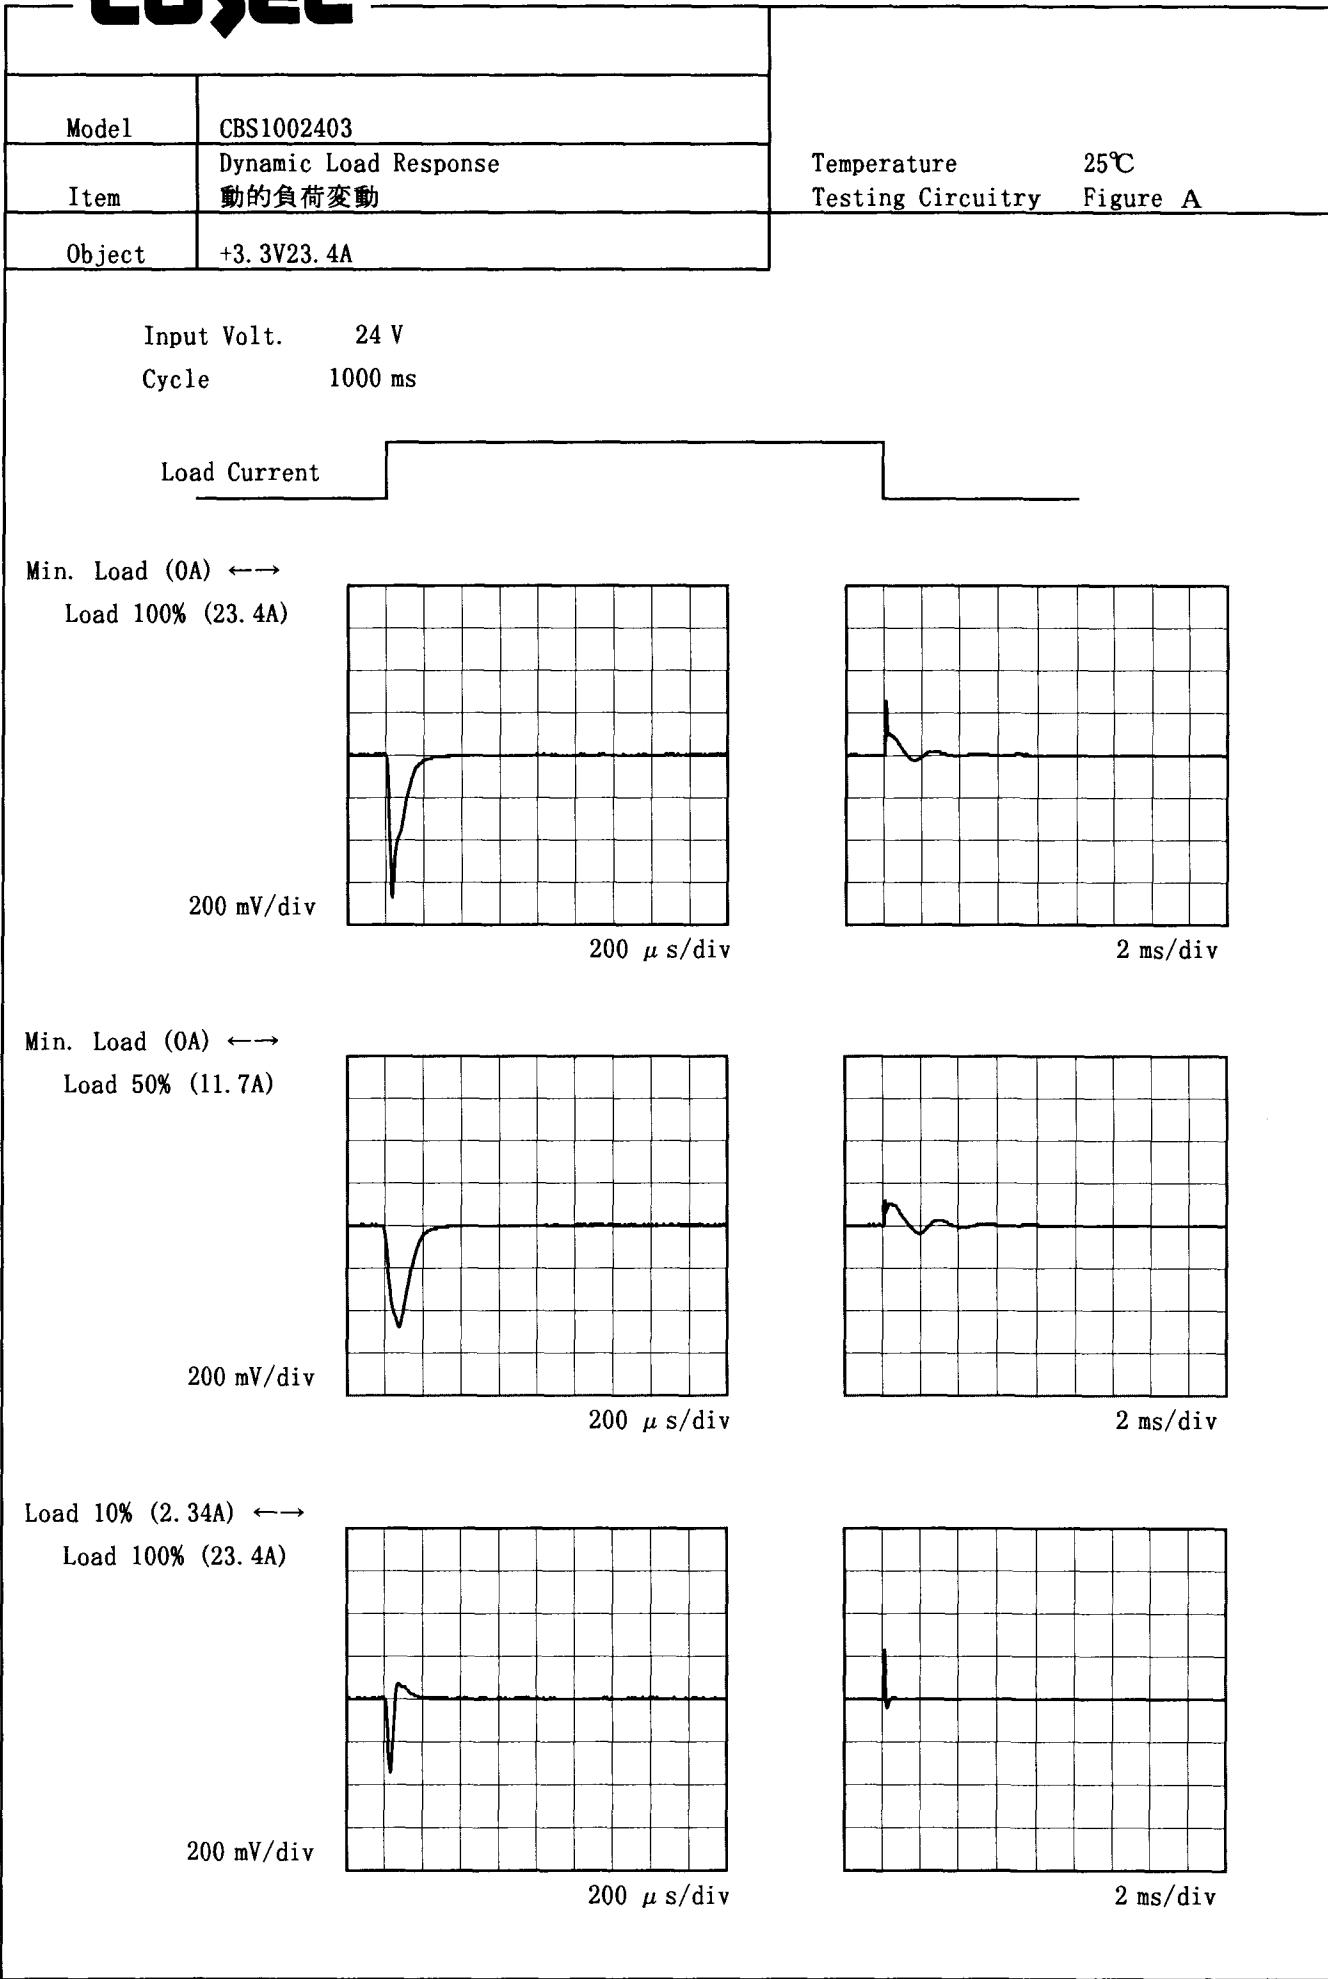**COSSEL**

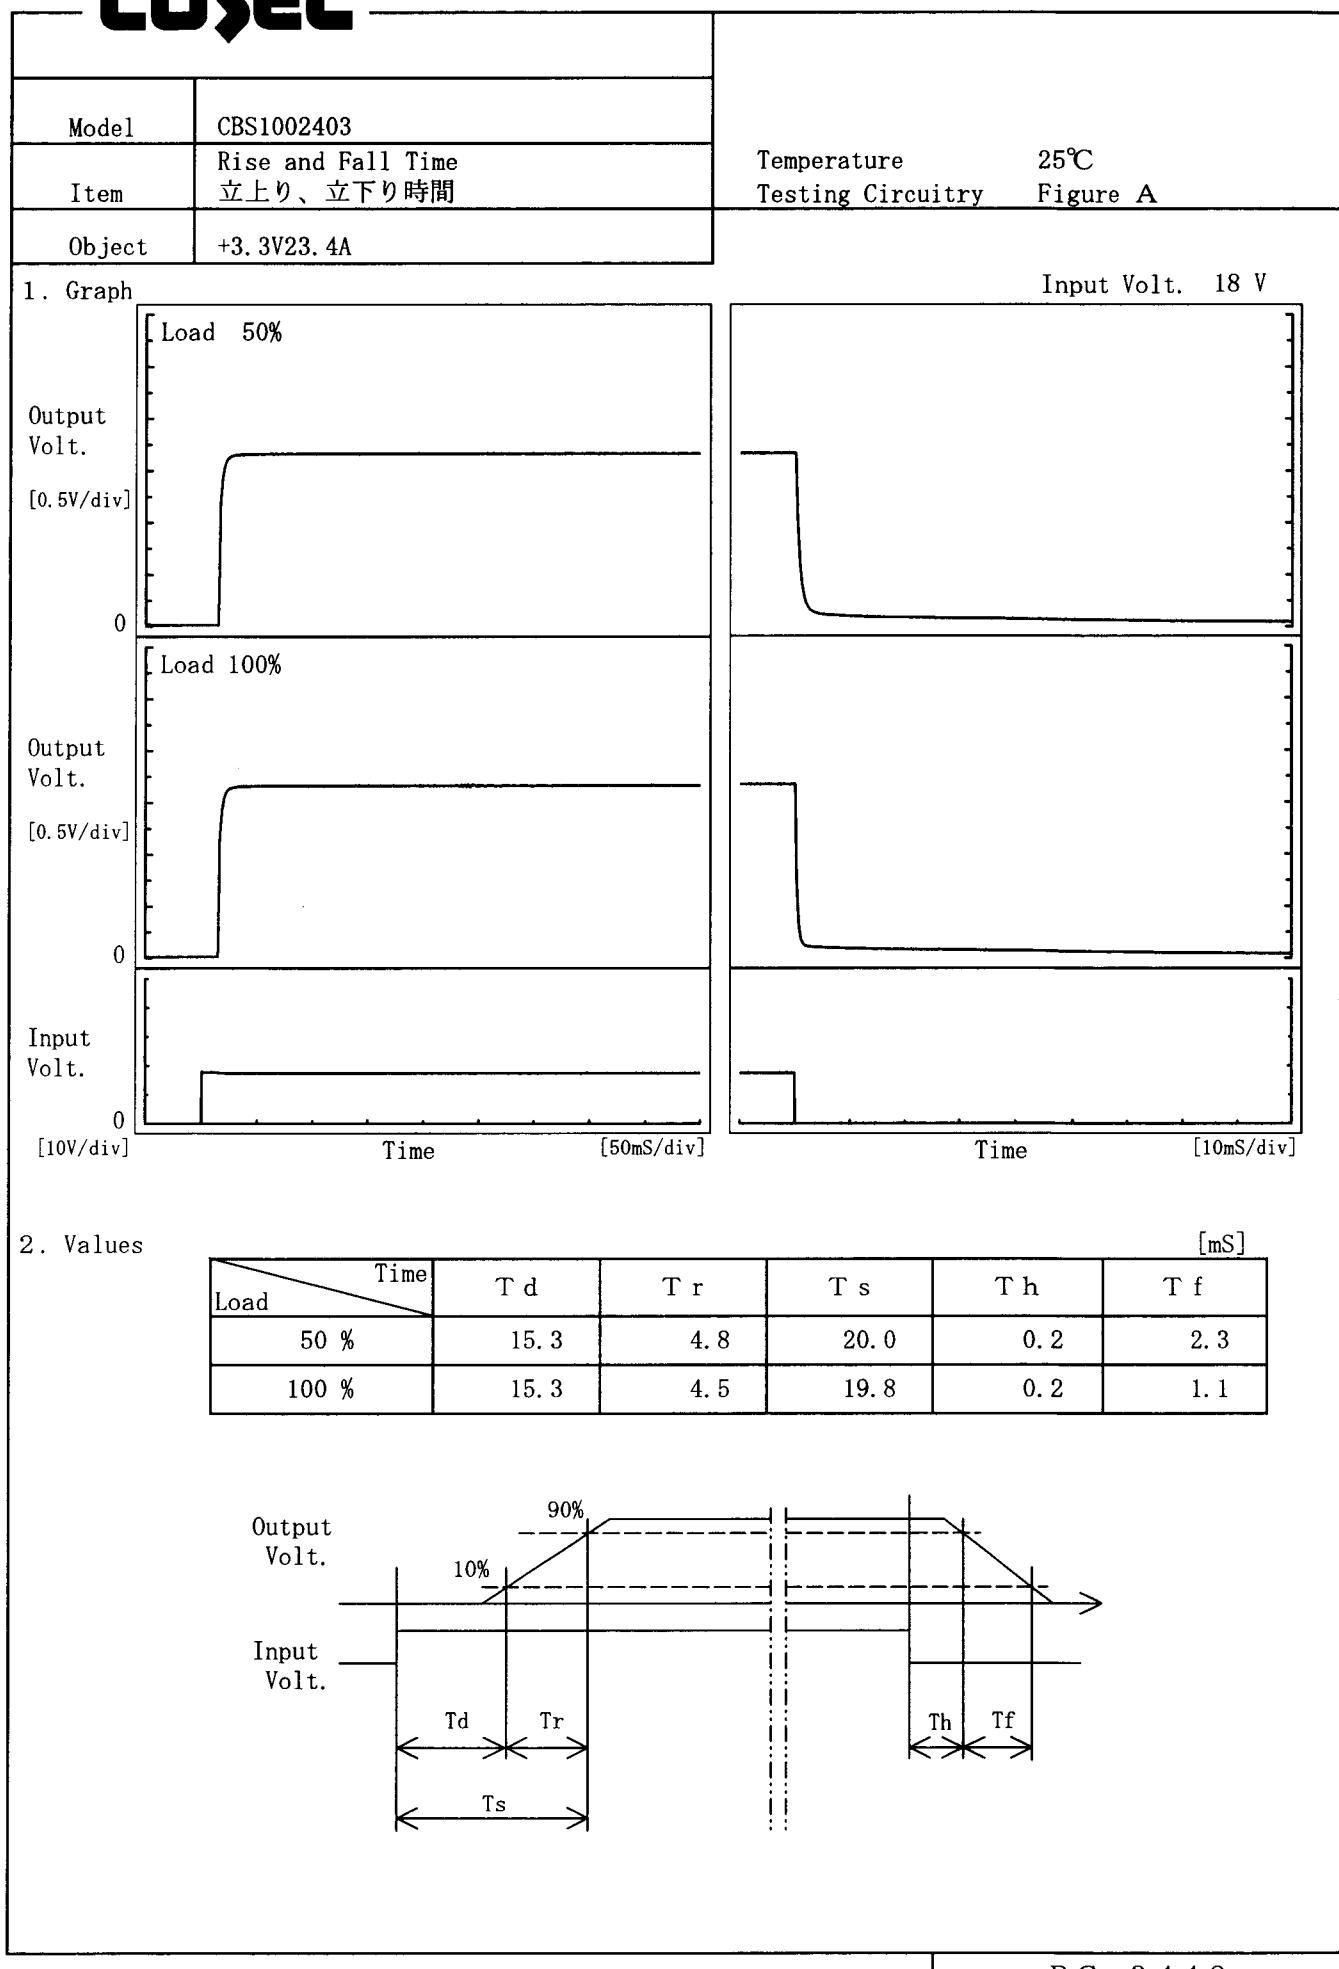**COSEL**

**COSEL**

Model	CBS1002403	Testing Circuitry      Figure A																																																					
Item	Ambient Temperature Drift 周囲温度変動																																																						
Object	+3.3V 23.4A																																																						
1. Graph	<p>—△— Input Volt. 18V        - - -□- - - Input Volt. 24V        - - ○- - - Input Volt. 36V</p> <p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p>																																																						
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr> <td>-50</td><td>3.351</td><td>3.351</td><td>3.351</td></tr> <tr> <td>-40</td><td>3.352</td><td>3.352</td><td>3.352</td></tr> <tr> <td>-20</td><td>3.352</td><td>3.352</td><td>3.353</td></tr> <tr> <td>0</td><td>3.354</td><td>3.354</td><td>3.354</td></tr> <tr> <td>25</td><td>3.354</td><td>3.353</td><td>3.354</td></tr> <tr> <td>40</td><td>3.351</td><td>3.351</td><td>3.351</td></tr> <tr> <td>60</td><td>3.347</td><td>3.347</td><td>3.347</td></tr> <tr> <td>85</td><td>3.340</td><td>3.340</td><td>3.340</td></tr> <tr> <td>100</td><td>3.336</td><td>3.336</td><td>3.336</td></tr> <tr> <td>105</td><td>3.334</td><td>3.334</td><td>3.334</td></tr> <tr> <td>--</td><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>				Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	-50	3.351	3.351	3.351	-40	3.352	3.352	3.352	-20	3.352	3.352	3.353	0	3.354	3.354	3.354	25	3.354	3.353	3.354	40	3.351	3.351	3.351	60	3.347	3.347	3.347	85	3.340	3.340	3.340	100	3.336	3.336	3.336	105	3.334	3.334	3.334	--	--	--	--
Ambient Temperature [°C]	Output Voltage [V]																																																						
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																				
-50	3.351	3.351	3.351																																																				
-40	3.352	3.352	3.352																																																				
-20	3.352	3.352	3.353																																																				
0	3.354	3.354	3.354																																																				
25	3.354	3.353	3.354																																																				
40	3.351	3.351	3.351																																																				
60	3.347	3.347	3.347																																																				
85	3.340	3.340	3.340																																																				
100	3.336	3.336	3.336																																																				
105	3.334	3.334	3.334																																																				
--	--	--	--																																																				

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。


**COSEL**

Model	CBS1002403																																								
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧	Testing Circuitry      Figure A																																							
Object	+3.3V 23.4A																																								
1. Graph																																									
		2. Values																																							
<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Input Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr> <td>-50</td><td>14.2</td><td>14.9</td> </tr> <tr> <td>-40</td><td>14.2</td><td>14.8</td> </tr> <tr> <td>-20</td><td>14.2</td><td>14.9</td> </tr> <tr> <td>0</td><td>14.1</td><td>14.9</td> </tr> <tr> <td>25</td><td>14.2</td><td>15.0</td> </tr> <tr> <td>40</td><td>14.1</td><td>15.0</td> </tr> <tr> <td>60</td><td>14.1</td><td>15.0</td> </tr> <tr> <td>85</td><td>14.0</td><td>15.1</td> </tr> <tr> <td>100</td><td>14.0</td><td>15.0</td> </tr> <tr> <td>105</td><td>14.0</td><td>15.1</td> </tr> <tr> <td>--</td><td>--</td><td>--</td> </tr> </tbody> </table>				Ambient Temperature [°C]	Input Voltage [V]		Load 50%	Load 100%	-50	14.2	14.9	-40	14.2	14.8	-20	14.2	14.9	0	14.1	14.9	25	14.2	15.0	40	14.1	15.0	60	14.1	15.0	85	14.0	15.1	100	14.0	15.0	105	14.0	15.1	--	--	--
Ambient Temperature [°C]	Input Voltage [V]																																								
	Load 50%	Load 100%																																							
-50	14.2	14.9																																							
-40	14.2	14.8																																							
-20	14.2	14.9																																							
0	14.1	14.9																																							
25	14.2	15.0																																							
40	14.1	15.0																																							
60	14.1	15.0																																							
85	14.0	15.1																																							
100	14.0	15.0																																							
105	14.0	15.1																																							
--	--	--																																							
<p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注) 斜線は定格周囲温度範囲を示す。</p>																																									

**COSEL**

Model	CBS1002403
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)
Object	+3.3V 23.4A

## 1. Graph

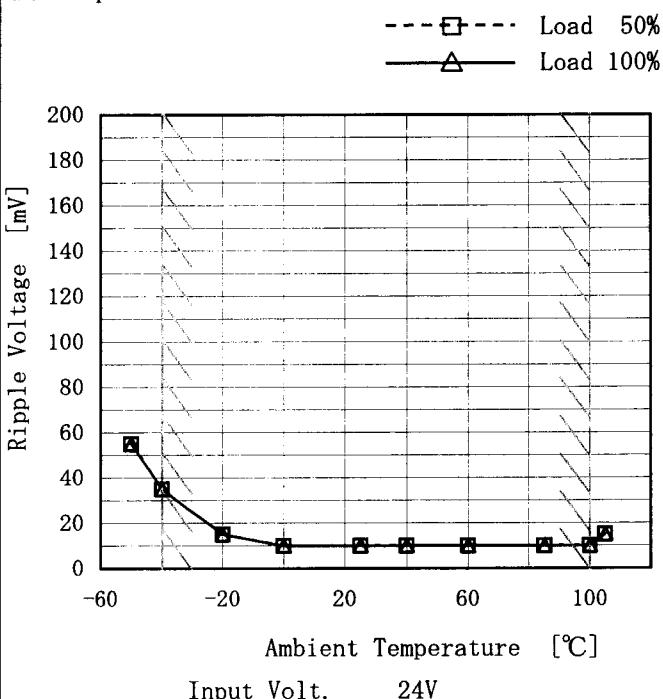

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

Testing Circuitry Figure A

## 2. Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-50	55	55
-40	35	35
-20	15	15
0	10	10
25	10	10
40	10	10
60	10	10
85	10	10
100	10	10
105	15	15
--	—	—

**COSEL**

Model	CBS1002403	Temperature Testing Circuitry 25°C Figure A																					
Item	Time Lapse Drift 経時ドリフト																						
Object	+3.3V 23.4A																						
1. Graph		2. Values																					
<p>Output Voltage [V]</p> <p>Time [H]</p> <p>Input Volt. 24V</p> <p>Load 100%</p>																							
<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>3.352</td></tr> <tr><td>0.5</td><td>3.350</td></tr> <tr><td>1.0</td><td>3.350</td></tr> <tr><td>2.0</td><td>3.350</td></tr> <tr><td>3.0</td><td>3.350</td></tr> <tr><td>4.0</td><td>3.350</td></tr> <tr><td>5.0</td><td>3.350</td></tr> <tr><td>6.0</td><td>3.350</td></tr> <tr><td>7.0</td><td>3.350</td></tr> <tr><td>8.0</td><td>3.350</td></tr> </tbody> </table>		Time since start [H]	Output Voltage [V]	0.0	3.352	0.5	3.350	1.0	3.350	2.0	3.350	3.0	3.350	4.0	3.350	5.0	3.350	6.0	3.350	7.0	3.350	8.0	3.350
Time since start [H]	Output Voltage [V]																						
0.0	3.352																						
0.5	3.350																						
1.0	3.350																						
2.0	3.350																						
3.0	3.350																						
4.0	3.350																						
5.0	3.350																						
6.0	3.350																						
7.0	3.350																						
8.0	3.350																						



Model	CBS1002403	
Item	Output Voltage Accuracy 定電圧精度	Testing Circuitry      Figure A
Object	+3.3V 23.4A	

### 1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 ~ 100°C

Input Voltage : 18 ~ 36V

Load Current : 0 ~ 23.4A

\* Output Voltage Accuracy = ±(Maximum of Output Voltage - Minimum of Output Voltage) / 2

$$* \text{ Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage}}{\text{Rated Output Voltage}} \times 100$$

### 1. 定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -40 ~ 100°C

入力電圧 : 18 ~ 36V

負荷電流 : 0 ~ 23.4A

\* 定電圧精度(変動値) = ±(出力電圧の最高値 - 出力電圧の最低値) / 2

$$* \text{ 定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

### 2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	25	36	0	3.353		
Minimum Voltage	100	36	23.4	3.335	±9	±0.3



Model	CBS1002403	Testing Circuitry Figure A
Item	Condense 結露特性	
Object	+3.3V 23.4A	

### 1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

### 1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い異常のないことを確認する。

### 2. Values

Item	Data	Testing Conditions
Output Voltage [V]	3.345	Input Volt.: 24V, Load Current.: 23.4A
Line Regulation [mV]	1	Input Volt.: 18~36V, Load Current.: 23.4A
Load Regulation [mV]	1	Input Volt.: 24V, Load Current.: 0~23.4A

**COSEL**

Model	CBS1002403	Temperature	25°C
Item	Line Noise Tolerance 入力雑音耐量	Testing Circuitry	Figure B
Object	+3.3V23.4A		

## 1. Conditions

- Input Voltage : 24 V
- Pulse Input Duration : 1 min. or more
- Pulse Voltage : 2000 V
- Load : 100 %
- Pulse Cycle : 16.7 mS

## 2. Results

Pulse Width [nS]	MODE	No protection failure should occur 保護回路の誤動作がない		DC-like Regulation of Output Voltage 出力電圧の直流的変動
		POLARITY		
50	COMMON	+	OK	no fluctuation
		-	OK	no fluctuation
	NORMAL	+	OK	no fluctuation
		-	OK	no fluctuation
1000	COMMON	+	OK	no fluctuation
		-	OK	no fluctuation
	NORMAL	+	OK	no fluctuation
		-	OK	no fluctuation

COSEL

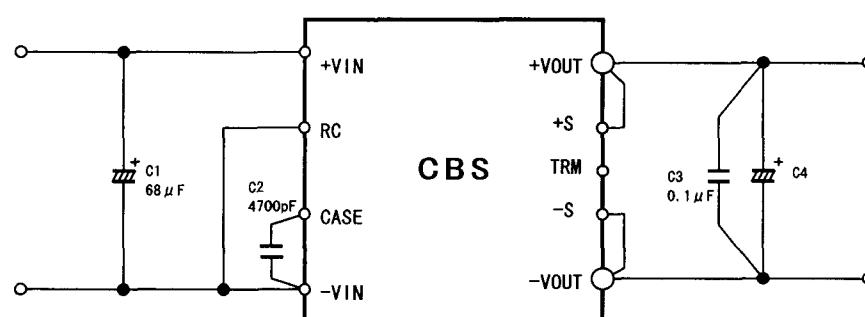
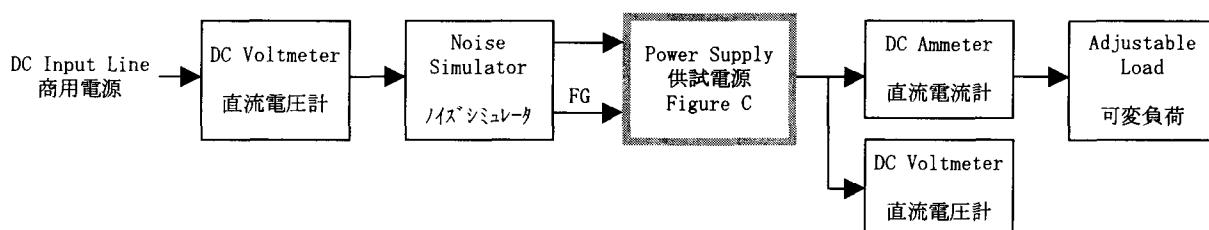
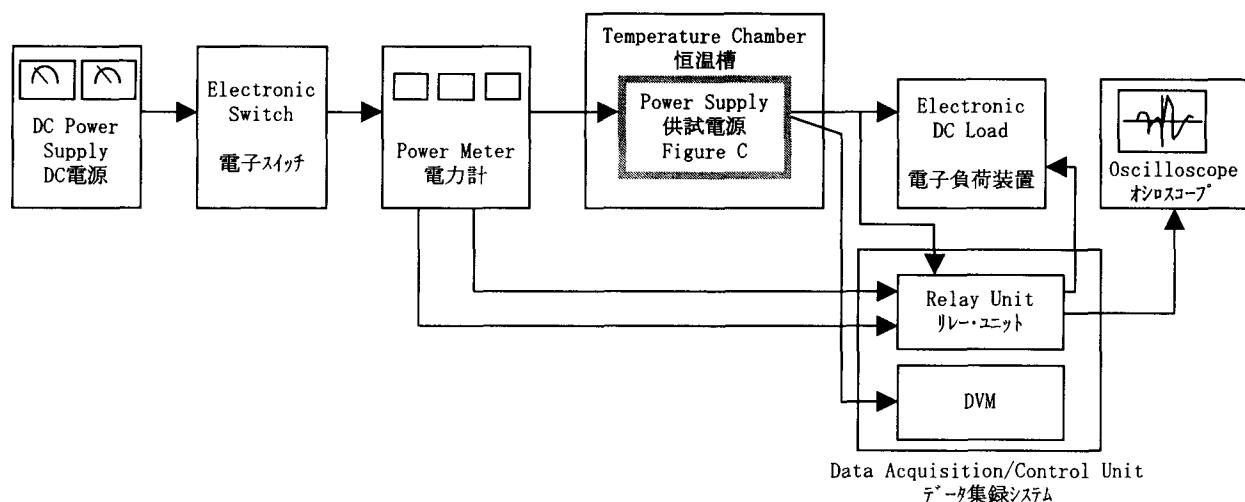


Figure C