

TEST DATA OF DBS100A05

Regulated DC Power Supply
Oct 31, 2008

Approved by : Tatsuya Mori
Tatsuya Mori Design Manager

Prepared by : Takuya Mori
Takuya Mori Design Engineer

COSEL CO.,LTD.



CONTENTS

1. Input Current (by Input Voltage) · · · · ·	1
2. Input Current (by Load Current) · · · · ·	2
3. Input Power (by Load Current) · · · · ·	3
4. Efficiency (by Input Voltage) · · · · ·	4
5. Efficiency (by Load Current) · · · · ·	5
6. Line Regulation · · · · ·	6
7. Load Regulation · · · · ·	7
8. Dynamic Load Response · · · · ·	8
9. Ripple Voltage (by Load Current) · · · · ·	9
10. Ripple-Noise · · · · ·	10
11. Ripple Voltage (by Ambient Temperature) · · · · ·	11
12. Ambient Temperature Drift · · · · ·	12
13. Output Voltage Accuracy · · · · ·	13
14. Time Lapse Drift · · · · ·	14
15. Rise and Fall Time · · · · ·	15
16. Minimum Input Voltage for Regulated Output Voltage · · · · ·	16
17. Overcurrent Protection · · · · ·	17
18. Overvoltage Protection · · · · ·	18
19. Figure of Testing Circuitry · · · · ·	19

(Final Page 19)

coSEL

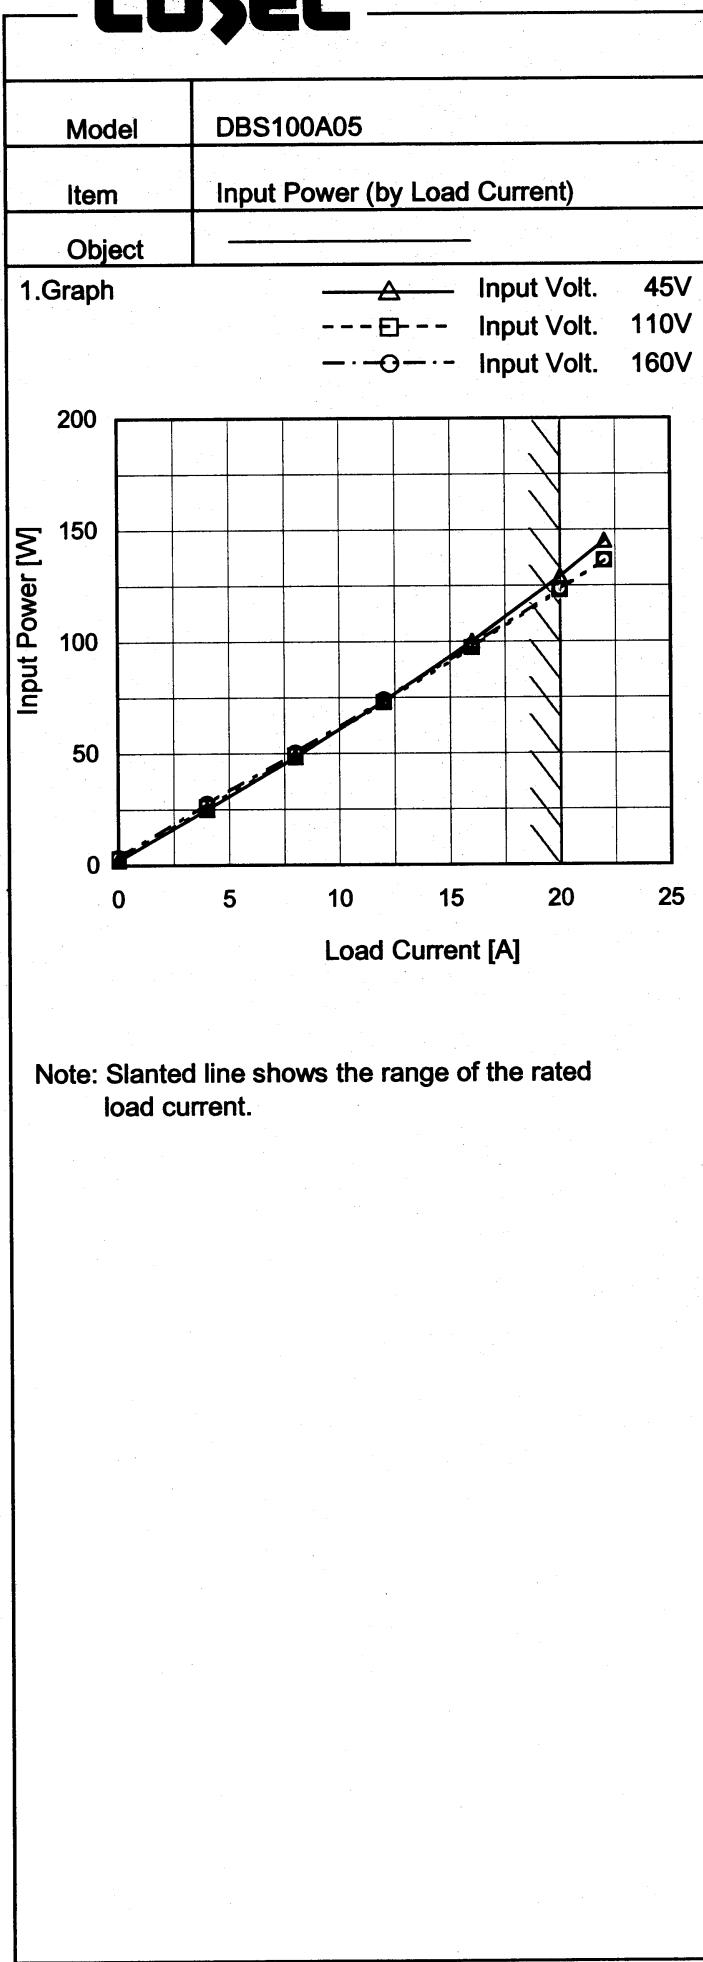
Model	DBS100A05	Temperature	25°C			
Item	Input Current (by Input Voltage)	Testing Circuitry	Figure A			
Object	<hr/>					
1.Graph						
<p style="text-align: center;"> — △ — Load 100% --- □ --- Load 50% --- ○ --- Load 0% </p>						
<p style="text-align: center;">Input Current [A]</p> <p style="text-align: center;">Input Voltage [V]</p> <p>Note: Slanted line shows the range of the rated input voltage.</p>						

2.Values

Input Voltage [V]	Input Current [A]		
	Load 0%	Load 50%	Load 100%
0	0.000	0.000	0.000
20	0.000	0.000	0.000
30	0.014	0.014	0.014
36	0.015	0.015	0.015
40	0.055	1.530	3.143
60	0.039	1.008	2.014
80	0.032	0.757	1.514
100	0.028	0.608	1.184
110	0.027	0.554	1.076
130	0.025	0.473	0.895
150	0.024	0.414	0.810
170	0.022	0.370	0.731
185	0.021	0.343	0.678
190	0.020	0.334	0.661
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

coSEL

Model	DBS100A05	Temperature	25°C																																																		
Item	Input Current (by Load Current)	Testing Circuitry	Figure A																																																		
Object	<hr/>																																																				
1.Graph																																																					
	<p>Legend:</p> <ul style="list-style-type: none"> — ▲ — Input Volt. 45V - - ■ - - Input Volt. 110V - · ○ - - Input Volt. 160V <table border="1"> <thead> <tr> <th>Load Current [A]</th> <th>Input Volt. 45[V]</th> <th>Input Volt. 110[V]</th> <th>Input Volt. 160[V]</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.049</td><td>0.027</td><td>0.023</td></tr> <tr><td>4</td><td>0.556</td><td>0.238</td><td>0.173</td></tr> <tr><td>8</td><td>1.078</td><td>0.447</td><td>0.315</td></tr> <tr><td>12</td><td>1.630</td><td>0.662</td><td>0.464</td></tr> <tr><td>16</td><td>2.226</td><td>0.884</td><td>0.614</td></tr> <tr><td>20</td><td>2.874</td><td>1.076</td><td>0.772</td></tr> <tr><td>22</td><td>3.220</td><td>1.239</td><td>0.852</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Input Volt. 45[V]	Input Volt. 110[V]	Input Volt. 160[V]	0	0.049	0.027	0.023	4	0.556	0.238	0.173	8	1.078	0.447	0.315	12	1.630	0.662	0.464	16	2.226	0.884	0.614	20	2.874	1.076	0.772	22	3.220	1.239	0.852	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-				
Load Current [A]	Input Volt. 45[V]	Input Volt. 110[V]	Input Volt. 160[V]																																																		
0	0.049	0.027	0.023																																																		
4	0.556	0.238	0.173																																																		
8	1.078	0.447	0.315																																																		
12	1.630	0.662	0.464																																																		
16	2.226	0.884	0.614																																																		
20	2.874	1.076	0.772																																																		
22	3.220	1.239	0.852																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
2.Values																																																					
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 45[V]</th> <th>Input Volt. 110[V]</th> <th>Input Volt. 160[V]</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.049</td><td>0.027</td><td>0.023</td></tr> <tr><td>4</td><td>0.556</td><td>0.238</td><td>0.173</td></tr> <tr><td>8</td><td>1.078</td><td>0.447</td><td>0.315</td></tr> <tr><td>12</td><td>1.630</td><td>0.662</td><td>0.464</td></tr> <tr><td>16</td><td>2.226</td><td>0.884</td><td>0.614</td></tr> <tr><td>20</td><td>2.874</td><td>1.076</td><td>0.772</td></tr> <tr><td>22</td><td>3.220</td><td>1.239</td><td>0.852</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Input Current [A]			Input Volt. 45[V]	Input Volt. 110[V]	Input Volt. 160[V]	0	0.049	0.027	0.023	4	0.556	0.238	0.173	8	1.078	0.447	0.315	12	1.630	0.662	0.464	16	2.226	0.884	0.614	20	2.874	1.076	0.772	22	3.220	1.239	0.852	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Current [A]																																																				
	Input Volt. 45[V]	Input Volt. 110[V]	Input Volt. 160[V]																																																		
0	0.049	0.027	0.023																																																		
4	0.556	0.238	0.173																																																		
8	1.078	0.447	0.315																																																		
12	1.630	0.662	0.464																																																		
16	2.226	0.884	0.614																																																		
20	2.874	1.076	0.772																																																		
22	3.220	1.239	0.852																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
<p>Note: Slanted line shows the range of the rated load current.</p>																																																					

COSEL

 Temperature 25°C
 Testing Circuitry Figure A


2. Values

Load Current [A]	Input Power [W]		
	Input Volt. 45[V]	Input Volt. 110[V]	Input Volt. 160[V]
0	2.2	3.0	3.6
4	25.0	26.1	27.7
8	48.4	49.1	50.5
12	73.4	72.8	74.2
16	100.1	97.3	98.3
20	129.2	123.0	123.5
22	145.1	136.2	136.4
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

COSEL

Model	DBS100A05
Item	Efficiency (by Input Voltage)
Object	—

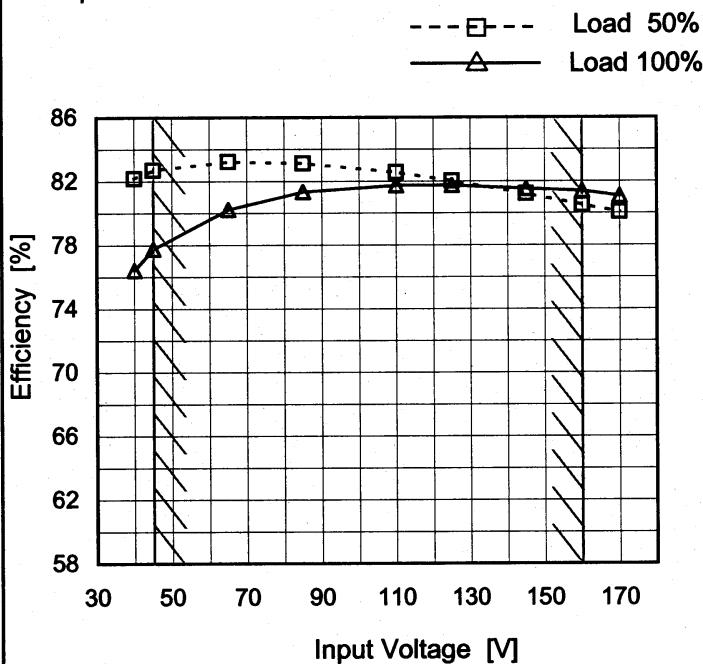1. Graph



Note: Slanted line shows the range of the rated input voltage.

Temperature 25°C
Testing Circuitry Figure A

2. Values

Input Voltage [V]	Efficiency [%]	
	Load 50%	Load 100%
40	82.2	76.4
45	82.7	77.8
65	83.2	80.2
85	83.1	81.3
110	82.6	81.7
125	82.0	81.7
145	81.2	81.5
160	80.5	81.4
170	80.1	81.1

COSEL

Model	DBS100A05
Item	Efficiency (by Load Current)
Object	

1.Graph

Efficiency [%]

Load Current [A]

Legend:

- △— Input Volt. 45V
- -□-- Input Volt. 110V
- -○-- Input Volt. 160V

Note: Slanted line shows the range of the rated load current.

Temperature 25°C
Testing Circuitry Figure A


2.Values

Load Current [A]	Efficiency [%]		
	Input Volt. 45[V]	Input Volt. 110[V]	Input Volt. 160[V]
0	-	-	-
4	80.3	76.9	72.4
8	83.0	81.8	79.6
12	82.1	82.8	81.2
16	80.2	82.5	81.7
20	77.8	81.7	81.4
22	76.2	81.2	81.1
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

COSEL

Model	DBS100A05
Item	Line Regulation
Object	+5V20A

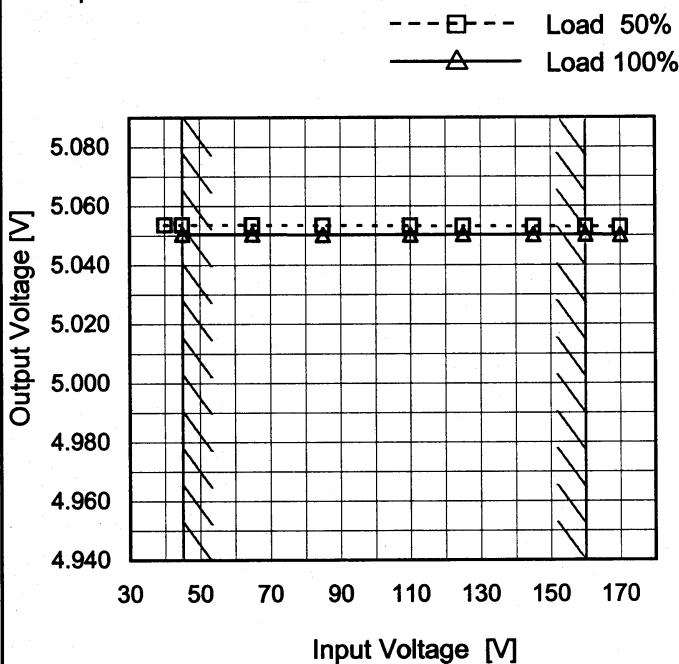1. Graph




Note: Slanted line shows the range of the rated input voltage.

 Temperature 25°C
 Testing Circuitry Figure A

2. Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
40	5.054	-
45	5.054	5.051
65	5.054	5.051
85	5.053	5.050
110	5.053	5.050
125	5.053	5.050
145	5.053	5.050
160	5.053	5.050
170	5.053	5.050

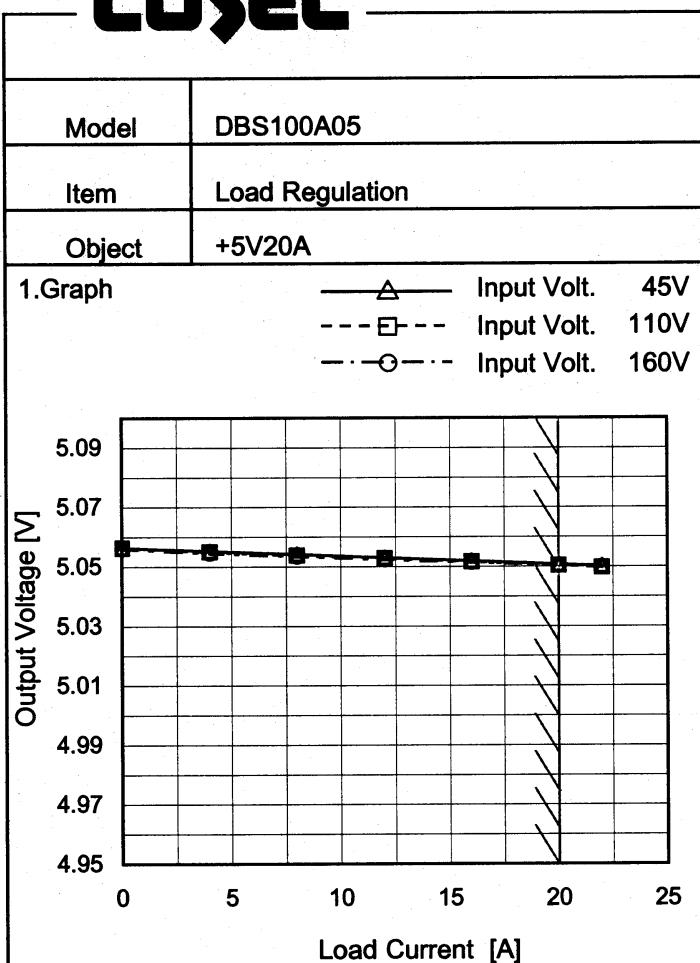
coSEL


Note: Slanted line shows the range of the rated load current.

Temperature 25°C
Testing Circuitry Figure A

2. Values


Load Current [A]	Output Voltage [V]		
	Input Volt. 45[V]	Input Volt. 110[V]	Input Volt. 160[V]
0	5.056	5.056	5.056
4	5.055	5.055	5.055
8	5.054	5.054	5.053
12	5.053	5.053	5.052
16	5.052	5.052	5.051
20	5.051	5.050	5.050
22	5.050	5.050	5.050
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

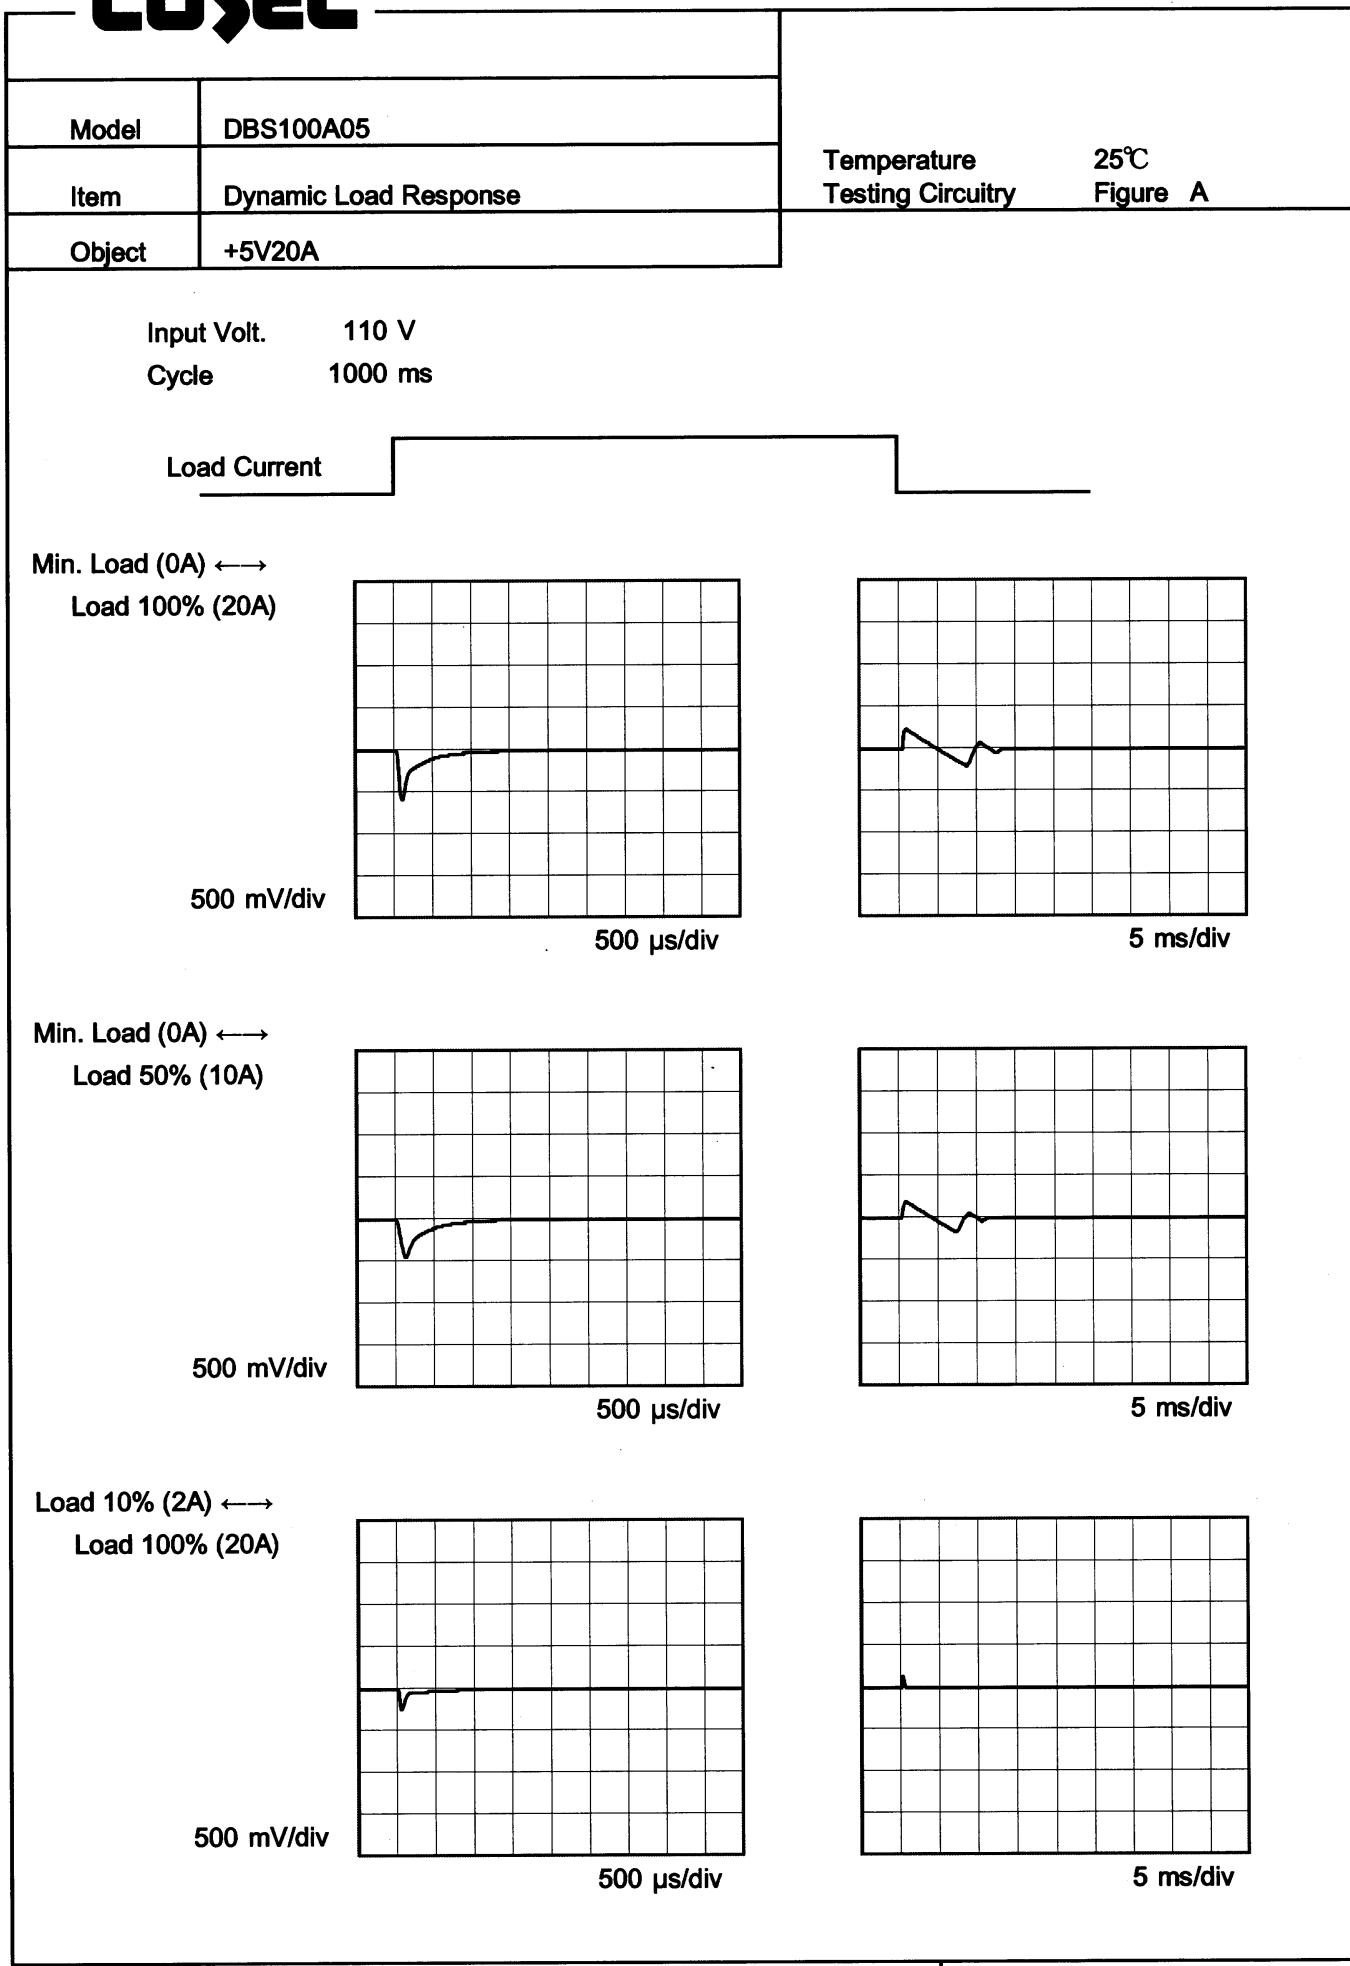COSEL

COSEL

Model	DBS100A05
Item	Ripple Voltage (by Load Current)
Object	+5V20A

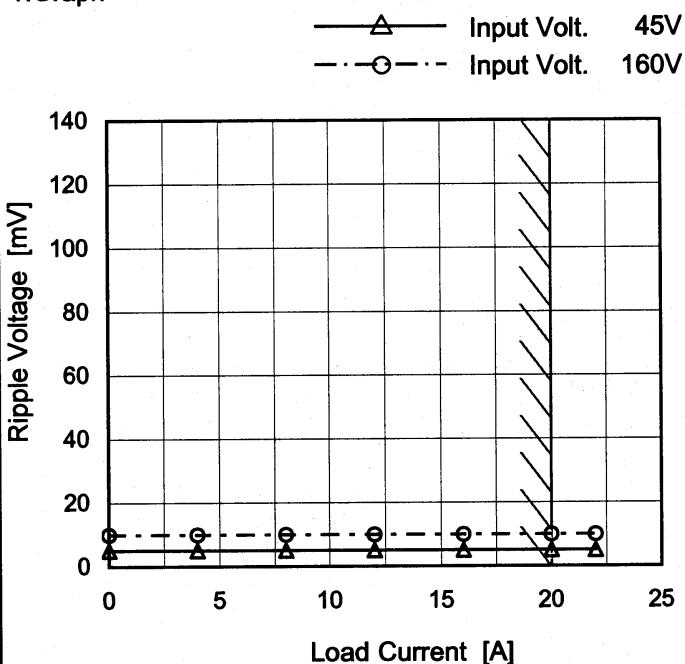1.Graph



Measured by 20 MHz Oscilloscope.

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

Temperature 25°C
Testing Circuitry Figure B

2.Values

Load Current [A]	Ripple Voltage [mV]	
	Input Volt. 45 [V]	Input Volt. 160 [V]
0	5	10
4	5	10
8	5	10
12	5	10
16	5	10
20	5	10
22	5	10
-	-	-
-	-	-
-	-	-
-	-	-

Ripple [mVp-p]

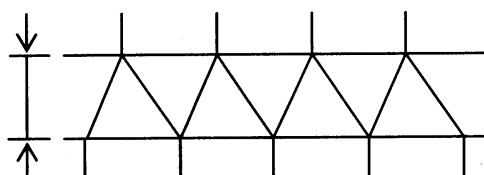



Fig.Complex Ripple Wave Form

COSEL

Model	DBS100A05
Item	Ripple-Noise
Object	+5V20A

Temperature 25°C
Testing Circuitry Figure B

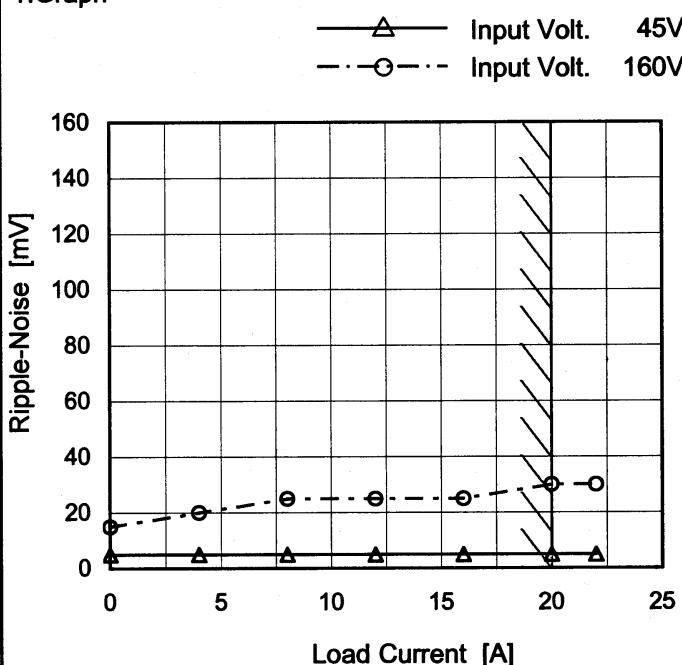1.Graph



Measured by 20 MHz Oscilloscope.

Ripple-Noise is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

2.Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 45 [V]	Input Volt. 160 [V]
0	5	15
4	5	20
8	5	25
12	5	25
16	5	25
20	5	30
22	5	30
-	-	-
-	-	-
-	-	-
-	-	-

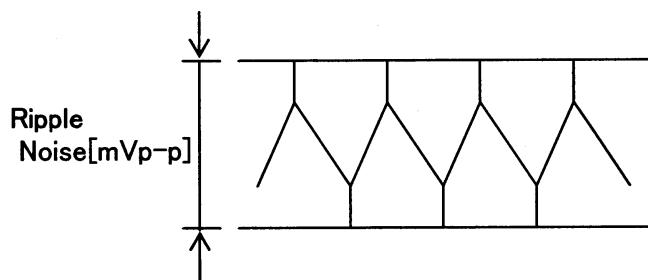
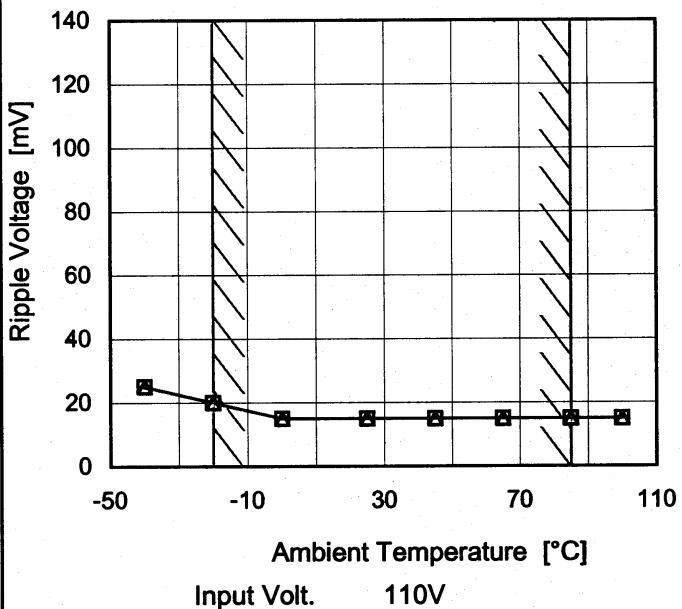



Fig.Complex Ripple Noise Wave Form

COSEL
Model DBS100A05
Item Ripple Voltage (by Ambient Temp.)
Object +5V20A
1. Graph

---□--- Load 50%
—△— Load 100%



Input Volt. 110V
Measured by 20 MHz Oscilloscope.
Note: Slanted line shows the range of the rated ambient temperature.
Testing Circuitry Figure B
2. Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-40	25	25
-20	20	20
0	15	15
25	15	15
45	15	15
65	15	15
85	15	15
100	15	15
-	-	-
-	-	-
-	-	-

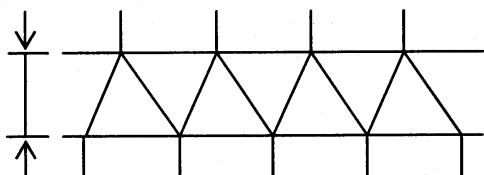Ripple [mVp-p]

Fig.Complex Ripple Wave Form

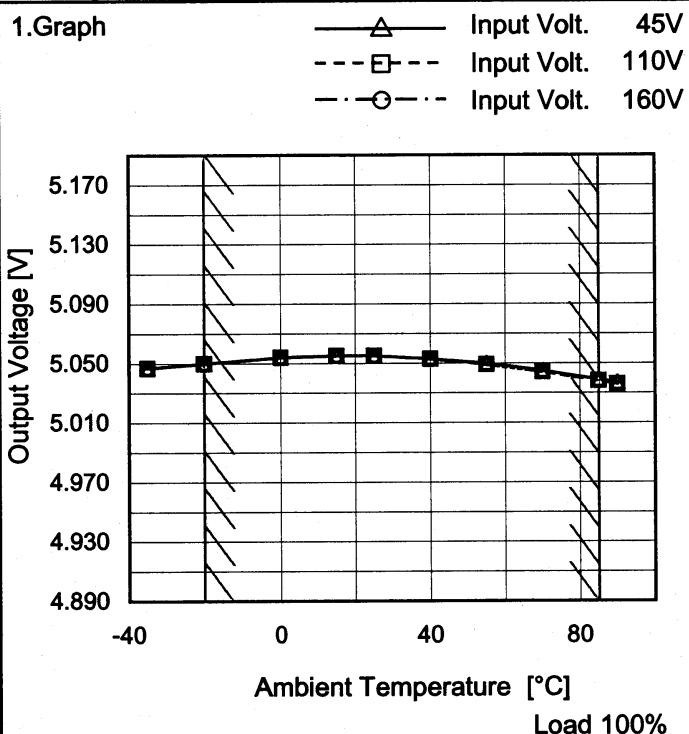COSEL

Model	DBS100A05
Item	Ambient Temperature Drift
Object	+5V20A


Testing Circuitry Figure A
2.Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 45[V]	Input Volt. 110[V]	Input Volt. 160[V]
-35	5.047	5.047	5.047
-20	5.050	5.050	5.050
0	5.054	5.054	5.054
15	5.055	5.055	5.055
25	5.055	5.055	5.055
40	5.053	5.053	5.053
55	5.050	5.049	5.049
70	5.045	5.044	5.044
85	5.039	5.038	5.038
90	5.037	5.036	5.036
--	-	-	-

Note: Slanted line shows the range of the rated ambient temperature.



Model	DBS100A05	Testing Circuitry Figure A
Item	Output Voltage Accuracy	
Object	+5V20A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20 - 85°C

Input Voltage : 45 - 160V

Load Current : 0 - 20A

* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

$$\text{* Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$


2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	25	45	0	5.061	± 12	± 0.2
Minimum Voltage	85	160	20	5.038		

COSEL

Model	DBS100A05
Item	Time Lapse Drift
Object	+5V20A

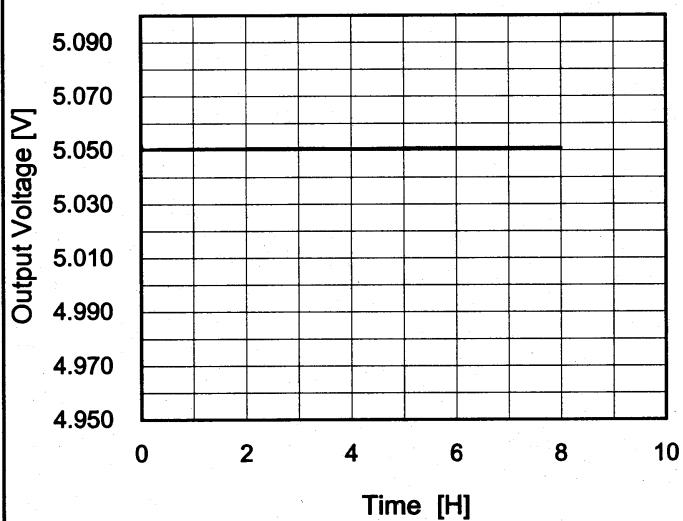1. Graph



Input Volt. 110V
Load 100%

Temperature 25°C
Testing Circuitry Figure A

2. Values

Time since start [H]	Output Voltage [V]
0.0	5.052
0.5	5.051
1.0	5.051
2.0	5.051
3.0	5.051
4.0	5.051
5.0	5.051
6.0	5.051
7.0	5.051
8.0	5.051

COSEL

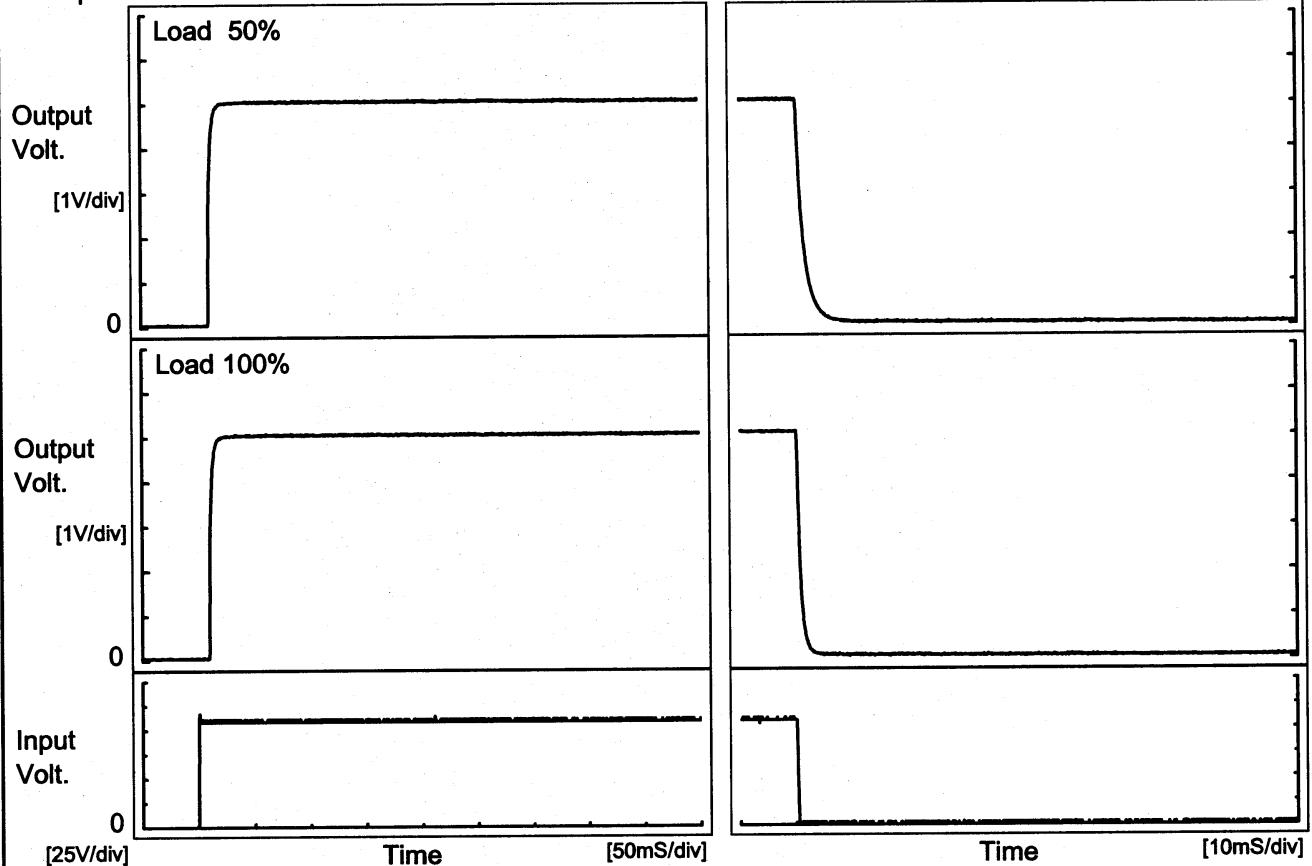
Model DBS100A05

Item Rise and Fall Time

Object +5V20A


Temperature 25°C
Testing Circuitry Figure A

1. Graph



2. Values


Load	Time	Td	Tr	Ts	Th	Tf	[mS]
50 %		10.5	3.5	14.0	0.3	3.3	
100 %		10.5	3.5	14.0	0.3	1.5	

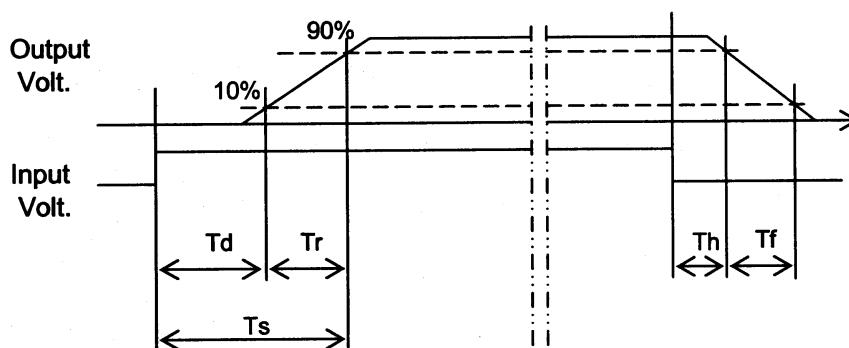

COSEL

Model	DBS100A05
Item	Minimum Input Voltage for Regulated Output Voltage
Object	+5V20A

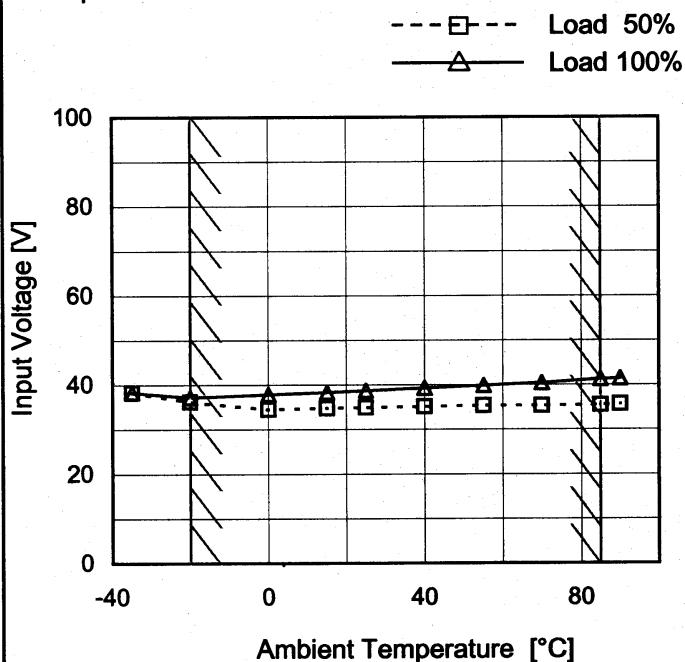1.Graph



Note: Slanted line shows the range of the rated ambient temperature.

Testing Circuitry Figure A

2.Values


Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-35	39	39
-20	37	38
0	35	38
15	35	39
25	35	39
40	36	40
55	36	40
70	36	41
85	36	42
90	36	42
-	-	-

COSEL

Model DBS100A05

Item Overcurrent Protection

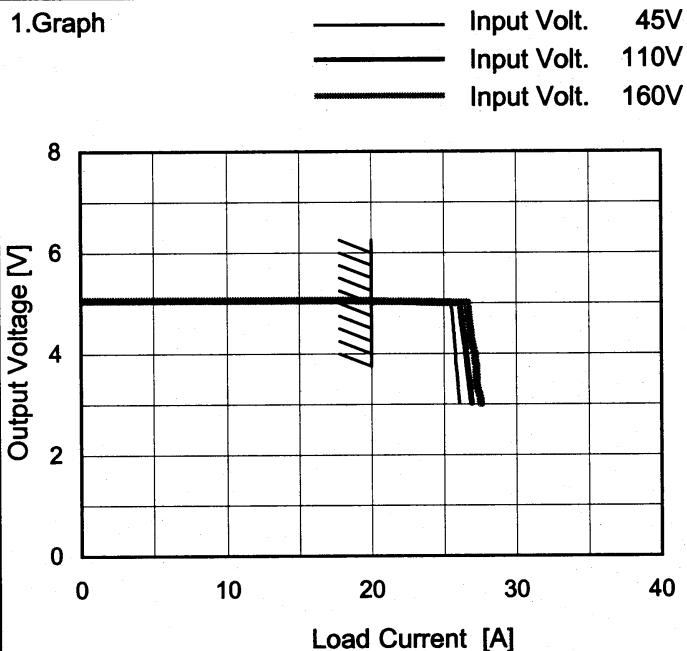Object +5V20A




Intermittent operation occurs when the output voltage is from 3V to 0V.

Temperature 25°C
Testing Circuitry Figure A

2. Values

Output Voltage [V]	Load Current [A]		
	Input Volt. 45[V]	Input Volt. 110[V]	Input Volt. 160[V]
5.00	25.38	26.09	26.61
4.75	25.58	26.18	26.70
4.50	25.38	26.27	26.61
4.00	25.79	26.50	27.11
3.50	25.92	26.69	27.26
3.00	26.06	26.91	27.55
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

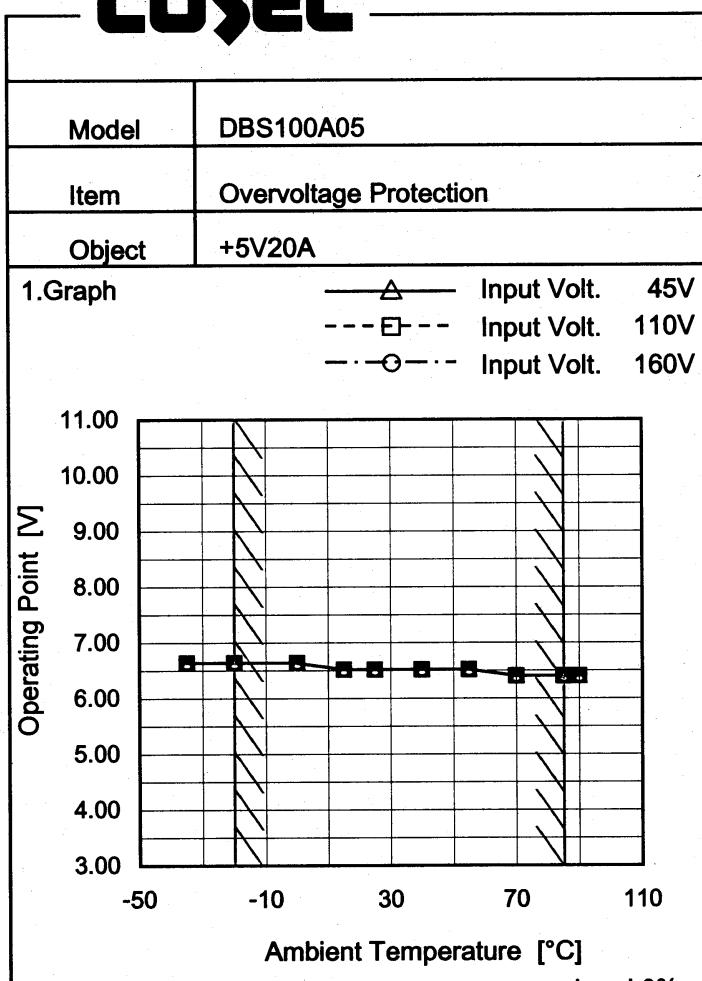COSEL


Testing Circuitry Figure A

2. Values

Ambient Temperature [°C]	Operating Point [V]		
	45[V]	110[V]	160[V]
-35	6.64	6.64	6.64
-20	6.64	6.64	6.64
0	6.64	6.64	6.64
15	6.52	6.52	6.52
25	6.52	6.52	6.52
40	6.52	6.52	6.52
55	6.52	6.52	6.52
70	6.40	6.40	6.40
85	6.40	6.40	6.40
90	6.40	6.40	6.40
--	-	-	-

Note: Slanted line shows the range of the rated ambient temperature.

COSEL

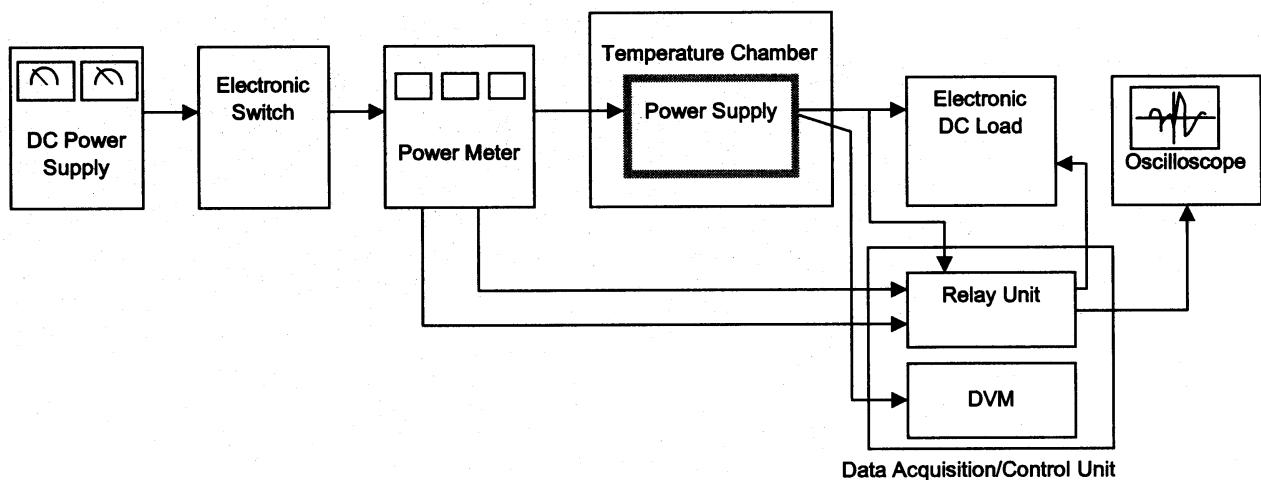


Figure A

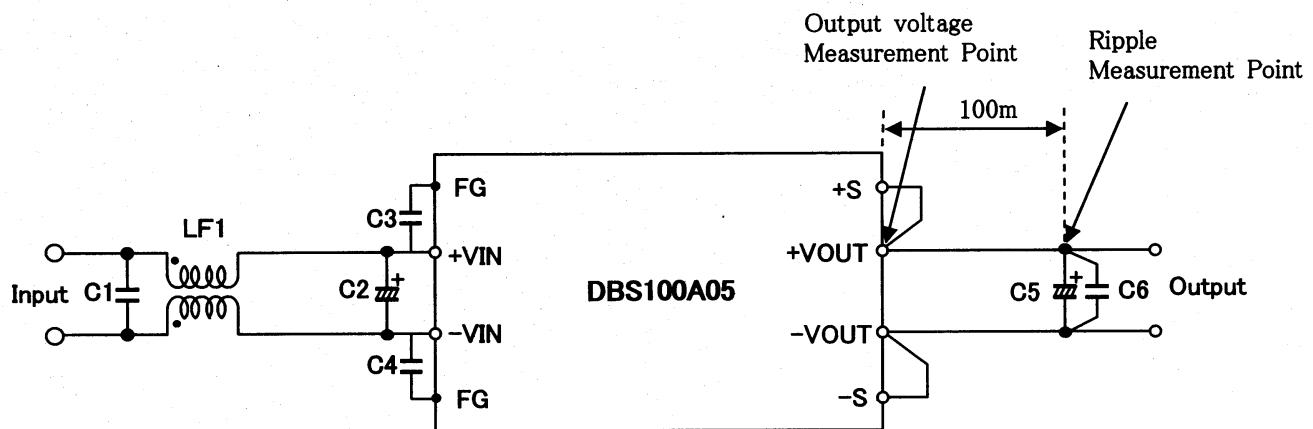


Figure B

- C1 : $0.1 \mu F$ 250V Film capacitor
- C2 : $47 \mu F$ 250V Electric capacitor
- C3, C4 : 2200pF 250V Ceramic capacitor
- C5 : $2200 \mu F$ 10V Electric capacitor
- C6 : $0.1 \mu F$ 50V Film capacitor
- LF1 : 1mH 3A Common mode Choke Coil