



TEST DATA OF DPF1000 (200V INPUT)

AC-DC Front End Module

Jul 29, 2005

Approved by : Kazuyoshi Shimano
Kazuyoshi Shimano Design Manager

Prepared by : Yukihiro Takehashi
Yukihiro Takehashi Design Engineer

コーチセル株式会社
COSEL CO., LTD.



CONTENTS

1. Output Voltage (by Input Voltage) · · · · ·	1
出力電圧 (入力電圧特性)	
2. Input Current (by Load Power) · · · · ·	2
入力電流 (負荷特性)	
3. Input Power (by Load Power) · · · · ·	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage) · · · · ·	4
効率 (入力電圧特性)	
5. Efficiency (by Load Power) · · · · ·	5
効率 (負荷特性)	
6. Power Factor (by Input Voltage) · · · · ·	6
力率 (入力電圧特性)	
7. Power Factor (by Load Power) · · · · ·	7
力率 (負荷特性)	
8. Load Regulation · · · · ·	8
静的負荷変動	
9. Ripple Voltage (by Load Power) · · · · ·	9
リップル電圧 (負荷特性)	
10. Overvoltage Protection · · · · ·	10
過電圧保護	
11. Inrush Current · · · · ·	11
突入電流	
12. Dynamic Load Response · · · · ·	12
動的負荷変動	
13. Rise and Fall Time · · · · ·	13
立上り、立下り時間	
14. Ambient Temperature Drift · · · · ·	14
周囲温度変動	
15. Minimum Input Voltage for Regulated Output Voltage · · · ·	15
最低レギュレーション電圧	
16. Ripple Voltage (by Ambient Temperature) · · · · ·	16
リップル電圧 (周囲温度特性)	
17. Time Lapse Drift · · · · ·	17
経時ドリフト	
18. Output Voltage Accuracy · · · · ·	18
定電圧精度	
19. Harmonic Current · · · · ·	19
高調波電流	
20. Condensation · · · · ·	21
結露特性	
21. Leakage Current · · · · ·	22
漏洩電流	
22. Line Noise Tolerance · · · · ·	23
入力雑音耐量	
23. Figure of Testing Circuitry · · · · ·	24
測定回路図	

(Final Page 25)


COSEL

Model	DPF1000		Temperature	25°C																																
Item	Output Voltage (by Input Voltage) 出力電圧 (入力電圧特性)		Testing Circuitry	Figure A																																
Object	+360V 1500W																																			
1. Graph	<p>Load 50% Load 100%</p>																																			
	<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>150</td><td>375.4</td><td>371.8</td></tr> <tr><td>170</td><td>375.9</td><td>373.3</td></tr> <tr><td>180</td><td>376.1</td><td>373.6</td></tr> <tr><td>200</td><td>376.4</td><td>374.4</td></tr> <tr><td>220</td><td>376.6</td><td>375.0</td></tr> <tr><td>240</td><td>376.8</td><td>375.5</td></tr> <tr><td>255</td><td>376.9</td><td>375.9</td></tr> <tr><td>264</td><td>377.0</td><td>376.0</td></tr> <tr><td>280</td><td>384.2</td><td>378.5</td></tr> </tbody> </table>				Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	150	375.4	371.8	170	375.9	373.3	180	376.1	373.6	200	376.4	374.4	220	376.6	375.0	240	376.8	375.5	255	376.9	375.9	264	377.0	376.0	280	384.2	378.5
Input Voltage [V]	Output Voltage [V]																																			
	Load 50%	Load 100%																																		
150	375.4	371.8																																		
170	375.9	373.3																																		
180	376.1	373.6																																		
200	376.4	374.4																																		
220	376.6	375.0																																		
240	376.8	375.5																																		
255	376.9	375.9																																		
264	377.0	376.0																																		
280	384.2	378.5																																		

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。


COSEL

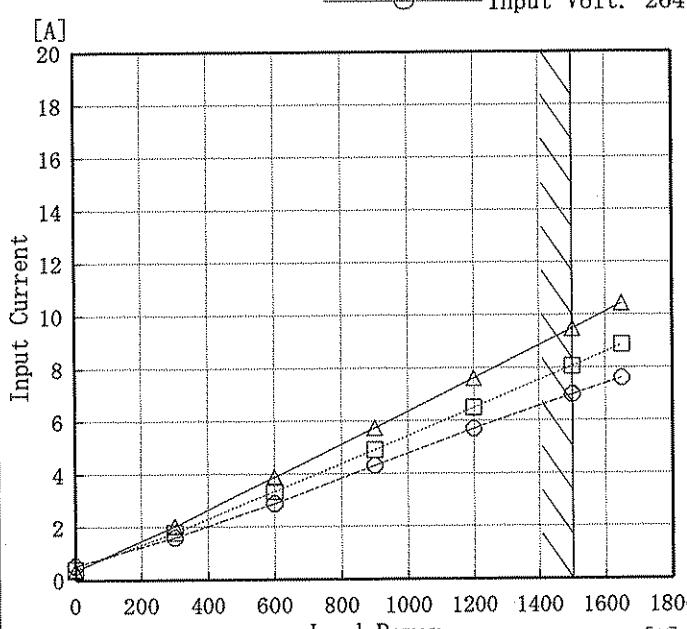Model	DPF1000		
Item	Input Current (by Load Power) 入力電流 (負荷特性)	Temperature Testing Circuitry Figure A	25°C
Object	—		
1. Graph	<p style="text-align: center;"> △— Input Volt. 170V □— Input Volt. 200V ○— Input Volt. 264V </p>  <p>[A]</p> <p>Y-axis: Input Current [A] (0 to 20) X-axis: Load Power [W] (0 to 1800)</p>		
2. Values	Load Power [W]	Input Current [A]	
	170[V]	200[V]	264[V]
0	0.34	0.39	0.53
300	2.03	1.78	1.60
600	3.87	3.34	2.87
900	5.73	4.91	4.32
1200	7.60	6.49	5.70
1500	9.48	8.06	6.99
1650	10.44	8.87	7.61
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

Note: Slanted line shows the range of the rated load power.

(注) 斜線は定格負荷電力範囲を示す。

COSEL

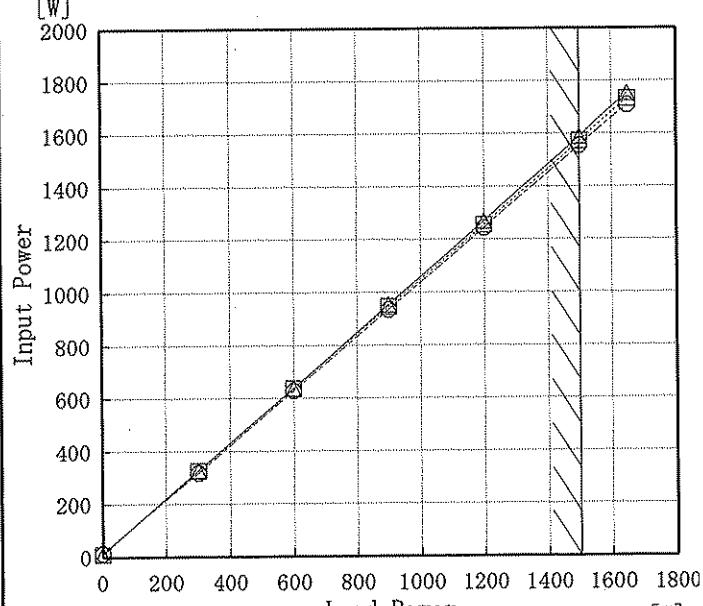
Model	DPF1000																																																									
Item	Input Power (by Load Power) 入力電力 (負荷特性)	Temperature 25°C	Testing Circuitry Figure A																																																							
Object	_____																																																									
1. Graph	<p>△ Input Volt. 170V ■ Input Volt. 200V ○ Input Volt. 264V</p> 																																																									
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Power [W]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>170[V]</th> <th>200[V]</th> <th>264[V]</th> </tr> </thead> <tbody> <tr><td>0</td><td>10</td><td>9</td><td>14</td></tr> <tr><td>300</td><td>328</td><td>325</td><td>319</td></tr> <tr><td>600</td><td>638</td><td>636</td><td>630</td></tr> <tr><td>900</td><td>953</td><td>946</td><td>936</td></tr> <tr><td>1200</td><td>1270</td><td>1255</td><td>1244</td></tr> <tr><td>1500</td><td>1589</td><td>1572</td><td>1555</td></tr> <tr><td>1650</td><td>1753</td><td>1732</td><td>1708</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Power [W]	Input Power [W]			170[V]	200[V]	264[V]	0	10	9	14	300	328	325	319	600	638	636	630	900	953	946	936	1200	1270	1255	1244	1500	1589	1572	1555	1650	1753	1732	1708	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Power [W]	Input Power [W]																																																									
	170[V]	200[V]	264[V]																																																							
0	10	9	14																																																							
300	328	325	319																																																							
600	638	636	630																																																							
900	953	946	936																																																							
1200	1270	1255	1244																																																							
1500	1589	1572	1555																																																							
1650	1753	1732	1708																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							

Note: Slanted line shows the range of the rated load power.

(注)斜線は定格負荷電力範囲を示す。

COSEL

Model	DPF1000		Temperature Testing Circuitry	25°C Figure A																																
Item	Efficiency (by Input Voltage) 効率(入力電圧特性)																																			
Object	<hr/>																																			
1. Graph	<p>Load 50% </p> <p>Load 100% </p> <table border="1"> <caption>Data points estimated from Figure A</caption> <thead> <tr> <th>Input Voltage [V]</th> <th>Efficiency Load 50% [%]</th> <th>Efficiency Load 100% [%]</th> </tr> </thead> <tbody> <tr><td>150</td><td>93.5</td><td>93.6</td></tr> <tr><td>170</td><td>93.9</td><td>94.4</td></tr> <tr><td>180</td><td>94.3</td><td>94.7</td></tr> <tr><td>200</td><td>95.1</td><td>95.4</td></tr> <tr><td>220</td><td>95.2</td><td>95.9</td></tr> <tr><td>240</td><td>95.5</td><td>96.2</td></tr> <tr><td>255</td><td>95.5</td><td>96.4</td></tr> <tr><td>264</td><td>96.1</td><td>96.5</td></tr> <tr><td>280</td><td>96.1</td><td>96.3</td></tr> </tbody> </table>				Input Voltage [V]	Efficiency Load 50% [%]	Efficiency Load 100% [%]	150	93.5	93.6	170	93.9	94.4	180	94.3	94.7	200	95.1	95.4	220	95.2	95.9	240	95.5	96.2	255	95.5	96.4	264	96.1	96.5	280	96.1	96.3		
Input Voltage [V]	Efficiency Load 50% [%]	Efficiency Load 100% [%]																																		
150	93.5	93.6																																		
170	93.9	94.4																																		
180	94.3	94.7																																		
200	95.1	95.4																																		
220	95.2	95.9																																		
240	95.5	96.2																																		
255	95.5	96.4																																		
264	96.1	96.5																																		
280	96.1	96.3																																		
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>150</td><td>93.5</td><td>93.6</td></tr> <tr><td>170</td><td>93.9</td><td>94.4</td></tr> <tr><td>180</td><td>94.3</td><td>94.7</td></tr> <tr><td>200</td><td>95.1</td><td>95.4</td></tr> <tr><td>220</td><td>95.2</td><td>95.9</td></tr> <tr><td>240</td><td>95.5</td><td>96.2</td></tr> <tr><td>255</td><td>95.5</td><td>96.4</td></tr> <tr><td>264</td><td>96.1</td><td>96.5</td></tr> <tr><td>280</td><td>96.1</td><td>96.3</td></tr> </tbody> </table>				Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	150	93.5	93.6	170	93.9	94.4	180	94.3	94.7	200	95.1	95.4	220	95.2	95.9	240	95.5	96.2	255	95.5	96.4	264	96.1	96.5	280	96.1	96.3
Input Voltage [V]	Efficiency [%]																																			
	Load 50%	Load 100%																																		
150	93.5	93.6																																		
170	93.9	94.4																																		
180	94.3	94.7																																		
200	95.1	95.4																																		
220	95.2	95.9																																		
240	95.5	96.2																																		
255	95.5	96.4																																		
264	96.1	96.5																																		
280	96.1	96.3																																		
	<p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>																																			

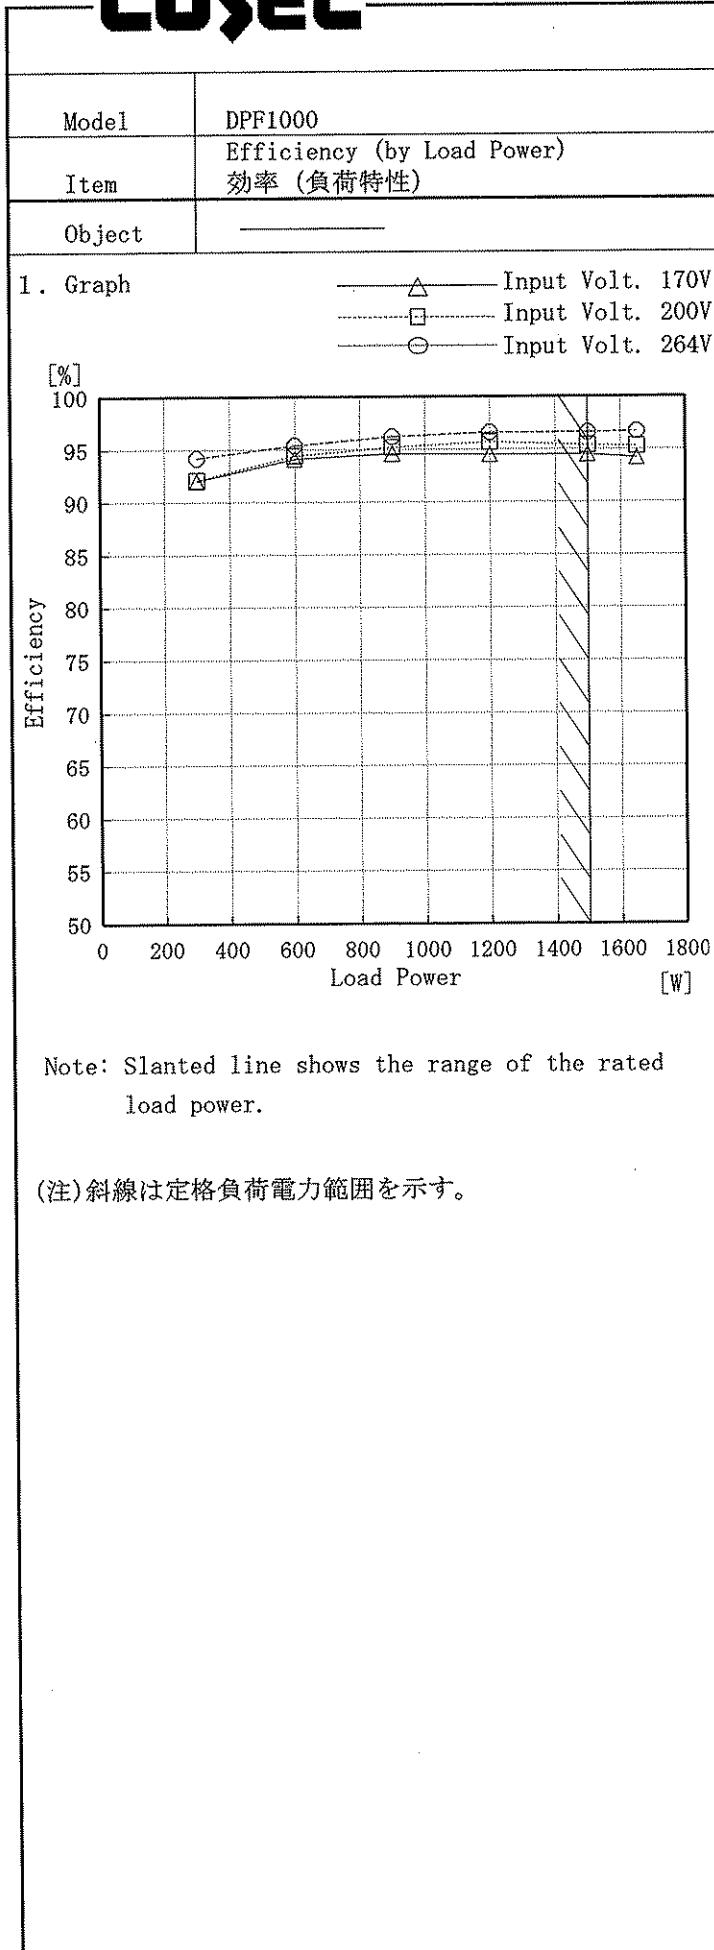COSEL

Temperature 25°C
Testing Circuitry Figure A


2. Values

Load Power [W]	Efficiency [%]		
	170[V]	200[V]	264[V]
300	92.0	92.1	94.2
600	94.1	94.4	95.4
900	94.6	95.2	96.2
1200	94.5	95.7	96.6
1500	94.5	95.4	96.6
1650	94.2	95.3	96.7
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

COSEL

Model	DPF1000
Item	Power Factor (by Input Voltage) 力率(入力電圧特性)

Object

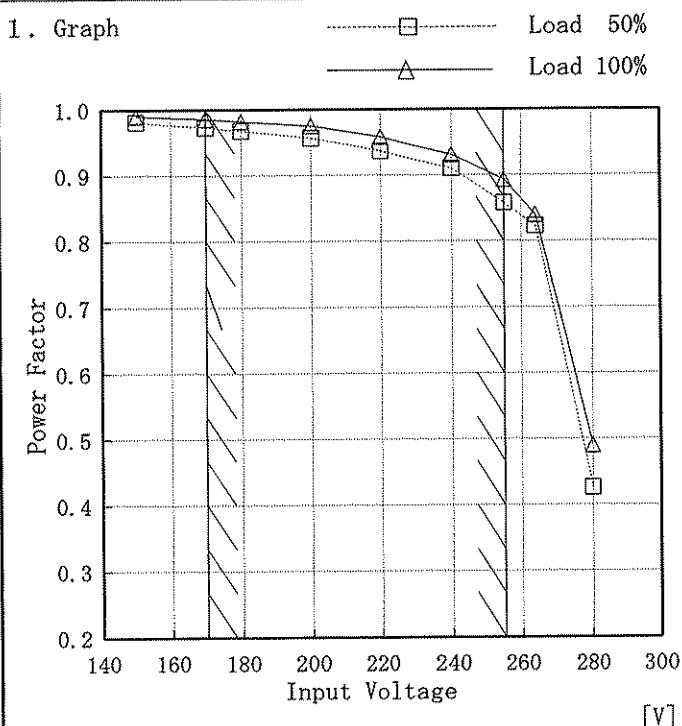
 Temperature 25°C
 Testing Circuitry Figure A

2. Values


Input Voltage [V]	Power Factor	
	Load 50%	Load 100%
150	0.98	0.99
170	0.97	0.99
180	0.97	0.98
200	0.96	0.98
220	0.94	0.96
240	0.91	0.93
255	0.86	0.89
264	0.82	0.84
280	0.43	0.49

Note: Slanted line shows power factor correction range.

(注)斜線は力率改善入力電圧範囲を示す。

COSSEL

Model	DPF1000
Item	Power Factor (by Load Power) 力率(負荷特性)

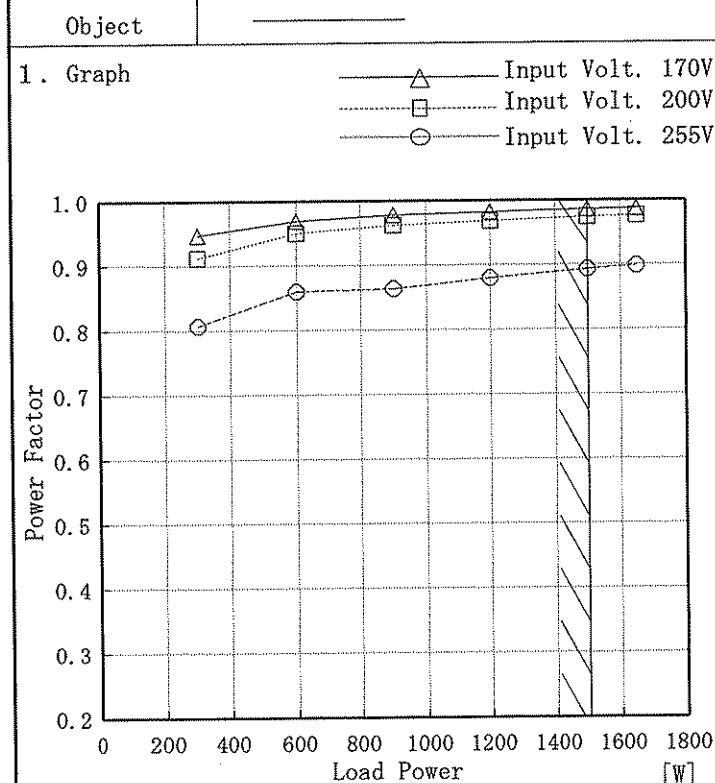
 Temperature 25°C
 Testing Circuitry Figure A

2. Values

Load Power [W]	Power Factor		
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 255[V]
300	0.95	0.91	0.81
600	0.97	0.95	0.86
900	0.98	0.96	0.86
1200	0.98	0.97	0.88
1500	0.99	0.97	0.89
1650	0.99	0.98	0.90
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

Note: Slanted line shows the range of the rated load power.

(注)斜線は定格負荷電力範囲を示す。

COSSEL

Model	DPF1000	Temperature	25°C																																															
Item	Load Regulation 靜的負荷變動	Testing Circuitry	Figure A																																															
Object	+360V 1500W																																																	
1. Graph	<p>—△— Input Volt. 170 V —□— Input Volt. 200 V —○— Input Volt. 264 V</p> <table border="1"> <caption>Data points estimated from the graph</caption> <thead> <tr> <th>Load Power [W]</th> <th>Output Voltage 170V [V]</th> <th>Output Voltage 200V [V]</th> <th>Output Voltage 264V [V]</th> </tr> </thead> <tbody> <tr><td>0</td><td>377.2</td><td>377.3</td><td>377.5</td></tr> <tr><td>300</td><td>376.7</td><td>376.9</td><td>377.2</td></tr> <tr><td>600</td><td>376.2</td><td>376.6</td><td>377.0</td></tr> <tr><td>900</td><td>375.6</td><td>376.2</td><td>376.9</td></tr> <tr><td>1200</td><td>375.0</td><td>375.8</td><td>376.8</td></tr> <tr><td>1500</td><td>374.6</td><td>375.5</td><td>376.4</td></tr> <tr><td>1650</td><td>374.2</td><td>375.2</td><td>376.5</td></tr> </tbody> </table>			Load Power [W]	Output Voltage 170V [V]	Output Voltage 200V [V]	Output Voltage 264V [V]	0	377.2	377.3	377.5	300	376.7	376.9	377.2	600	376.2	376.6	377.0	900	375.6	376.2	376.9	1200	375.0	375.8	376.8	1500	374.6	375.5	376.4	1650	374.2	375.2	376.5															
Load Power [W]	Output Voltage 170V [V]	Output Voltage 200V [V]	Output Voltage 264V [V]																																															
0	377.2	377.3	377.5																																															
300	376.7	376.9	377.2																																															
600	376.2	376.6	377.0																																															
900	375.6	376.2	376.9																																															
1200	375.0	375.8	376.8																																															
1500	374.6	375.5	376.4																																															
1650	374.2	375.2	376.5																																															
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Power [W]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0</td><td>377.2</td><td>377.3</td><td>377.5</td></tr> <tr><td>300</td><td>376.7</td><td>376.9</td><td>377.2</td></tr> <tr><td>600</td><td>376.2</td><td>376.6</td><td>377.0</td></tr> <tr><td>900</td><td>375.6</td><td>376.2</td><td>376.9</td></tr> <tr><td>1200</td><td>375.0</td><td>375.8</td><td>376.8</td></tr> <tr><td>1500</td><td>374.6</td><td>375.5</td><td>376.4</td></tr> <tr><td>1650</td><td>374.2</td><td>375.2</td><td>376.5</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Power [W]	Output Voltage [V]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0	377.2	377.3	377.5	300	376.7	376.9	377.2	600	376.2	376.6	377.0	900	375.6	376.2	376.9	1200	375.0	375.8	376.8	1500	374.6	375.5	376.4	1650	374.2	375.2	376.5	—	—	—	—	—	—	—	—	—	—	—	—
Load Power [W]	Output Voltage [V]																																																	
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																															
0	377.2	377.3	377.5																																															
300	376.7	376.9	377.2																																															
600	376.2	376.6	377.0																																															
900	375.6	376.2	376.9																																															
1200	375.0	375.8	376.8																																															
1500	374.6	375.5	376.4																																															
1650	374.2	375.2	376.5																																															
—	—	—	—																																															
—	—	—	—																																															
—	—	—	—																																															


Note: Slanted line shows the range of the rated load power.

(注) 斜線は定格負荷電力範囲を示す。

COSEL

Model	DPF1000	Temperature	25°C																																						
Item	Ripple Voltage(by Load Power) リップル電圧(負荷特性)	Testing Circuitry	Figure A																																						
Object	+360V 1500W																																								
1. Graph	<p style="text-align: center;">△ Input Volt. 170V [V] ○ Input Volt. 255V</p> <table border="1"> <caption>Data points estimated from Figure 1</caption> <thead> <tr> <th>Load Power [W]</th> <th>Ripple Voltage 170V [V]</th> <th>Ripple Voltage 255V [V]</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.1</td><td>0.1</td></tr> <tr><td>300</td><td>4.0</td><td>4.0</td></tr> <tr><td>600</td><td>6.0</td><td>6.8</td></tr> <tr><td>900</td><td>8.8</td><td>9.6</td></tr> <tr><td>1200</td><td>10.8</td><td>12.4</td></tr> <tr><td>1500</td><td>12.4</td><td>15.6</td></tr> <tr><td>1650</td><td>14.0</td><td>16.4</td></tr> </tbody> </table>			Load Power [W]	Ripple Voltage 170V [V]	Ripple Voltage 255V [V]	0	0.1	0.1	300	4.0	4.0	600	6.0	6.8	900	8.8	9.6	1200	10.8	12.4	1500	12.4	15.6	1650	14.0	16.4														
Load Power [W]	Ripple Voltage 170V [V]	Ripple Voltage 255V [V]																																							
0	0.1	0.1																																							
300	4.0	4.0																																							
600	6.0	6.8																																							
900	8.8	9.6																																							
1200	10.8	12.4																																							
1500	12.4	15.6																																							
1650	14.0	16.4																																							
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Power [W]</th> <th colspan="2">Ripple Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 170 [V]</th> <th>Input Volt. 255 [V]</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.1</td><td>0.1</td></tr> <tr><td>300</td><td>4.0</td><td>4.0</td></tr> <tr><td>600</td><td>6.0</td><td>6.8</td></tr> <tr><td>900</td><td>8.8</td><td>9.6</td></tr> <tr><td>1200</td><td>10.8</td><td>12.4</td></tr> <tr><td>1500</td><td>12.4</td><td>15.6</td></tr> <tr><td>1650</td><td>14.0</td><td>16.4</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Power [W]	Ripple Output Voltage [V]		Input Volt. 170 [V]	Input Volt. 255 [V]	0	0.1	0.1	300	4.0	4.0	600	6.0	6.8	900	8.8	9.6	1200	10.8	12.4	1500	12.4	15.6	1650	14.0	16.4	—	—	—	—	—	—	—	—	—	—	—	—
Load Power [W]	Ripple Output Voltage [V]																																								
	Input Volt. 170 [V]	Input Volt. 255 [V]																																							
0	0.1	0.1																																							
300	4.0	4.0																																							
600	6.0	6.8																																							
900	8.8	9.6																																							
1200	10.8	12.4																																							
1500	12.4	15.6																																							
1650	14.0	16.4																																							
—	—	—																																							
—	—	—																																							
—	—	—																																							
—	—	—																																							
<p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load power.</p> <p>リップル電圧は、下図 p - p 値で示される。 (注) 斜線は定格負荷電力範囲を示す。</p> <p>T1: Due to AC Input Line 入力商用周期 T2: Due to Switching スイッチング周期</p> <p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																									

COSEL

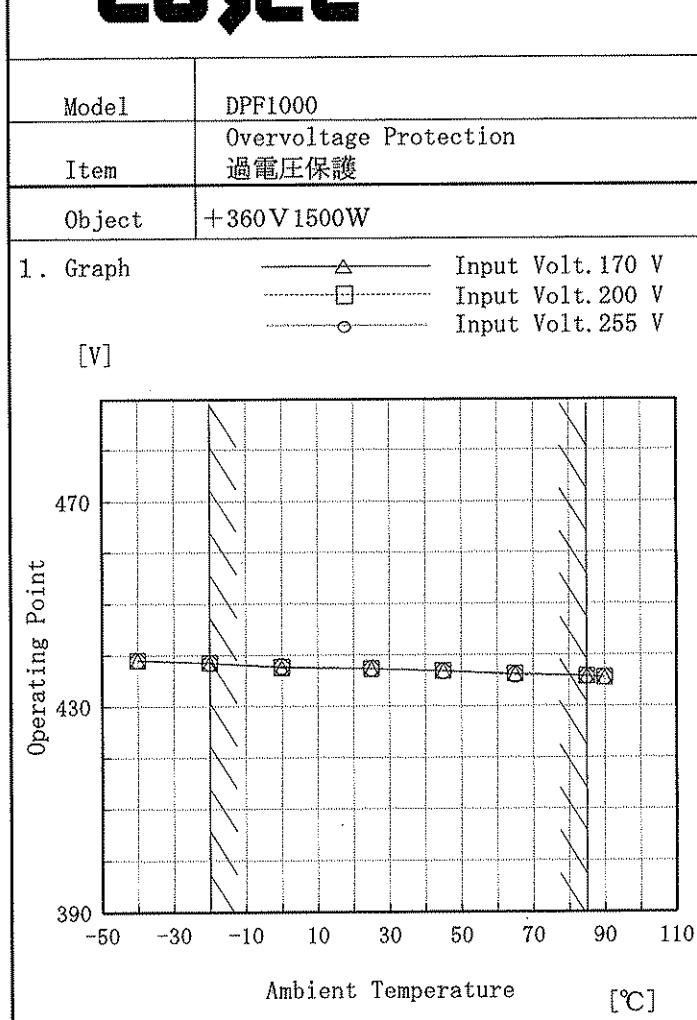


Testing Circuitry Figure A

2. Values


Ambient Temperature [°C]	Operating Point [V]		
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 255[V]
-40	439.1	439.0	439.0
-20	438.5	438.5	438.5
0	437.6	437.7	437.8
25	437.3	437.3	437.4
45	436.9	436.9	436.8
65	436.3	436.3	436.1
85	435.9	435.8	435.8
90	435.6	435.6	435.6
—	—	—	—
—	—	—	—
—	—	—	—


COSEL

Model	DPF1000	Temperature Testing Circuitry Figure A	25°C
Item	Inrush Current 突入電流		
Object	_____		

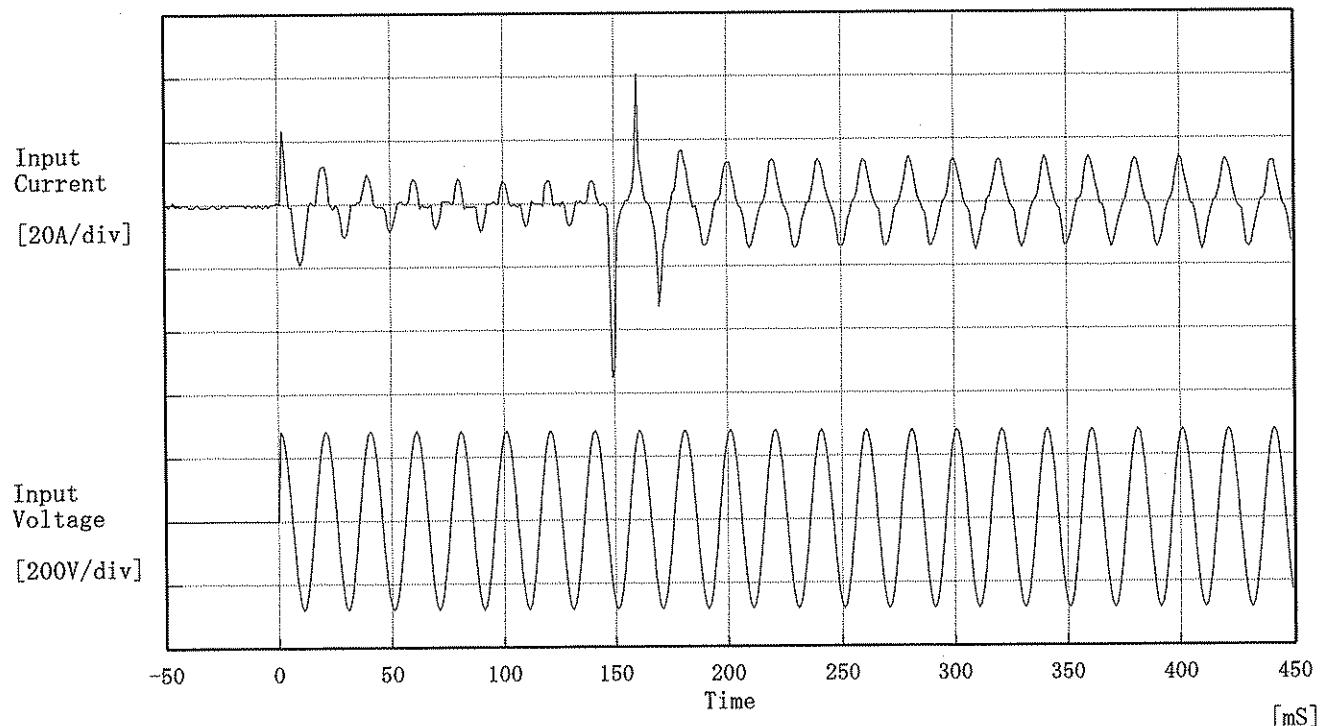

Input Voltage 200 V
 Frequency 50 Hz
 Load 100 %
 Inrush Current
 ① 23.20 [A]
 ② 55.20 [A]

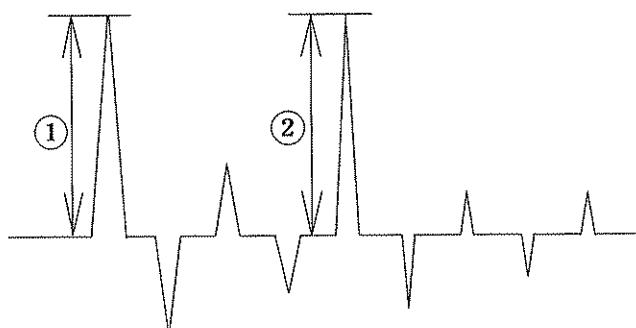

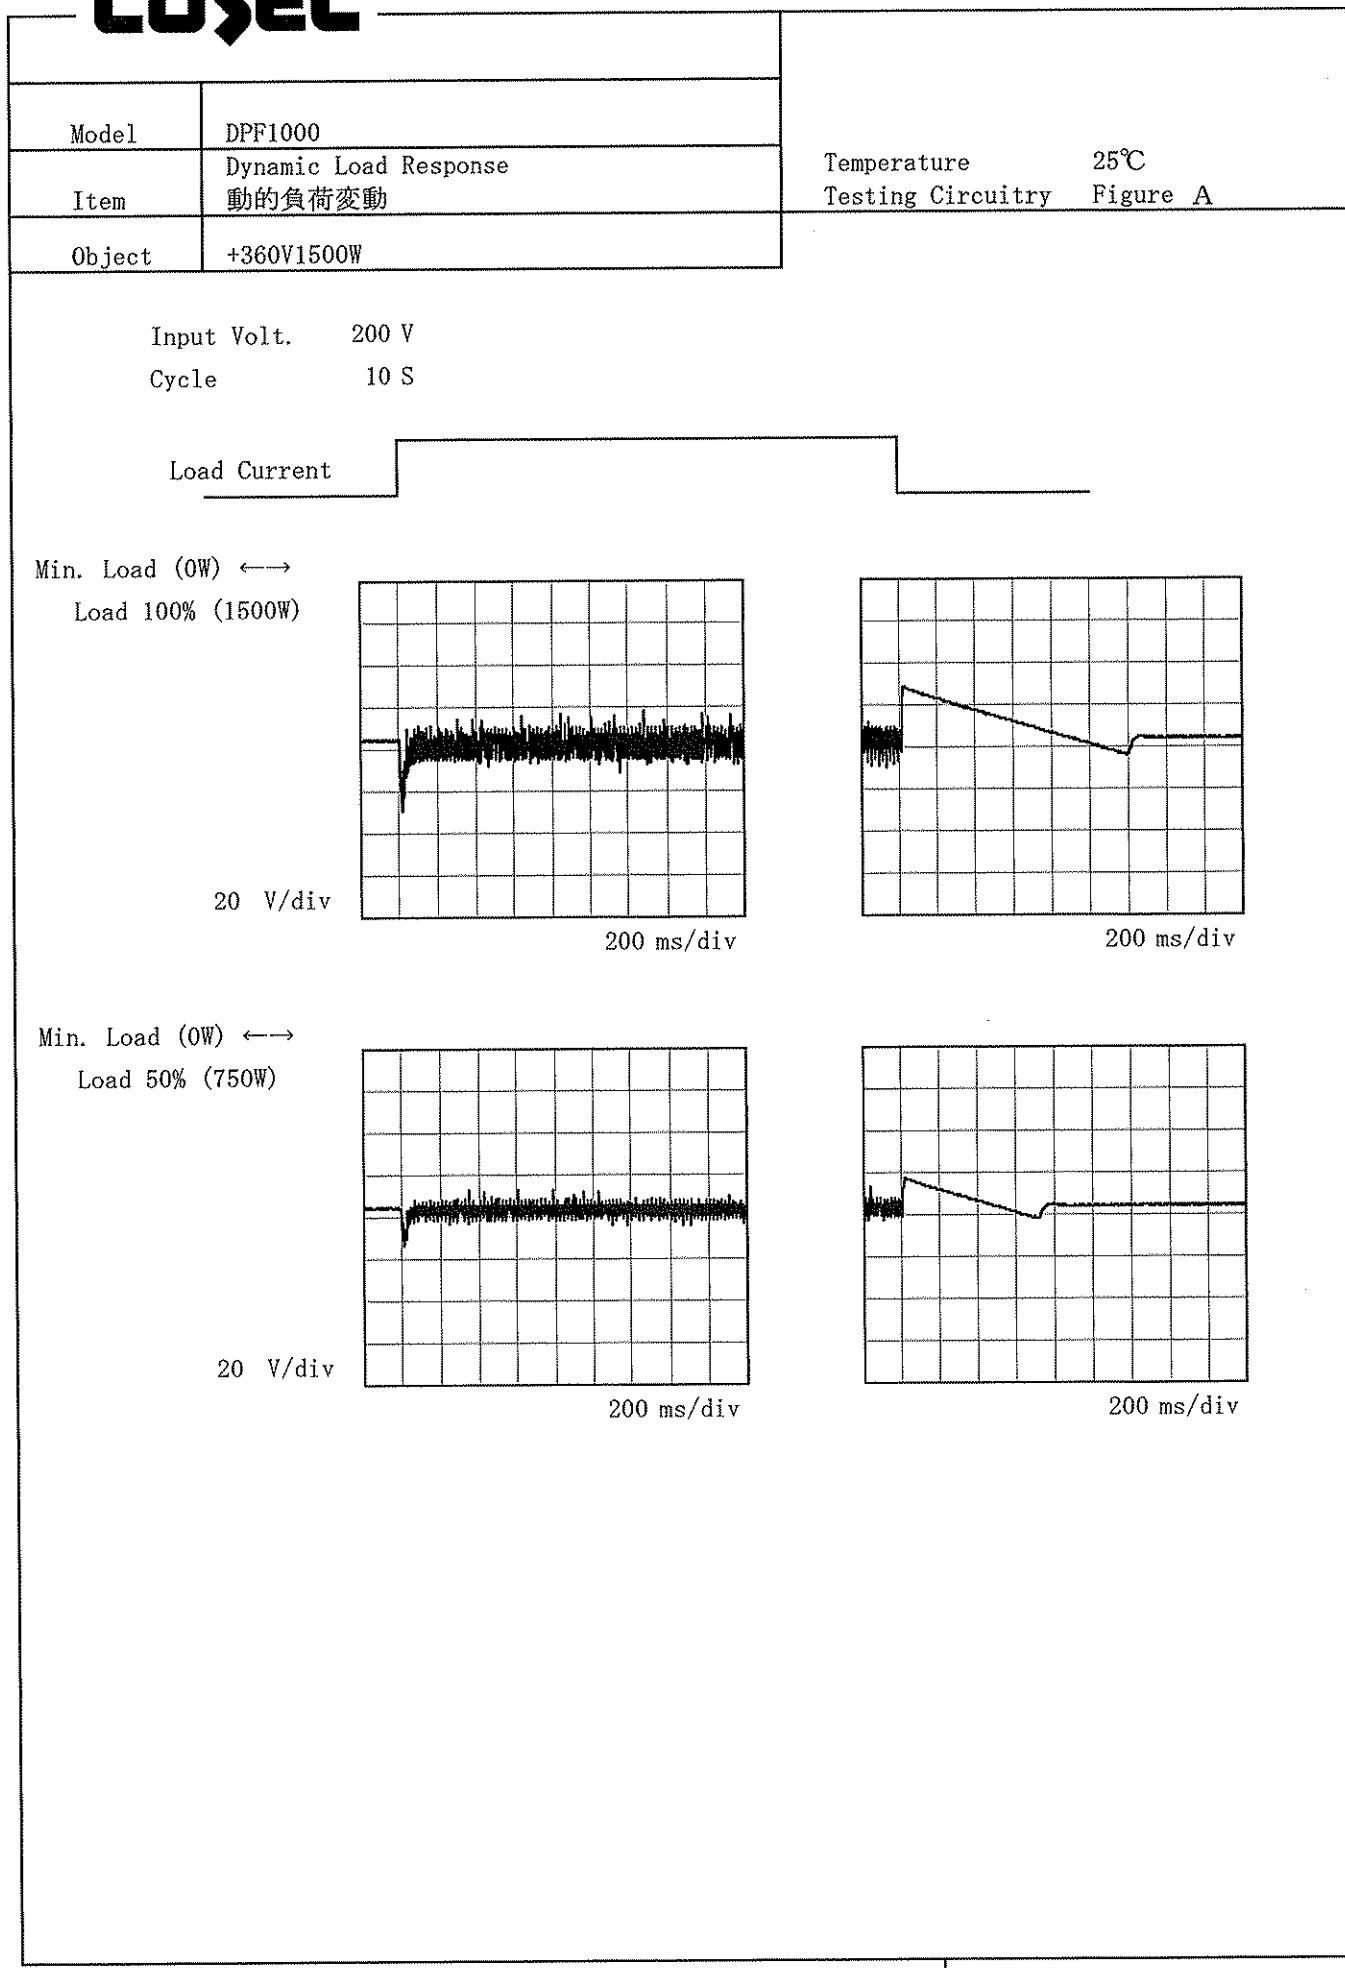
COSEL

COSEL

Model	DPF1000
Item	Rise and Fall Time 立上り、立下り時間
Object	+360V 1500W


Temperature 25°C
Testing Circuitry Figure A

1. Graph

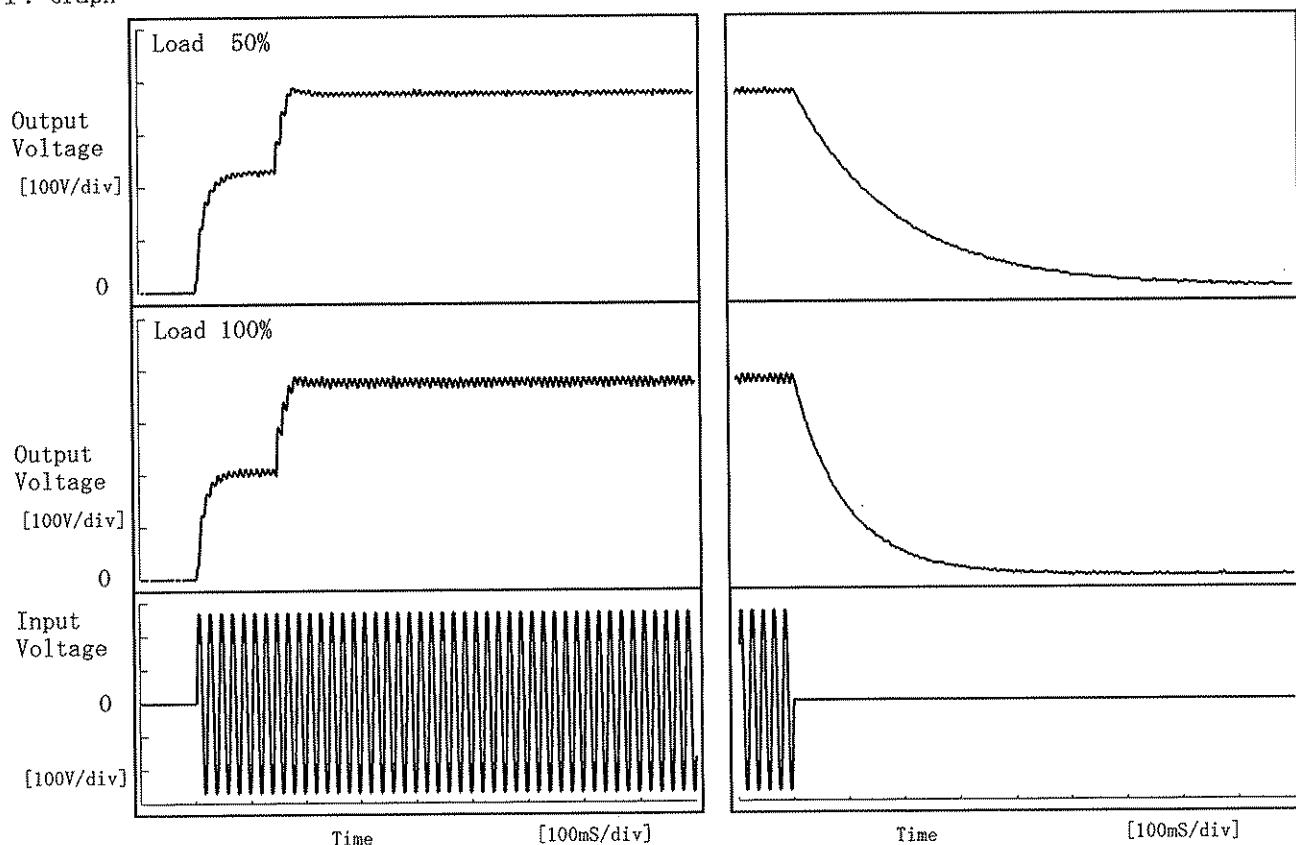

2. Values

Load	Time	T _d	T _r	T _s	T _h	T _f	[mS]
50 %		0.1	156.0	156.1	32.0	400.0	
100 %		0.1	160.0	160.1	18.0	200.0	

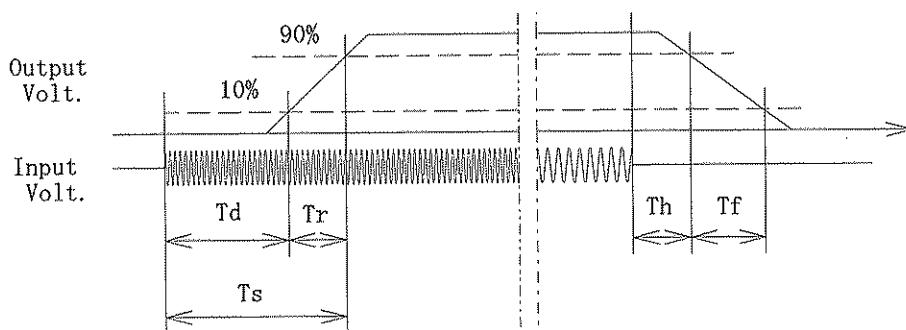



Model	DPF1000																																																					
Item	Ambient Temperature Drift 周囲温度変動																																																					
Object	+360V 1500W																																																					
1. Graph		Testing Circuitry Figure A																																																				
<p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p>		<p>2. Values</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 255[V]</th> </tr> </thead> <tbody> <tr><td>-40</td><td>375.5</td><td>376.2</td><td>377.0</td></tr> <tr><td>-20</td><td>375.0</td><td>375.6</td><td>376.5</td></tr> <tr><td>0</td><td>374.6</td><td>375.5</td><td>376.3</td></tr> <tr><td>25</td><td>374.4</td><td>375.2</td><td>376.2</td></tr> <tr><td>45</td><td>374.1</td><td>375.1</td><td>376.1</td></tr> <tr><td>65</td><td>373.9</td><td>374.9</td><td>376.0</td></tr> <tr><td>85</td><td>373.4</td><td>374.6</td><td>375.7</td></tr> <tr><td>90</td><td>373.4</td><td>374.6</td><td>375.6</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 255[V]	-40	375.5	376.2	377.0	-20	375.0	375.6	376.5	0	374.6	375.5	376.3	25	374.4	375.2	376.2	45	374.1	375.1	376.1	65	373.9	374.9	376.0	85	373.4	374.6	375.7	90	373.4	374.6	375.6	—	—	—	—	—	—	—	—	—	—	—	—
Ambient Temperature [°C]	Output Voltage [V]																																																					
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 255[V]																																																			
-40	375.5	376.2	377.0																																																			
-20	375.0	375.6	376.5																																																			
0	374.6	375.5	376.3																																																			
25	374.4	375.2	376.2																																																			
45	374.1	375.1	376.1																																																			
65	373.9	374.9	376.0																																																			
85	373.4	374.6	375.7																																																			
90	373.4	374.6	375.6																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			


Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

COSEL

Model	DPF1000
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧
Object	+360V 1500W

Testing Circuitry Figure A

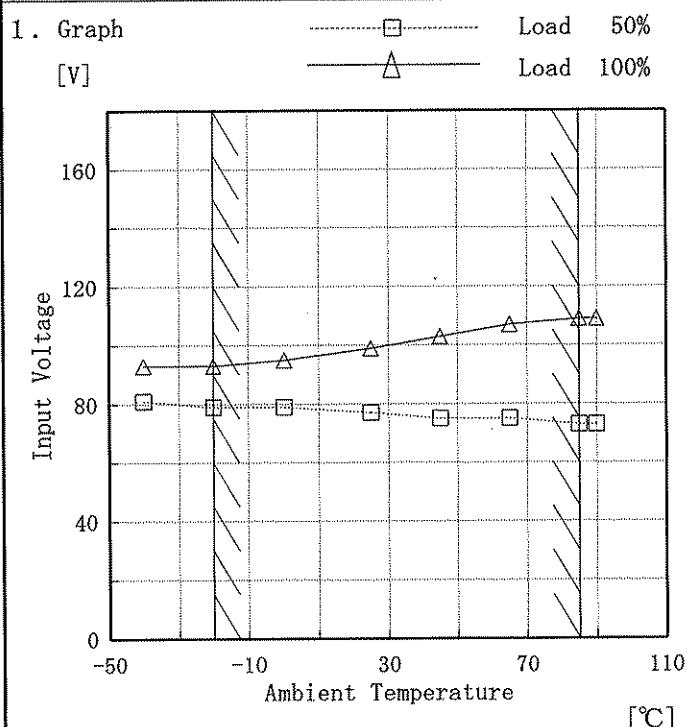

2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-40	81	93
-20	79	93
0	79	95
25	77	99
45	75	103
65	75	107
85	73	109
90	73	109
—	—	—
—	—	—
—	—	—

Note: Slanted line shows the range of the rated ambient temperature.


(注)斜線は定格周囲温度範囲を示す。

COSEL

Model	DPF1000
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)
Object	+360V 1500W

Testing Circuitry Figure A

1. Graph

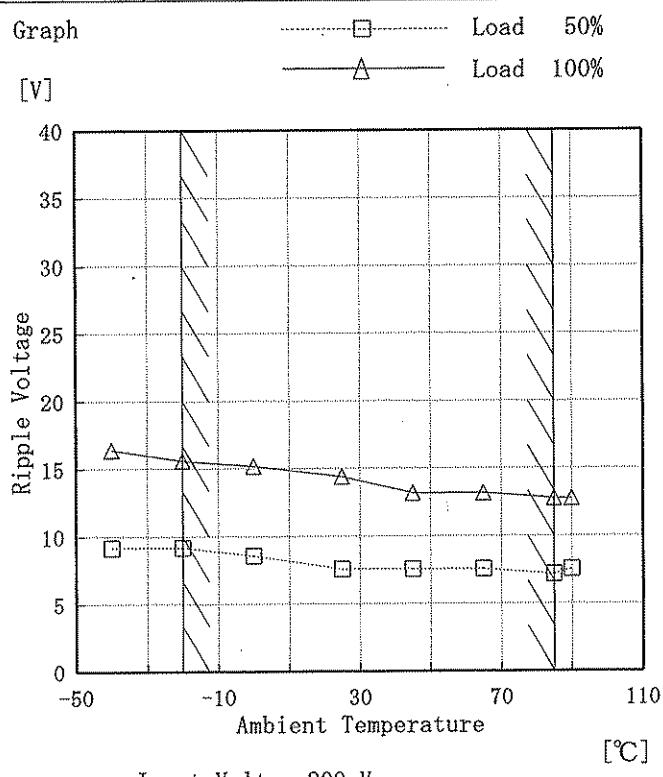

Input Volt. 200 V

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。


2. Values

Ambient Temperature [°C]	Ripple Output Voltage [V]	
	Load 50%	Load 100%
-40	9.2	16.4
-20	9.2	15.6
0	8.6	15.2
25	7.6	14.4
45	7.6	13.2
65	7.6	13.2
85	7.2	12.8
90	7.6	12.8
—	—	—
—	—	—
—	—	—

COSEL

Model	DFP1000	Temperature	25°C
Item	Time Lapse Drift 経時ドリフト	Testing Circuitry	Figure A
Object	+360V 1500W		

1. Graph

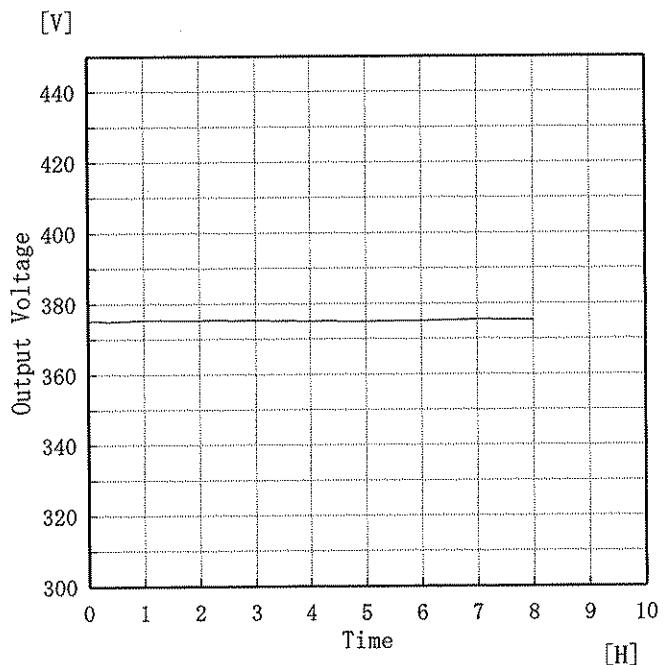

Input Volt. 200V
Load 100%

2. Values

Time since start [H]	Output Voltage [V]
0.0	375.50
0.5	375.11
1.0	375.30
2.0	375.33
3.0	375.26
4.0	375.11
5.0	375.00
6.0	375.07
7.0	375.42
8.0	375.24



Model	DPF1000
Item	Output Voltage Accuracy 定電圧精度
Object	+360V 1500W

Testing Circuitry Figure A

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20~85 °C

Input Voltage : 170~255 V

Load Power : 0~1500 W

* Output Voltage Accuracy = ±(Maximum of Output Voltage — Minimum of Output Voltage) / 2

$$* \text{ Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

1. 定電圧精度

周囲温度、入力電圧、負荷電力を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -20~85 °C

入力電圧 170~255 V

負荷電力 0~1500 W

* 定電圧精度(変動値) = ±(出力電圧の最高値—出力電圧の最低値) / 2


$$* \text{ 定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

2. Values

Item	Temperature [°C]	Input Voltage [V]	Output Power [W]	Output Voltage [V]	Output Voltage Accuracy [V]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	-20	255	0.0	377.49		
Minimum Voltage	85	170	1500.0	373.40	±3	±0.6


Model	DPF1000	Temperature Testing Circuitry	25°C Figure E
Item	Harmonic Current 高調波電流		
Object	<hr/>		

1. Input Current Waveform

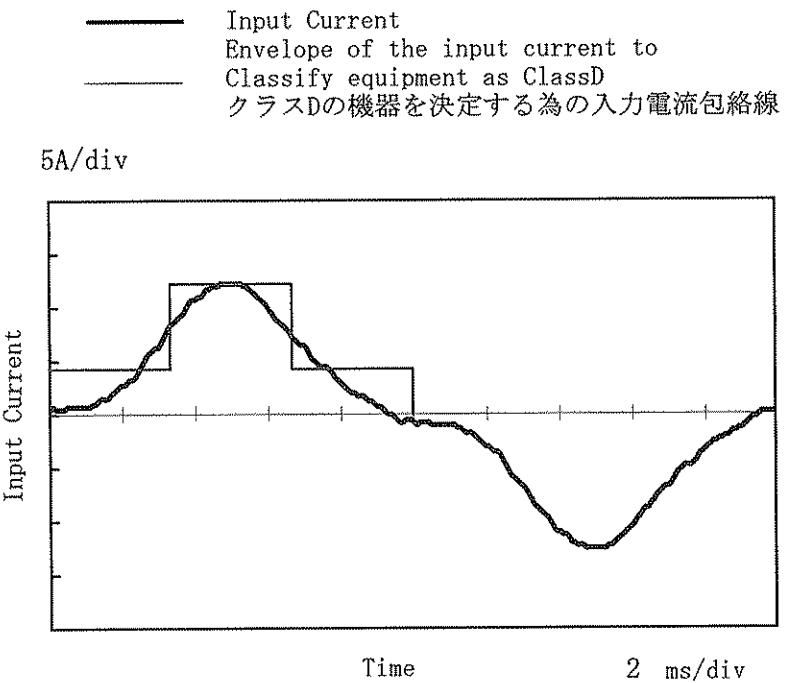

Conditions	Values
Input Voltage [V]	228.1
Input Current [A]	7.300
Active Power [W]	1585.6
Apparent Power [VA]	1666.5
Frequency [Hz]	50
Power Factor	0.951
Output Power [W]	1508

2. Harmonic Current

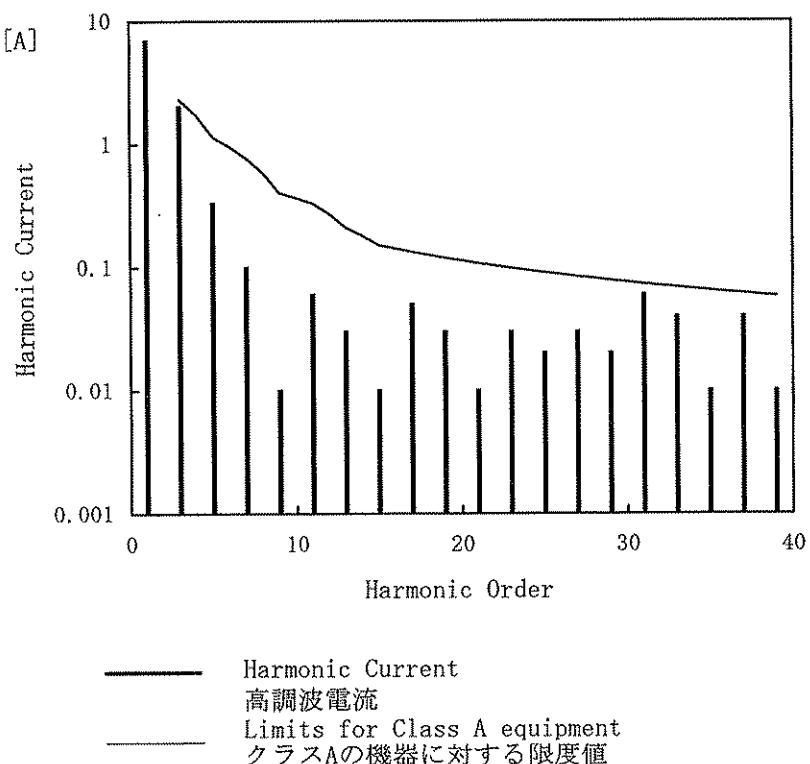


Harmonics oeder 高調波次数	Limits 限度値 [A]	Values 測定値 [A]
1	—	7.00000
2	—	0.00000
3	2.31916	2.04000
4	—	0.00000
5	1.14950	0.33000
6	—	0.00000
7	0.77641	0.10000
8	—	0.00000
9	0.40333	0.01000
10	—	0.00000
11	0.33275	0.06000
12	—	0.00000
13	0.21175	0.03000
14	—	0.00000
15	0.15125	0.01000
16	—	0.00000
17	0.13346	0.05000
18	—	0.00000
19	0.11941	0.03000
20	—	0.00000
21	0.10804	0.01000
22	—	0.00000
23	0.09864	0.03000
24	—	0.00000
25	0.09075	0.02000
26	—	0.00000
27	0.08403	0.03000
28	—	0.00000
29	0.07823	0.02000
30	—	0.00000
31	0.07319	0.06000
32	—	0.00000
33	0.06875	0.04000
34	—	0.00000
35	0.06482	0.01000
36	—	0.00000
37	0.06132	0.04000
38	—	0.00000
39	0.05817	0.01000
40	—	0.00000

Model	DPF1000
Item	Harmonic Current 高調波電流
Object	_____


Temperature 25°C
Testing Circuitry Figure E

1. Input Current Waveform

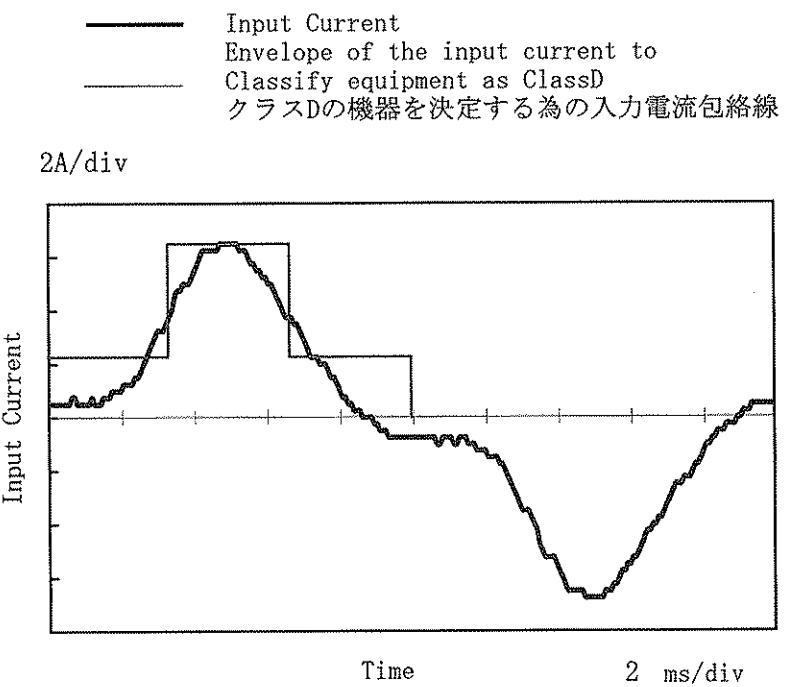

Conditions	Values
Input Voltage [V]	229.5
Input Current [A]	3.740
Active Power [W]	795.3
Apparent Power [VA]	859.3
Frequency [Hz]	50
Power Factor	0.926
Output Power [W]	752

2. Harmonic Current

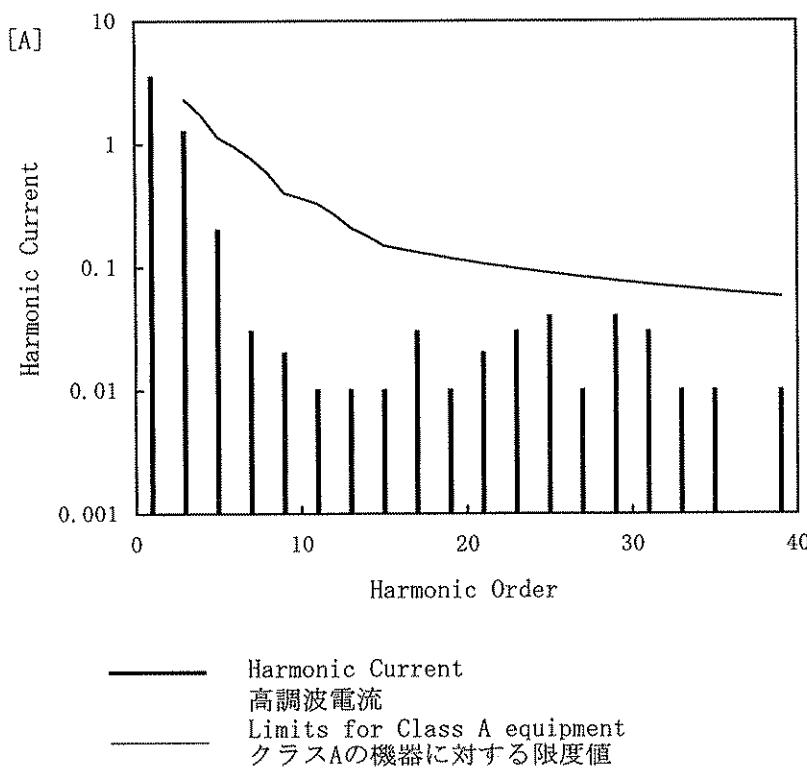

Harmonics oeder 高調波次数	Limits 限度値 [A]	Values 測定値 [A]
1	-	3.51000
2	-	0.00000
3	2.30501	1.27000
4	-	0.00000
5	1.14248	0.20000
6	-	0.00000
7	0.77168	0.03000
8	-	0.00000
9	0.40087	0.02000
10	-	0.00000
11	0.33072	0.01000
12	-	0.00000
13	0.21046	0.01000
14	-	0.00000
15	0.15033	0.01000
16	-	0.00000
17	0.13264	0.03000
18	-	0.00000
19	0.11868	0.01000
20	-	0.00000
21	0.10738	0.02000
22	-	0.00000
23	0.09804	0.03000
24	-	0.00000
25	0.09020	0.04000
26	-	0.00000
27	0.08351	0.01000
28	-	0.00000
29	0.07776	0.04000
30	-	0.00000
31	0.07274	0.03000
32	-	0.00000
33	0.06833	0.01000
34	-	0.00000
35	0.06443	0.01000
36	-	0.00000
37	0.06094	0.00100
38	-	0.00000
39	0.05782	0.01000
40	-	0.00000



Model	DPF1000	Testing Circuitry Figure A
Item	Condensation 結露特性	
Object	+360V 1500W	

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。

2. Values

Item	Data	Testing Conditions
Output Voltage [V]	374.4	Input Volt.: 200V, Load Power:1500W
Line Regulation [V]	2.5	Input Volt.: 170~255V, Load Power:1500W
Load Regulation [V]	2	Input Volt.: 200V, Load Power:0~1500W



Model	DPF1000	Temperature	25°C
Item	Leakage Current 漏洩電流	Testing Circuitry	Figure B
Object	<hr/>		

1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DEN-AN	—	—	—
(B) IEC60950	—	—	—

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力の両相について測定し、その大きい方を漏洩電流測定値とする。

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 230 [V]	Input Volt. 264 [V]
(B) IEC60950	0.34	0.41	0.56



Model	DPF1000	Temperature Testing Circuitry Figure C	25°C
Item	Line Noise Tolerance 入力雑音耐量		
Object	+360V 1500W		

1. Results

Pulse Width [nS]	MODE	No protection failure should occur 保護回路の誤動作がない		DC-like Regulation of Output Voltage 出力電圧の直流的変動
		POLARITY		
50	COMMON	+	OK	no fluctuation
		-	OK	no fluctuation
	NORMAL	+	OK	no fluctuation
		-	OK	no fluctuation
1000	COMMON	+	OK	no fluctuation
		-	OK	no fluctuation
	NORMAL	+	OK	no fluctuation
		-	OK	no fluctuation

2. Conditions

Input Voltage : 200 V
 Pulse Voltage : 2000 V
 Pulse Cycle : 10 mS
 Pulse Input Duration : 1 min. or more
 Load : 100 %

COSEL

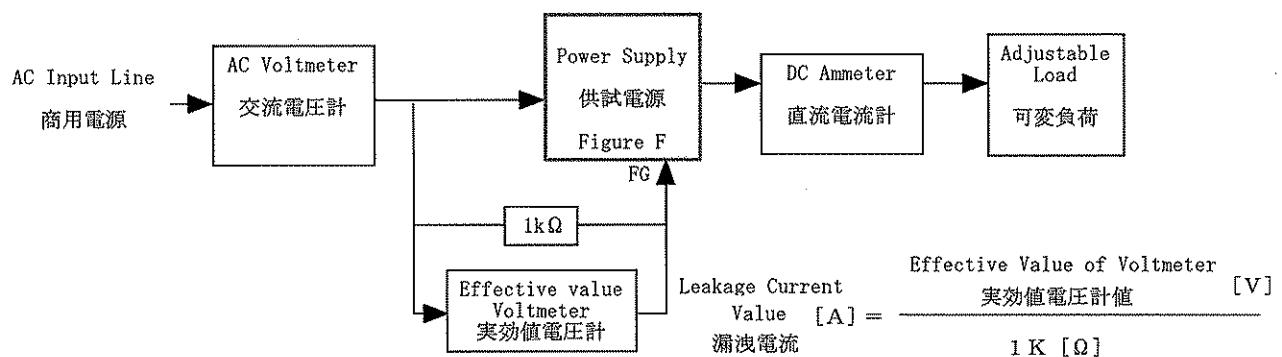
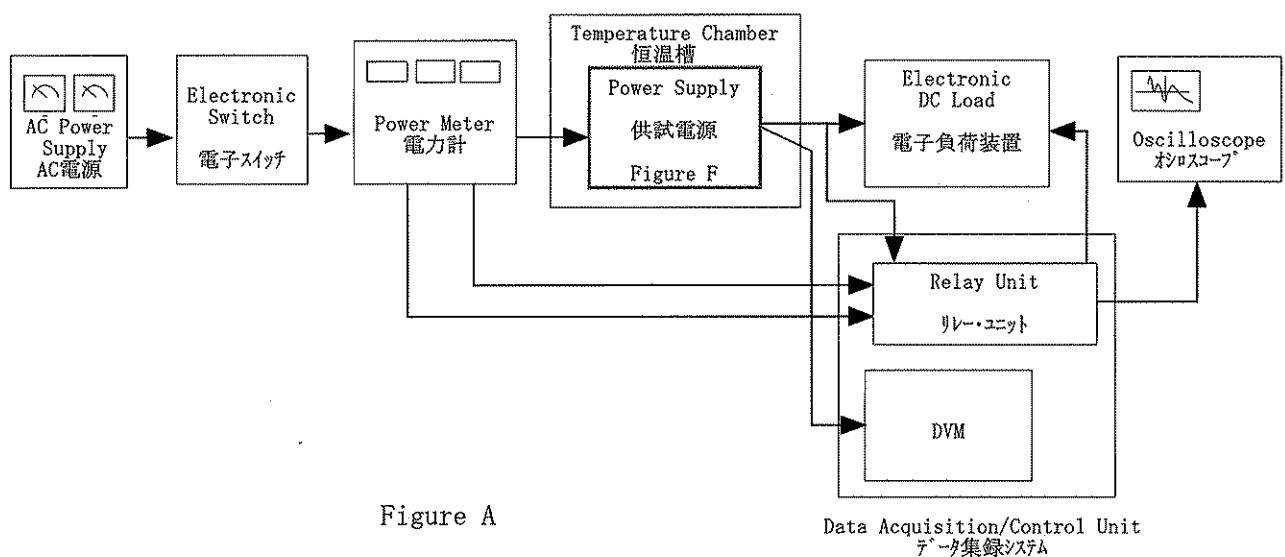


Figure B (DEN-AN)

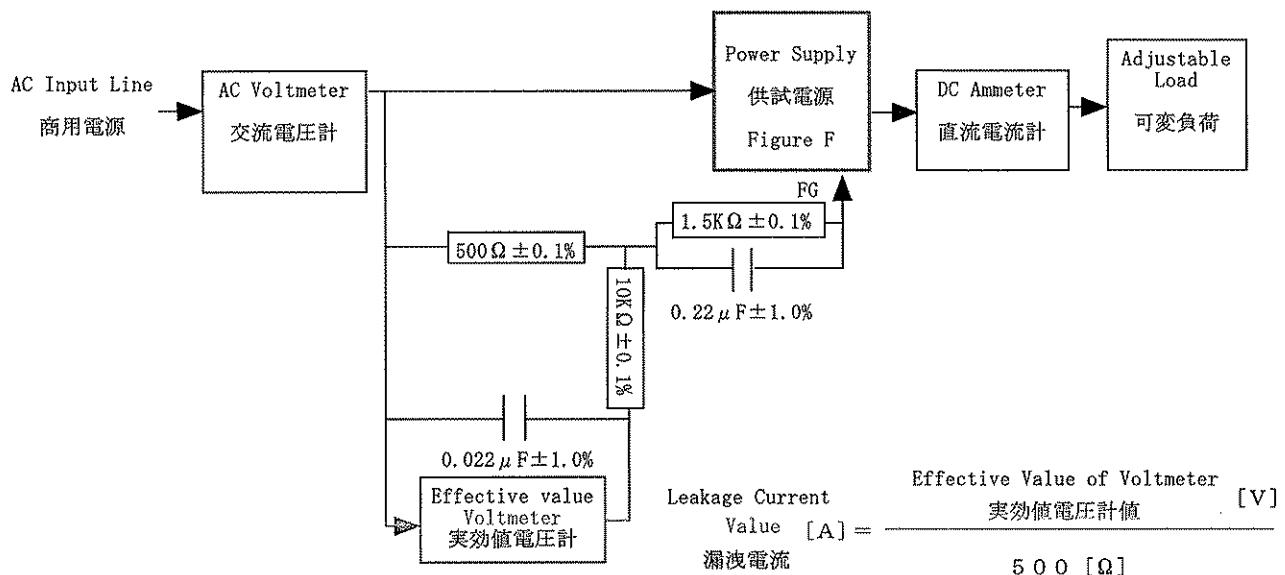


Figure B (IEC60950)

COSEL

