



# TEST DATA OF JAC-60-□□□-H

## Noise Filter

Dec. 17, 2019

Approved by :

*Tadayuki Noda*

Tadayuki Noda

Design Manager

Prepared by :

*Naoya Kunishima*

Naoya Kunishima

Design Engineer

**COSEL CO.,LTD.**





## CONTENTS

1.Attenuation Characteristics .....	1
2.Leakage Current .....	3
3.Figure of Testing Circuitry .....	4
(Final Page 5)	


COSEL

Model	JAC-60-□□□-H	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	—		

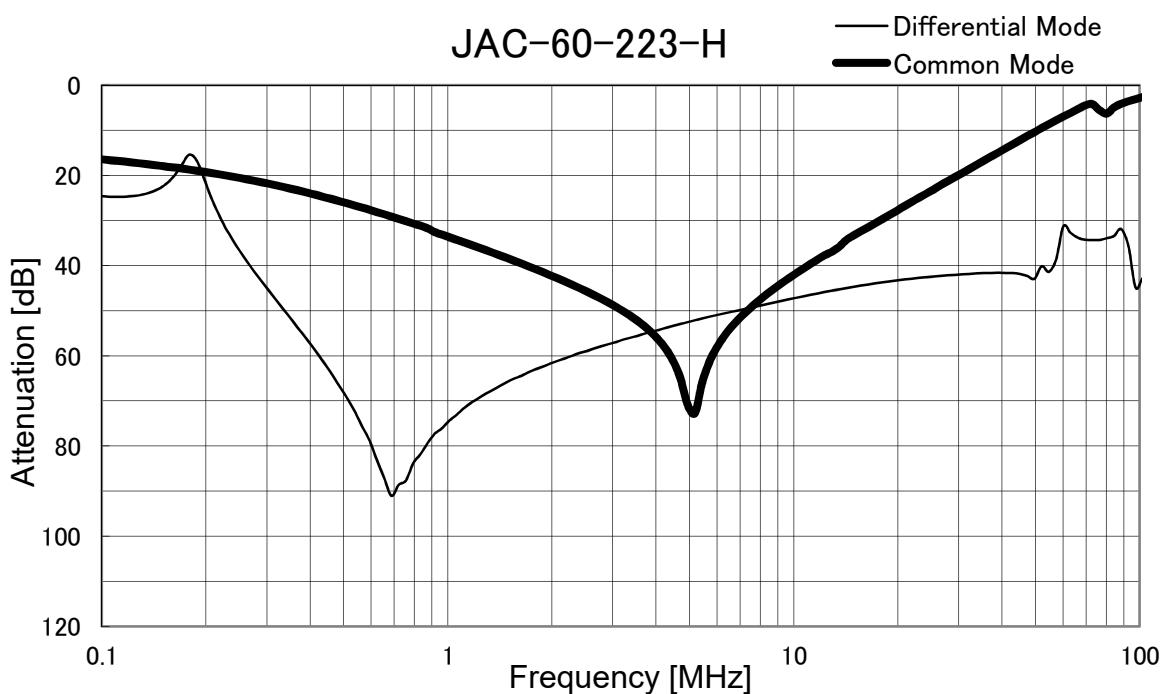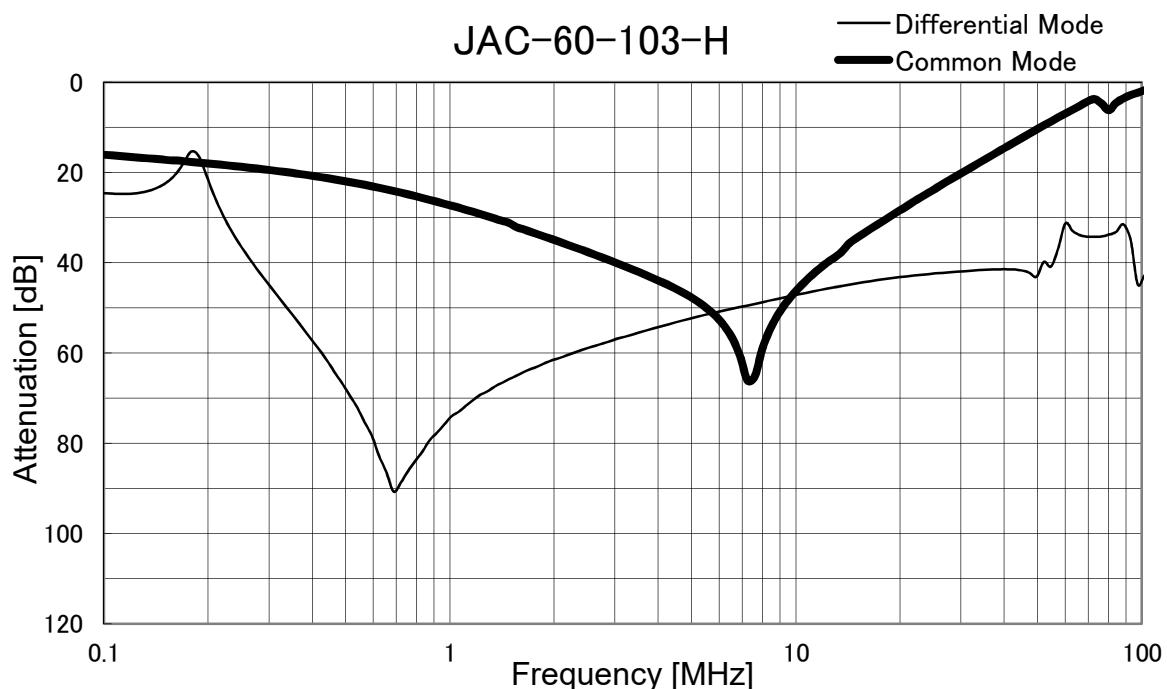

**coSEL**

Model	JAC-60-□□□-H	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	_____		

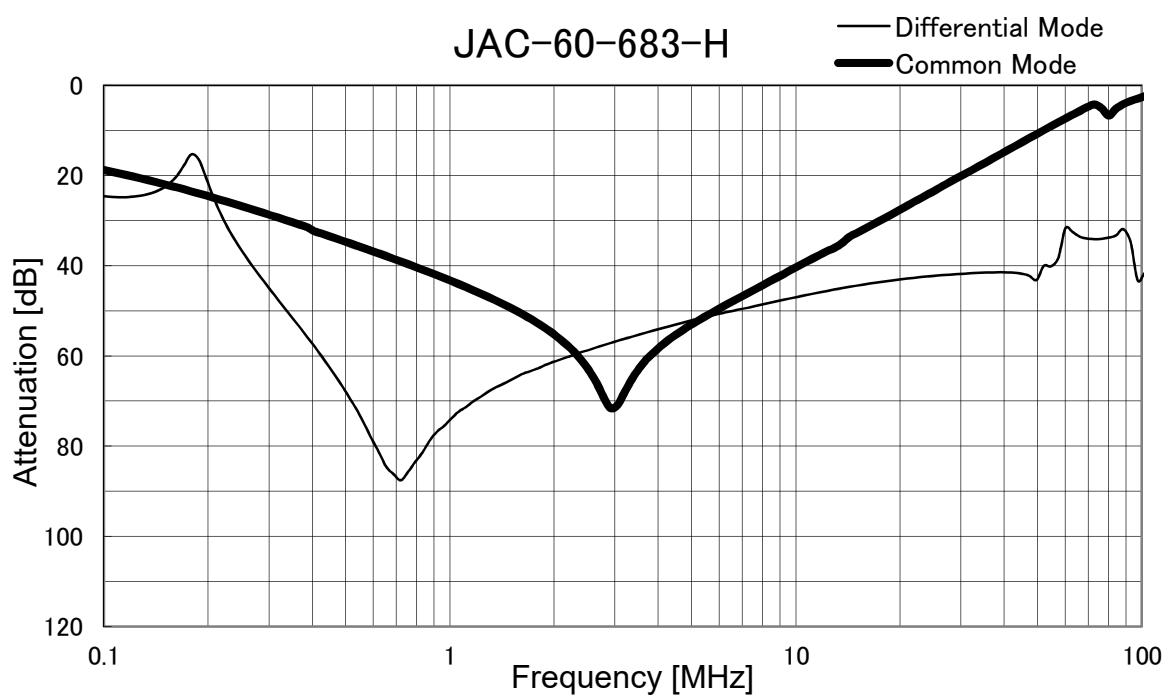



Model	JAC-60-□□□-H	Temperature Testing Circuitry	25°C Figure B	
Item	Leakage Current			
Object	_____			

## 1. Results

[mA]

Model	Standards	Voltage system	Input Volt.					Note
			200[V]	250[V]	400[V]	480[V]	500[V]	
JAC-60-103-H	UL60939	Δ-connection	0.22	0.29	0.45	0.55	0.58	
		Y-connection	0.003	0.003	0.003	0.003	0.003	
JAC-60-223-H	UL60939	Δ-connection	0.46	0.58	0.92	1.05	1.10	
		Y-connection	0.001	0.002	0.003	0.003	0.003	
JAC-60-683-H	UL60939	Δ-connection	1.40	1.75	2.80	3.30	3.50	
		Y-connection	0.005	0.005	0.007	0.008	0.008	

## 2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

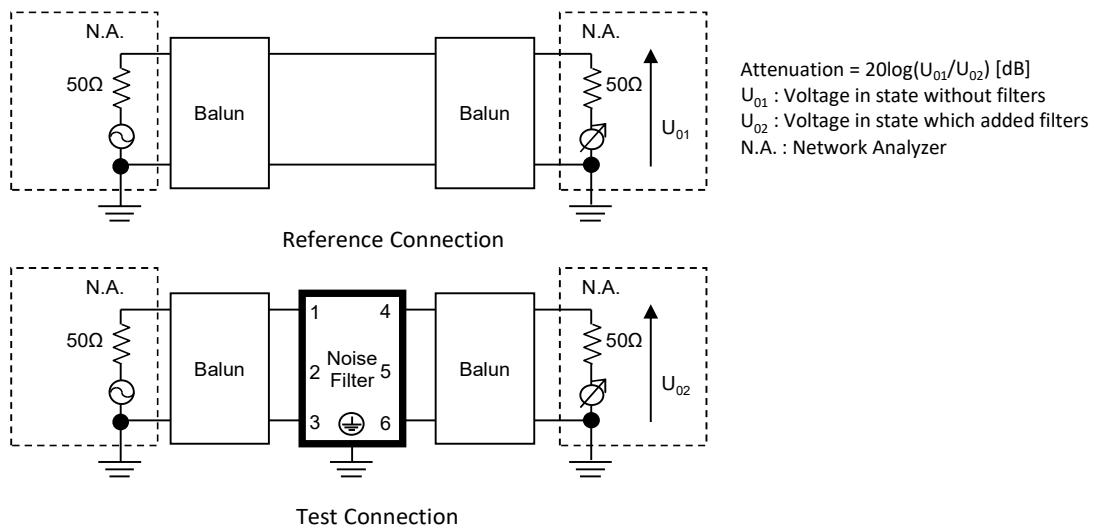


Figure A - 1 Differential mode attenuation measurement

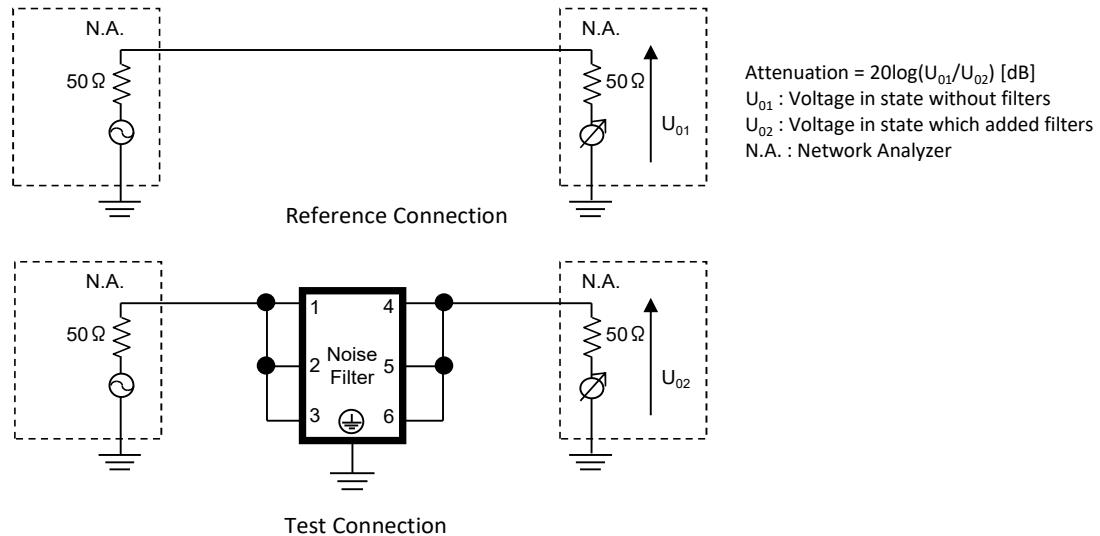


Figure A - 2 Common mode attenuation measurement

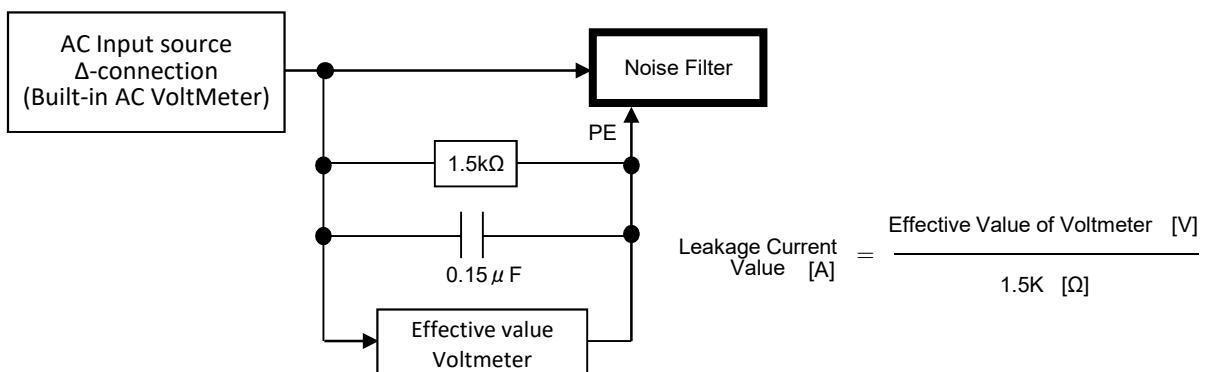


Figure B - 1 Leakage current measurement ( UL60939 Δ -connection)

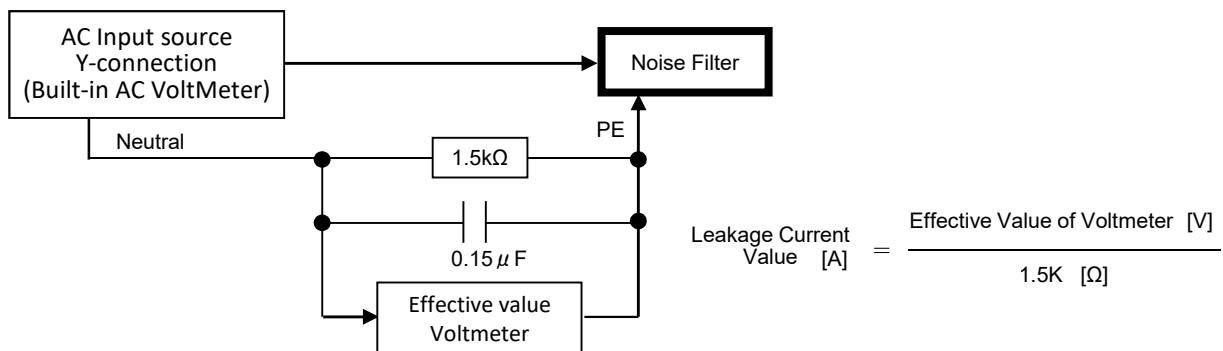


Figure B - 2 Leakage current measurement ( UL60939 Y-connection)