

TEST DATA OF KHNA60F-24

Regulated DC Power Supply
November 15, 2013

Approved by : Yukihiro Takehashi
Yukihiro Takehashi Design Manager

Prepared by : Yasunari Hirano
Yasunari Hirano Design Engineer

COSEL CO.,LTD.

CONTENTS

1. Input Current (by Load Current)	1
2. Input Power (by Load Current)	2
3. Efficiency (by Input Voltage)	3
4. Efficiency (by Load Current)	4
5. Power Factor (by Input Voltage)	5
6. Power Factor (by Load Current)	6
7. Inrush Current	7
8. Leakage Current	8
9. Line Regulation	9
10. Load Regulation	10
11. Dynamic Load Response	11
12. Ripple Voltage (by Load Current)	12
13. Ripple-Noise	13
14. Ripple Voltage (by Ambient Temperature)	14
15. Ambient Temperature Drift	15
16. Output Voltage Accuracy	16
17. Time Lapse Drift	17
18. Rise and Fall Time	18
19. Hold-Up Time	19
20. Instantaneous Interruption Compensation	20
21. Minimum Input Voltage for Regulated Output Voltage	21
22. Overcurrent Protection	22
23. Overvoltage Protection	23
24. Figure of Testing Circuitry	24


(Final Page 25)

COSEL

Model	KHNA60F-24
Item	Input Current (by Load Current)
Object	—

1. Graph

—△— Input Volt. 100V
 - -□--- Input Volt. 115V
 - -○--- Input Volt. 230V

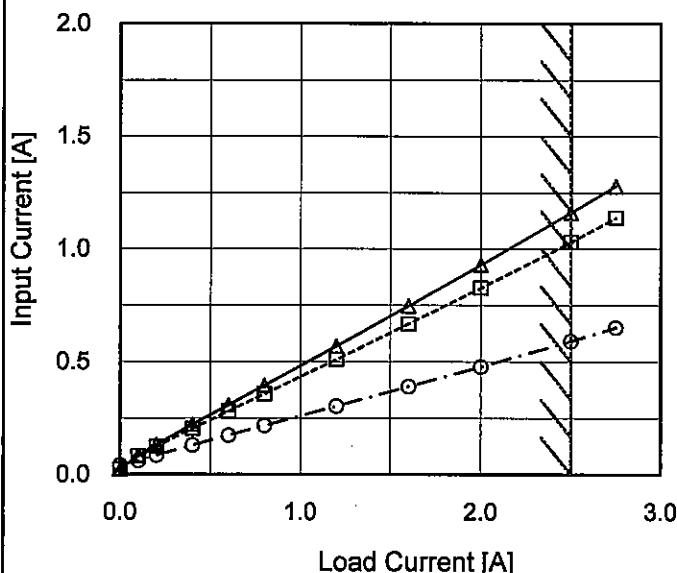

Note: Slanted line shows the range of the rated load current.


Temperature 25°C
Testing Circuitry Figure A

2. Values

Load Current [A]	Input Current [A]		
	Input Volt. 100[V]	Input Volt. 115[V]	Input Volt. 230[V]
0.00	0.021	0.023	0.041
0.10	0.085	0.082	0.061
0.20	0.134	0.125	0.086
0.40	0.222	0.204	0.131
0.60	0.308	0.281	0.175
0.80	0.395	0.358	0.218
1.20	0.568	0.511	0.304
1.60	0.747	0.668	0.391
2.00	0.930	0.828	0.479
2.50	1.162	1.031	0.592
2.75	1.280	1.139	0.652

COSEL

Model	KHNA60F-24
Item	Input Power (by Load Current)
Object	_____

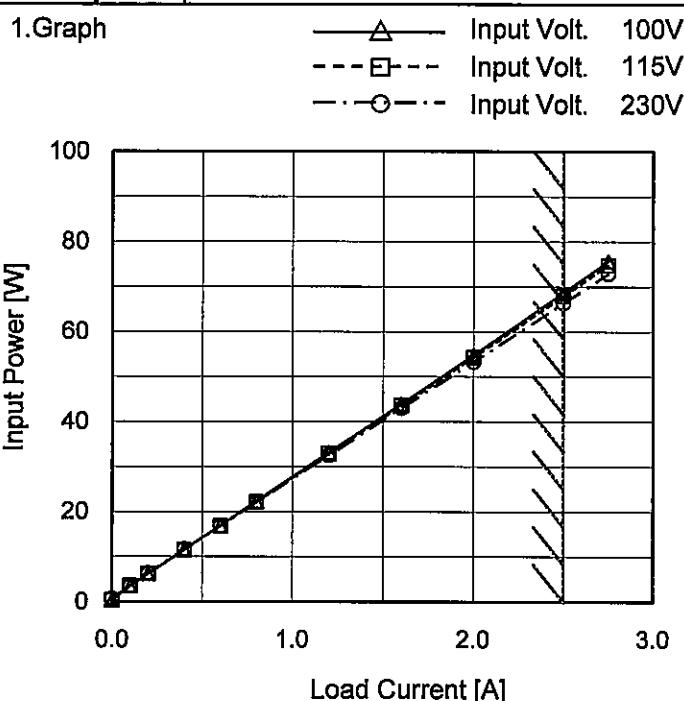

Temperature 25°C
Testing Circuitry Figure A

2. Values

Load Current [A]	Input Power [W]		
	Input Volt. 100[V]	Input Volt. 115[V]	Input Volt. 230[V]
0.00	0.37	0.39	0.84
0.10	3.52	3.59	3.52
0.20	6.27	6.25	6.44
0.40	11.55	11.49	11.70
0.60	16.93	16.80	16.87
0.80	22.37	22.19	22.10
1.20	33.14	32.90	32.50
1.60	43.90	43.55	43.00
2.00	54.80	54.30	53.30
2.50	68.70	68.00	66.40
2.75	75.70	74.80	72.90


Note: Slanted line shows the range of the rated load current.

COSEL

Model	KHNA60F-24
Item	Efficiency (by Input Voltage)
Object	_____

Temperature 25°C
Testing Circuitry Figure A

1. Graph

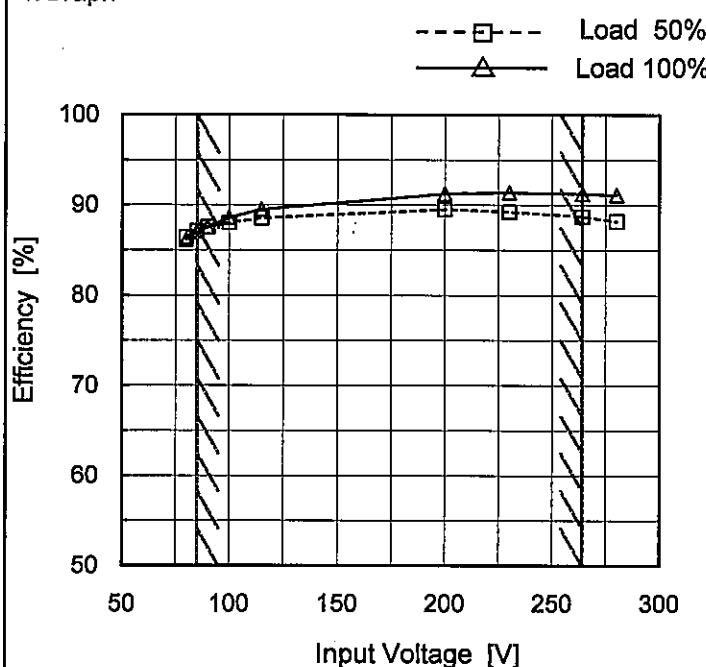

2. Values

Input Voltage [V]	Efficiency [%]	
	Load 50%	Load 100%
80	86.4	86.2
85	87.1	87.1
90	87.5	87.6
100	88.0	88.6
115	88.5	89.5
200	89.5	91.2
230	89.2	91.4
264	88.7	91.2
280	88.2	91.1

Note: Slanted line shows the range of the rated input voltage.

COSEL


Model KHNA60F-24

Item Efficiency (by Load Current)

Object _____

1. Graph

—△— Input Volt. 100V
 - -□--- Input Volt. 115V
 - -○--- Input Volt. 230V

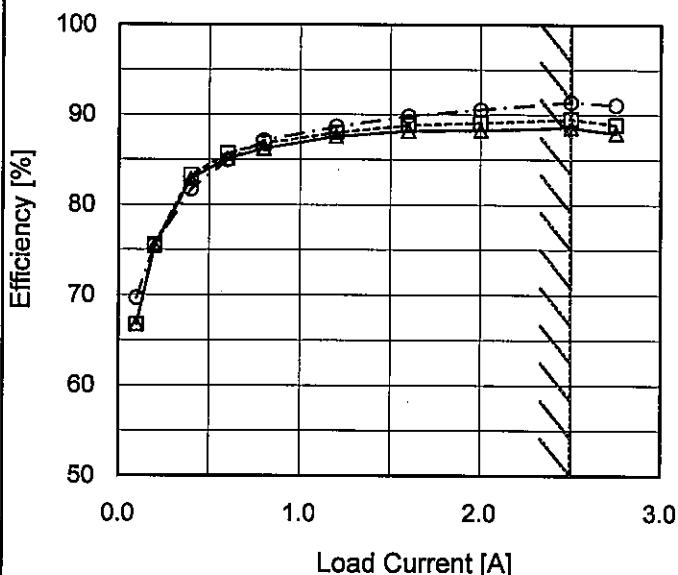

Note: Slanted line shows the range of the rated load current.

Temperature 25°C
 Testing Circuitry Figure A


2. Values

Load Current [A]	Efficiency [%]		
	Input Volt. 100[V]	Input Volt. 115[V]	Input Volt. 230[V]
0.00	2.1	4.1	1.7
0.10	66.8	66.8	69.7
0.20	75.4	75.6	75.6
0.40	82.9	83.3	81.7
0.60	85.1	85.7	85.0
0.80	86.2	86.8	87.1
1.20	87.6	88.0	88.7
1.60	88.2	88.8	89.8
2.00	88.3	89.1	90.6
2.50	88.6	89.5	91.4
2.75	88.0	88.9	91.1

COSEL

Model	KHNA60F-24
Item	Power Factor (by Input Voltage)
Object	—

1. Graph

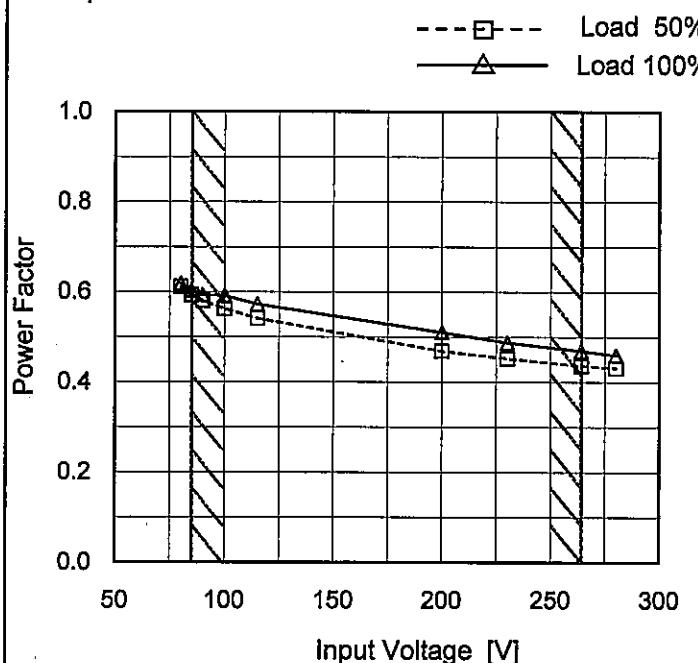

Note: Slanted line shows the range of the rated input voltage.

Temperature 25°C
Testing Circuitry Figure A

2. Values

Input Voltage [V]	Power Factor	
	Load 50%	Load 100%
80	0.611	0.619
85	0.593	0.603
90	0.580	0.593
100	0.563	0.591
115	0.542	0.573
200	0.469	0.511
230	0.452	0.488
264	0.436	0.470
280	0.431	0.460

COSEL

Model	KHNA60F-24																																																					
Item	Power Factor (by Load Current)	Temperature	25°C																																																			
Object	Testing Circuitry Figure A																																																					
1.Graph	<p>—△— Input Volt. 100V - - -□- - Input Volt. 115V - - ○ - - Input Volt. 230V</p> <table border="1"> <caption>Data points estimated from Graph</caption> <thead> <tr> <th>Load Current [A]</th> <th>Input Volt. 100V</th> <th>Input Volt. 115V</th> <th>Input Volt. 230V</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.176</td><td>0.149</td><td>0.089</td></tr> <tr><td>0.10</td><td>0.416</td><td>0.383</td><td>0.252</td></tr> <tr><td>0.20</td><td>0.468</td><td>0.435</td><td>0.327</td></tr> <tr><td>0.40</td><td>0.520</td><td>0.489</td><td>0.388</td></tr> <tr><td>0.60</td><td>0.549</td><td>0.520</td><td>0.420</td></tr> <tr><td>0.80</td><td>0.566</td><td>0.539</td><td>0.441</td></tr> <tr><td>1.20</td><td>0.583</td><td>0.560</td><td>0.464</td></tr> <tr><td>1.60</td><td>0.588</td><td>0.567</td><td>0.478</td></tr> <tr><td>2.00</td><td>0.589</td><td>0.570</td><td>0.484</td></tr> <tr><td>2.50</td><td>0.591</td><td>0.573</td><td>0.488</td></tr> <tr><td>2.75</td><td>0.590</td><td>0.571</td><td>0.486</td></tr> </tbody> </table>			Load Current [A]	Input Volt. 100V	Input Volt. 115V	Input Volt. 230V	0.00	0.176	0.149	0.089	0.10	0.416	0.383	0.252	0.20	0.468	0.435	0.327	0.40	0.520	0.489	0.388	0.60	0.549	0.520	0.420	0.80	0.566	0.539	0.441	1.20	0.583	0.560	0.464	1.60	0.588	0.567	0.478	2.00	0.589	0.570	0.484	2.50	0.591	0.573	0.488	2.75	0.590	0.571	0.486			
Load Current [A]	Input Volt. 100V	Input Volt. 115V	Input Volt. 230V																																																			
0.00	0.176	0.149	0.089																																																			
0.10	0.416	0.383	0.252																																																			
0.20	0.468	0.435	0.327																																																			
0.40	0.520	0.489	0.388																																																			
0.60	0.549	0.520	0.420																																																			
0.80	0.566	0.539	0.441																																																			
1.20	0.583	0.560	0.464																																																			
1.60	0.588	0.567	0.478																																																			
2.00	0.589	0.570	0.484																																																			
2.50	0.591	0.573	0.488																																																			
2.75	0.590	0.571	0.486																																																			
2.Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Power Factor</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 115[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.176</td><td>0.149</td><td>0.089</td></tr> <tr><td>0.10</td><td>0.416</td><td>0.383</td><td>0.252</td></tr> <tr><td>0.20</td><td>0.468</td><td>0.435</td><td>0.327</td></tr> <tr><td>0.40</td><td>0.520</td><td>0.489</td><td>0.388</td></tr> <tr><td>0.60</td><td>0.549</td><td>0.520</td><td>0.420</td></tr> <tr><td>0.80</td><td>0.566</td><td>0.539</td><td>0.441</td></tr> <tr><td>1.20</td><td>0.583</td><td>0.560</td><td>0.464</td></tr> <tr><td>1.60</td><td>0.588</td><td>0.567</td><td>0.478</td></tr> <tr><td>2.00</td><td>0.589</td><td>0.570</td><td>0.484</td></tr> <tr><td>2.50</td><td>0.591</td><td>0.573</td><td>0.488</td></tr> <tr><td>2.75</td><td>0.590</td><td>0.571</td><td>0.486</td></tr> </tbody> </table>			Load Current [A]	Power Factor			Input Volt. 100[V]	Input Volt. 115[V]	Input Volt. 230[V]	0.00	0.176	0.149	0.089	0.10	0.416	0.383	0.252	0.20	0.468	0.435	0.327	0.40	0.520	0.489	0.388	0.60	0.549	0.520	0.420	0.80	0.566	0.539	0.441	1.20	0.583	0.560	0.464	1.60	0.588	0.567	0.478	2.00	0.589	0.570	0.484	2.50	0.591	0.573	0.488	2.75	0.590	0.571	0.486
Load Current [A]	Power Factor																																																					
	Input Volt. 100[V]	Input Volt. 115[V]	Input Volt. 230[V]																																																			
0.00	0.176	0.149	0.089																																																			
0.10	0.416	0.383	0.252																																																			
0.20	0.468	0.435	0.327																																																			
0.40	0.520	0.489	0.388																																																			
0.60	0.549	0.520	0.420																																																			
0.80	0.566	0.539	0.441																																																			
1.20	0.583	0.560	0.464																																																			
1.60	0.588	0.567	0.478																																																			
2.00	0.589	0.570	0.484																																																			
2.50	0.591	0.573	0.488																																																			
2.75	0.590	0.571	0.486																																																			
<p>Note: Slanted line shows the range of the rated load current.</p>																																																						


COSEL

Model KHNA60F-24

Item Inrush Current


Temperature 25°C
Testing Circuitry Figure A

Object _____

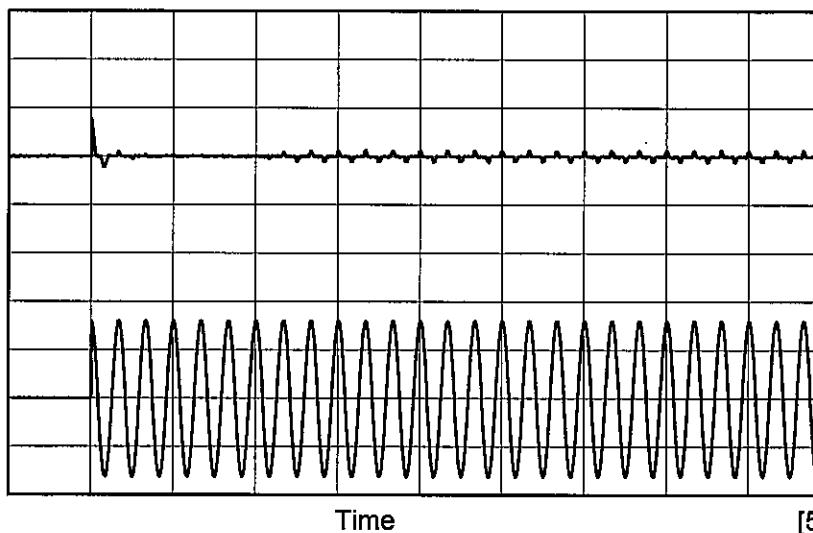Input
Current
[20A/div]


Input Voltage 115 V
Frequency 60 Hz
Load 100 %

Primary inrush current :
15.2 A
Secondary inrush current :
2.8 A

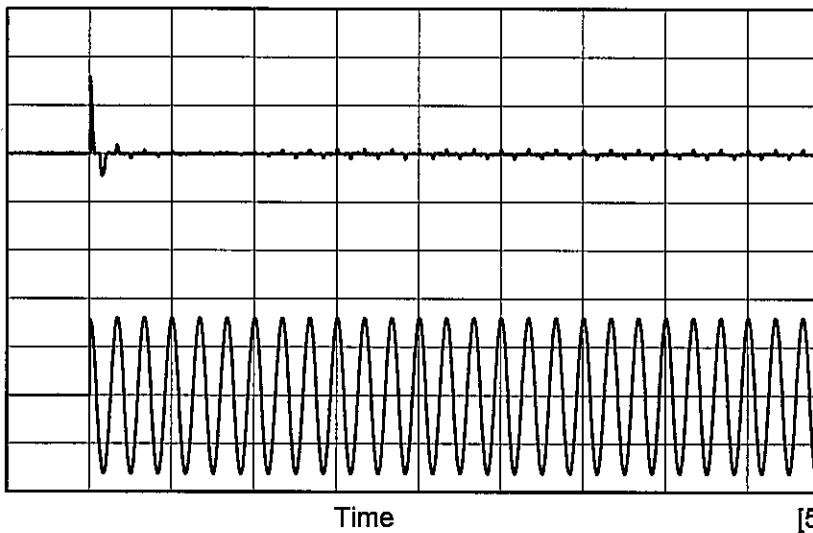Input
Voltage
[100V/div]Input
Current
[20A/div]

Input Voltage 230 V
Frequency 60 Hz
Load 100 %

Primary inrush current :
32.0 A
Secondary inrush current :
2.0 A

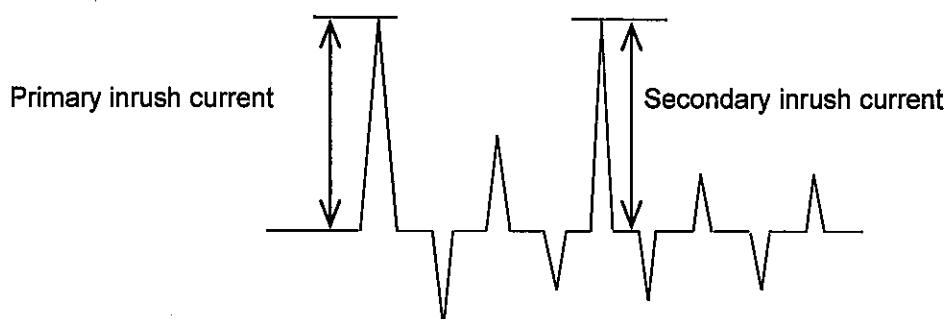Input
Voltage
[200V/div]



Model	KHNA60F-24	Temperature	25°C
Item	Leakage Current	Testing Circuitry	Figure B
Object	_____		

1. Results

Standards		Input Volt.			Note
		100 [V]	115 [V]	240 [V]	
DEN-AN	Both phases	0.07	0.08	0.21	Operation
	One of phases	0.13	0.14	0.35	Stand by
IEC60950-1	Both phases	0.07	0.07	0.22	Operation
	One of phases	0.12	0.13	0.33	Stand by

The value for "One of phases" is the reference value only.

2. Condition


Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

COSEL

Model	KHNA60F-24																																	
Item	Line Regulation	Temperature 25°C Testing Circuitry Figure A																																
Object	+24V2.5A																																	
1. Graph																																		
		2. Values																																
<p>Output Voltage [V]</p> <p>Input Voltage [V]</p> <p>Legend: --- Load 50% —△— Load 100%</p>		<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>80</td><td>24.264</td><td>24.260</td></tr> <tr><td>85</td><td>24.264</td><td>24.260</td></tr> <tr><td>90</td><td>24.264</td><td>24.260</td></tr> <tr><td>100</td><td>24.264</td><td>24.260</td></tr> <tr><td>115</td><td>24.264</td><td>24.260</td></tr> <tr><td>200</td><td>24.263</td><td>24.260</td></tr> <tr><td>230</td><td>24.263</td><td>24.260</td></tr> <tr><td>264</td><td>24.263</td><td>24.260</td></tr> <tr><td>280</td><td>24.263</td><td>24.260</td></tr> </tbody> </table>	Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	80	24.264	24.260	85	24.264	24.260	90	24.264	24.260	100	24.264	24.260	115	24.264	24.260	200	24.263	24.260	230	24.263	24.260	264	24.263	24.260	280	24.263	24.260
Input Voltage [V]	Output Voltage [V]																																	
	Load 50%	Load 100%																																
80	24.264	24.260																																
85	24.264	24.260																																
90	24.264	24.260																																
100	24.264	24.260																																
115	24.264	24.260																																
200	24.263	24.260																																
230	24.263	24.260																																
264	24.263	24.260																																
280	24.263	24.260																																
Note: Slanted line shows the range of the rated input voltage.																																		

COSEL

Model	KHNA60F-24																																																					
Item	Load Regulation																																																					
Object	+24V2.5A																																																					
1. Graph																																																						
<p>Output Voltage [V]</p> <p>Load Current [A]</p> <ul style="list-style-type: none"> — △ — Input Volt. 100V - - □ - - Input Volt. 115V - - ○ - - Input Volt. 230V 																																																						
2. Values																																																						
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 115[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>24.268</td><td>24.268</td><td>24.268</td></tr> <tr><td>0.10</td><td>24.268</td><td>24.268</td><td>24.268</td></tr> <tr><td>0.20</td><td>24.268</td><td>24.267</td><td>24.268</td></tr> <tr><td>0.40</td><td>24.267</td><td>24.267</td><td>24.267</td></tr> <tr><td>0.60</td><td>24.266</td><td>24.266</td><td>24.266</td></tr> <tr><td>0.80</td><td>24.266</td><td>24.266</td><td>24.266</td></tr> <tr><td>1.20</td><td>24.265</td><td>24.265</td><td>24.265</td></tr> <tr><td>1.60</td><td>24.264</td><td>24.265</td><td>24.264</td></tr> <tr><td>2.00</td><td>24.263</td><td>24.263</td><td>24.263</td></tr> <tr><td>2.50</td><td>24.260</td><td>24.260</td><td>24.260</td></tr> <tr><td>2.75</td><td>24.258</td><td>24.258</td><td>24.258</td></tr> </tbody> </table>				Load Current [A]	Output Voltage [V]			Input Volt. 100[V]	Input Volt. 115[V]	Input Volt. 230[V]	0.00	24.268	24.268	24.268	0.10	24.268	24.268	24.268	0.20	24.268	24.267	24.268	0.40	24.267	24.267	24.267	0.60	24.266	24.266	24.266	0.80	24.266	24.266	24.266	1.20	24.265	24.265	24.265	1.60	24.264	24.265	24.264	2.00	24.263	24.263	24.263	2.50	24.260	24.260	24.260	2.75	24.258	24.258	24.258
Load Current [A]	Output Voltage [V]																																																					
	Input Volt. 100[V]	Input Volt. 115[V]	Input Volt. 230[V]																																																			
0.00	24.268	24.268	24.268																																																			
0.10	24.268	24.268	24.268																																																			
0.20	24.268	24.267	24.268																																																			
0.40	24.267	24.267	24.267																																																			
0.60	24.266	24.266	24.266																																																			
0.80	24.266	24.266	24.266																																																			
1.20	24.265	24.265	24.265																																																			
1.60	24.264	24.265	24.264																																																			
2.00	24.263	24.263	24.263																																																			
2.50	24.260	24.260	24.260																																																			
2.75	24.258	24.258	24.258																																																			
<p>Note: Slanted line shows the range of the rated load current.</p>																																																						

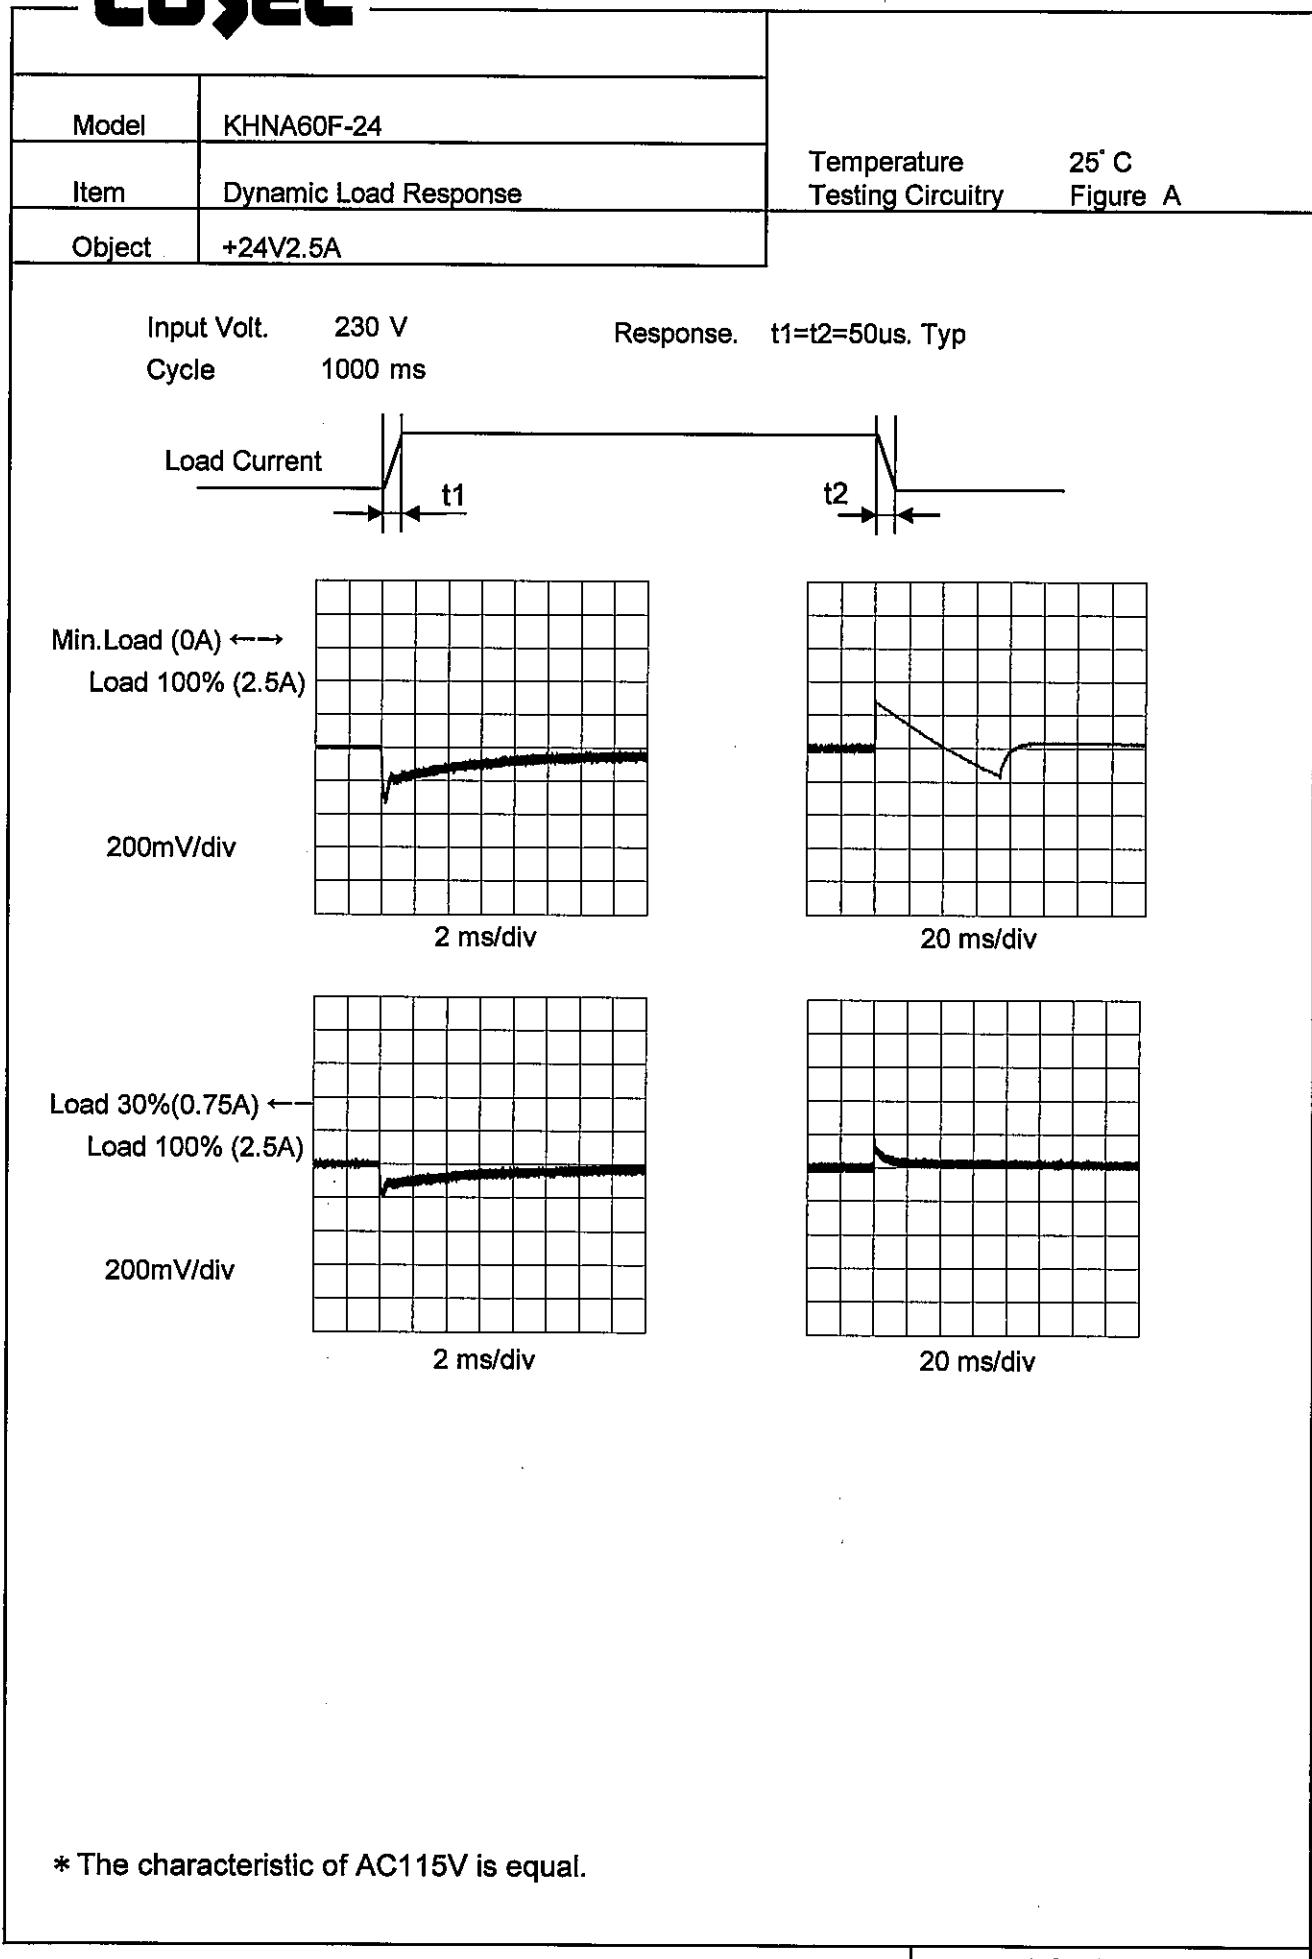
COSEL

COSEL

Model	KHNA60F-24
Item	Ripple Voltage (by Load Current)
Object	+24V2.5A

 Temperature 25°C
 Testing Circuitry Figure C

1.Graph

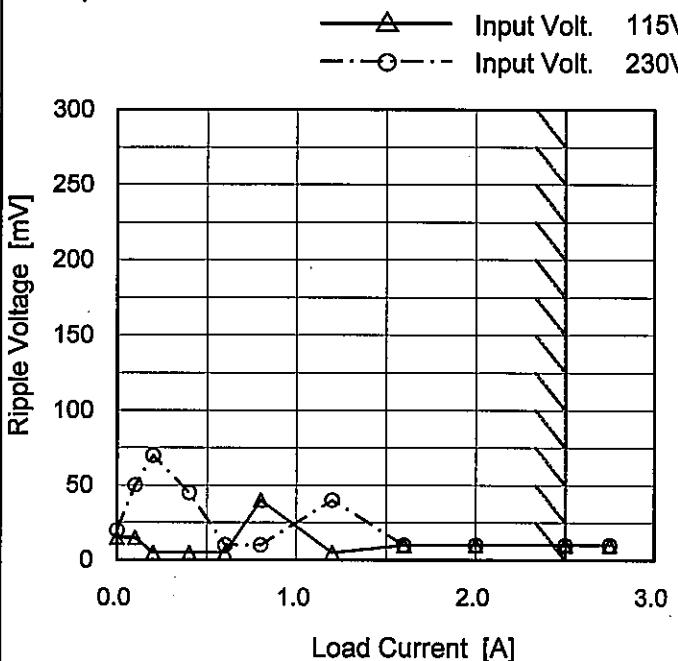

2.Values

Load Current [A]	Ripple Voltage [mV]	
	Input Volt. 115 [V]	Input Volt. 230 [V]
0.00	15	20
0.10	15	50
0.20	5	70
0.40	5	45
0.60	5	10
0.80	40	10
1.20	5	40
1.60	10	10
2.00	10	10
2.50	10	10
2.75	10	10

Measured by 20 MHz Oscilloscope.

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

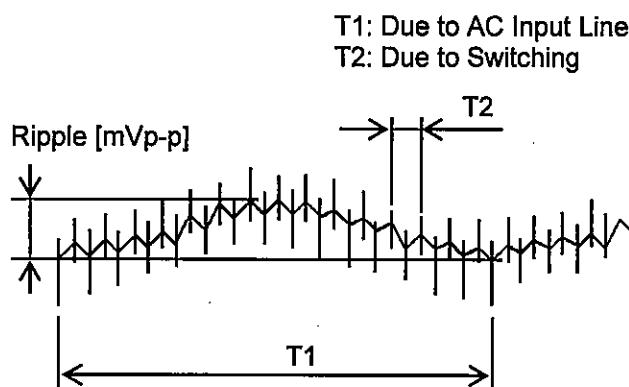



Fig. Complex Ripple Wave Form

COSEL

Model	KHNA60F-24
Item	Ripple-Noise
Object	+24V2.5A

Temperature 25°C
Testing Circuitry Figure C

1. Graph

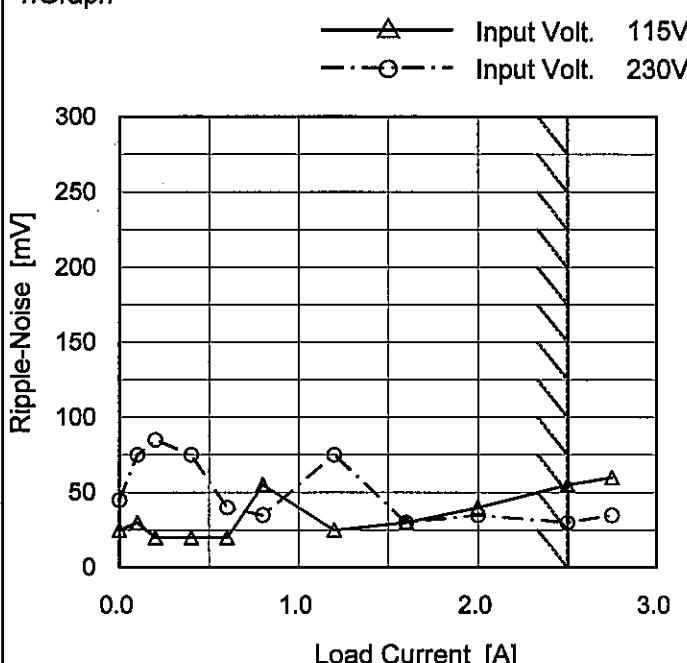

Measured by 20 MHz Oscilloscope.
Ripple-Noise is shown as p-p in the figure below.
Note: Slanted line shows the range of the rated load current.

2. Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 115 [V]	Input Volt. 230 [V]
0.00	25	45
0.10	30	75
0.20	20	85
0.40	20	75
0.60	20	40
0.80	55	35
1.20	25	75
1.60	30	30
2.00	40	35
2.50	55	30
2.75	60	35

T1: Due to AC Input Line
T2: Due to Switching


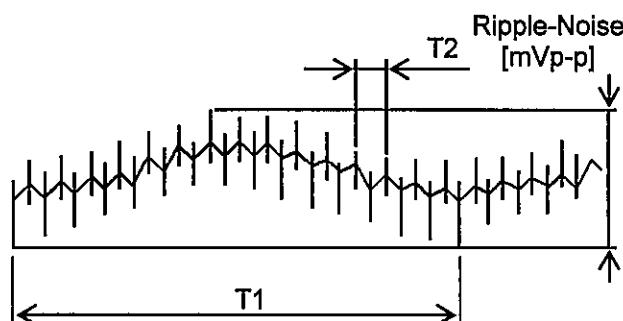


Fig. Complex Ripple Wave Form

COSEL

Model	KHNA60F-24
Item	Ripple Voltage (by Ambient Temp.)
Object	+24V2.5A

1.Graph

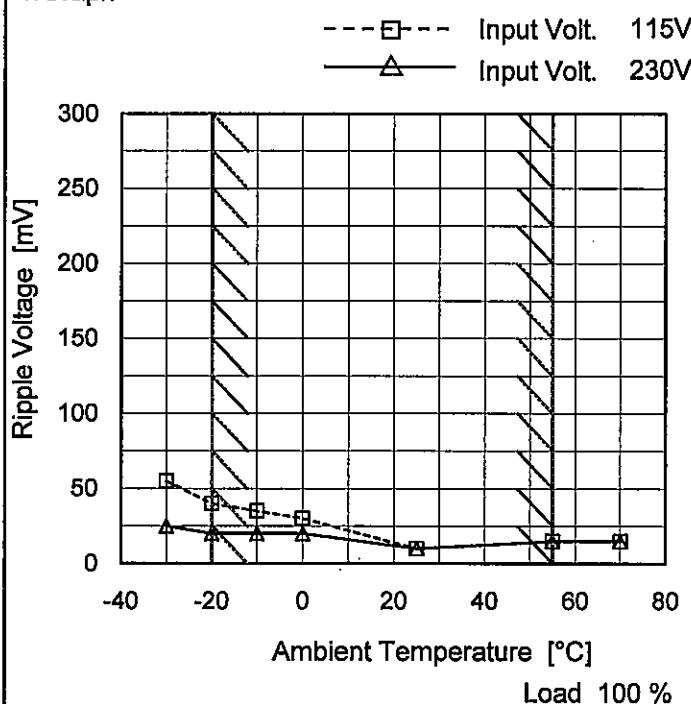

Measured by 20 MHz Oscilloscope.

Note: Slanted line shows the range of the rated ambient temperature.


Testing Circuitry Figure C

2.Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Input Volt. 115 [V]	Input Volt. 230 [V]
-30	55	25
-20	40	20
-10	35	20
0	30	20
25	10	10
55	15	15
70	15	15
--	-	-
--	-	-
--	-	-
--	-	-

COSEL

Model	KHNA60F-24
Item	Ambient Temperature Drift
Object	+24V2.5A

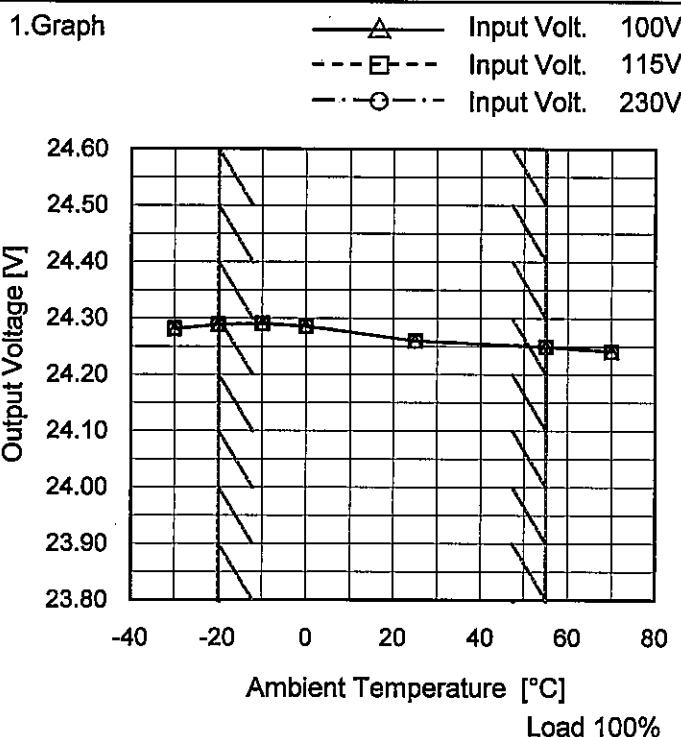

Note: Slanted line shows the range of the rated ambient temperature:

Testing Circuitry Figure A

2. Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 100[V]	Input Volt. 115[V]	Input Volt. 230[V]
-30	24.281	24.282	24.282
-20	24.289	24.289	24.289
-10	24.290	24.291	24.290
0	24.286	24.286	24.286
25	24.260	24.260	24.260
55	24.249	24.250	24.250
70	24.241	24.242	24.241
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-



Model	KHNA60F-24	Testing Circuitry Figure A
Item	Output Voltage Accuracy	
Object	+24V2.5A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature -20 - 55°C

Input Voltage 85 - 264V

Load Current 0 - 2.5A

* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

$$\text{* Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	-10	230	0	24.323	±37	±0.2
Minimum Voltage	55	100	2.5	24.249		

COSEL


Model	KHNA60F-24																							
Item	Time Lapse Drift	Temperature 25°C Testing Circuitry Figure A																						
Object	+24V2.5A																							
1.Graph																								
<p>Output Voltage [V]</p> <p>Time [H]</p> <p>Input Volt. 230V Load 100%</p>																								
<p>2.Values</p> <table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>24.260</td></tr> <tr><td>0.5</td><td>24.256</td></tr> <tr><td>1.0</td><td>24.256</td></tr> <tr><td>2.0</td><td>24.256</td></tr> <tr><td>3.0</td><td>24.255</td></tr> <tr><td>4.0</td><td>24.256</td></tr> <tr><td>5.0</td><td>24.256</td></tr> <tr><td>6.0</td><td>24.256</td></tr> <tr><td>7.0</td><td>24.256</td></tr> <tr><td>8.0</td><td>24.256</td></tr> </tbody> </table>			Time since start [H]	Output Voltage [V]	0.0	24.260	0.5	24.256	1.0	24.256	2.0	24.256	3.0	24.255	4.0	24.256	5.0	24.256	6.0	24.256	7.0	24.256	8.0	24.256
Time since start [H]	Output Voltage [V]																							
0.0	24.260																							
0.5	24.256																							
1.0	24.256																							
2.0	24.256																							
3.0	24.255																							
4.0	24.256																							
5.0	24.256																							
6.0	24.256																							
7.0	24.256																							
8.0	24.256																							
<p>* The characteristic of AC115V is equal.</p>																								

COSEL

Model	KHNA60F-24
Item	Rise and Fall Time
Object	+24V2.5A

Temperature 25°C
Testing Circuitry Figure A


1. Graph

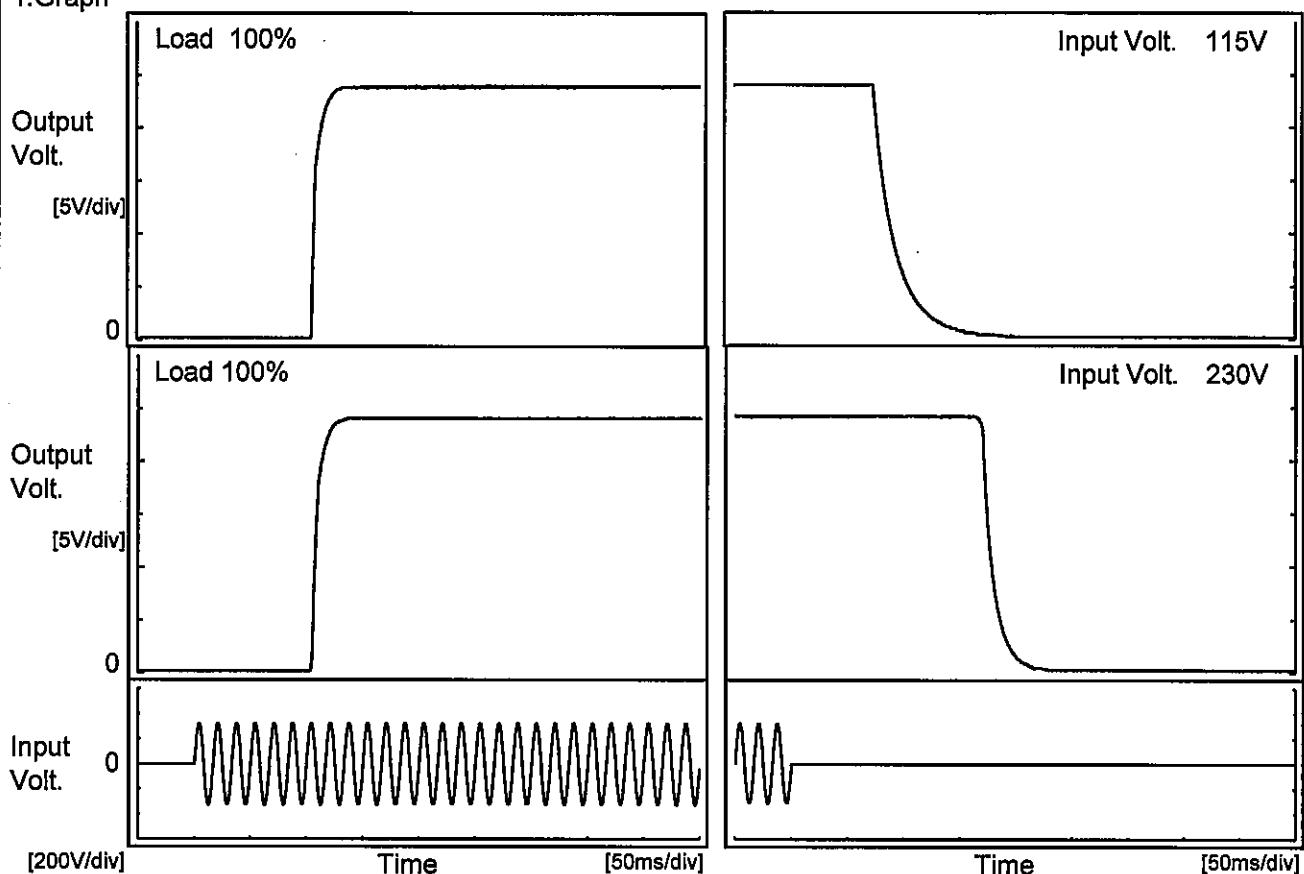

2. Values

[ms]

Load	Time	Td	Tr	Ts	Th	Tf
115 V		106.3	12.0	118.3	36.0	22.5
230 V		105.3	12.0	117.3	171.0	23.3

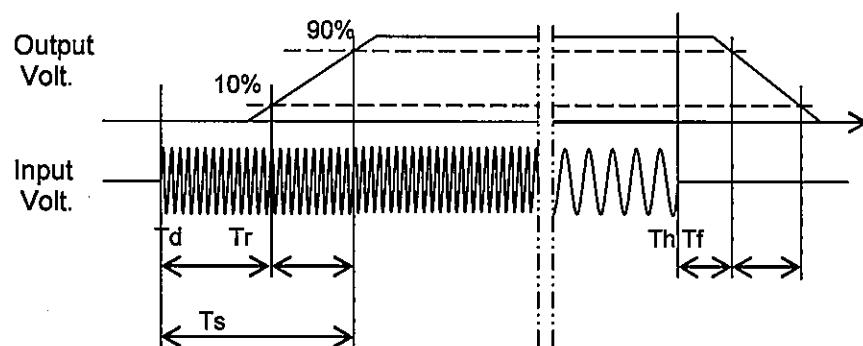

COSEL


Model KHNA60F-24

Item Hold-Up Time

Object +24V2.5A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

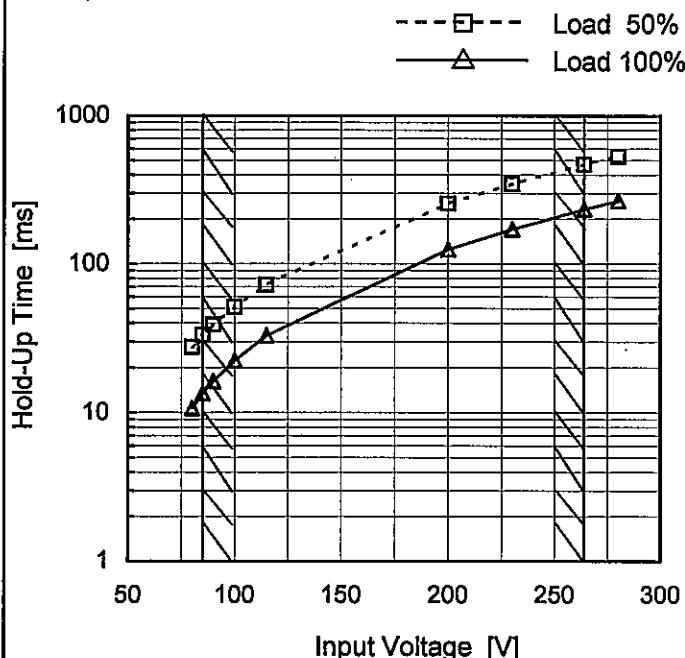


2. Values

Input Voltage [V]	Hold-Up Time [ms]	
	Load 50%	Load 100%
80	28	11
85	33	14
90	39	16
100	51	22
115	72	33
200	256	125
230	347	171
264	470	234
280	533	266

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.
Note: Slanted line shows the range of the rated input voltage.

COSEL

Model	KHNA60F-24
Item	Instantaneous Interruption Compensation
Object	+24V2.5A

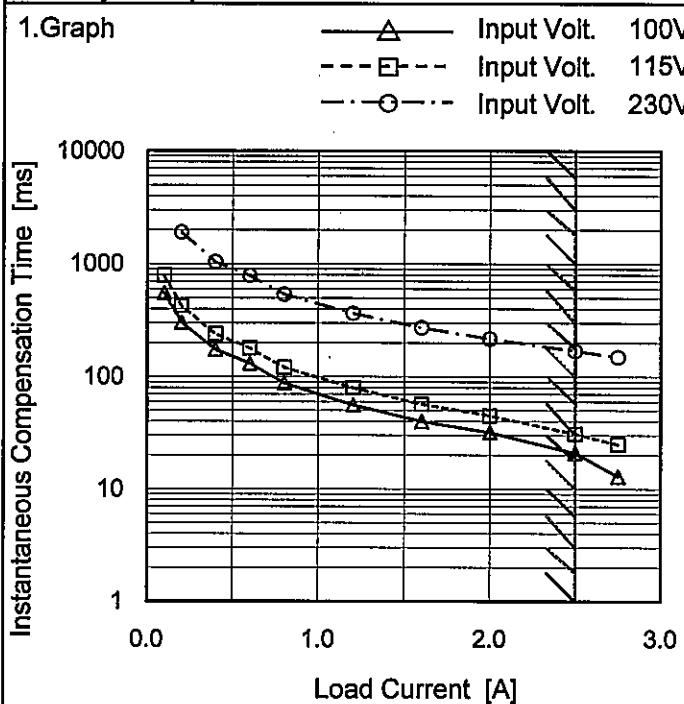
 Temperature 25°C
 Testing Circuitry Figure A

2.Values


Load Current [A]	Time [ms]		
	Input Volt. 100[V]	Input Volt. 115[V]	Input Volt. 230[V]
0.00	-	-	-
0.10	554	795	-
0.20	305	425	1906
0.40	175	239	1040
0.60	132	180	790
0.80	88	121	540
1.20	56	80	365
1.60	40	57	273
2.00	32	45	217
2.50	21	31	170
2.75	13	25	150

Note: Slanted line shows the range of the rated load current.

COSEL

Model	KHNA60F-24
Item	Minimum Input Voltage for Regulated Output Voltage
Object	+24V2.5A

1. Graph

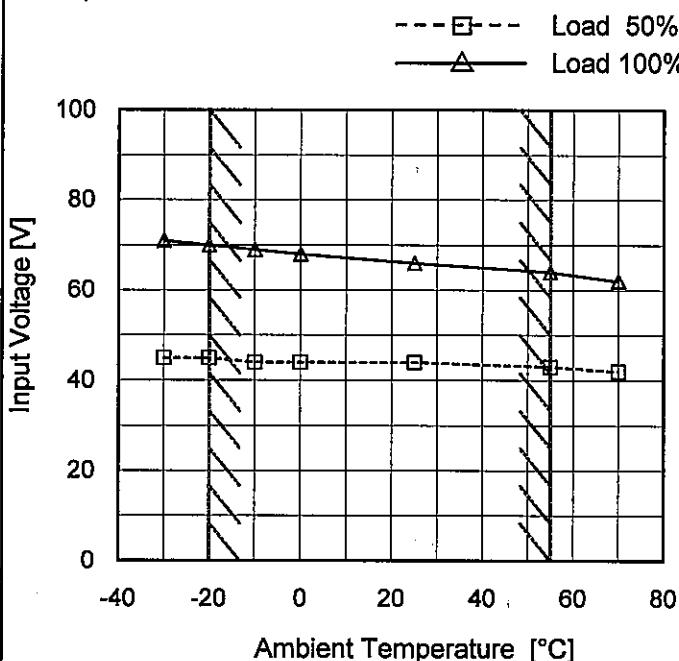

Note: Slanted line shows the range of the rated ambient temperature.

Testing Circuitry Figure A

2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-30	45	71
-20	45	70
-10	44	69
0	44	68
25	44	66
55	43	64
70	42	62
--	-	-
--	-	-
--	-	-
--	-	-


COSEL

Model KHNA60F-24

Item Overcurrent Protection

Object +24V2.5A

1. Graph

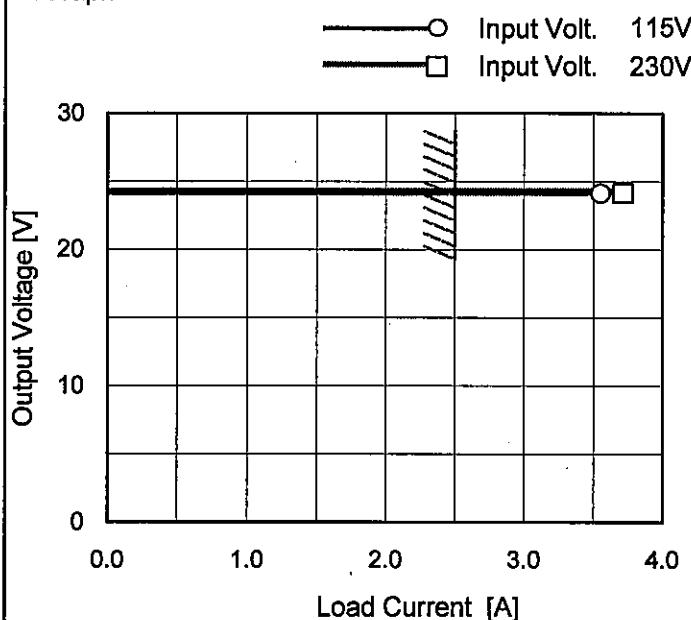

Note: Slanted line shows the range of the rated load current.

Intermittent operation occurs when overcurrent protection is activated

Temperature 25°C
Testing Circuitry Figure A

2. Values

Output Voltage [V]	Load Current [A]	
	Input Volt. 115[V]	Input Volt. 230[V]
24.3	3.55	3.66
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-


COSEL

Model KHNA60F-24

Item Overvoltage Protection

Object +24V2.5A

1.Graph

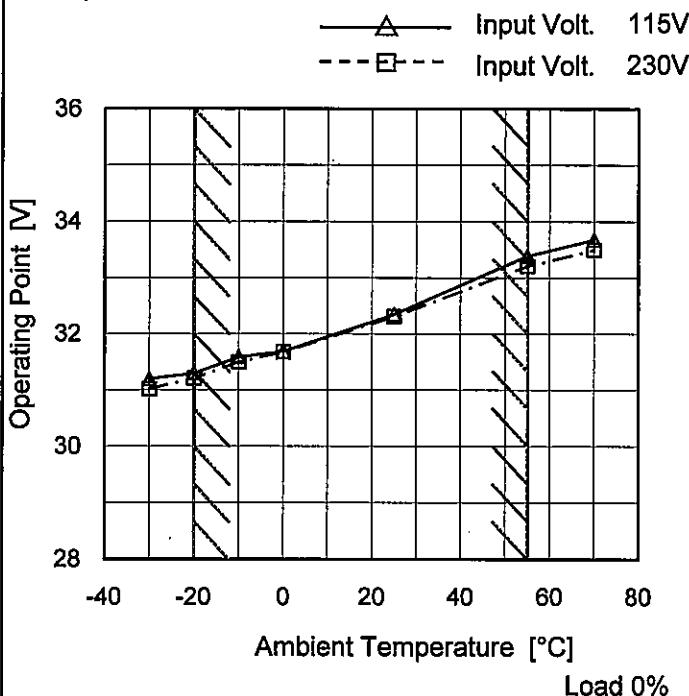

Note: Slanted line shows the range of the rated ambient temperature..

Testing Circuitry Figure A

2.Values

Ambient Temperature [°C]	Operating Point [V]	
	Input Volt. 115[V]	Input Volt. 230[V]
-30	31.20	31.02
-20	31.30	31.21
-10	31.59	31.50
0	31.69	31.68
25	32.35	32.31
55	33.39	33.21
70	33.68	33.50
--	-	-
--	-	-
--	-	-
--	-	-

COSEL

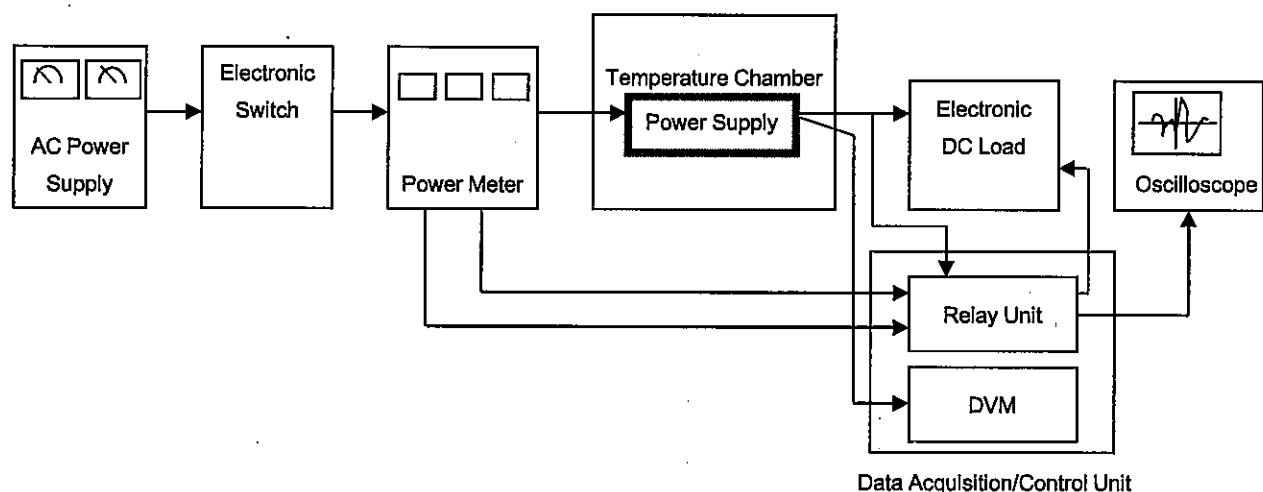


Figure A

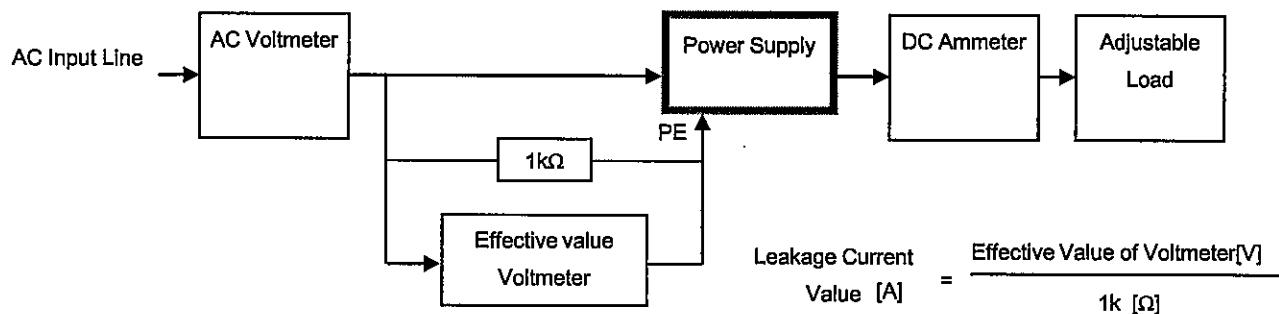


Figure B (DEN-AN)

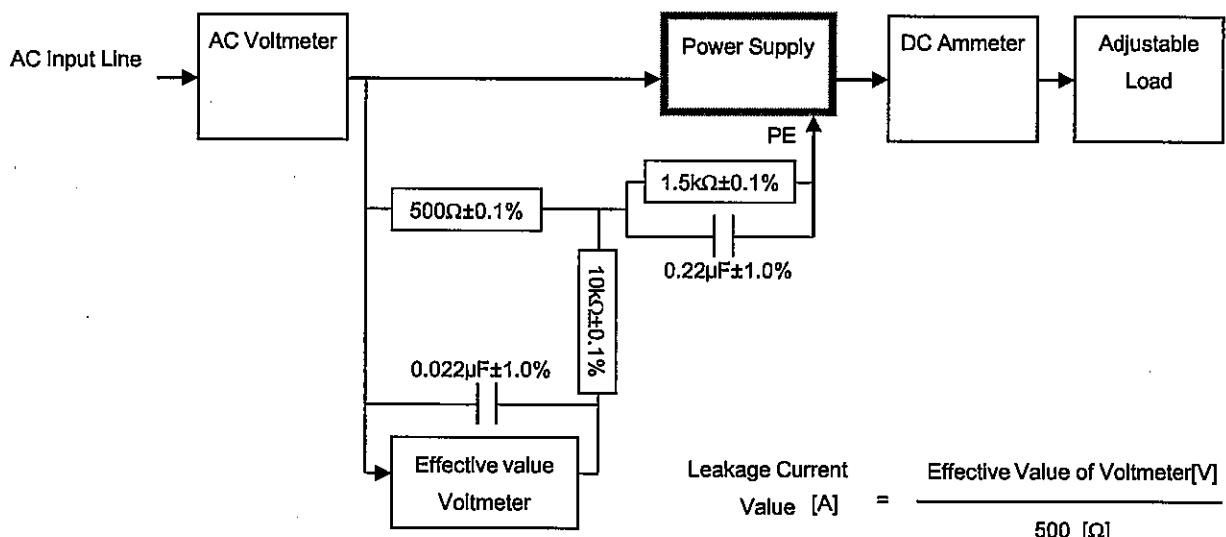


Figure B (IEC60950-1)

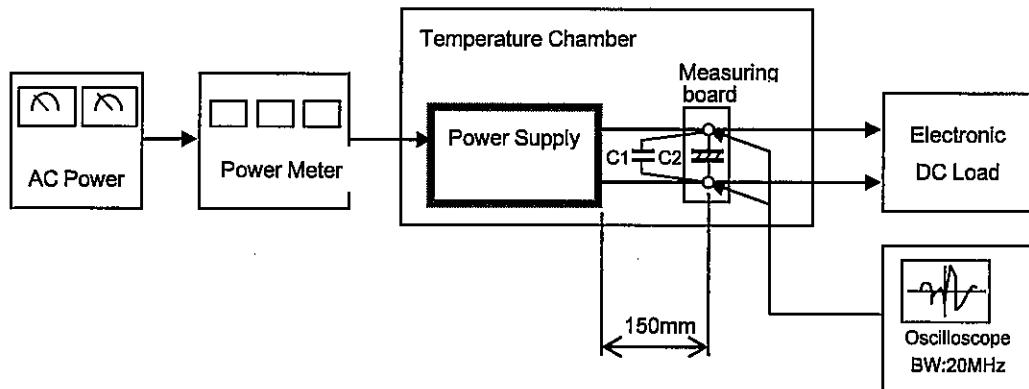
COSEL

Figure C