



DATA SHEET		Date	10-Aug-11
Model	PLA300F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Oki

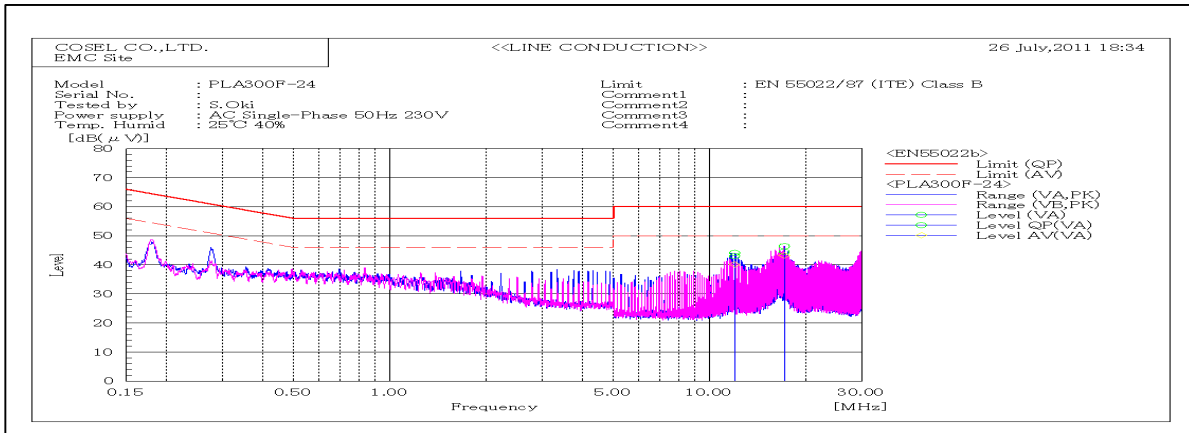


Frequency MHz	Line Phase	Reading dB(uV)		Factor dB	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
11.97135	VA	32	29.1	11.1	43.1	40.2	60	50	16.9	9.8	Pass	
17.11755	VA	33.2	32	11.3	44.5	43.3	60	50	15.5	6.7	Pass	

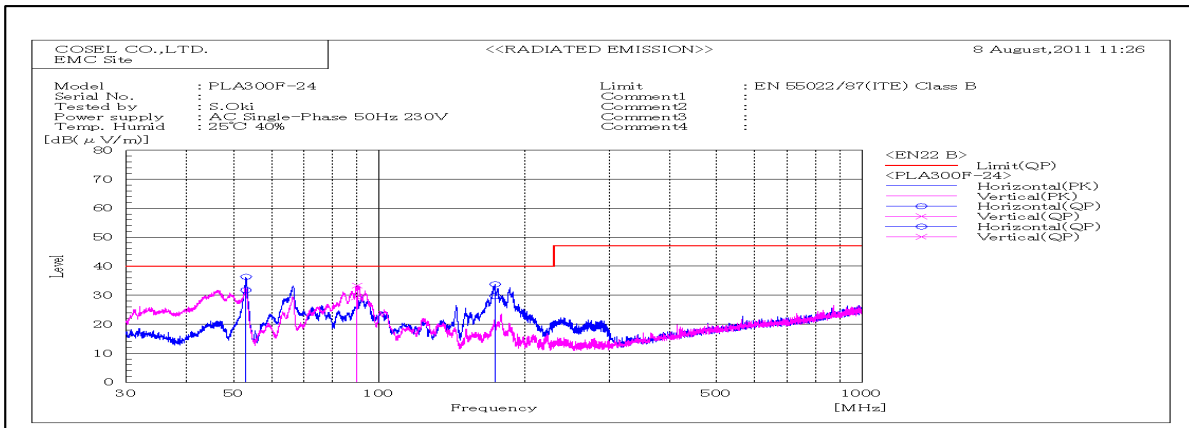

Frequency MHz	Polarization	Stability	Reading dB(uV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP		QP						
53.032	H	Stable	53.2	-21.4	31.8	40	8.2	Pass	155	327	
90.116	V	Stable	48.5	-19.2	29.3	40	10.7	Pass	154	286	
173.72	H	Stable	47.9	-18.2	29.7	40	10.3	Pass	127	347	

DATA SHEET		Date	10-Aug-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Oki

1. Line conduction

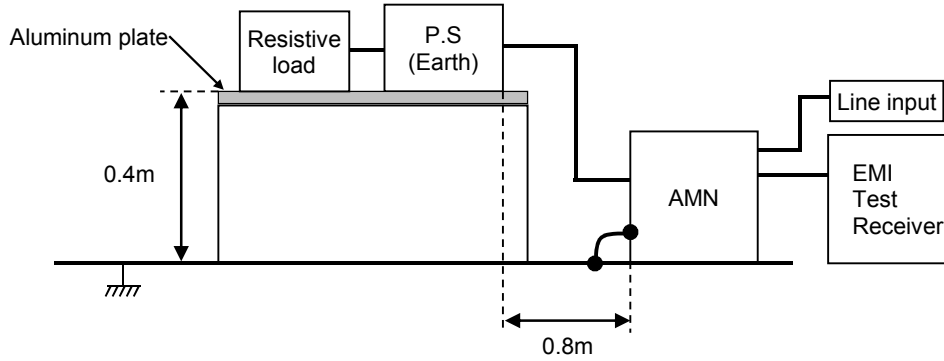

2. Radiated emission

