





DATA SHEET		Date	02-Jul-14
Model	PLA30F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sugimori

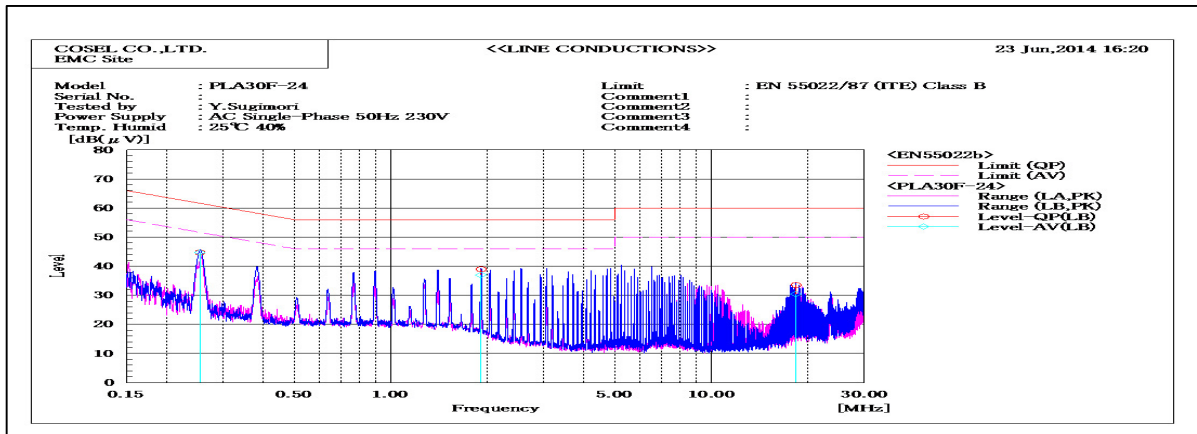


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
18.3941	LB	22	18.9	11.5	33.5	30.4	60	50	26.5	19.6	Pass	
0.2541	LB	37.5	37.5	7.2	44.7	44.7	61.6	51.6	16.9	6.9	Pass	
1.91368	LB	31.2	29.1	7.8	39	36.9	56	46	17	9.1	Pass	

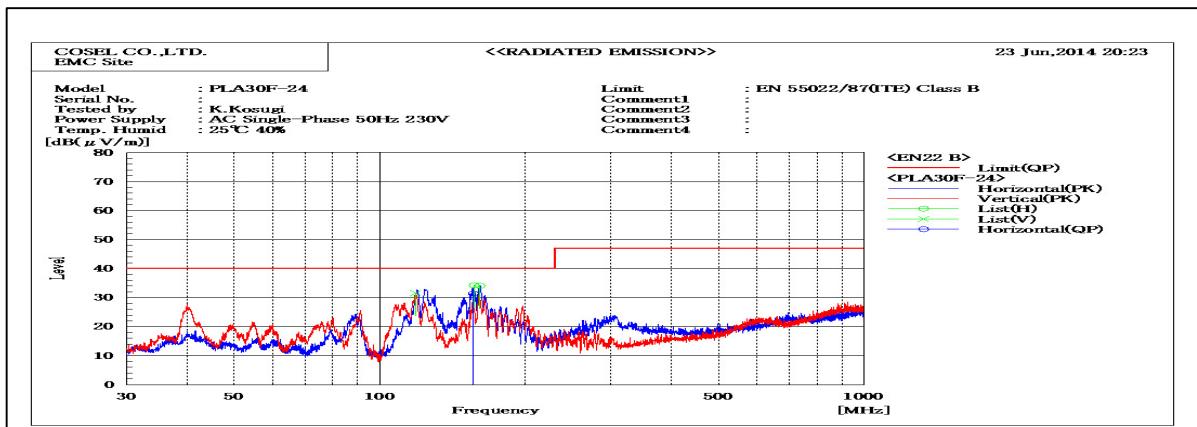

Frequency MHz	Polariz ation	Reading	Space Loss	Level	Limit	Margin	Pass/ Fail	Height cm	Angle deg	Remark
		dB(μV) QP		dB	dB(mW) QP					
155.957	H	44	-12.6	31.4	40	8.6	Pass	195	201	

DATA SHEET		Date	02-Jul-14
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sugimori

1. Line conduction

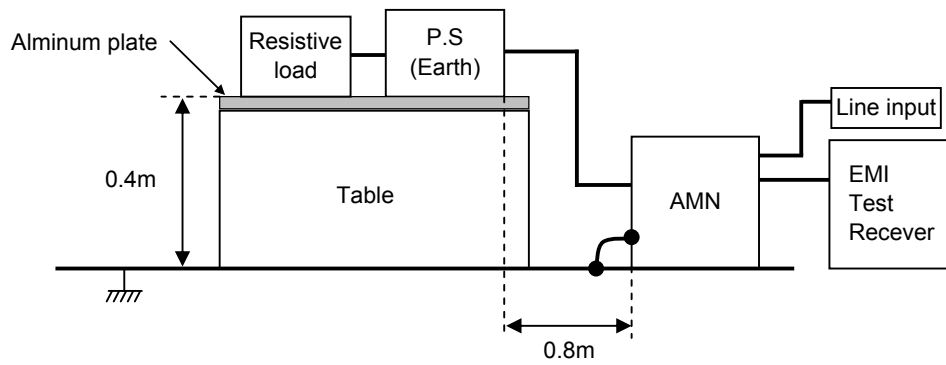

2. Radiated emission

