

COSEL

TEST DATA OF LDA10F-24
(200V INPUT)

Regulated DC Power Supply

June 18, 1999

Approved by : H. Yamaguchi
Design Manager

Prepared by : J. Ashihara
Design Engineer

コーワセル株式会社
COSEL CO., LTD.



C O N T E N T S


| | |
|--|----|
| 1. Line Regulation | 1 |
| 静的入力変動 | |
| 2. Input Current (by Load Current) | 2 |
| 入力電流 (負荷特性) | |
| 3. Input Power (by Load Current) | 3 |
| 入力電力 (負荷特性) | |
| 4. Efficiency (by Input Voltage) | 4 |
| 効率 (入力電圧特性) | |
| 5. Efficiency (by Load Current) | 5 |
| 効率 (負荷特性) | |
| 6. Hold-Up Time | 6 |
| 出力保持時間 | |
| 7. Instantaneous Interruption Compensation | 7 |
| 瞬時停電保障 | |
| 8. Load Regulation | 8 |
| 静的負荷変動 | |
| 9. Ripple Voltage (by Load Current) | 9 |
| リップル電圧 (負荷特性) | |
| 10. Ripple-Noise | 10 |
| リップルノイズ | |
| 11. Overcurrent Protection | 11 |
| 過電流保護 | |
| 12. Inrush Current | 12 |
| 突入電流 | |
| 13. Dynamic Load Responce | 13 |
| 動的負荷変動 | |
| 14. Rise and Fall Time | 14 |
| 立ち上り、立下がり時間 | |
| 15. Ambient Temperature Drift | 15 |
| 周囲温度変動 | |
| 16. Minimum Input Voltage for Regulated Output Voltage . | 16 |
| 最低レギュレーション電圧 | |
| 17. Ripple Voltage (by Ambient Temperature) | 17 |
| リップル電圧 (周囲温度特性) | |
| 18. Time Lapse Drift | 18 |
| 経時ドリフト | |
| 19. Output Voltage Accuracy | 19 |
| 定電圧精度 | |
| 20. Condensation | 20 |
| 結露特性 | |
| 21. Leakage Current | 21 |
| 漏洩電流 | |
| 22. Line Noise Tolerance | 22 |
| 入力雑音耐量 | |
| 23. Conducted Emission | 23 |
| 雑音端子電圧 | |
| 24. Figure of Testing Circuitry | 24 |
| 測定回路図 | |

(Final Page 25)

COSEL

| | |
|--------|------------------------|
| Model | LDA10F-24 |
| Item | Line Regulation 静的入力変動 |
| Object | +24.0V 0.5A |

Temperature 25°C
Testing Circuitry Figure A

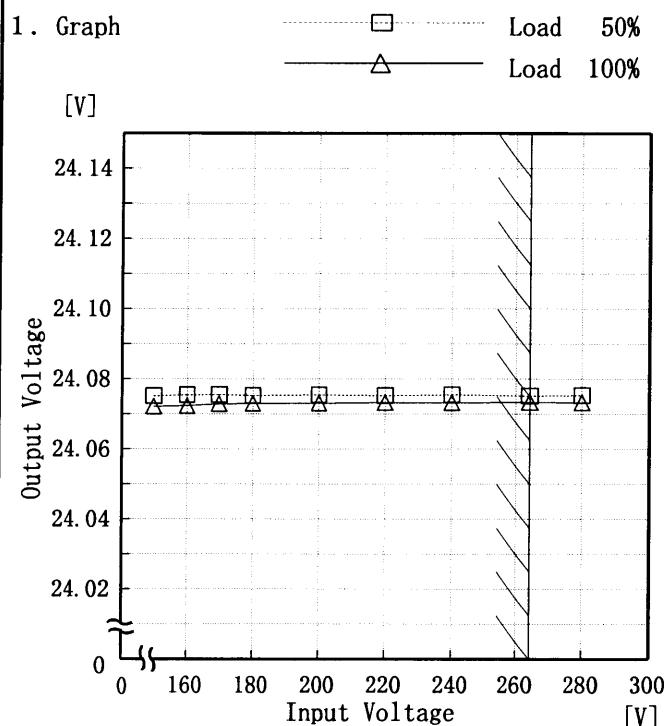

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

2. Values

| Input Voltage [V] | Output Voltage [V] | |
|-------------------|--------------------|-----------|
| | Load 50% | Load 100% |
| 150 | 24.075 | 24.072 |
| 160 | 24.075 | 24.072 |
| 170 | 24.076 | 24.073 |
| 180 | 24.075 | 24.073 |
| 200 | 24.075 | 24.073 |
| 220 | 24.075 | 24.073 |
| 240 | 24.076 | 24.073 |
| 264 | 24.075 | 24.073 |
| 280 | 24.075 | 24.073 |

COSEL

| Model | LDA10F-24 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------|---|---------------------|-------------------------------|-------------------|--|--|--------------------|--------------------|--------------------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|---|---|---|---|---|---|---|---|---|---|---|---|
| Item | Input Current (by Load Current) 入力電流（負荷特性） | Temperature 25°C | Testing Circuitry Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Output | _____ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1. Graph | <p>—△— Input Volt. 170V —□— Input Volt. 200V —○— Input Volt. 264V</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2. Values | <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.030</td><td>0.032</td><td>0.036</td></tr> <tr><td>0.08</td><td>0.060</td><td>0.058</td><td>0.056</td></tr> <tr><td>0.16</td><td>0.085</td><td>0.080</td><td>0.076</td></tr> <tr><td>0.24</td><td>0.109</td><td>0.102</td><td>0.094</td></tr> <tr><td>0.32</td><td>0.133</td><td>0.123</td><td>0.111</td></tr> <tr><td>0.40</td><td>0.157</td><td>0.144</td><td>0.128</td></tr> <tr><td>0.48</td><td>0.181</td><td>0.163</td><td>0.143</td></tr> <tr><td>0.50</td><td>0.187</td><td>0.170</td><td>0.148</td></tr> <tr><td>0.55</td><td>0.201</td><td>0.182</td><td>0.157</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table> | | Load Current [A] | Input Current [A] | | | Input Volt. 170[V] | Input Volt. 200[V] | Input Volt. 264[V] | 0.00 | 0.030 | 0.032 | 0.036 | 0.08 | 0.060 | 0.058 | 0.056 | 0.16 | 0.085 | 0.080 | 0.076 | 0.24 | 0.109 | 0.102 | 0.094 | 0.32 | 0.133 | 0.123 | 0.111 | 0.40 | 0.157 | 0.144 | 0.128 | 0.48 | 0.181 | 0.163 | 0.143 | 0.50 | 0.187 | 0.170 | 0.148 | 0.55 | 0.201 | 0.182 | 0.157 | — | — | — | — | — | — | — | — | — | — | — | — |
| Load Current [A] | Input Current [A] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Input Volt. 170[V] | Input Volt. 200[V] | Input Volt. 264[V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.00 | 0.030 | 0.032 | 0.036 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.08 | 0.060 | 0.058 | 0.056 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.16 | 0.085 | 0.080 | 0.076 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.24 | 0.109 | 0.102 | 0.094 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.32 | 0.133 | 0.123 | 0.111 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.40 | 0.157 | 0.144 | 0.128 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.48 | 0.181 | 0.163 | 0.143 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.50 | 0.187 | 0.170 | 0.148 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.55 | 0.201 | 0.182 | 0.157 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Note: Slanted line shows the range of the rated load current


(注)斜線は定格負荷電流範囲を示す。

COSEL

| | |
|--------|--|
| Model | LDA10F-24 |
| Item | Input Power (by Load Current) 入力電力 (負荷特性) |
| Output | _____ |

Temperature 25°C
Testing Circuitry Figure A

1. Graph

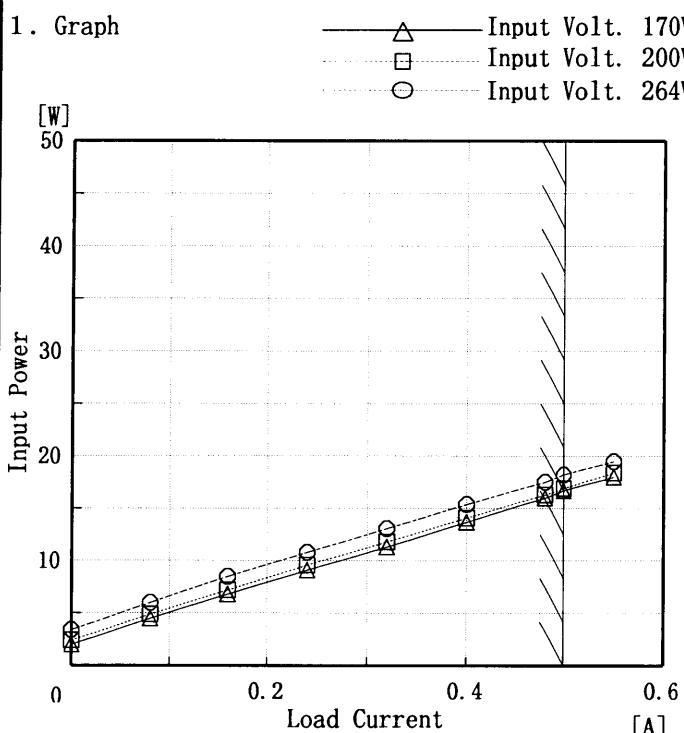

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。

2. Values

| Load Current [A] | Input Power [W] | | |
|---------------------|-----------------------|-----------------------|-----------------------|
| | Input Volt. 170[V] | Input Volt. 200[V] | Input Volt. 264[V] |
| 0.00 | 2.00 | 2.40 | 3.40 |
| 0.08 | 4.50 | 4.90 | 6.00 |
| 0.16 | 6.80 | 7.20 | 8.50 |
| 0.24 | 9.10 | 9.60 | 10.80 |
| 0.32 | 11.30 | 11.80 | 13.10 |
| 0.40 | 13.70 | 14.10 | 15.40 |
| 0.48 | 16.00 | 16.30 | 17.50 |
| 0.50 | 16.70 | 16.90 | 18.20 |
| 0.55 | 18.00 | 18.40 | 19.50 |
| — | — | — | — |
| — | — | — | — |
| — | — | — | — |

COSEL

| Model | LDA10F-24 | Temperature Testing Circuitry | 25°C Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------|---|----------------------------------|------------------|-------------------|----------------|--|----------|-----------|-----|------|------|-----|------|------|-----|------|------|-----|------|------|-----|------|------|-----|------|------|-----|------|------|-----|------|------|-----|------|------|
| Item | Efficiency 効率 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1. Graph | □ Load 50% △ Load 100% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <p>The graph plots Efficiency [%] on the y-axis (0 to 81) against Input Voltage [V] on the x-axis (0 to 300). Two sets of data points are shown: Load 50% (squares) and Load 100% (triangles). Both sets show a general downward trend as input voltage increases. Slanted lines indicate the rated input voltage range for each load level.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2. Values | <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>150</td><td>71.1</td><td>77.3</td></tr> <tr><td>160</td><td>69.0</td><td>76.7</td></tr> <tr><td>170</td><td>68.0</td><td>76.0</td></tr> <tr><td>180</td><td>67.1</td><td>75.3</td></tr> <tr><td>200</td><td>64.2</td><td>74.3</td></tr> <tr><td>220</td><td>62.0</td><td>72.8</td></tr> <tr><td>240</td><td>59.3</td><td>71.1</td></tr> <tr><td>264</td><td>57.0</td><td>69.3</td></tr> <tr><td>280</td><td>55.2</td><td>67.8</td></tr> </tbody> </table> | | | Input Voltage [V] | Efficiency [%] | | Load 50% | Load 100% | 150 | 71.1 | 77.3 | 160 | 69.0 | 76.7 | 170 | 68.0 | 76.0 | 180 | 67.1 | 75.3 | 200 | 64.2 | 74.3 | 220 | 62.0 | 72.8 | 240 | 59.3 | 71.1 | 264 | 57.0 | 69.3 | 280 | 55.2 | 67.8 |
| Input Voltage [V] | Efficiency [%] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Load 50% | Load 100% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 150 | 71.1 | 77.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 160 | 69.0 | 76.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 170 | 68.0 | 76.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 180 | 67.1 | 75.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 200 | 64.2 | 74.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 220 | 62.0 | 72.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 240 | 59.3 | 71.1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 264 | 57.0 | 69.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 280 | 55.2 | 67.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

COSEL

| Model | LDA10F-24 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------|---|----------------------------------|--------------------|------------------|----------------|--|--|--------------------|--------------------|--------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Item | Efficiency (by Load Current) 効率(負荷電流特性) | Temperature Testing Circuitry | 25°C Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Output | _____ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1. Graph | <p>Efficiency [%]</p> <p>Load Current [A]</p> <p>Legend: Input Volt. 170V (triangle), Input Volt. 200V (square), Input Volt. 264V (circle)</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2. Values | <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0.08</td><td>48.6</td><td>44.8</td><td>36.7</td></tr> <tr><td>0.16</td><td>60.7</td><td>57.3</td><td>48.4</td></tr> <tr><td>0.24</td><td>67.2</td><td>63.6</td><td>56.6</td></tr> <tr><td>0.32</td><td>71.7</td><td>68.4</td><td>61.8</td></tr> <tr><td>0.40</td><td>73.6</td><td>71.5</td><td>65.5</td></tr> <tr><td>0.48</td><td>75.0</td><td>73.6</td><td>68.6</td></tr> <tr><td>0.50</td><td>75.5</td><td>74.3</td><td>69.0</td></tr> <tr><td>0.55</td><td>76.4</td><td>74.7</td><td>70.4</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table> | | | Load Current [A] | Efficiency [%] | | | Input Volt. 170[V] | Input Volt. 200[V] | Input Volt. 264[V] | 0.08 | 48.6 | 44.8 | 36.7 | 0.16 | 60.7 | 57.3 | 48.4 | 0.24 | 67.2 | 63.6 | 56.6 | 0.32 | 71.7 | 68.4 | 61.8 | 0.40 | 73.6 | 71.5 | 65.5 | 0.48 | 75.0 | 73.6 | 68.6 | 0.50 | 75.5 | 74.3 | 69.0 | 0.55 | 76.4 | 74.7 | 70.4 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Load Current [A] | Efficiency [%] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Input Volt. 170[V] | Input Volt. 200[V] | Input Volt. 264[V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.08 | 48.6 | 44.8 | 36.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.16 | 60.7 | 57.3 | 48.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.24 | 67.2 | 63.6 | 56.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.32 | 71.7 | 68.4 | 61.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.40 | 73.6 | 71.5 | 65.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.48 | 75.0 | 73.6 | 68.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.50 | 75.5 | 74.3 | 69.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.55 | 76.4 | 74.7 | 70.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Note: | Slanted line shows the range of the rated load current | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| (注) | 斜線は定格負荷電流範囲を示す。 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

COSEL

| Model | LDA10F-24 | | Temperature Testing Circuitry | 25°C Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|-----------|----------------------------------|------------------|-------------------------|----------------------|--|----------|-----------|-----|-----|----|-----|-----|----|-----|-----|----|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Item | Hold-Up Time 出力保持時間 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | +24.0V 0.5A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1. Graph | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2. Values | <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Hold-Up Time [mS]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>150</td><td>126</td><td>60</td></tr> <tr><td>160</td><td>143</td><td>69</td></tr> <tr><td>170</td><td>162</td><td>79</td></tr> <tr><td>180</td><td>181</td><td>89</td></tr> <tr><td>200</td><td>222</td><td>112</td></tr> <tr><td>220</td><td>266</td><td>138</td></tr> <tr><td>240</td><td>314</td><td>165</td></tr> <tr><td>264</td><td>376</td><td>201</td></tr> <tr><td>280</td><td>419</td><td>226</td></tr> </tbody> </table> | | | | Input Voltage [V] | Hold-Up Time [mS] | | Load 50% | Load 100% | 150 | 126 | 60 | 160 | 143 | 69 | 170 | 162 | 79 | 180 | 181 | 89 | 200 | 222 | 112 | 220 | 266 | 138 | 240 | 314 | 165 | 264 | 376 | 201 | 280 | 419 | 226 |
| Input Voltage [V] | Hold-Up Time [mS] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Load 50% | Load 100% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 150 | 126 | 60 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 160 | 143 | 69 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 170 | 162 | 79 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 180 | 181 | 89 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 200 | 222 | 112 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 220 | 266 | 138 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 240 | 314 | 165 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 264 | 376 | 201 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 280 | 419 | 226 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</p> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。</p> <p>(注)斜線は定格入力電圧範囲を示す。</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Model | LDA10F-24 | Temperature 25°C Testing Circuitry Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------|---|--|-------------------------|-------------------------|-------------------------|-----------|-----|-----|--------------------|--------------------|--------------------|------|-----|------|-----|------|-----|------|-----|------|-----|------|-----|------|-----|------|-----|------|-----|------|-----|------|-----|------|-----|------|-----|-----|-----|------|----|-----|-----|------|----|----|-----|---|---|---|---|---|---|---|---|
| Item | Instantaneous Interruption Compensation 瞬時停電保障 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | +24.0V 0.5A | 2. Values | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1. Graph | <p>—△— Input Volt. 170 V -□- Input Volt. 200 V -○- Input Volt. 264 V</p> <table border="1"> <caption>Data extracted from Graph 1. Graph</caption> <thead> <tr> <th>Load Current [A]</th> <th>Input Volt. 170[V] [ms]</th> <th>Input Volt. 200[V] [ms]</th> <th>Input Volt. 264[V] [ms]</th> </tr> </thead> <tbody> <tr><td>0.08</td><td>399</td><td>533</td><td>855</td></tr> <tr><td>0.16</td><td>230</td><td>314</td><td>524</td></tr> <tr><td>0.24</td><td>157</td><td>218</td><td>374</td></tr> <tr><td>0.32</td><td>120</td><td>170</td><td>292</td></tr> <tr><td>0.40</td><td>98</td><td>140</td><td>248</td></tr> <tr><td>0.48</td><td>81</td><td>115</td><td>211</td></tr> <tr><td>0.50</td><td>81</td><td>115</td><td>211</td></tr> <tr><td>0.55</td><td>65</td><td>95</td><td>180</td></tr> </tbody> </table> | Load Current [A] | Input Volt. 170[V] [ms] | Input Volt. 200[V] [ms] | Input Volt. 264[V] [ms] | 0.08 | 399 | 533 | 855 | 0.16 | 230 | 314 | 524 | 0.24 | 157 | 218 | 374 | 0.32 | 120 | 170 | 292 | 0.40 | 98 | 140 | 248 | 0.48 | 81 | 115 | 211 | 0.50 | 81 | 115 | 211 | 0.55 | 65 | 95 | 180 | | | | | | | | | | | | | | | | | | |
| Load Current [A] | Input Volt. 170[V] [ms] | Input Volt. 200[V] [ms] | Input Volt. 264[V] [ms] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.08 | 399 | 533 | 855 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.16 | 230 | 314 | 524 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.24 | 157 | 218 | 374 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.32 | 120 | 170 | 292 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.40 | 98 | 140 | 248 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.48 | 81 | 115 | 211 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.50 | 81 | 115 | 211 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.55 | 65 | 95 | 180 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2. Values | | <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Time [mS]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>0.08</td><td>399</td><td>533</td><td>855</td></tr> <tr><td>0.16</td><td>230</td><td>314</td><td>524</td></tr> <tr><td>0.24</td><td>157</td><td>218</td><td>374</td></tr> <tr><td>0.32</td><td>120</td><td>170</td><td>292</td></tr> <tr><td>0.40</td><td>98</td><td>140</td><td>248</td></tr> <tr><td>0.48</td><td>81</td><td>115</td><td>211</td></tr> <tr><td>0.50</td><td>81</td><td>115</td><td>211</td></tr> <tr><td>0.55</td><td>65</td><td>95</td><td>180</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table> | | | Load Current [A] | Time [mS] | | | Input Volt. 170[V] | Input Volt. 200[V] | Input Volt. 264[V] | 0.00 | — | — | — | 0.08 | 399 | 533 | 855 | 0.16 | 230 | 314 | 524 | 0.24 | 157 | 218 | 374 | 0.32 | 120 | 170 | 292 | 0.40 | 98 | 140 | 248 | 0.48 | 81 | 115 | 211 | 0.50 | 81 | 115 | 211 | 0.55 | 65 | 95 | 180 | — | — | — | — | — | — | — | — |
| Load Current [A] | Time [mS] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Input Volt. 170[V] | Input Volt. 200[V] | Input Volt. 264[V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.00 | — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.08 | 399 | 533 | 855 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.16 | 230 | 314 | 524 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.24 | 157 | 218 | 374 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.32 | 120 | 170 | 292 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.40 | 98 | 140 | 248 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.48 | 81 | 115 | 211 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.50 | 81 | 115 | 211 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.55 | 65 | 95 | 180 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note: Slanted line shows the range of the rated load current.

瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間をいう。
(注)斜線は定格負荷電流範囲を示す。

COSEL

| Model | LDA10F-24 | Temperature Testing Circuitry | 25°C Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------|---|----------------------------------|-----------------------|---------------------|-----------------------|--|--|-----------------------|-----------------------|-----------------------|------|--------|--------|--------|------|--------|--------|--------|------|--------|--------|--------|------|--------|--------|--------|------|--------|--------|--------|------|--------|--------|--------|------|--------|--------|--------|------|--------|--------|--------|------|--------|--------|--------|---|---|---|---|
| Item | Load Regulation 靜的負荷変動 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | +24.0V 0.5A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1. Graph | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2. Values | <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td><td>24.083</td><td>24.085</td><td>24.085</td></tr> <tr> <td>0.08</td><td>24.080</td><td>24.081</td><td>24.082</td></tr> <tr> <td>0.16</td><td>24.079</td><td>24.080</td><td>24.081</td></tr> <tr> <td>0.24</td><td>24.079</td><td>24.079</td><td>24.079</td></tr> <tr> <td>0.32</td><td>24.080</td><td>24.080</td><td>24.079</td></tr> <tr> <td>0.40</td><td>24.076</td><td>24.076</td><td>24.076</td></tr> <tr> <td>0.48</td><td>24.074</td><td>24.075</td><td>24.075</td></tr> <tr> <td>0.50</td><td>24.074</td><td>24.074</td><td>24.075</td></tr> <tr> <td>0.55</td><td>24.073</td><td>24.072</td><td>24.072</td></tr> <tr> <td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table> | | | Load Current [A] | Output Voltage [V] | | | Input Volt. 170[V] | Input Volt. 200[V] | Input Volt. 264[V] | 0.00 | 24.083 | 24.085 | 24.085 | 0.08 | 24.080 | 24.081 | 24.082 | 0.16 | 24.079 | 24.080 | 24.081 | 0.24 | 24.079 | 24.079 | 24.079 | 0.32 | 24.080 | 24.080 | 24.079 | 0.40 | 24.076 | 24.076 | 24.076 | 0.48 | 24.074 | 24.075 | 24.075 | 0.50 | 24.074 | 24.074 | 24.075 | 0.55 | 24.073 | 24.072 | 24.072 | — | — | — | — |
| Load Current [A] | Output Voltage [V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Input Volt. 170[V] | Input Volt. 200[V] | Input Volt. 264[V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.00 | 24.083 | 24.085 | 24.085 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.08 | 24.080 | 24.081 | 24.082 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.16 | 24.079 | 24.080 | 24.081 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.24 | 24.079 | 24.079 | 24.079 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.32 | 24.080 | 24.080 | 24.079 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.40 | 24.076 | 24.076 | 24.076 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.48 | 24.074 | 24.075 | 24.075 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.50 | 24.074 | 24.074 | 24.075 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.55 | 24.073 | 24.072 | 24.072 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

COSEL


| Model | LDA10F-24 | Temperature Testing Circuitry 25°C Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|--|--|--|------------------|--|--|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|---|---|---|---|---|---|---|---|---|
| Item | Ripple Voltage (by Load Current) リップル電圧(負荷電流特性) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | +24.0V 0.5A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1. Graph | | 2. Values | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>[mV]</p> | | <table border="1"> <thead> <tr> <th>Load Current [A]</th> <th>Input Volt. 170 [V] Ripple Output Volt. [mV]</th> <th>Input Volt. 264 [V] Ripple Output Volt. [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>10</td><td>10</td></tr> <tr><td>0.10</td><td>10</td><td>10</td></tr> <tr><td>0.20</td><td>10</td><td>10</td></tr> <tr><td>0.25</td><td>10</td><td>10</td></tr> <tr><td>0.30</td><td>10</td><td>10</td></tr> <tr><td>0.40</td><td>10</td><td>10</td></tr> <tr><td>0.50</td><td>10</td><td>10</td></tr> <tr><td>0.55</td><td>10</td><td>10</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table> | | | Load Current [A] | Input Volt. 170 [V] Ripple Output Volt. [mV] | Input Volt. 264 [V] Ripple Output Volt. [mV] | 0.00 | 10 | 10 | 0.10 | 10 | 10 | 0.20 | 10 | 10 | 0.25 | 10 | 10 | 0.30 | 10 | 10 | 0.40 | 10 | 10 | 0.50 | 10 | 10 | 0.55 | 10 | 10 | — | — | — | — | — | — | — | — | — |
| Load Current [A] | Input Volt. 170 [V] Ripple Output Volt. [mV] | Input Volt. 264 [V] Ripple Output Volt. [mV] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.00 | 10 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.10 | 10 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.20 | 10 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.25 | 10 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.30 | 10 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.40 | 10 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.50 | 10 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.55 | 10 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>リップル電圧は、下図 p – p 値で示される。 (注) 斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line T2: Due to Switching</p> <p>Ripple [mVp-p]</p> <p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

COSEL

| Model | LDA10F-24 | Temperature Testing Circuitry | 25°C Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|----------------------------------|------------------|---------------------|------------------------|------------------------|----------------------|----------------------|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|---|---|---|---|---|---|---|---|---|
| Item | Ripple-Noise リップルノイズ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | +24.0V 0.5A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1. Graph | <p>□ Input Volt. 170V △ Input Volt. 264V</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2. Values | <table border="1"> <thead> <tr> <th rowspan="2">Load current [A]</th> <th>Input Volt. 170 [V]</th> <th>Input Volt. 264 [V]</th> </tr> <tr> <th>Ripple-Noise [mV]</th> <th>Ripple-Noise [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>10</td><td>10</td></tr> <tr><td>0.10</td><td>15</td><td>15</td></tr> <tr><td>0.20</td><td>15</td><td>15</td></tr> <tr><td>0.25</td><td>15</td><td>15</td></tr> <tr><td>0.30</td><td>15</td><td>15</td></tr> <tr><td>0.40</td><td>15</td><td>15</td></tr> <tr><td>0.50</td><td>20</td><td>15</td></tr> <tr><td>0.55</td><td>20</td><td>15</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table> | | | Load current [A] | Input Volt. 170 [V] | Input Volt. 264 [V] | Ripple-Noise [mV] | Ripple-Noise [mV] | 0.00 | 10 | 10 | 0.10 | 15 | 15 | 0.20 | 15 | 15 | 0.25 | 15 | 15 | 0.30 | 15 | 15 | 0.40 | 15 | 15 | 0.50 | 20 | 15 | 0.55 | 20 | 15 | — | — | — | — | — | — | — | — | — |
| Load current [A] | Input Volt. 170 [V] | Input Volt. 264 [V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Ripple-Noise [mV] | Ripple-Noise [mV] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.00 | 10 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.10 | 15 | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.20 | 15 | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.25 | 15 | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.30 | 15 | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.40 | 15 | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.50 | 20 | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.55 | 20 | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p> <p>リップルノイズは、下図 p - p 値で示される。 (注) 斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line T2: Due to Switching</p> <p>Ripple-Noise [mVp-p]</p> <p>T1 T2</p> <p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

COSEL

| | |
|--------|---------------------------------|
| Model | LDA10F-24 |
| Item | Overcurrent Protection 過電流保護 |
| Object | +24.0V 0.5A |

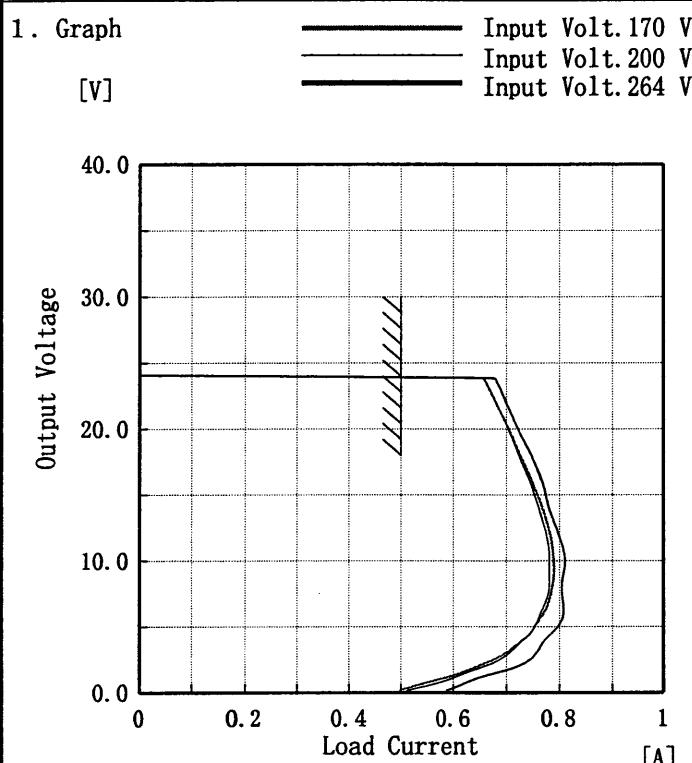Temperature 25°C
Testing Circuitry Figure A

2. Values


| Output Voltage [V] | Load Current [A] | | |
|--------------------|--------------------|--------------------|--------------------|
| | Input Volt. 170[V] | Input Volt. 200[V] | Input Volt. 264[V] |
| 24.00 | 0.66 | 0.66 | 0.67 |
| 22.80 | 0.67 | 0.67 | 0.69 |
| 21.60 | 0.68 | 0.68 | 0.70 |
| 19.20 | 0.71 | 0.71 | 0.73 |
| 16.80 | 0.74 | 0.74 | 0.76 |
| 14.40 | 0.76 | 0.76 | 0.78 |
| 12.00 | 0.78 | 0.77 | 0.80 |
| 9.60 | 0.79 | 0.78 | 0.81 |
| 7.20 | 0.78 | 0.78 | 0.81 |
| 4.80 | 0.75 | 0.75 | 0.79 |
| 2.40 | 0.67 | 0.68 | 0.74 |
| 0.00 | 0.50 | 0.51 | 0.59 |

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。


COSSEL


| | | | |
|--------|---------------------|----------------------------------|----------|
| Model | LDA10F-24 | Temperature Testing Circuitry | 25°C |
| Item | Inrush Current 突入電流 | | Figure A |
| Object | — | | |

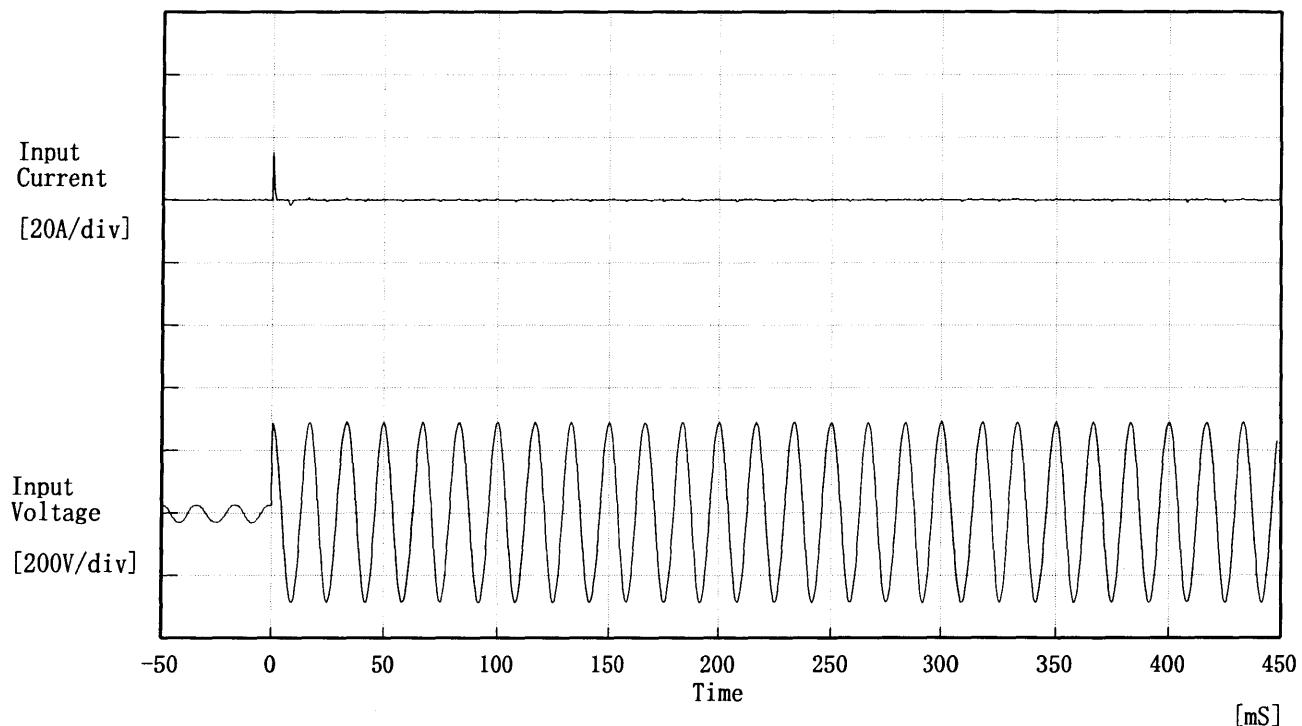

Input Voltage 200 V
 Frequency 60 Hz
 Load 100 %
 Inrush Current

- ① 15.19 [A]
- ② 0.81 [A]

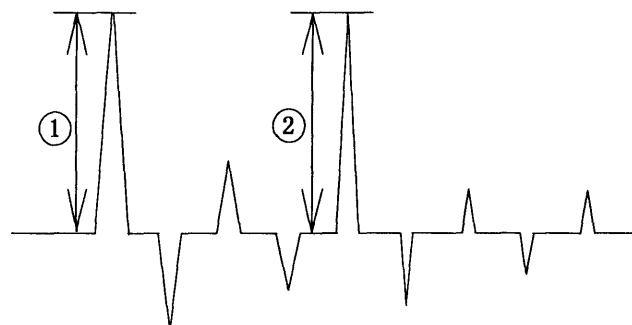


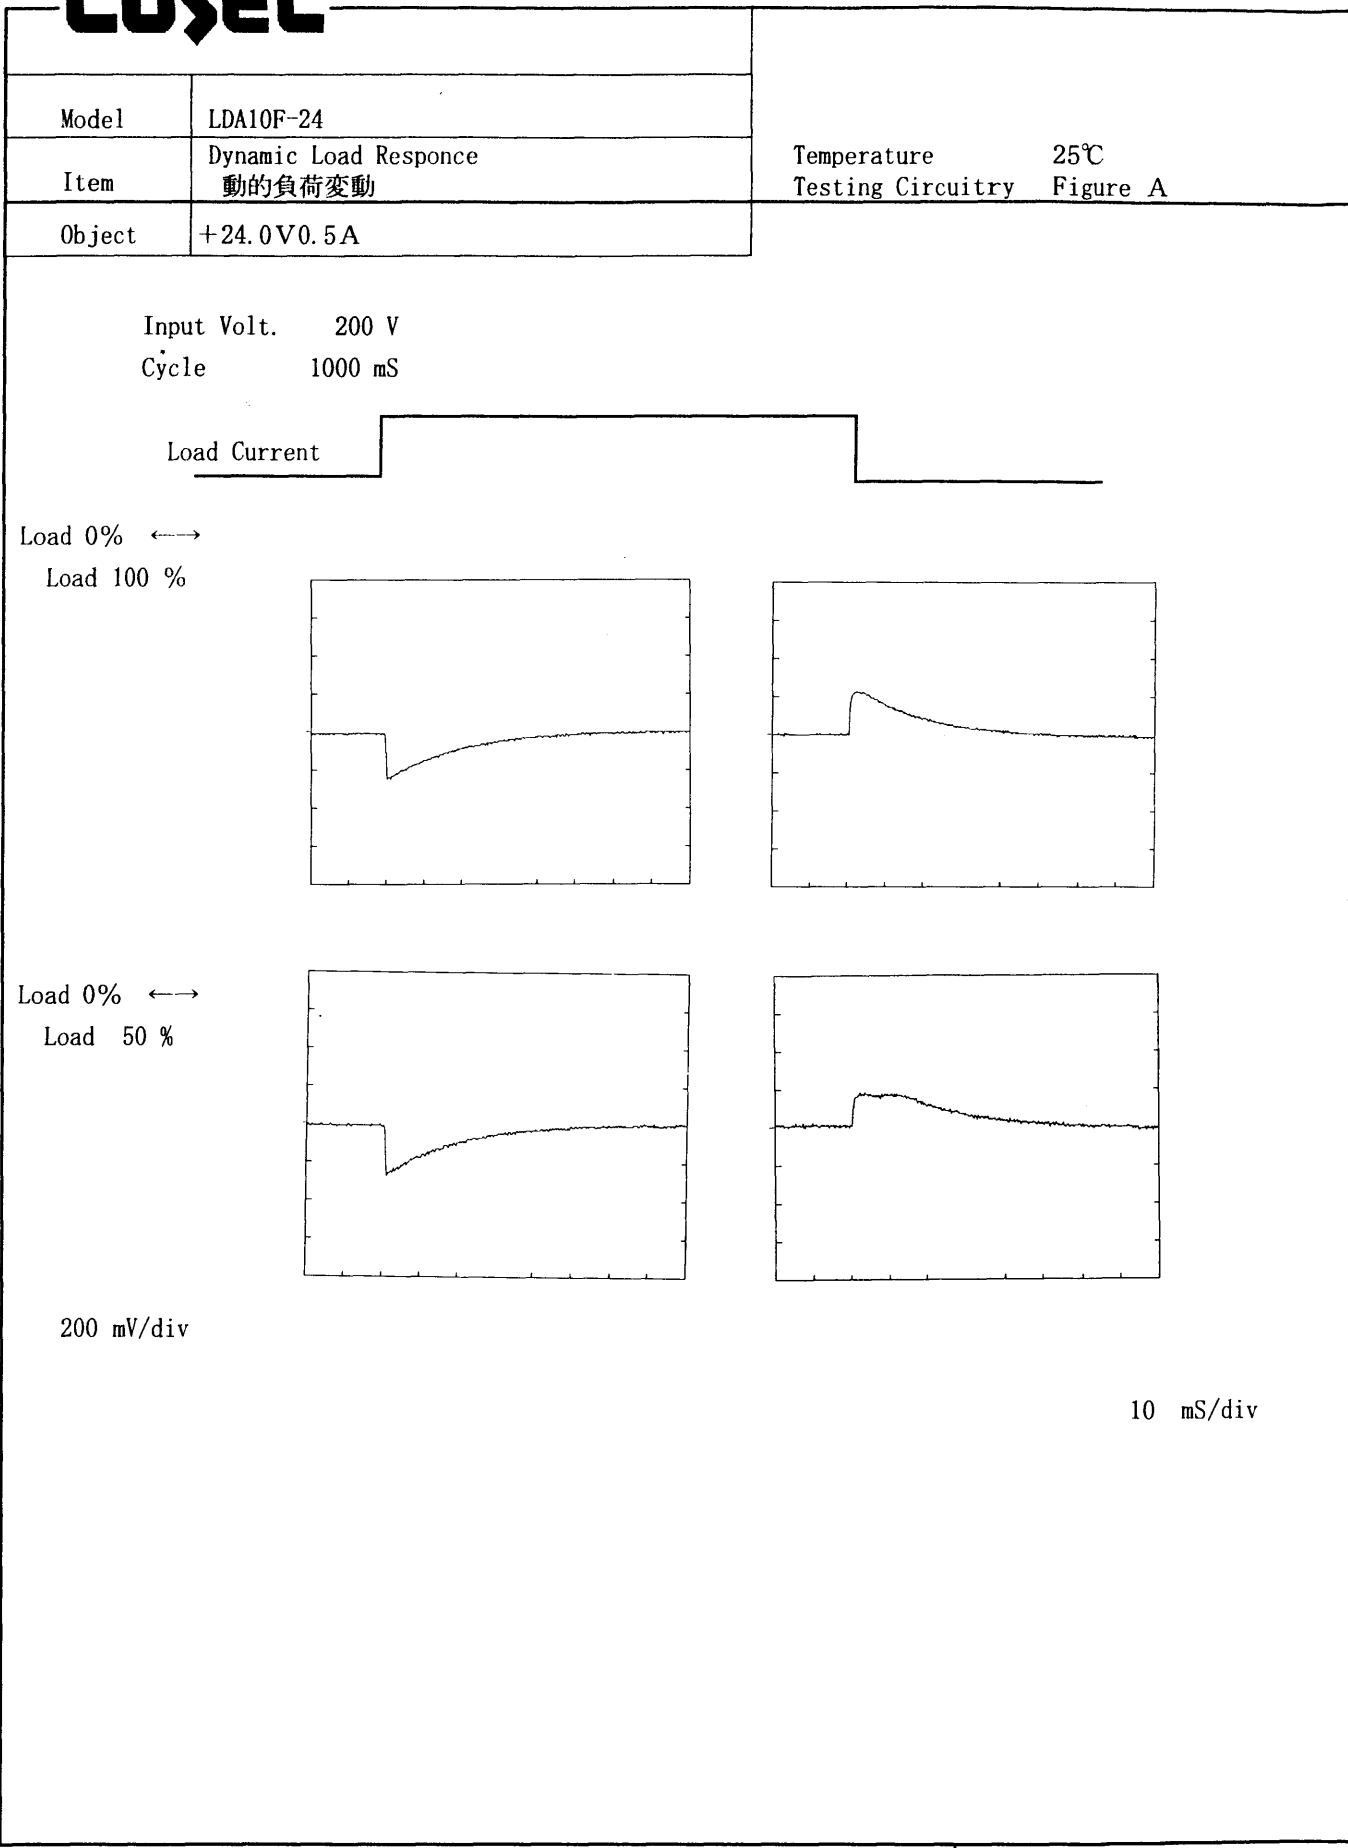COSEL

COSEL


| | | | |
|--------|------------------------------|--|------|
| Model | LDA10F-24 | Temperature Testing Circuitry Figure A | 25°C |
| Item | Rise and Fall Time 立上り、立下り時間 | | |
| Object | +24.0V 0.5A | | |

1. Graph

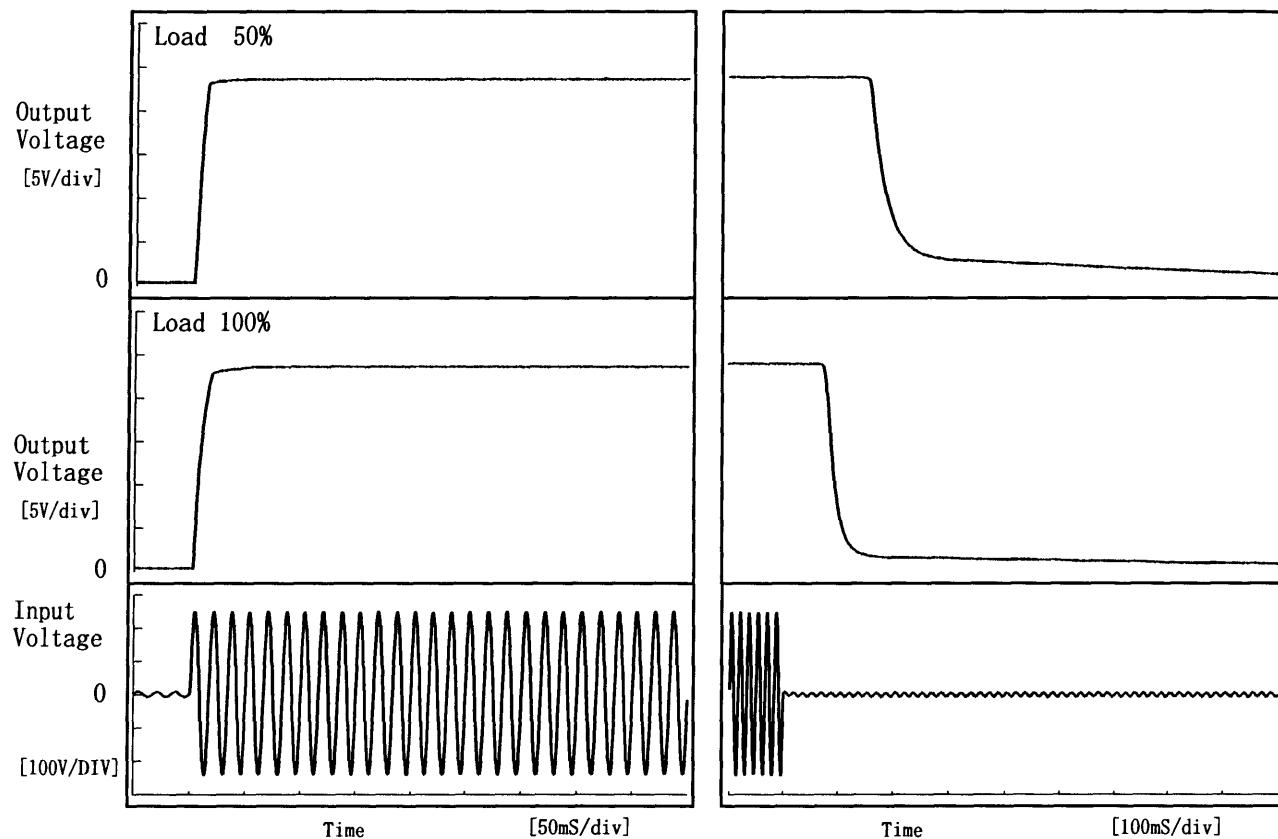

2. Values

| Load | Time | T d | T r | T s | T h | T f | [mS] |
|-------|------|-----|------|------|-------|-------|------|
| 50 % | | 2.8 | 10.3 | 13.0 | 161.5 | 300.0 | |
| 100 % | | 2.8 | 14.3 | 17.0 | 80.5 | 52.5 | |

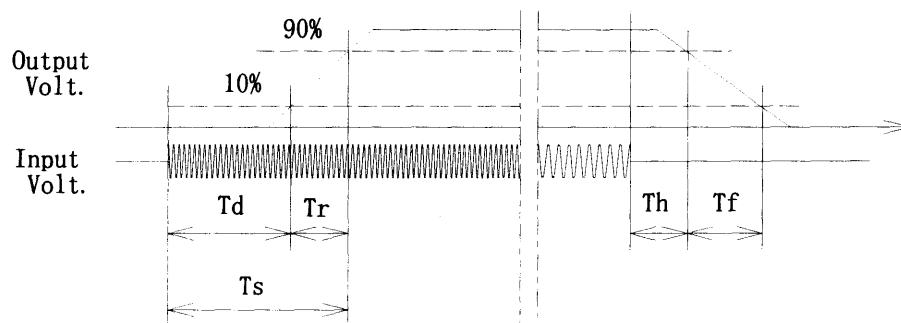

COSEL

Model LDA10F-24


Item Ambient Temperature Drift
周囲温度変動

Object +24.0V 0.5A

1. Graph

—△— Input Volt. 170V
 - - -□- Input Volt. 200V
 - - -○- Input Volt. 264V

[V]

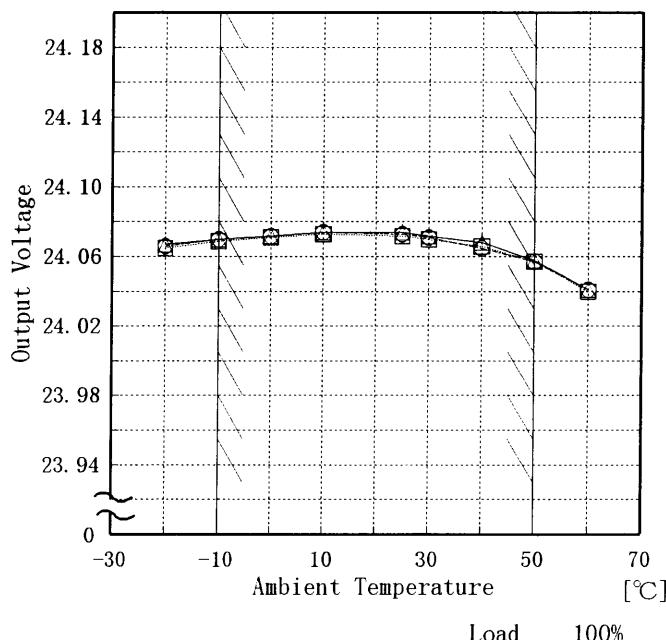

Load 100%

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

Testing Circuitry Figure A

2. Values

| Temperature [°C] | Output Voltage [V] | | |
|---------------------|-----------------------|-----------------------|-----------------------|
| | Input Volt. 170[V] | Input Volt. 200[V] | Input Volt. 264[V] |
| -20 | 24.067 | 24.065 | 24.066 |
| -10 | 24.070 | 24.069 | 24.070 |
| 0 | 24.072 | 24.071 | 24.072 |
| 10 | 24.074 | 24.073 | 24.074 |
| 25 | 24.074 | 24.072 | 24.073 |
| 30 | 24.072 | 24.070 | 24.071 |
| 40 | 24.068 | 24.066 | 24.065 |
| 50 | 24.058 | 24.057 | 24.057 |
| 60 | 24.041 | 24.040 | 24.041 |
| — | — | — | — |
| — | — | — | — |

| Model | LDA10F-24 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------------------|--|-----------|----------------------------|--|--------------------------|-------------------|--|----------|-----------|-----|----|----|-----|----|----|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|
| Item | Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧 | | Testing Circuitry Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | +24.0V 0.5A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1. Graph | <p>[V]</p> <p>Load 50% Load 100%</p> <p>Ambient Temperature [°C]</p> | | | 2. Values | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Input Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>-20</td><td>41</td><td>63</td></tr> <tr><td>-10</td><td>41</td><td>63</td></tr> <tr><td>0</td><td>40</td><td>64</td></tr> <tr><td>10</td><td>40</td><td>65</td></tr> <tr><td>20</td><td>41</td><td>65</td></tr> <tr><td>25</td><td>41</td><td>66</td></tr> <tr><td>30</td><td>41</td><td>66</td></tr> <tr><td>40</td><td>41</td><td>68</td></tr> <tr><td>50</td><td>41</td><td>68</td></tr> <tr><td>60</td><td>42</td><td>70</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table> | Ambient Temperature [°C] | Input Voltage [V] | | Load 50% | Load 100% | -20 | 41 | 63 | -10 | 41 | 63 | 0 | 40 | 64 | 10 | 40 | 65 | 20 | 41 | 65 | 25 | 41 | 66 | 30 | 41 | 66 | 40 | 41 | 68 | 50 | 41 | 68 | 60 | 42 | 70 | — | — | — |
| Ambient Temperature [°C] | Input Voltage [V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Load 50% | Load 100% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -20 | 41 | 63 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -10 | 41 | 63 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 40 | 64 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | 40 | 65 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 20 | 41 | 65 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25 | 41 | 66 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30 | 41 | 66 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 40 | 41 | 68 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50 | 41 | 68 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 60 | 42 | 70 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注) 斜線は定格周囲温度範囲を示す。</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

COSEL

| Model | LDA10F-24 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|--|--|--------------------|-----------------------------------|------------------------------------|-----|----|----|-----|----|----|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|
| Item | Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性) | Testing Circuitry | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | +24.0V 0.5A | Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1. Graph | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 2. Values | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Legend:</p> <ul style="list-style-type: none"> Load 50% (Squares) Load 100% (Triangles) | | <table border="1"> <thead> <tr> <th>Ambient Temp. [°C]</th> <th>Load 50% Ripple Output Volt. [mV]</th> <th>Load 100% Ripple Output Volt. [mV]</th> </tr> </thead> <tbody> <tr><td>-20</td><td>25</td><td>50</td></tr> <tr><td>-10</td><td>15</td><td>20</td></tr> <tr><td>0</td><td>15</td><td>20</td></tr> <tr><td>10</td><td>15</td><td>20</td></tr> <tr><td>20</td><td>10</td><td>15</td></tr> <tr><td>25</td><td>10</td><td>15</td></tr> <tr><td>30</td><td>10</td><td>10</td></tr> <tr><td>40</td><td>10</td><td>10</td></tr> <tr><td>50</td><td>10</td><td>10</td></tr> <tr><td>60</td><td>10</td><td>10</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table> | | Ambient Temp. [°C] | Load 50% Ripple Output Volt. [mV] | Load 100% Ripple Output Volt. [mV] | -20 | 25 | 50 | -10 | 15 | 20 | 0 | 15 | 20 | 10 | 15 | 20 | 20 | 10 | 15 | 25 | 10 | 15 | 30 | 10 | 10 | 40 | 10 | 10 | 50 | 10 | 10 | 60 | 10 | 10 | — | — | — |
| Ambient Temp. [°C] | Load 50% Ripple Output Volt. [mV] | Load 100% Ripple Output Volt. [mV] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -20 | 25 | 50 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -10 | 15 | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 15 | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | 15 | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 20 | 10 | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25 | 10 | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30 | 10 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 40 | 10 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50 | 10 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 60 | 10 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注) 斜線は定格周囲温度範囲を示す。</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

COSEL

| Model | LDA10F-24 | Temperature Testing Circuitry | 25°C Figure A | | | | | | | | | | | | | | | | | | | | | | |
|---|-------------------------|----------------------------------|--|----------------------|--------------------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|
| Item | Time Lapse Drift 経時ドリフト | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | +24.0V 0.5A | | | | | | | | | | | | | | | | | | | | | | | | |
| 1. Graph | | | 2. Values | | | | | | | | | | | | | | | | | | | | | | |
| <p>[V]</p> <p>Output Voltage [V]</p> <p>Input Volt. 200V</p> <p>Load 100%</p> | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | <table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>24.075</td></tr> <tr><td>0.5</td><td>24.064</td></tr> <tr><td>1.0</td><td>24.067</td></tr> <tr><td>2.0</td><td>24.067</td></tr> <tr><td>3.0</td><td>24.065</td></tr> <tr><td>4.0</td><td>24.067</td></tr> <tr><td>5.0</td><td>24.067</td></tr> <tr><td>6.0</td><td>24.067</td></tr> <tr><td>7.0</td><td>24.067</td></tr> <tr><td>8.0</td><td>24.066</td></tr> </tbody> </table> | Time since start [H] | Output Voltage [V] | 0.0 | 24.075 | 0.5 | 24.064 | 1.0 | 24.067 | 2.0 | 24.067 | 3.0 | 24.065 | 4.0 | 24.067 | 5.0 | 24.067 | 6.0 | 24.067 | 7.0 | 24.067 | 8.0 | 24.066 |
| Time since start [H] | Output Voltage [V] | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.0 | 24.075 | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.5 | 24.064 | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.0 | 24.067 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.0 | 24.067 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.0 | 24.065 | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.0 | 24.067 | | | | | | | | | | | | | | | | | | | | | | | | |
| 5.0 | 24.067 | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.0 | 24.067 | | | | | | | | | | | | | | | | | | | | | | | | |
| 7.0 | 24.067 | | | | | | | | | | | | | | | | | | | | | | | | |
| 8.0 | 24.066 | | | | | | | | | | | | | | | | | | | | | | | | |



| | | |
|--------|-------------------------------|----------------------------|
| Model | LDA10F-24 | Testing Circuitry Figure A |
| Item | Output Voltage Accuracy 定電圧精度 | |
| Object | +24.0V 0.5A | |

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature -10~50 °C

Input Voltage : 170~264 V

Load Current : 0~0.5 A

* Output Voltage Accuracy = ±(Maximum of Output Voltage - Minimum of Output Voltage) / 2

$$* \text{ Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -10~50 °C

入力電圧 170~264 V

負荷電流 0~0.5 A

* 定電圧精度(変動値) = ±(出力電圧の最高値-出力電圧の最低値) / 2

$$* \text{ 定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

| Item | Temperature [°C] | Input Voltage [V] | Output Current [A] | Output Voltage [V] | Output Voltage Accuracy [mV] | Output Voltage Accuracy(Ration) [%] |
|-----------------|------------------|-------------------|--------------------|--------------------|------------------------------|-------------------------------------|
| Maximum Voltage | 25 | 200 | 0.0 | 24.084 | | |
| Minimum Voltage | 50 | 200 | 0.5 | 24.045 | ±20 | ±0.1 |



| | | |
|--------|-------------------|----------------------------|
| Model | LDA10F-24 | |
| Item | Condensation 結露特性 | Testing Circuitry Figure A |
| Object | +24.0V 0.5A | |

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。

2. Values

| Item | Data | Testing Conditions |
|----------------------|-------|---|
| Output Voltage [V] | 24.08 | Input Volt.: 200V, Load Current: 0.5A |
| Line Regulation [mV] | 3 | Input Volt.: 170~264V, Load Current: 0.5A |
| Load Regulation [mV] | 12 | Input Volt.: 200V, Load Current: 0~0.5A |



| | | | |
|--------|----------------------|----------------------------------|------------------|
| Model | LDA10F-24 | Temperature Testing Circuitry | 25°C Figure B |
| Item | Leakage Current 漏洩電流 | | |
| Object | — | | |

1. Results

| Standards | Leakage Current [mA] | | |
|--------------|-----------------------|------------------------|------------------------|
| | Input Volt. 85 [V] | Input Volt. 100 [V] | Input Volt. 132 [V] |
| (A) DENTORI | --- | — | — |
| (B) IEC60950 | --- | — | — |

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力の両相について測定し、その大きい方を漏洩電流測定値とする。

| Standards | Leakage Current [mA] | | |
|--------------|------------------------|------------------------|------------------------|
| | Input Volt. 170 [V] | Input Volt. 230 [V] | Input Volt. 264 [V] |
| (B) IEC60950 | 0.23 | 0.25 | 0.28 |



| | | | |
|--------|--------------------------------|--|------|
| Model | LDA10F-24 | Temperature Testing Circuitry Figure C | 25°C |
| Item | Line Noise Tolerance 入力雑音耐量 | | |
| Object | +24.0V 0.5A | | |

1. Results

| Pulse Width [nS] | MODE | No protection failure should occur 保護回路の誤動作がない | DC-like Regulation of Output Voltage 出力電圧の直流的変動 |
|-----------------------|--------|---|--|
| 50 | COMMON | OK | no fluctuation |
| | NORMAL | OK | no fluctuation |
| 1000 | COMMON | OK | no fluctuation |
| | NORMAL | OK | no fluctuation |

2. Conditions

Input Voltage : 200 V
 Pulse Voltage : 2000 V
 Pulse Cycle : 10 mS
 Pulse Input Duration : 1 min. or more
 Load : 100 %

COSEL

| | | | |
|--------|------------------------------|----------------------------------|------------------|
| Model | LDA10F-24 | Temperature Testing Circuitry | 25°C Figure D |
| Item | Conducted Emission 雜音端子電圧 | | |
| Object | <hr/> | | |

1. Graph


Remarks

Input Volt. 230 V

Load 100 %

規格1: [EN 55022] Class B(平均値)

規格2: [EN 55022] Class B(QP)

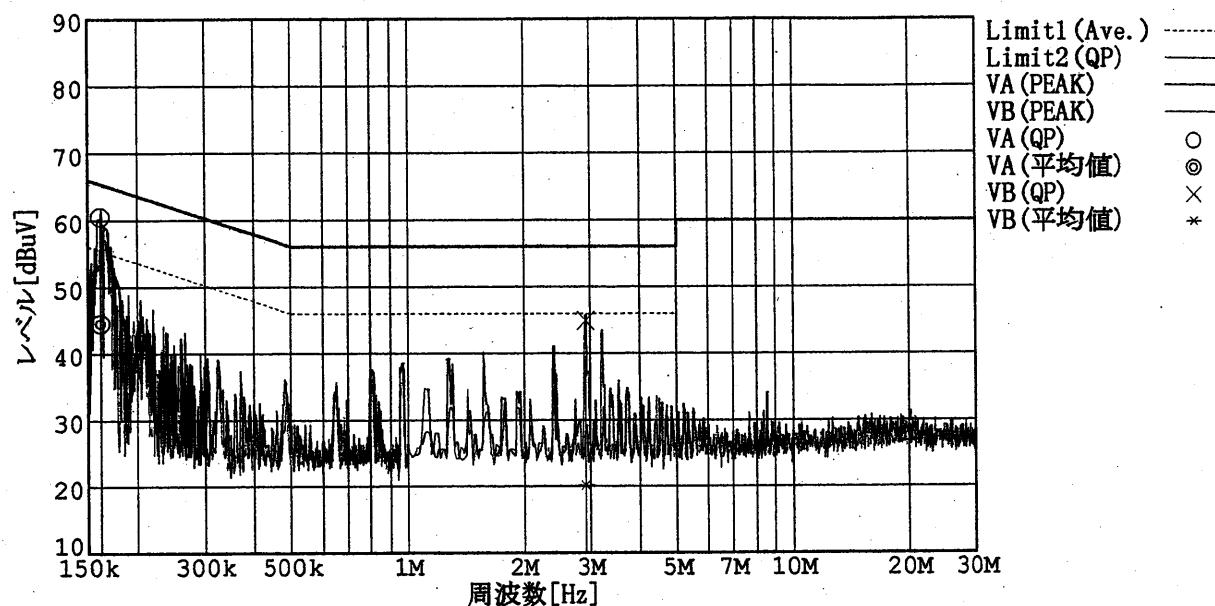

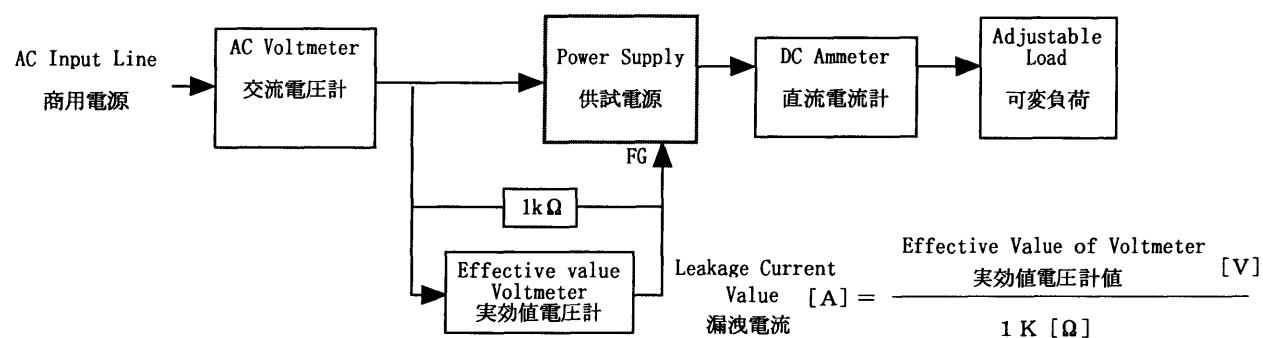
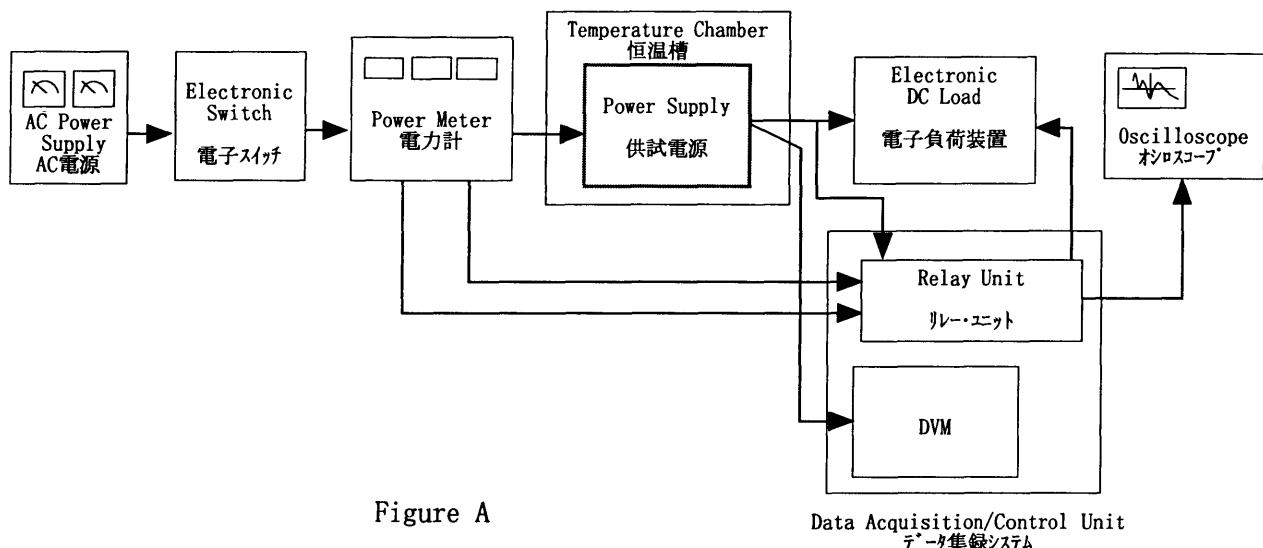


Figure B (DENTORI)

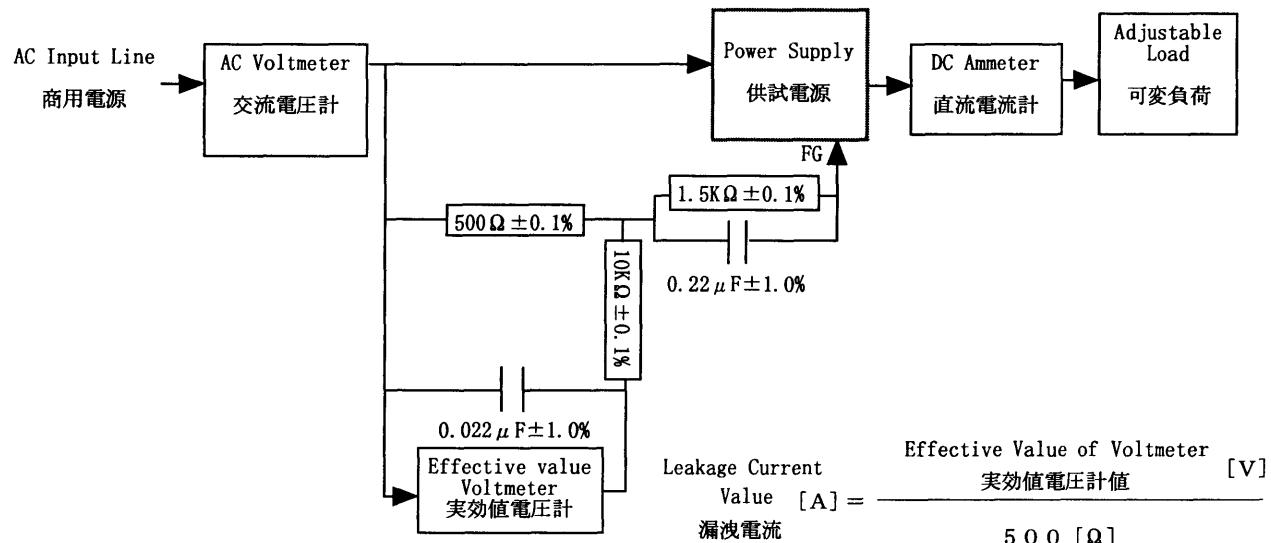


Figure B (IEC 60950)

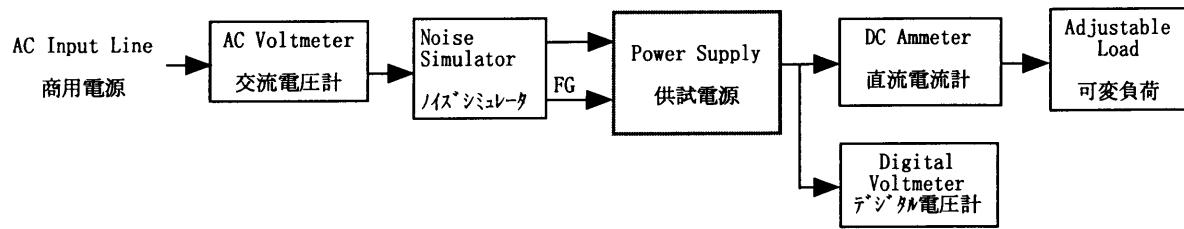


Figure C

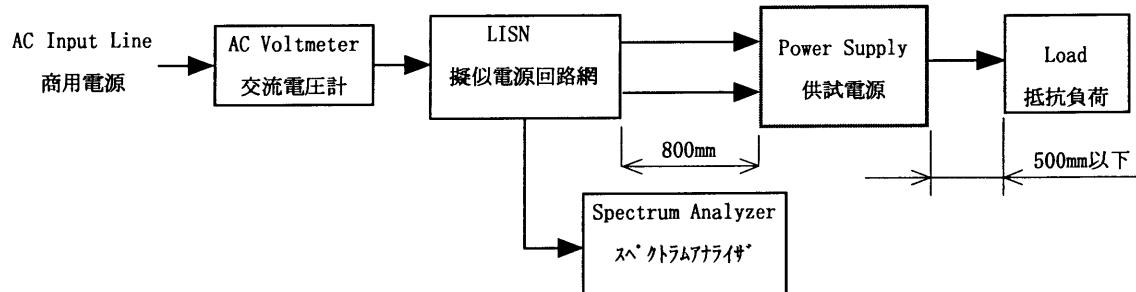


Figure D

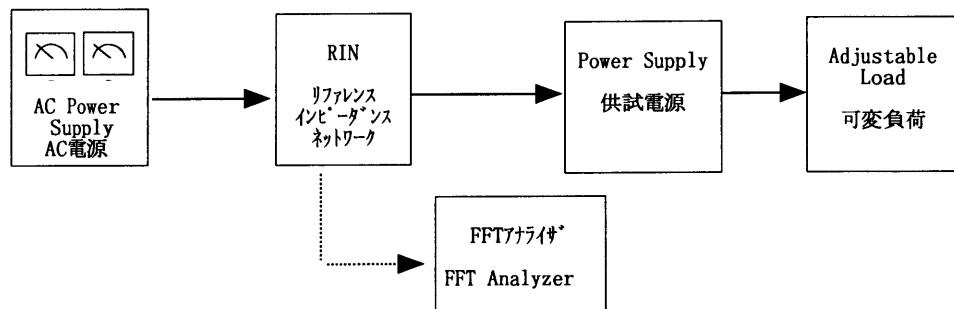


Figure E