



DATA SHEET		Date	10-Aug-11
Model	PLA600F-5	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Takami

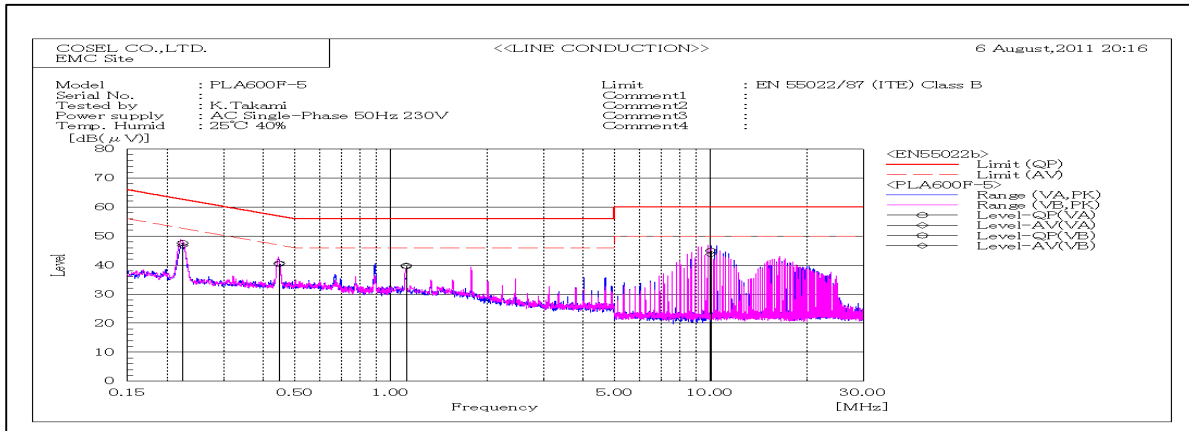


Frequency MHz	Line Phase	Reading dB(uV)		Factor dB	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.22334	VB	37.5	36.6	10.1	47.6	46.7	62.7	52.7	15.1	6	Pass	
0.44796	VA	30.4	30.4	10.1	40.5	40.5	56.9	46.9	16.4	6.4	Pass	
1.11751	VB	29.4	29.3	10.3	39.7	39.6	56	46	16.3	6.4	Pass	
10.03835	VB	34.1	32.9	10.8	44.9	43.7	60	50	15.1	6.3	Pass	

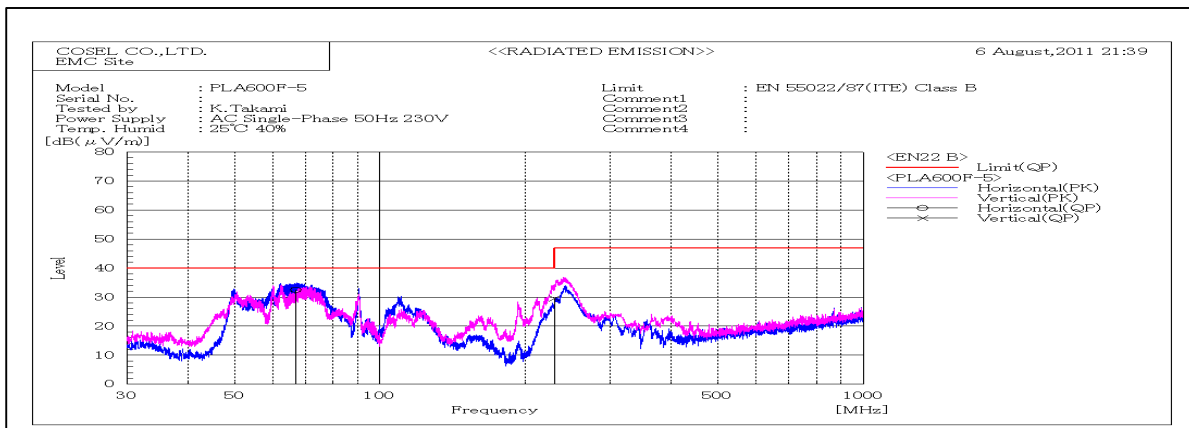

Frequency MHz	Polarization	Reading dB(uV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
		QP		QP						
66.968	H	54.6	-22.1	32.5	40	7.5	Pass	136	3	
229.748	V	45.3	-15.7	29.6	40	10.4	Pass	106	53	

DATA SHEET		Date	10-Aug-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Takami

1. Line conduction

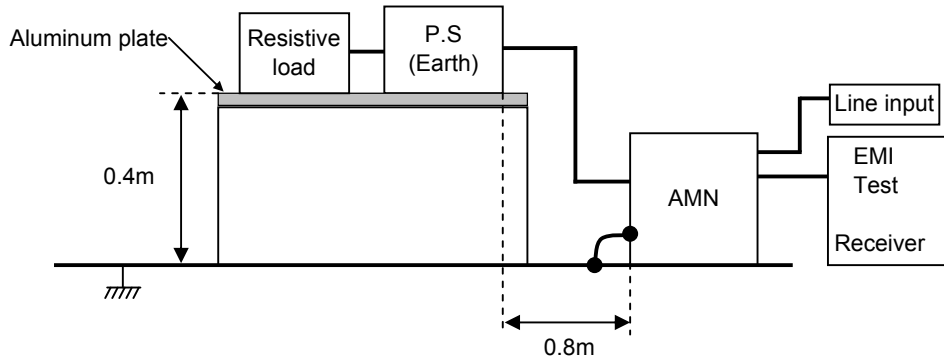

2. Radiated emission

