



# TEST DATA OF LDA50F-12

(200V INPUT)

Regulated DC Power Supply

Aug. 23, 1999

Approved by : H. Yamaguchi  
Design Manager

Prepared by : T. Ashihara  
Design Engineer

コーセル株式会社  
COSEL CO., LTD.

CONTENTS


1. Line Regulation . . . . .	1
静的入力変動	
2. Input Current (by Load Current) . . . . .	2
入力電流 (負荷特性)	
3. Input Power (by Load Current) . . . . .	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage) . . . . .	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current) . . . . .	5
効率 (負荷特性)	
6. Hold-Up Time . . . . .	6
出力保持時間	
7. Instantaneous Interruption Compensation . . . . .	7
瞬時停電保障	
8. Load Regulation . . . . .	8
静的負荷変動	
9. Ripple Voltage (by Load Current) . . . . .	9
リップル電圧 (負荷特性)	
10. Ripple-Noise . . . . .	10
リップルノイズ	
11. Overcurrent Protection . . . . .	11
過電流保護	
12. Overvoltage Protection . . . . .	12
過電圧保護	
13. Inrush Current . . . . .	13
突入電流	
14. Dynamic Load Responce . . . . .	14
動的負荷変動	
15. Rise and Fall Time . . . . .	15
立上り、立下り時間	
16. Ambient Temperature Drift . . . . .	16
周囲温度変動	
17. Minimum Input Voltage for Regulated Output Voltage . . . . .	17
最低レギュレーション電圧	
18. Ripple Voltage (by Ambient Temperature) . . . . .	18
リップル電圧 (周囲温度特性)	
19. Time Lapse Drift . . . . .	19
経時ドリフト	
20. Output Voltage Accuracy . . . . .	20
定電圧精度	
21. Condensation . . . . .	21
結露特性	
22. Leakage Current . . . . .	22
漏洩電流	
23. Line Noise Tolerance . . . . .	23
入力雑音耐量	
24. Conducted Emission . . . . .	24
雑音端子電圧	
25. Figure of Testing Circuitry . . . . .	25
測定回路図	

(Final Page 26 )

# COSEL

Model		LDA50F-12		Temperature Testing Circuitry	25℃ Figure A																																
Item		Line Regulation  静的入力変動																																			
Object		+12.0V4.3A																																			
1. Graph				2. Values																																	
<div><div><div>□</div><div>Load 50%</div></div><div><div>△</div><div>Load 100%</div></div></div> <div><div><div>Output Voltage [V]</div><div><div><div>12.220</div><div>12.200</div><div>12.180</div><div>12.160</div><div>12.140</div><div>12.120</div><div>12.100</div><div>0</div></div><div><div>0</div><div>160</div><div>180</div><div>200</div><div>220</div><div>240</div><div>260</div><div>280</div><div>300</div></div></div><div><div>Input Voltage [V]</div></div></div></div>				<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Output Voltage [V]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>150</td><td>12.148</td><td>12.143</td></tr><tr><td>160</td><td>12.148</td><td>12.143</td></tr><tr><td>170</td><td>12.148</td><td>12.143</td></tr><tr><td>180</td><td>12.148</td><td>12.143</td></tr><tr><td>200</td><td>12.147</td><td>12.143</td></tr><tr><td>220</td><td>12.148</td><td>12.143</td></tr><tr><td>240</td><td>12.147</td><td>12.143</td></tr><tr><td>264</td><td>12.148</td><td>12.143</td></tr><tr><td>280</td><td>12.147</td><td>12.143</td></tr></table>		Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	150	12.148	12.143	160	12.148	12.143	170	12.148	12.143	180	12.148	12.143	200	12.147	12.143	220	12.148	12.143	240	12.147	12.143	264	12.148	12.143	280	12.147	12.143
Input Voltage [V]	Output Voltage [V]																																				
	Load 50%	Load 100%																																			
150	12.148	12.143																																			
160	12.148	12.143																																			
170	12.148	12.143																																			
180	12.148	12.143																																			
200	12.147	12.143																																			
220	12.148	12.143																																			
240	12.147	12.143																																			
264	12.148	12.143																																			
280	12.147	12.143																																			
<div>Note: Slanted line shows the range of the rated input voltage.</div> <div>(注)斜線は定格入力電圧範囲を示す。</div>																																					

# COSEL

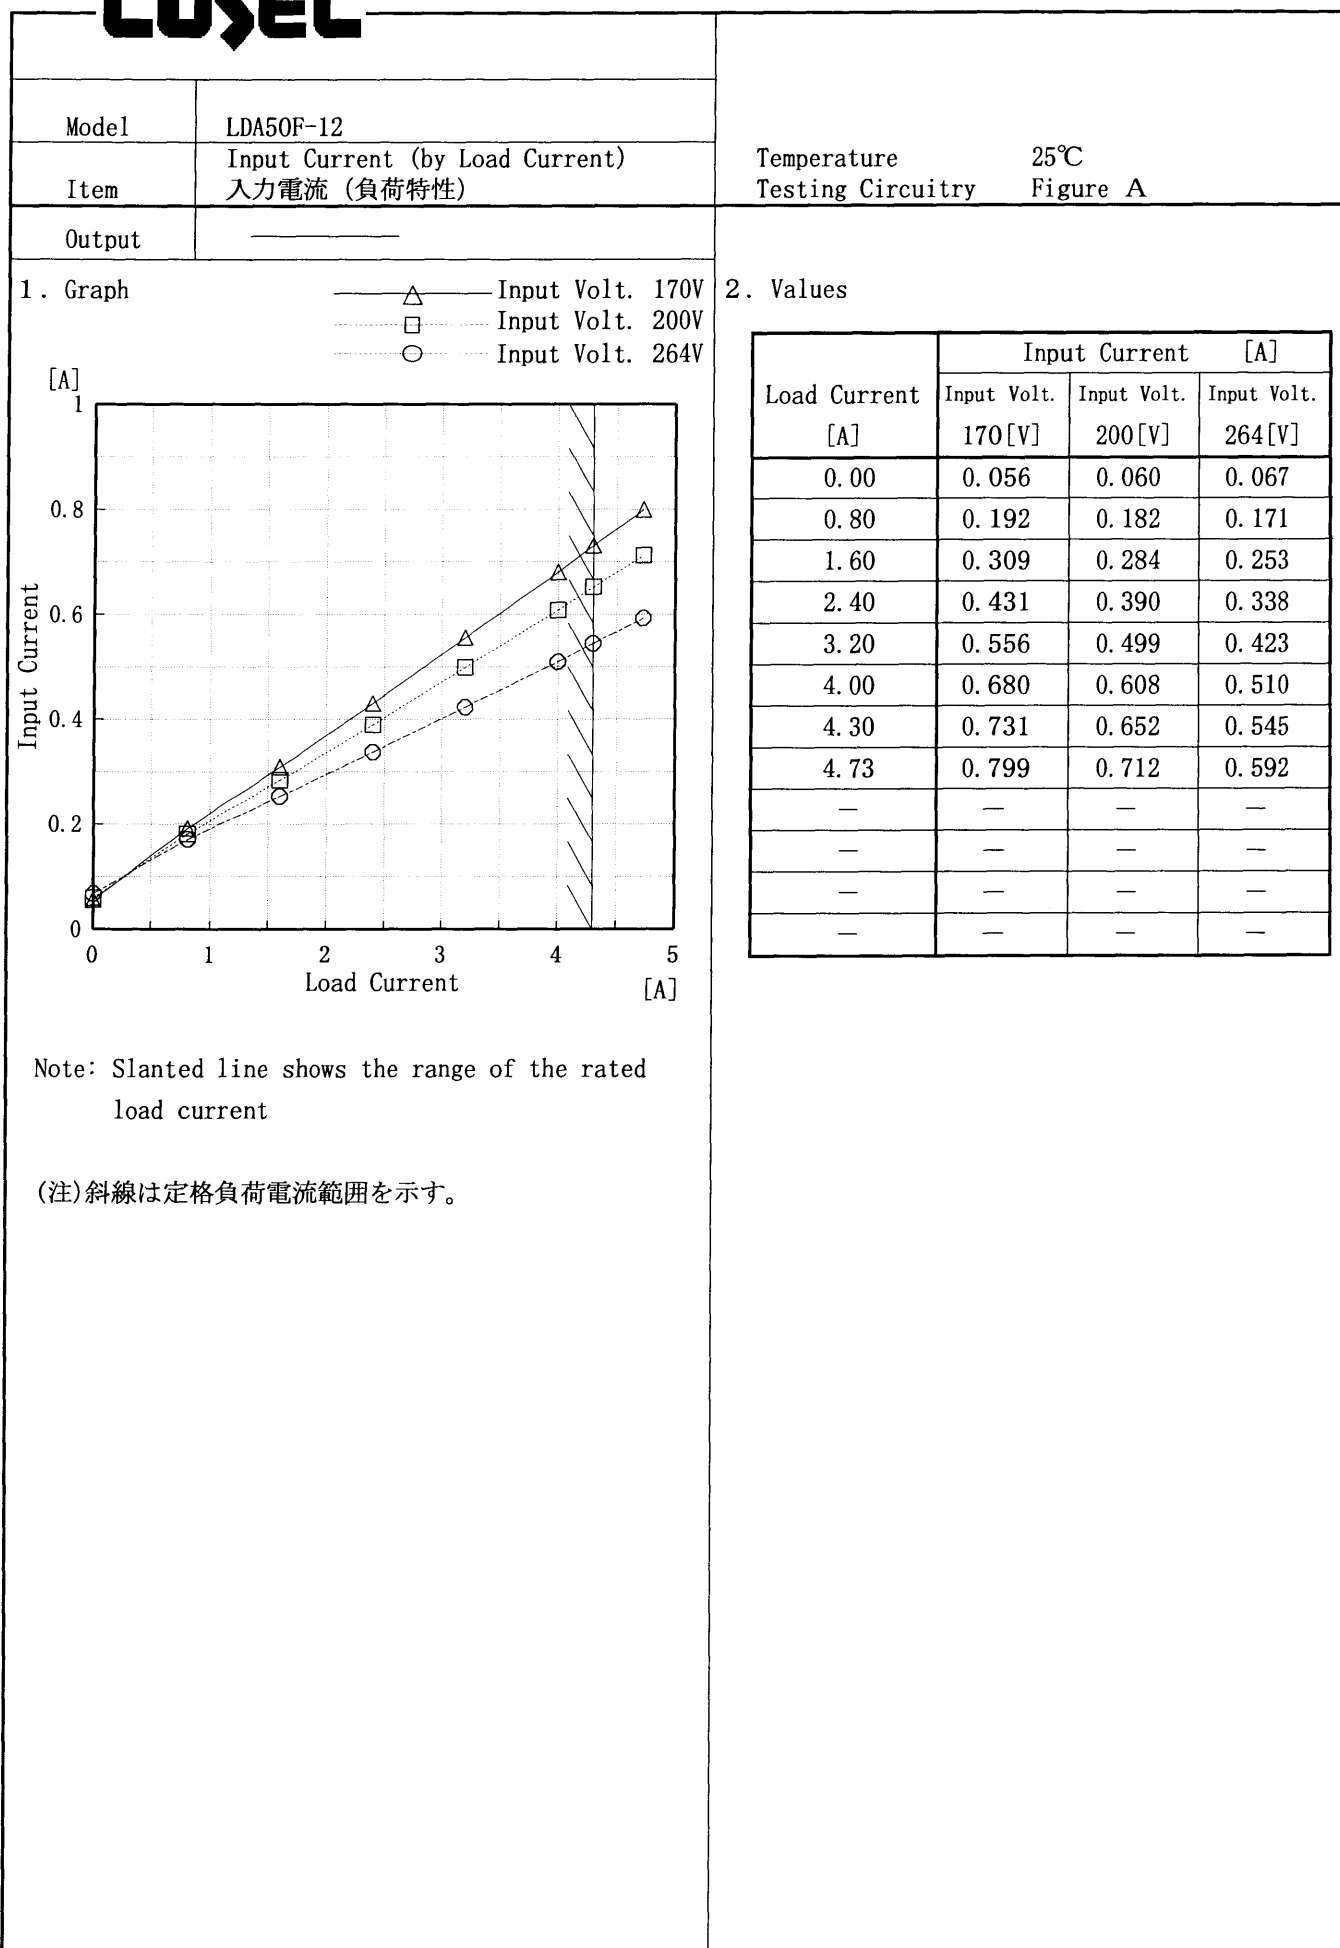

**COSEL**

Model	LDA50F-12	Temperature	25°C
Item	Input Power (by Load Current) 入力電力 (負荷特性)	Testing Circuitry	Figure A
Output	_____		

1. Graph

△

Input Volt. 170V

□

Input Volt. 200V

○

Input Volt. 264V

[W]

100

80

60

40

20

0

Input Power

0

1

2

3

4

5

Load Current

[A]

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。

2. Values

Load Current [A]	Input Power [W]		
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
0.00	3.30	4.10	5.90
0.80	15.60	16.60	19.50
1.60	26.70	27.80	30.50
2.40	38.00	39.00	41.80
3.20	49.50	50.30	53.10
4.00	60.90	61.60	64.20
4.30	65.30	66.20	68.60
4.73	71.70	72.30	74.80
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

# COSEL

Model

LDA50F-12

Item

Efficiency (by Input Voltage)  
効率 (入力電圧特性)

Object


Temperature

25℃

Testing Circuitry

Figure A

## 1. Graph

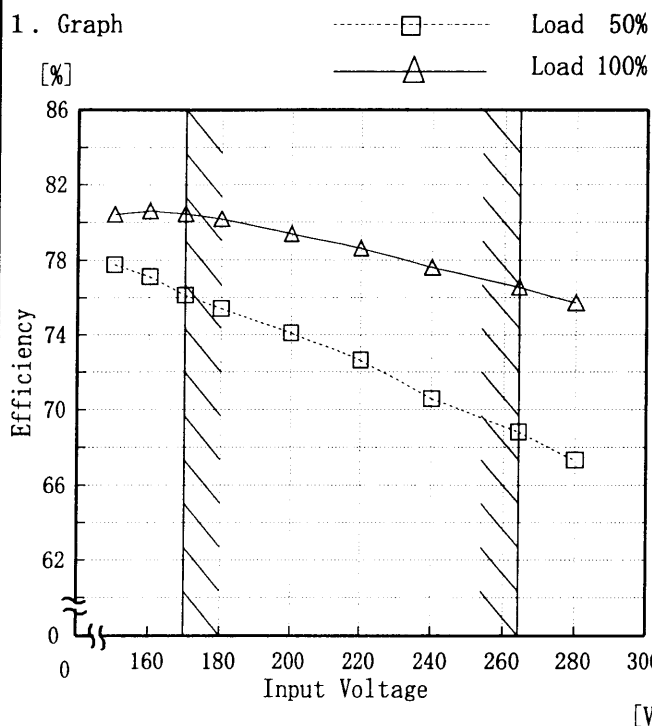

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

## 2. Values

Input Voltage [V]	Efficiency [%]	
	Load 50%	Load 100%
150	77.7	80.4
160	77.1	80.6
170	76.1	80.5
180	75.4	80.2
200	74.1	79.4
220	72.7	78.6
240	70.6	77.6
264	68.8	76.6
280	67.3	75.7

**COSEL**

Model	LDA50F-12	Temperature	25°C
Item	Efficiency (by Load Current) 効率 (負荷特性)	Testing Circuitry	Figure A
Output	—		

1. Graph

△

—

Input Volt. 170V

□

—

Input Volt. 200V

○

—

Input Volt. 264V

Efficiency [%]

90

80

70

60

50

40

0

0

1

2

3

4

5

Load Current [A]

0

1

2

3

4

5

Note: Slanted line shows the range of the rated load current

(注) 斜線は定格負荷電流範囲を示す。

2. Values

Load Current [A]	Efficiency [%]		
	Input Volt. 170 [V]	Input Volt. 200 [V]	Input Volt. 264 [V]
0.80	63.1	59.2	50.7
1.60	73.1	70.5	64.2
2.40	77.3	75.2	70.3
3.20	79.1	77.9	73.6
4.00	80.1	79.3	76.1
4.30	80.4	79.3	76.6
4.73	80.7	80.0	77.2
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

# COSEL


Model LDA50F-12		Temperature 25°C Testing Circuitry Figure A																																
Item	Hold-Up Time 出力保持時間																																	
Object	+12.0V 4.3A																																	
<p>1. Graph</p> <p> <span style="display: inline-block; width: 20px; border-bottom: 1px dotted black; margin-right: 5px;"></span> Load 50%  <span style="display: inline-block; width: 20px; border-bottom: 1px solid black; margin-right: 5px;"></span> Load 100%         </p> <p>Hold-Up Time [mS]</p> <p>Input Voltage [V]</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th><th colspan="2">Hold-Up Time [mS]</th></tr> <tr> <th>Load 50%</th><th>Load 100%</th></tr> </thead> <tbody> <tr><td>150</td><td>124</td><td>64</td></tr> <tr><td>160</td><td>143</td><td>75</td></tr> <tr><td>170</td><td>164</td><td>86</td></tr> <tr><td>180</td><td>186</td><td>98</td></tr> <tr><td>200</td><td>233</td><td>124</td></tr> <tr><td>220</td><td>284</td><td>152</td></tr> <tr><td>240</td><td>340</td><td>184</td></tr> <tr><td>264</td><td>413</td><td>225</td></tr> <tr><td>280</td><td>465</td><td>254</td></tr> </tbody> </table>	Input Voltage [V]	Hold-Up Time [mS]		Load 50%	Load 100%	150	124	64	160	143	75	170	164	86	180	186	98	200	233	124	220	284	152	240	340	184	264	413	225	280	465	254
Input Voltage [V]	Hold-Up Time [mS]																																	
	Load 50%	Load 100%																																
150	124	64																																
160	143	75																																
170	164	86																																
180	186	98																																
200	233	124																																
220	284	152																																
240	340	184																																
264	413	225																																
280	465	254																																
<p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</p> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。</p> <p>(注) 斜線は定格入力電圧範囲を示す。</p>																																		



# COSEL

Model		LDA50F-12		Temperature		25℃																																																				
Item		Instantaneous Interruption Compensation 瞬時停電保障		Testing Circuitry		Figure A																																																				
Object		+12.0V 4.3A																																																								
1. Graph				2. Values																																																						
<div><div><div>△</div><div>□</div><div>○</div></div><div><div>Input Volt. 170 V</div><div>Input Volt. 200 V</div><div>Input Volt. 264 V</div></div></div> <div><div><div>Instantaneous Compensation Time [mS]</div><div>1000</div><div>100</div><div>10</div><div>1</div></div><div><div>0</div><div>1</div><div>2</div><div>3</div><div>4</div><div>5</div></div><div><div>Load Current [A]</div></div></div> <div><div>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</div><div>Note: Slanted line shows the range of the rated load current.</div></div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Time [mS]</th></tr><tr><th>Input Volt. 170 [V]</th><th>Input Volt. 200 [V]</th><th>Input Volt. 264 [V]</th></tr><tr><td>0.00</td><td>—</td><td>—</td><td>—</td></tr><tr><td>0.80</td><td>416</td><td>580</td><td>982</td></tr><tr><td>1.60</td><td>232</td><td>329</td><td>577</td></tr><tr><td>2.40</td><td>157</td><td>227</td><td>405</td></tr><tr><td>3.20</td><td>119</td><td>171</td><td>307</td></tr><tr><td>4.00</td><td>96</td><td>138</td><td>249</td></tr><tr><td>4.30</td><td>88</td><td>128</td><td>232</td></tr><tr><td>4.73</td><td>79</td><td>115</td><td>212</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Time [mS]			Input Volt. 170 [V]	Input Volt. 200 [V]	Input Volt. 264 [V]	0.00	—	—	—	0.80	416	580	982	1.60	232	329	577	2.40	157	227	405	3.20	119	171	307	4.00	96	138	249	4.30	88	128	232	4.73	79	115	212	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Time [mS]																																																									
	Input Volt. 170 [V]	Input Volt. 200 [V]	Input Volt. 264 [V]																																																							
0.00	—	—	—																																																							
0.80	416	580	982																																																							
1.60	232	329	577																																																							
2.40	157	227	405																																																							
3.20	119	171	307																																																							
4.00	96	138	249																																																							
4.30	88	128	232																																																							
4.73	79	115	212																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							

**COSEL**

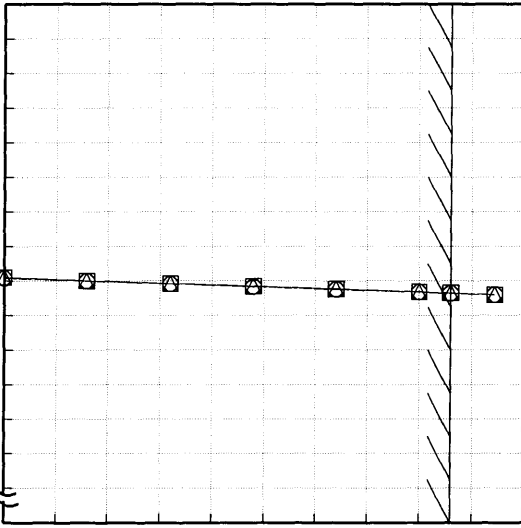Model		LDA50F-12		Temperature		25℃																																																
Item		Load Regulation 静的負荷変動		Testing Circuitry		Figure A																																																
Object		+12.0V4.3A																																																				
1. Graph				2. Values																																																		
<div><div><div>△</div><div>□</div><div>○</div></div><div>Input Volt. 170 V</div><div>Input Volt. 200 V</div><div>Input Volt. 264 V</div></div> <div><div><div>Output Voltage [V]</div><div><div><div>12.290</div><div>12.250</div><div>12.210</div><div>12.170</div><div>12.130</div><div>12.090</div><div>12.050</div><div>0</div></div><div><div>0</div><div>1</div><div>2</div><div>3</div><div>4</div><div>5</div></div><div><div>Load Current [A]</div></div></div></div><div><div>Note: Slanted line shows the range of the rated load current.</div><div>(注) 斜線は定格負荷電流範囲を示す。</div></div></div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 170 [V]</th><th>Input Volt. 200 [V]</th><th>Input Volt. 264 [V]</th></tr><tr><td>0.00</td><td>12.152</td><td>12.152</td><td>12.152</td></tr><tr><td>0.80</td><td>12.150</td><td>12.150</td><td>12.150</td></tr><tr><td>1.60</td><td>12.149</td><td>12.149</td><td>12.148</td></tr><tr><td>2.40</td><td>12.147</td><td>12.147</td><td>12.147</td></tr><tr><td>3.20</td><td>12.145</td><td>12.145</td><td>12.145</td></tr><tr><td>4.00</td><td>12.144</td><td>12.144</td><td>12.144</td></tr><tr><td>4.30</td><td>12.143</td><td>12.143</td><td>12.143</td></tr><tr><td>4.73</td><td>12.142</td><td>12.142</td><td>12.142</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Output Voltage [V]			Input Volt. 170 [V]	Input Volt. 200 [V]	Input Volt. 264 [V]	0.00	12.152	12.152	12.152	0.80	12.150	12.150	12.150	1.60	12.149	12.149	12.148	2.40	12.147	12.147	12.147	3.20	12.145	12.145	12.145	4.00	12.144	12.144	12.144	4.30	12.143	12.143	12.143	4.73	12.142	12.142	12.142	—	—	—	—	—	—	—	—
Load Current [A]	Output Voltage [V]																																																					
	Input Volt. 170 [V]	Input Volt. 200 [V]	Input Volt. 264 [V]																																																			
0.00	12.152	12.152	12.152																																																			
0.80	12.150	12.150	12.150																																																			
1.60	12.149	12.149	12.148																																																			
2.40	12.147	12.147	12.147																																																			
3.20	12.145	12.145	12.145																																																			
4.00	12.144	12.144	12.144																																																			
4.30	12.143	12.143	12.143																																																			
4.73	12.142	12.142	12.142																																																			
—	—	—	—																																																			
—	—	—	—																																																			

**COSEL**


Model		LDA50F-12	
Item		Ripple Voltage (by Load Current) リップル電圧 (負荷電流特性)	
Object		+12.0V 4.3A	
1. Graph		2. Values	

□

Input Volt. 170V

△

Input Volt. 264V

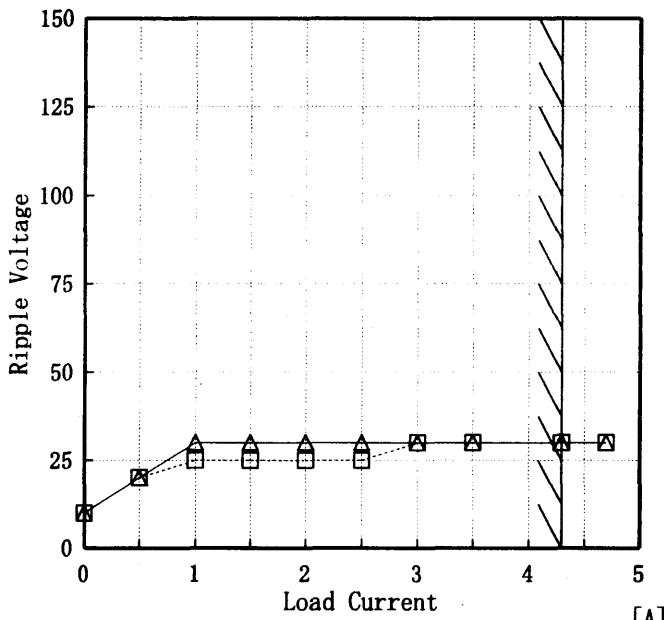

Ripple Voltage is shown as p-p in the figure below.


Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p - p 値で示される。

(注) 斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line  
入力商用周期

T2: Due to Switching  
スイッチング周期

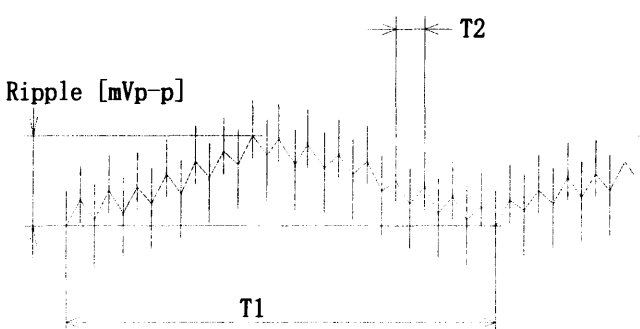


Load Current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.00	10	10
0.50	20	20
1.00	25	30
1.50	25	30
2.00	25	30
2.50	25	30
3.00	30	30
3.50	30	30
4.30	30	30
4.70	30	30
—	—	—

Fig. Complex Ripple Wave Form

図 リップル波形詳細図

# COSEL

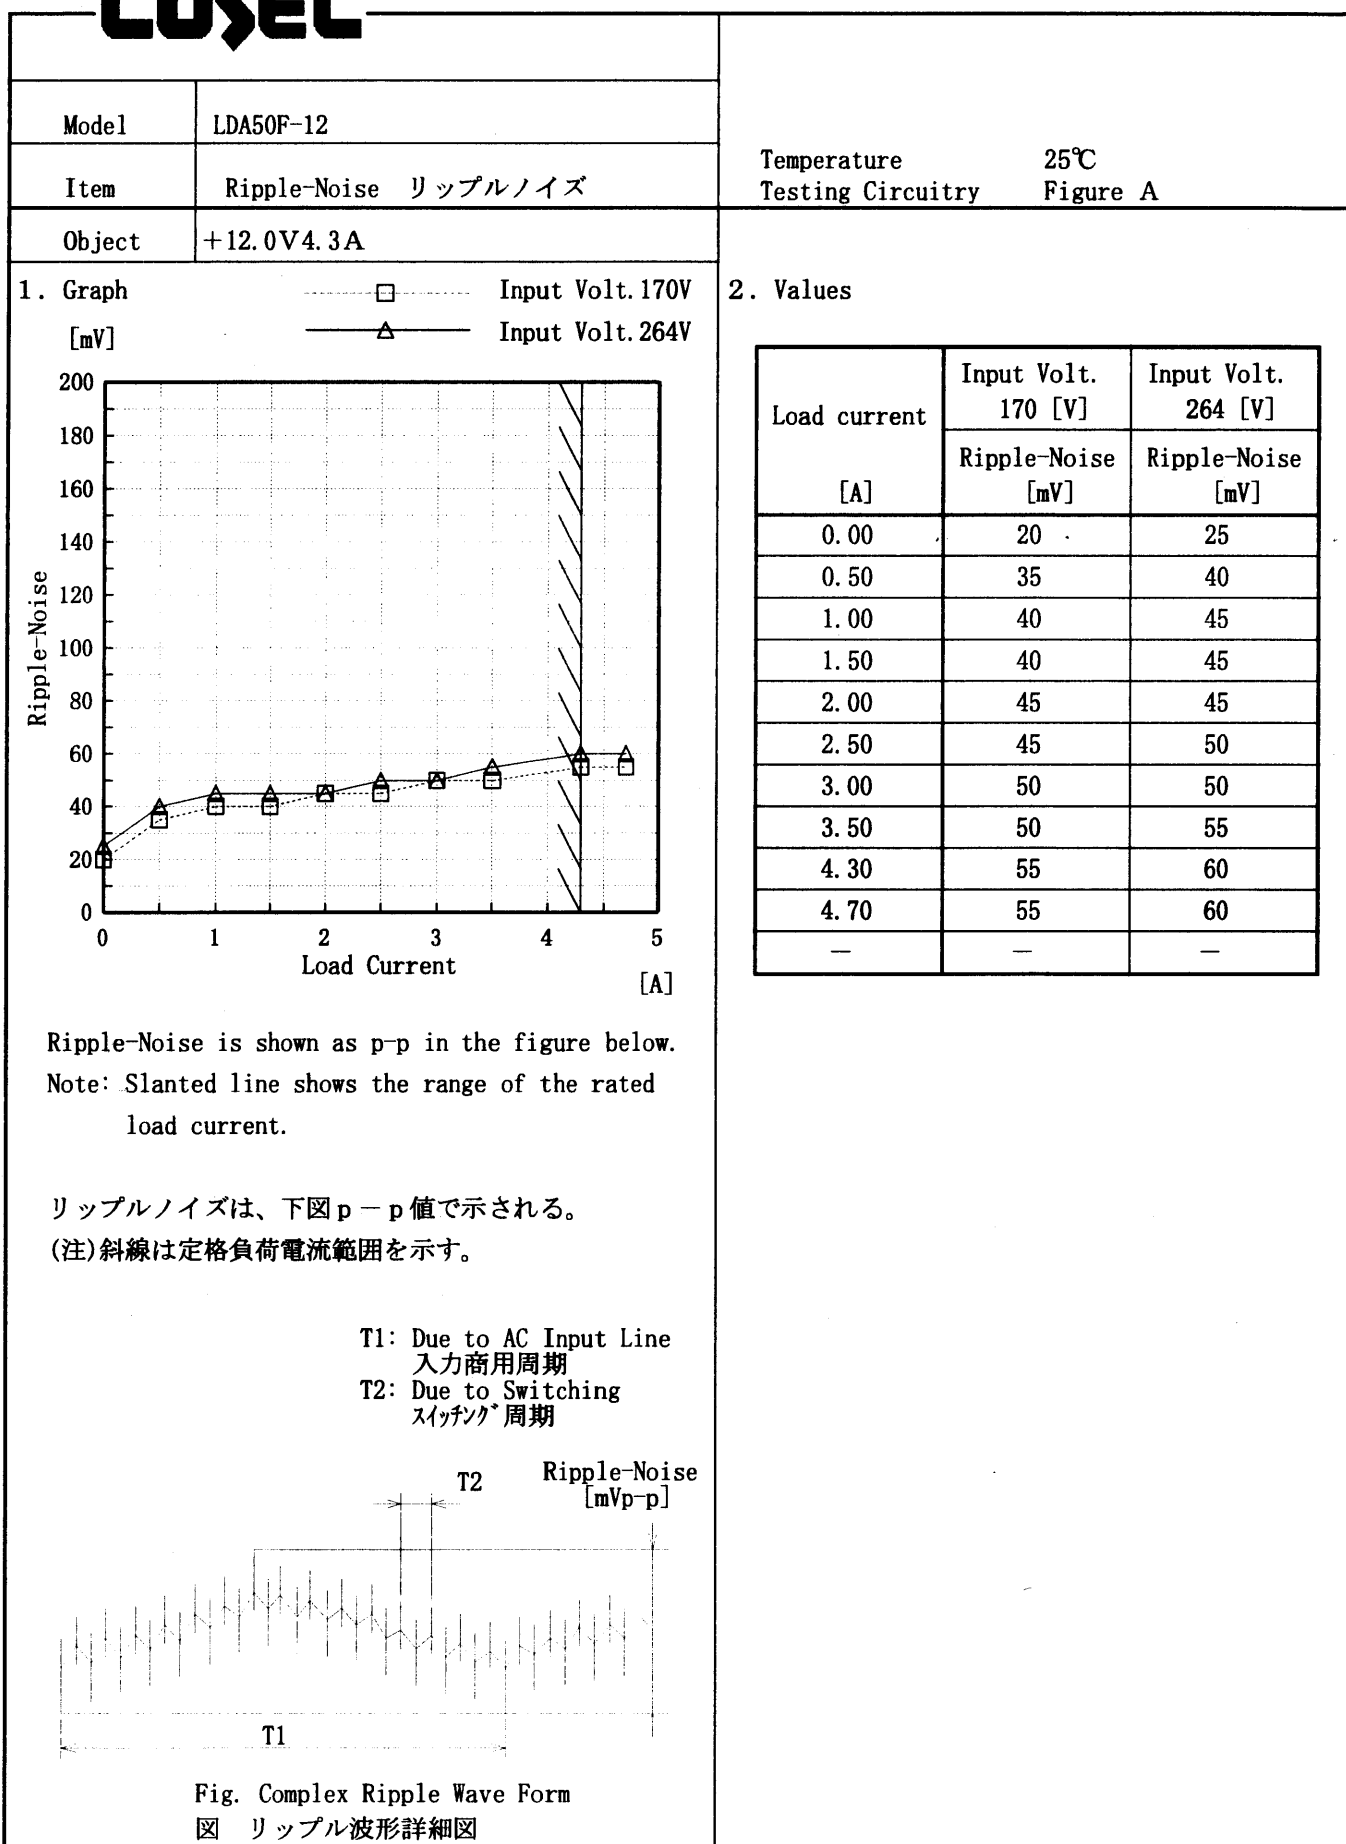

**COSEL**

Model		LDA50F-12	Temperature Testing Circuitry	25℃ Figure A
Item		Overcurrent Protection 過電流保護		
Object		+12.0V 4.3A		

1. Graph

Input Volt. 170 V

Input Volt. 200 V

Input Volt. 264 V

[V]

20.0

15.0

10.0

5.0

0.0

Output Voltage

0

2

4

6

Load Current

[A]

2. Values

Output Voltage [V]	Load Current [A]		
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
12.00	5.41	5.42	5.47
11.40	5.43	5.44	5.52
10.80	5.46	5.47	5.51
9.60	5.51	5.52	5.55
8.40	5.56	5.56	5.59
7.20	5.59	5.59	5.63
6.00	5.64	5.64	5.69
4.80	5.68	5.66	5.71
3.60	5.70	5.69	5.70
2.40	5.69	5.66	5.58
1.20	5.52	5.39	5.16
0.00	4.96	4.80	4.54

Note: Slanted line shows the range of the rated load current.


(注) 斜線は定格負荷電流範囲を示す。

# COSEL

Model		LDA50F-12	Testing Circuitry      Figure A																																																			
Item		Overvoltage Protection 過電圧保護																																																				
Object		+12.0V4.3A																																																				
1. Graph		<div> <div> <div>△</div> <div>Input Volt. 170 V</div> </div> <div> <div>□</div> <div>Input Volt. 200 V</div> </div> <div> <div>○</div> <div>Input Volt. 264 V</div> </div> </div> <p>Operating Point [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 0%</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注)斜線は定格周囲温度範囲を示す。</p>																																																				
2. Values		<table> <tr> <th>Ambient Temp.</th><th>Input Volt. 170[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 264[V]</th></tr> <tr> <th>[°C]</th><th colspan="3">Operating Point [V]</th></tr> <tr><td>-20</td><td>15.04</td><td>15.05</td><td>15.05</td></tr> <tr><td>-10</td><td>15.16</td><td>15.17</td><td>15.17</td></tr> <tr><td>0</td><td>15.23</td><td>15.23</td><td>15.29</td></tr> <tr><td>10</td><td>15.35</td><td>15.34</td><td>15.34</td></tr> <tr><td>20</td><td>15.46</td><td>15.46</td><td>15.46</td></tr> <tr><td>25</td><td>15.52</td><td>15.52</td><td>15.52</td></tr> <tr><td>30</td><td>15.52</td><td>15.52</td><td>15.52</td></tr> <tr><td>40</td><td>15.64</td><td>15.64</td><td>15.64</td></tr> <tr><td>50</td><td>15.76</td><td>15.76</td><td>15.76</td></tr> <tr><td>60</td><td>15.82</td><td>15.83</td><td>15.82</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </table>		Ambient Temp.	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	[°C]	Operating Point [V]			-20	15.04	15.05	15.05	-10	15.16	15.17	15.17	0	15.23	15.23	15.29	10	15.35	15.34	15.34	20	15.46	15.46	15.46	25	15.52	15.52	15.52	30	15.52	15.52	15.52	40	15.64	15.64	15.64	50	15.76	15.76	15.76	60	15.82	15.83	15.82	—	—	—
Ambient Temp.	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																			
[°C]	Operating Point [V]																																																					
-20	15.04	15.05	15.05																																																			
-10	15.16	15.17	15.17																																																			
0	15.23	15.23	15.29																																																			
10	15.35	15.34	15.34																																																			
20	15.46	15.46	15.46																																																			
25	15.52	15.52	15.52																																																			
30	15.52	15.52	15.52																																																			
40	15.64	15.64	15.64																																																			
50	15.76	15.76	15.76																																																			
60	15.82	15.83	15.82																																																			
—	—	—	—																																																			

**COSEL**

Model	LDA50F-12	Temperature	25°C
Item	Inrush Current 突入電流	Testing Circuitry	Figure A
Object	_____		

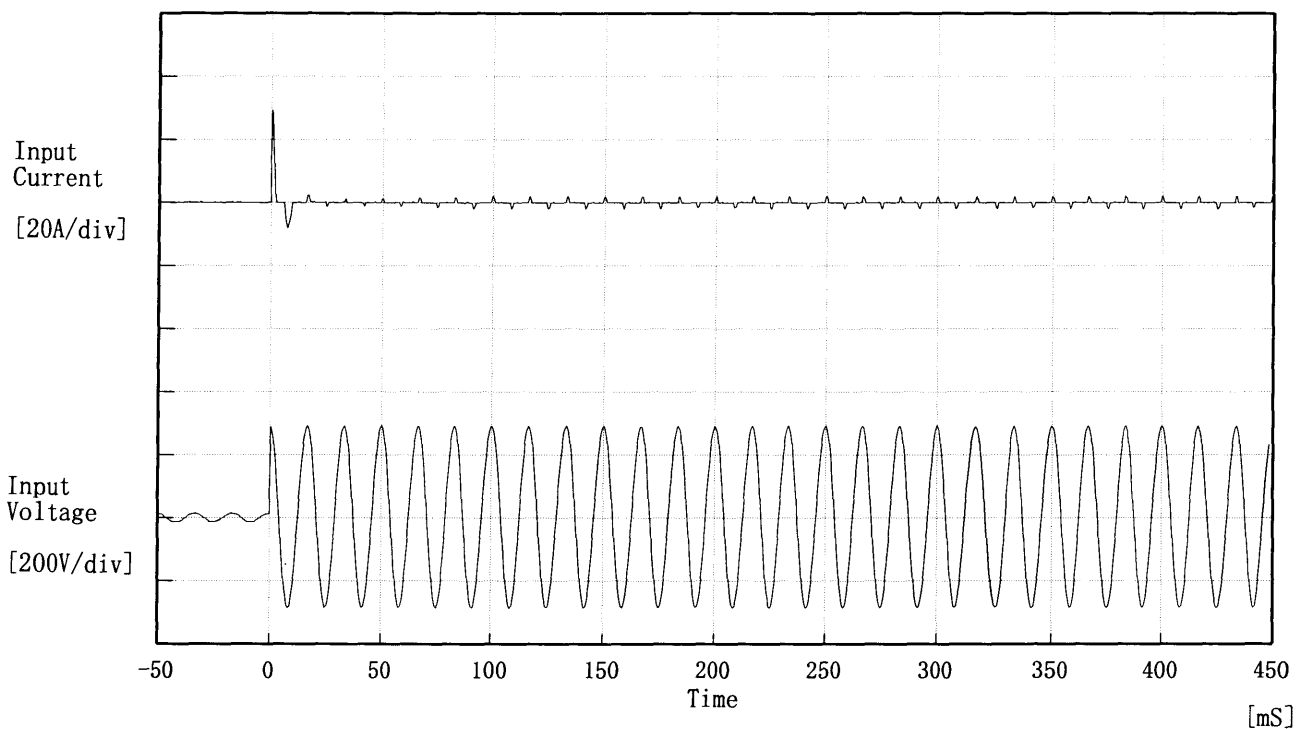

Input Voltage 200 V


Frequency 60 Hz

Load 100 %

Inrush Current

① 29.20 [A]

② 2.00 [A]

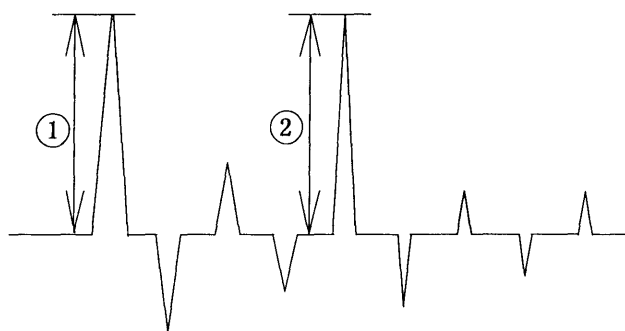

# COSEL

Model	LDA50F-12	Temperature 25℃ Testing Circuitry Figure A
Item	Dynamic Load Responce 動的負荷変動	
Object	+12.0V4.3A	



Input Volt. 200 V

Cycle 1000 mS

Load Current



Load 0% ←→

Load 100 %

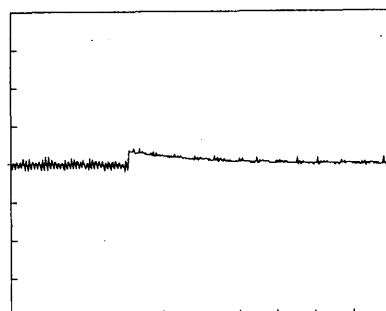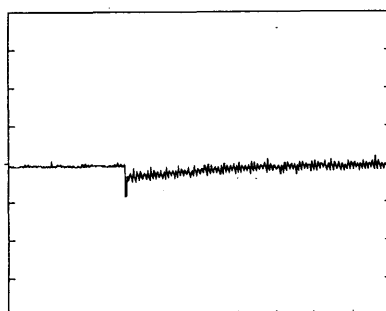

Load 0% ←→

Load 50 %

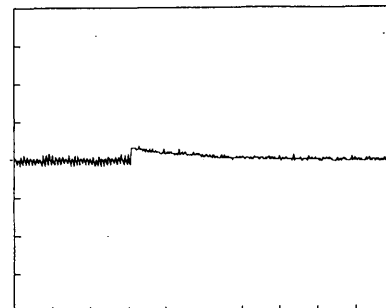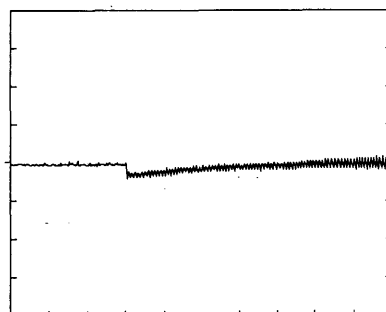

100 mV/div

10 mS/div




# COSEL

Model	LDA50F-12	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+12.0V4.3A		

## 1. Graph


Input Volt. 170 V

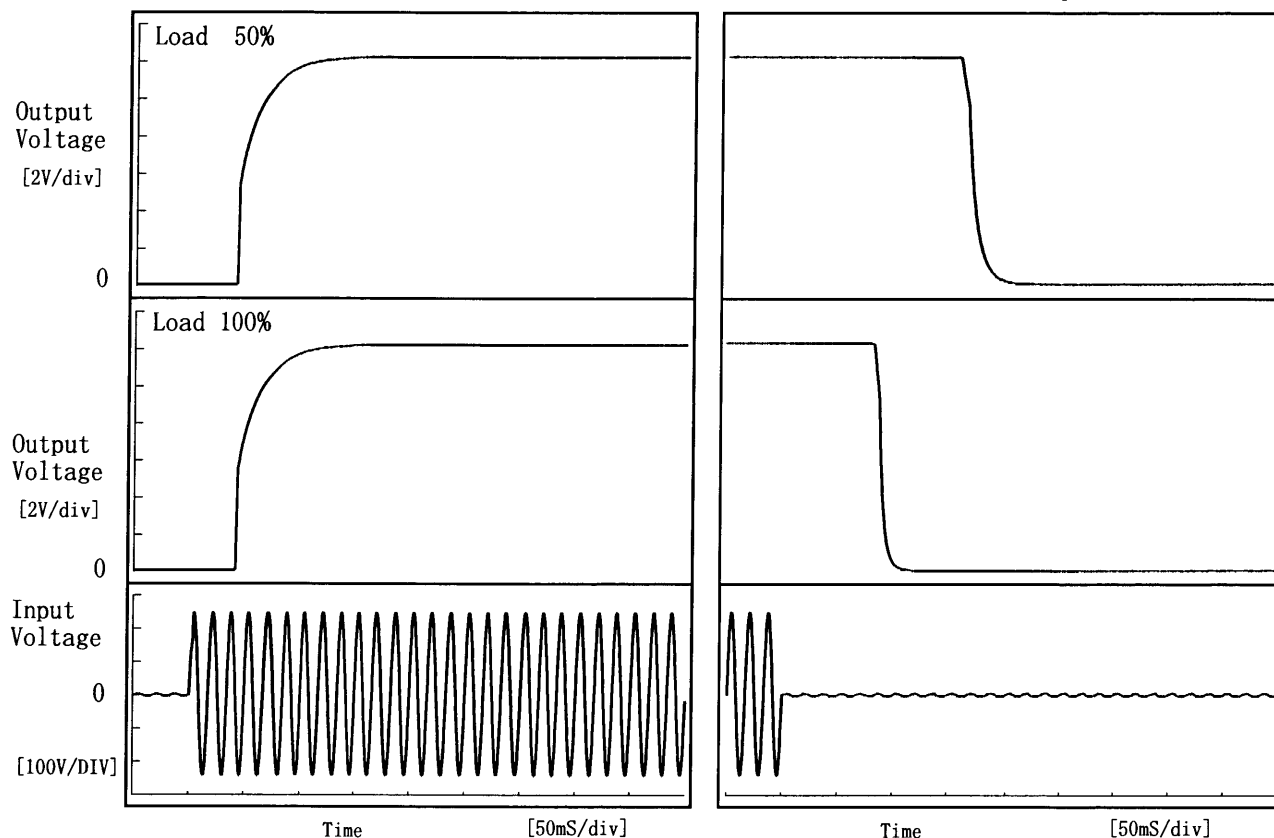

## 2. Values

[mS]


Load	Time	T d	T r	T s	T h	T f
50 %		41.0	35.0	76.0	163.8	19.0
100 %		41.3	35.5	76.8	86.3	10.5

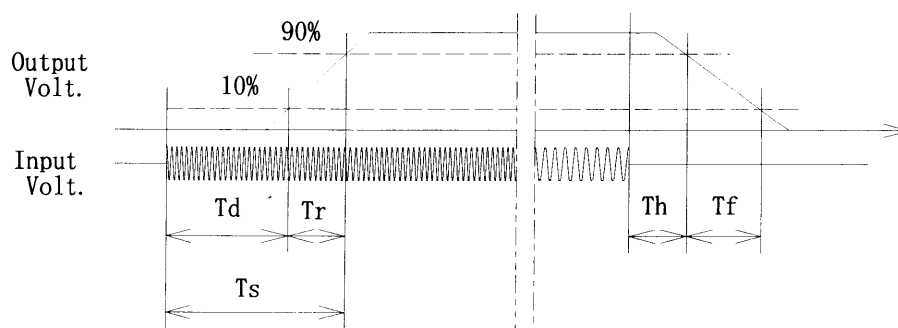

# COSEL

Model	LDA50F-12
Item	Ambient Temperature Drift 周囲温度変動
Object	+12.0V 4.3A

## 1. Graph

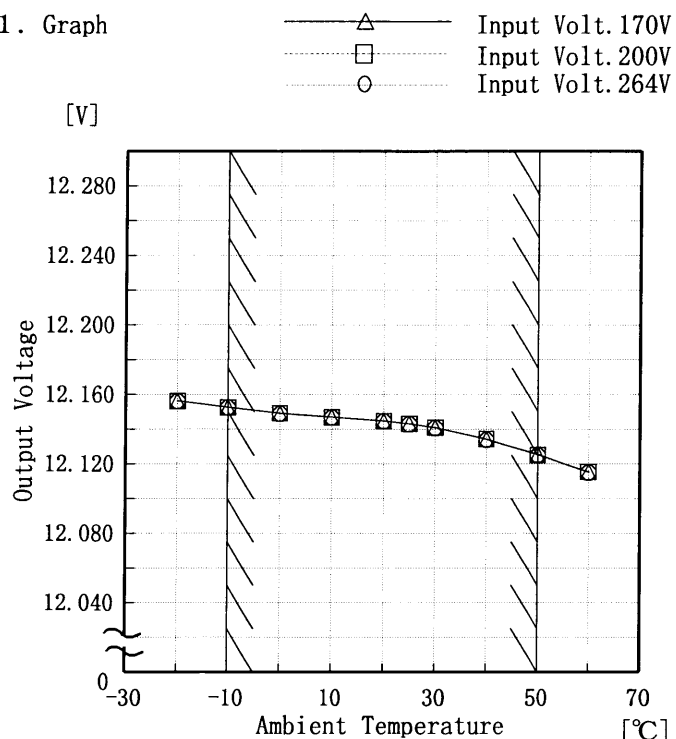

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

## Testing Circuitry Figure A

## 2. Values


Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 170 [V]	Input Volt. 200 [V]	Input Volt. 264 [V]
-20	12.156	12.156	12.156
-10	12.153	12.152	12.152
0	12.149	12.149	12.149
10	12.147	12.147	12.147
20	12.145	12.145	12.145
25	12.143	12.143	12.143
30	12.141	12.141	12.141
40	12.134	12.134	12.134
50	12.125	12.125	12.125
60	12.115	12.115	12.115
—	—	—	—

Model	LDA50F-12
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧
Object	+12.0V4.3A

Testing Circuitry Figure A

## 1. Graph

[V]

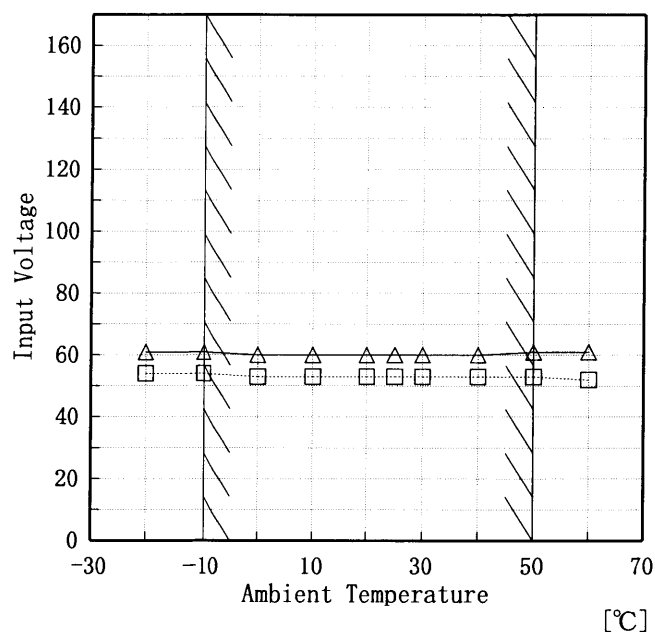

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。


## 2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-20	54	61
-10	54	61
0	53	60
10	53	60
20	53	60
25	53	60
30	53	60
40	53	60
50	53	61
60	52	61
—	—	—

# COSEL

Model LDA50F-12		Testing Circuitry Figure A																																				
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)																																					
Object	+12.0V 4.3A																																					
1. Graph <div style="display: flex; justify-content: flex-end; align-items: center; margin-top: 10px;"> <div style="margin-right: 20px;">□ Load 50%</div> <div>△ Load 100%</div> </div> <p style="text-align: center;">Input Volt. 200 V</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注) 斜線は定格周囲温度範囲を示す。</p>		2. Values <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>Ambient Temp. [°C]</th><th>Load 50% Ripple Output Volt. [mV]</th><th>Load 100% Ripple Output Volt. [mV]</th></tr> </thead> <tbody> <tr><td>-20</td><td>60</td><td>60</td></tr> <tr><td>-10</td><td>50</td><td>50</td></tr> <tr><td>0</td><td>40</td><td>40</td></tr> <tr><td>10</td><td>35</td><td>35</td></tr> <tr><td>20</td><td>30</td><td>35</td></tr> <tr><td>25</td><td>30</td><td>30</td></tr> <tr><td>30</td><td>30</td><td>30</td></tr> <tr><td>40</td><td>25</td><td>25</td></tr> <tr><td>50</td><td>25</td><td>25</td></tr> <tr><td>60</td><td>20</td><td>20</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]	-20	60	60	-10	50	50	0	40	40	10	35	35	20	30	35	25	30	30	30	30	30	40	25	25	50	25	25	60	20	20	—	—	—
Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]																																				
-20	60	60																																				
-10	50	50																																				
0	40	40																																				
10	35	35																																				
20	30	35																																				
25	30	30																																				
30	30	30																																				
40	25	25																																				
50	25	25																																				
60	20	20																																				
—	—	—																																				

**COSEL**

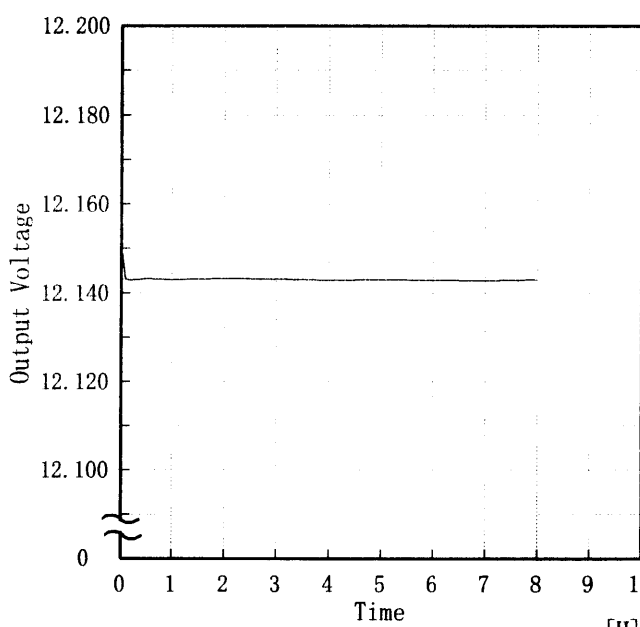COSEL																									
Model	LDA50F-12																								
Item	Time Lapse Drift 経時ドリフト	Temperature	25℃																						
Object	+12.0V4.3A	Testing Circuitry	Figure A																						
1. Graph		2.Values																							
<div>[V]</div> <div></div> <div>Output Voltage</div> <div>Time [H]</div> <div>Input Volt. 200V</div> <div>Load 100%</div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>12.149</td></tr><tr><td>0.5</td><td>12.143</td></tr><tr><td>1.0</td><td>12.143</td></tr><tr><td>2.0</td><td>12.143</td></tr><tr><td>3.0</td><td>12.143</td></tr><tr><td>4.0</td><td>12.143</td></tr><tr><td>5.0</td><td>12.143</td></tr><tr><td>6.0</td><td>12.143</td></tr><tr><td>7.0</td><td>12.143</td></tr><tr><td>8.0</td><td>12.143</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	12.149	0.5	12.143	1.0	12.143	2.0	12.143	3.0	12.143	4.0	12.143	5.0	12.143	6.0	12.143	7.0	12.143	8.0	12.143
Time since start [H]	Output Voltage [V]																								
0.0	12.149																								
0.5	12.143																								
1.0	12.143																								
2.0	12.143																								
3.0	12.143																								
4.0	12.143																								
5.0	12.143																								
6.0	12.143																								
7.0	12.143																								
8.0	12.143																								

---19---

BC-4077

# COSEL

Model		LDA50F-12	Testing Circuitry      Figure A
Item		Output Voltage Accuracy    定電圧精度	
Object		+12.0V4.3A	

## Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature    -10~50 °C

Input Voltage : 170~264 V

Load Current : 0~4.3 A

\* Output Voltage Accuracy =  $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

\* Output Voltage Accuracy (Ratio) =  $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

## 定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度        -10~50 °C

入力電圧        170~264 V

負荷電流        0~4.3 A

\* 定電圧精度(変動値) =  $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

\* 定電圧精度(変動率) =  $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	-10	264	0.0	12.153	±26	±0.3
Minimum Voltage	50	264	4.3	12.101		



# COSEL

Model		LDA50F-12	Temperature 25°C Testing Circuitry Figure B	
Item		Leakage Current 漏洩電流		
Object		_____		

## 1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DENTORI	---	---	---
(B) IEC60950	---	---	---

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 230 [V]	Input Volt. 264 [V]
(B) IEC60950	0.35	0.46	0.48

## 2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力の高相について測定し、その大きい方を漏洩電流測定値とする。



# COSEL

Model		LDA50F-12	Temperature Testing Circuitry	25°C Figure C
Item		Line Noise Tolerance 入力雑音耐量		
Object		+12.0V 4.3A		

## 1. Results

Pulse Width [ nS ]	MODE	No protection failure should occur 保護回路の誤動作がない	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation
1000	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation

## 2. Conditions

Input Voltage : 200 V  
 Pulse Voltage : 2000 V  
 Pulse Cycle : 10 mS  
 Pulse Input Duration : 1 min. or more  
 Load : 100 %

**COSEL**

Model	LDA50F-12	Temperature	25°C
Item	Conducted Emission 雑音端子電圧	Testing Circuitry	Figure D
Object			

## 1. Graph


## Remarks

Input Volt. 230 V

Load 100 %

規格 1: [EN 55022] Class B(平均値)

規格 2: [EN 55022] Class B(QP)

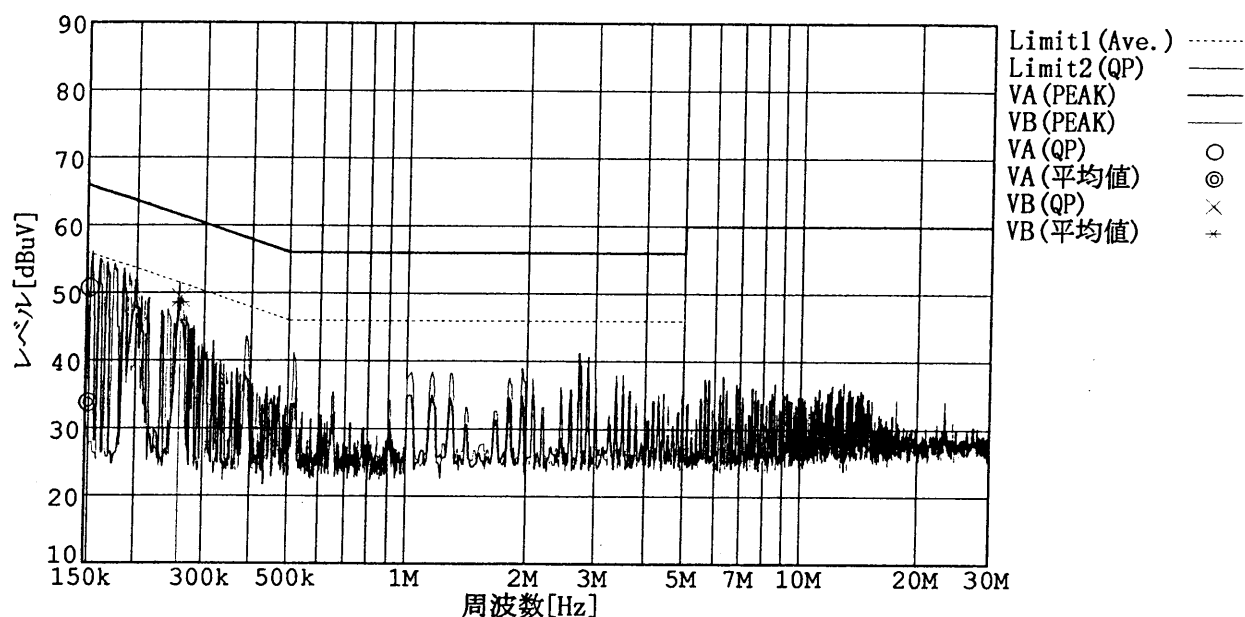

**COSEL**

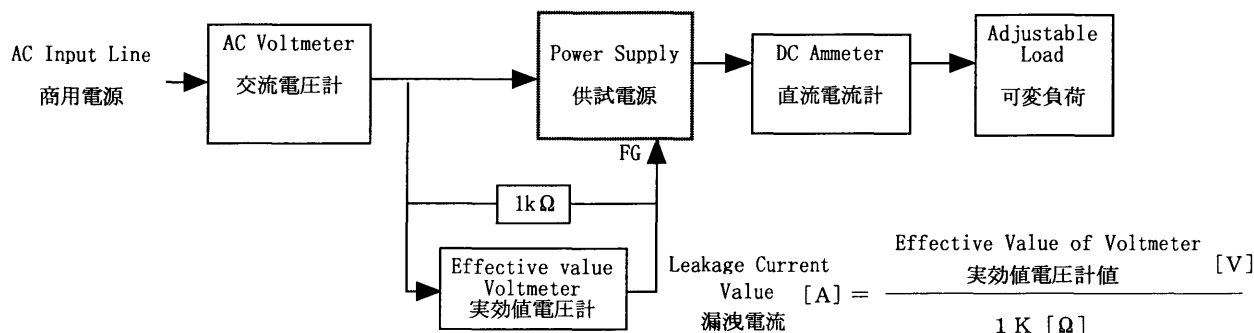
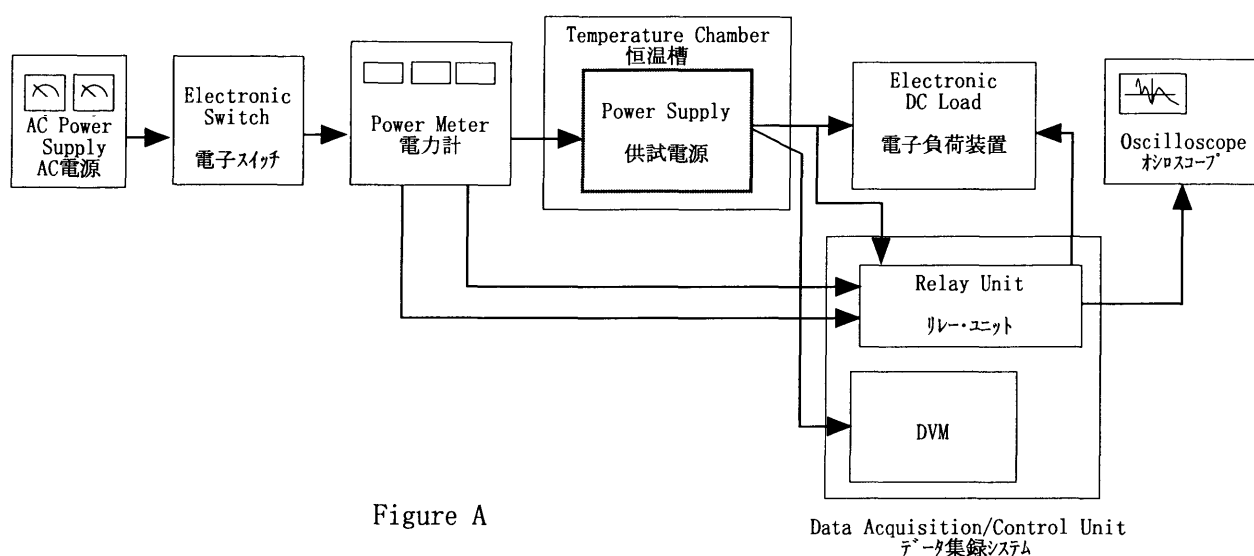


Figure B (DENTORI)

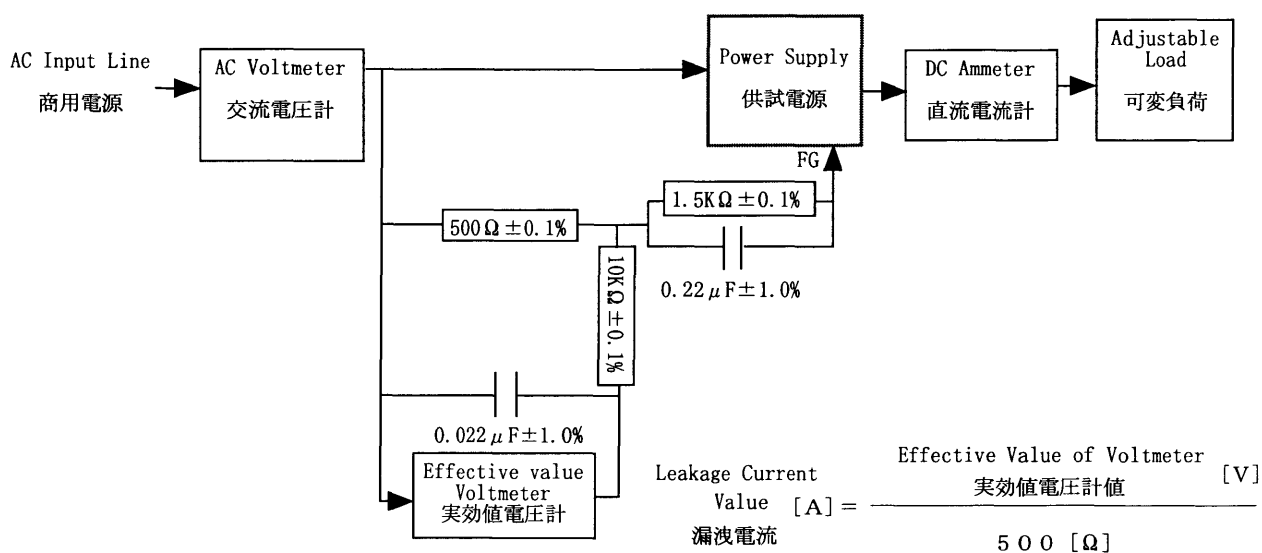


Figure B (IEC 60950)

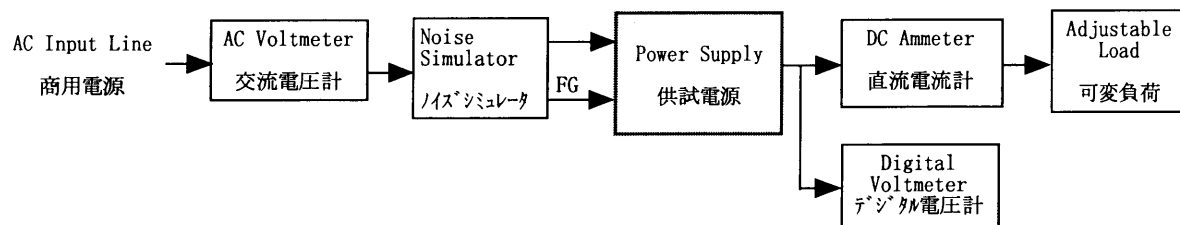


Figure C

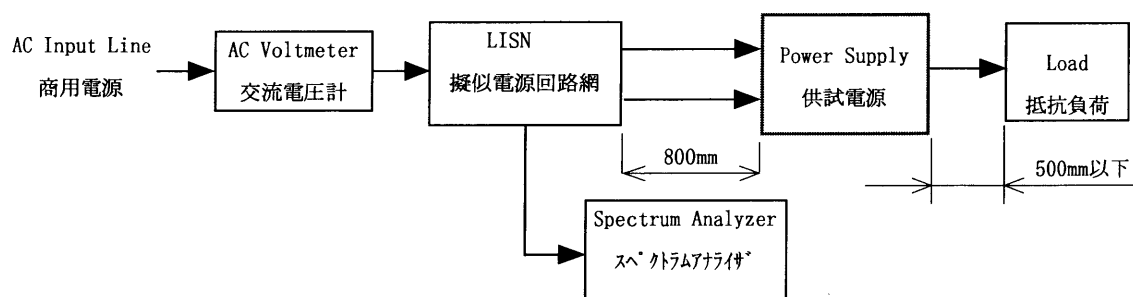


Figure D

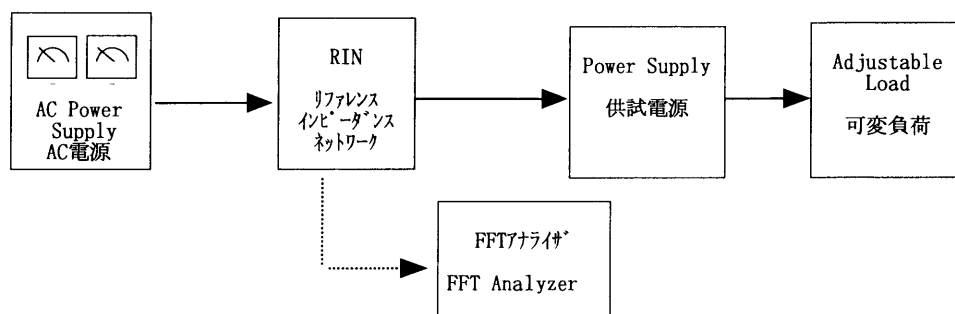


Figure E