



TEST DATA OF LEA50F-5 (200V INPUT)

Regulated DC Power Supply

Date : Feb. 15. 1999

Approved by : T. Watanabe
Design Manager

Prepared by : S. Koda
Design Engineer

コーセル株式会社
COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Input Current (by Load Current)	2
入力電流 (負荷特性)	
3. Input Power (by Load Current)	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage)	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current)	5
効率 (負荷特性)	
6. Power Factor (by Input Voltage)	6
力率 (入力電圧特性)	
7. Power Factor (by Load Current)	7
力率 (負荷特性)	
8. Hold-Up Time	8
出力保持時間	
9. Instantaneous Interruption Compensation	9
瞬時停電保障	
10. Load Regulation	10
静的負荷変動	
11. Ripple Voltage (by Load Current)	11
リップル電圧 (負荷特性)	
12. Ripple-Noise	12
リップルノイズ	
13. Overcurrent Protection	13
過電流保護	
14. Overvoltage Protection	14
過電圧保護	
15. Inrush Current	15
突入電流	
16. Dynamic Load Responce	16
動的負荷変動	
17. Rise and Fall Time	17
立上り、立下がり時間	
18. Ambient Temperature Drift	18
周囲温度変動	
19. Minimum Input Voltage for Regulated Output Voltage	19
最低レギュレーション電圧	
20. Ripple Voltage (by Ambient Temperature)	20
リップル電圧 (周囲温度特性)	
21. Time Lapse Drift	21
経時ドリフト	
22. Output Voltage Accuracy	22
定電圧精度	
23. Harmonic Current	23
高調波電流	
24. Condensation	25
結露特性	
25. Leakage Current	26
漏洩電流	
26. Line Noise Tolerance	27
入力雑音耐量	
27. Conducted Emission	28
雑音端子電圧	
28. Figure of Testing Circuitry	29
測定回路図	

(Final Page 30)

- 1 -

COSEL

Model		LEA50F-5	
Item		Input Current (by Load Current) 入力電流 (負荷特性)	
Output		_____	

1. Graph

—△—

Input Volt. 170V

- - -□- - -

Input Volt. 200V

- - -○- - -

Input Volt. 264V

Input Current

[A]

0.5

0.4

0.3

0.2

0.1

0

0

2

4

6

8

10

12

Load Current

[A]

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。

2. Values

Load Current	Input Current [A]		
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
0	0.047	0.050	0.065
2	0.122	0.113	0.105
4	0.190	0.171	0.149
6	0.260	0.229	0.192
8	0.331	0.289	0.237
10	0.404	0.351	0.283
11	0.442	0.382	0.307
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

COSEL

Model		LEA50F-5		Temperature		25℃																																																								
Item		Input Power (by Load Current) 入力電力（負荷特性）		Testing Circuitry		Figure A																																																								
Output		_____																																																												
1. Graph				2. Values																																																										
<div><div><div>—△—</div><div>Input Volt. 170V</div></div><div><div>---□---</div><div>Input Volt. 200V</div></div><div><div>---○---</div><div>Input Volt. 264V</div></div></div> <p>Note: Slanted line shows the range of the rated load current</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>				<table><tr><th rowspan="2">Load Current</th><th colspan="3">Input Power [W]</th></tr><tr><th>Input Volt. 170[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 264[V]</th></tr><tr><td>0</td><td>4.00</td><td>4.10</td><td>6.30</td></tr><tr><td>2</td><td>16.90</td><td>17.00</td><td>17.40</td></tr><tr><td>4</td><td>28.70</td><td>28.70</td><td>28.90</td></tr><tr><td>6</td><td>40.80</td><td>40.70</td><td>40.80</td></tr><tr><td>8</td><td>53.20</td><td>53.00</td><td>53.00</td></tr><tr><td>10</td><td>65.90</td><td>65.70</td><td>65.50</td></tr><tr><td>11</td><td>72.40</td><td>72.10</td><td>71.90</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current	Input Power [W]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0	4.00	4.10	6.30	2	16.90	17.00	17.40	4	28.70	28.70	28.90	6	40.80	40.70	40.80	8	53.20	53.00	53.00	10	65.90	65.70	65.50	11	72.40	72.10	71.90	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current	Input Power [W]																																																													
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																											
0	4.00	4.10	6.30																																																											
2	16.90	17.00	17.40																																																											
4	28.70	28.70	28.90																																																											
6	40.80	40.70	40.80																																																											
8	53.20	53.00	53.00																																																											
10	65.90	65.70	65.50																																																											
11	72.40	72.10	71.90																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											

COSEL

Model		LEA50F-5	
Item		Efficiency (by Input Voltage) 効率 (入力電圧特性)	
Object			

1. Graph

□

Load 50%

△

Load 100%

Efficiency [%]

COSEL

Model		LEA50F-5		Temperature		25℃																																																								
Item		Efficiency (by Load Current) 効率 (負荷電流特性)		Testing Circuitry		Figure A																																																								
Output		_____																																																												
1. Graph				2. Values																																																										
<div><div>—△—</div>Input Volt. 170V</div> <div><div>---□---</div>Input Volt. 200V</div> <div><div>---○---</div>Input Volt. 264V</div> <p>Efficiency [%]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Efficiency [%]</th></tr><tr><th>Input Volt. 170[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 264[V]</th></tr><tr><td>2</td><td>60.5</td><td>60.1</td><td>58.7</td></tr><tr><td>4</td><td>71.2</td><td>71.2</td><td>70.7</td></tr><tr><td>6</td><td>75.0</td><td>75.2</td><td>75.0</td></tr><tr><td>8</td><td>76.5</td><td>76.8</td><td>76.8</td></tr><tr><td>10</td><td>77.1</td><td>77.4</td><td>77.6</td></tr><tr><td>11</td><td>77.1</td><td>77.5</td><td>77.7</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Efficiency [%]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	2	60.5	60.1	58.7	4	71.2	71.2	70.7	6	75.0	75.2	75.0	8	76.5	76.8	76.8	10	77.1	77.4	77.6	11	77.1	77.5	77.7	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Efficiency [%]																																																													
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																											
2	60.5	60.1	58.7																																																											
4	71.2	71.2	70.7																																																											
6	75.0	75.2	75.0																																																											
8	76.5	76.8	76.8																																																											
10	77.1	77.4	77.6																																																											
11	77.1	77.5	77.7																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											

COSEL

Model		LEA50F-5	Temperature 25℃ Testing Circuitry Figure A																														
Item		Power Factor (by Input Voltage) 力率 (入力電圧特性)																															
Object																																	
1. Graph		<div><div>□ load 50%</div><div>△ load 100%</div></div> <p>Power Factor</p> <p>Input Voltage [V]</p>	2. Values																														
		<table><tr><th>Input Voltage [V]</th><th>load 50% Power Factor</th><th>load 100% Power Factor</th></tr><tr><td>150</td><td>0.93</td><td>0.97</td></tr><tr><td>160</td><td>0.92</td><td>0.97</td></tr><tr><td>170</td><td>0.91</td><td>0.96</td></tr><tr><td>180</td><td>0.89</td><td>0.95</td></tr><tr><td>200</td><td>0.87</td><td>0.94</td></tr><tr><td>220</td><td>0.84</td><td>0.92</td></tr><tr><td>240</td><td>0.81</td><td>0.90</td></tr><tr><td>264</td><td>0.77</td><td>0.87</td></tr><tr><td>280</td><td>0.56</td><td>0.72</td></tr></table>	Input Voltage [V]	load 50% Power Factor	load 100% Power Factor	150	0.93	0.97	160	0.92	0.97	170	0.91	0.96	180	0.89	0.95	200	0.87	0.94	220	0.84	0.92	240	0.81	0.90	264	0.77	0.87	280	0.56	0.72	
Input Voltage [V]	load 50% Power Factor	load 100% Power Factor																															
150	0.93	0.97																															
160	0.92	0.97																															
170	0.91	0.96																															
180	0.89	0.95																															
200	0.87	0.94																															
220	0.84	0.92																															
240	0.81	0.90																															
264	0.77	0.87																															
280	0.56	0.72																															
Note: Slanted line shows the range of the rated input voltage.																																	
(注)斜線は定格入力電圧範囲を示す。																																	

COSEL

Model		LEA50F-5																																																								
Item	Power Factor (by Load Current) 力率 (負荷電流特性)		Temperature 25℃ Testing Circuitry Figure A																																																							
Output	_____																																																									
1. Graph																																																										
<div><div>—△—</div>Input Volt. 170V</div> <div><div>---□---</div>Input Volt. 200V</div> <div><div>---○---</div>Input Volt. 264V</div> <table><thead><tr><th>Load Current [A]</th><th>170V Power Factor</th><th>200V Power Factor</th><th>264V Power Factor</th></tr></thead><tbody><tr><td>0</td><td>0.49</td><td>0.41</td><td>0.37</td></tr><tr><td>2</td><td>0.81</td><td>0.75</td><td>0.63</td></tr><tr><td>4</td><td>0.89</td><td>0.84</td><td>0.74</td></tr><tr><td>6</td><td>0.92</td><td>0.89</td><td>0.80</td></tr><tr><td>8</td><td>0.94</td><td>0.92</td><td>0.85</td></tr><tr><td>10</td><td>0.96</td><td>0.94</td><td>0.87</td></tr><tr><td>11</td><td>0.96</td><td>0.94</td><td>0.89</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></tbody></table>				Load Current [A]	170V Power Factor	200V Power Factor	264V Power Factor	0	0.49	0.41	0.37	2	0.81	0.75	0.63	4	0.89	0.84	0.74	6	0.92	0.89	0.80	8	0.94	0.92	0.85	10	0.96	0.94	0.87	11	0.96	0.94	0.89	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
Load Current [A]	170V Power Factor	200V Power Factor	264V Power Factor																																																							
0	0.49	0.41	0.37																																																							
2	0.81	0.75	0.63																																																							
4	0.89	0.84	0.74																																																							
6	0.92	0.89	0.80																																																							
8	0.94	0.92	0.85																																																							
10	0.96	0.94	0.87																																																							
11	0.96	0.94	0.89																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
2. Values																																																										
<table><thead><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Power Factor</th></tr><tr><th>Input Volt. 170[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 264[V]</th></tr></thead><tbody><tr><td>0</td><td>0.49</td><td>0.41</td><td>0.37</td></tr><tr><td>2</td><td>0.81</td><td>0.75</td><td>0.63</td></tr><tr><td>4</td><td>0.89</td><td>0.84</td><td>0.74</td></tr><tr><td>6</td><td>0.92</td><td>0.89</td><td>0.80</td></tr><tr><td>8</td><td>0.94</td><td>0.92</td><td>0.85</td></tr><tr><td>10</td><td>0.96</td><td>0.94</td><td>0.87</td></tr><tr><td>11</td><td>0.96</td><td>0.94</td><td>0.89</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></tbody></table>				Load Current [A]	Power Factor			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0	0.49	0.41	0.37	2	0.81	0.75	0.63	4	0.89	0.84	0.74	6	0.92	0.89	0.80	8	0.94	0.92	0.85	10	0.96	0.94	0.87	11	0.96	0.94	0.89	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Power Factor																																																									
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																							
0	0.49	0.41	0.37																																																							
2	0.81	0.75	0.63																																																							
4	0.89	0.84	0.74																																																							
6	0.92	0.89	0.80																																																							
8	0.94	0.92	0.85																																																							
10	0.96	0.94	0.87																																																							
11	0.96	0.94	0.89																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
Note: Slanted line shows the range of the rated load current																																																										
(注)斜線は定格負荷電流範囲を示す。																																																										


COSEL

Model		LEA50F-5	Temperature25℃ Testing CircuitryFigure A																																
Item		Hold-Up Time 出力保持時間																																	
Object		+5V10A																																	
1. Graph			2. Values																																
<div><div><div>—△—</div><div>Load 50%</div></div><div><div>- -□- -</div><div>Load 100%</div></div></div> <div><div>[mS]</div><div>1000</div><div>100</div><div>10</div><div>1</div></div> <div><div>Hold-Up Time</div></div> <div><div>0</div><div>160</div><div>180</div><div>200</div><div>220</div><div>240</div><div>260</div><div>280</div><div>300</div></div> <div><div>Input Voltage</div><div>[V]</div></div> <div><div>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</div><div>Note: Slanted line shows the range of the rated input voltage.</div><div>出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。</div><div>(注)斜線は定格入力電圧範囲を示す。</div></div>																																			
			<table><tr><th rowspan="2">Input Voltage [V]</th><th>Load 50%</th><th>Load 100%</th></tr><tr><th>Hold-Up Time [mS]</th><th>Hold-Up Time [mS]</th></tr><tr><td>150</td><td>76</td><td>35</td></tr><tr><td>160</td><td>76</td><td>36</td></tr><tr><td>170</td><td>77</td><td>36</td></tr><tr><td>180</td><td>77</td><td>37</td></tr><tr><td>200</td><td>78</td><td>37</td></tr><tr><td>220</td><td>79</td><td>38</td></tr><tr><td>240</td><td>79</td><td>38</td></tr><tr><td>264</td><td>80</td><td>38</td></tr><tr><td>280</td><td>81</td><td>39</td></tr></table>	Input Voltage [V]	Load 50%	Load 100%	Hold-Up Time [mS]	Hold-Up Time [mS]	150	76	35	160	76	36	170	77	36	180	77	37	200	78	37	220	79	38	240	79	38	264	80	38	280	81	39
Input Voltage [V]	Load 50%	Load 100%																																	
	Hold-Up Time [mS]	Hold-Up Time [mS]																																	
150	76	35																																	
160	76	36																																	
170	77	36																																	
180	77	37																																	
200	78	37																																	
220	79	38																																	
240	79	38																																	
264	80	38																																	
280	81	39																																	

COSEL

Model	LEA50F-5	Temperature	25°C																																																			
Item	Instantaneous Interruption Compensation 瞬時停電保障	Testing Circuitry	Figure A																																																			
Object	+5V10A																																																					
1. Graph		2. Values																																																				
<div> <div> <div>—△—</div> <div>—□—</div> <div>—○—</div> </div> <div> <div>Input Volt. 170 V</div> <div>Input Volt. 200 V</div> <div>Input Volt. 264 V</div> </div> </div> <div> <div>[mS]</div> <div>1000</div> <div>100</div> <div>10</div> <div>1</div> <div>Instantaneous Compensation Time</div> <div>0 2 4 6 8 10 12</div> <div>Load Current [A]</div> </div>		<table> <tr> <th rowspan="2">Load Current [A]</th><th>Input Volt. 170[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 264[V]</th></tr> <tr> <th colspan="3">Time [mS]</th></tr> <tr><td>0</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>2</td><td>172</td><td>178</td><td>180</td></tr> <tr><td>4</td><td>90</td><td>95</td><td>97</td></tr> <tr><td>6</td><td>62</td><td>63</td><td>64</td></tr> <tr><td>8</td><td>46</td><td>47</td><td>48</td></tr> <tr><td>10</td><td>35</td><td>36</td><td>37</td></tr> <tr><td>11</td><td>31</td><td>32</td><td>34</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </table>		Load Current [A]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	Time [mS]			0	—	—	—	2	172	178	180	4	90	95	97	6	62	63	64	8	46	47	48	10	35	36	37	11	31	32	34	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																			
	Time [mS]																																																					
0	—	—	—																																																			
2	172	178	180																																																			
4	90	95	97																																																			
6	62	63	64																																																			
8	46	47	48																																																			
10	35	36	37																																																			
11	31	32	34																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			
<p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間をいう。</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>																																																						

COSEL

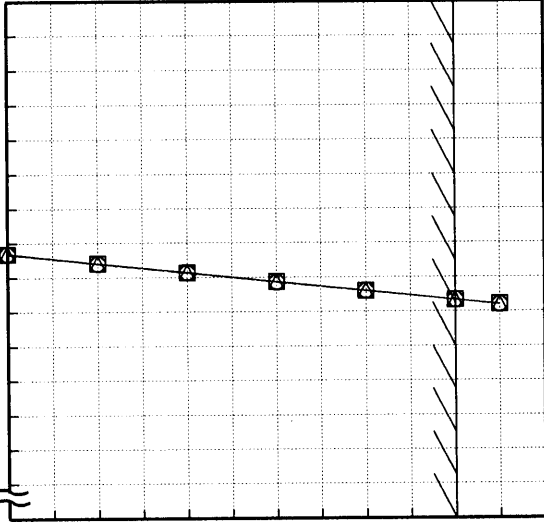Model		LEA50F-5		Temperature		25℃																																																
Item		Load Regulation 静的負荷変動		Testing Circuitry		Figure A																																																
Object		+5V10A																																																				
1. Graph				2. Values																																																		
<div><div><div>—△—</div><div>—□—</div><div>—○—</div></div><div>Input Volt. 170V</div><div>Input Volt. 200V</div><div>Input Volt. 264V</div></div> <div><div><div>Output Voltage [V]</div><div>5.230</div><div>5.190</div><div>5.150</div><div>5.110</div><div>5.070</div><div>5.030</div><div>4.990</div><div>0</div></div><div><div>Load Current [A]</div><div>0</div><div>2</div><div>4</div><div>6</div><div>8</div><div>10</div><div>12</div></div></div>  <div>Note: Slanted line shows the range of the rated load current.</div> <div>(注)斜線は定格負荷電流範囲を示す。</div>				<table><tr><th rowspan="2">Load Current [A]</th><th>Input Volt. 170[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 264[V]</th></tr><tr><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>0.0</td><td>5.104</td><td>5.104</td><td>5.104</td></tr><tr><td>2.0</td><td>5.098</td><td>5.098</td><td>5.098</td></tr><tr><td>4.0</td><td>5.093</td><td>5.093</td><td>5.093</td></tr><tr><td>6.0</td><td>5.087</td><td>5.087</td><td>5.087</td></tr><tr><td>8.0</td><td>5.082</td><td>5.082</td><td>5.082</td></tr><tr><td>10.0</td><td>5.077</td><td>5.077</td><td>5.077</td></tr><tr><td>11.0</td><td>5.074</td><td>5.074</td><td>5.074</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.0	5.104	5.104	5.104	2.0	5.098	5.098	5.098	4.0	5.093	5.093	5.093	6.0	5.087	5.087	5.087	8.0	5.082	5.082	5.082	10.0	5.077	5.077	5.077	11.0	5.074	5.074	5.074	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																			
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																			
0.0	5.104	5.104	5.104																																																			
2.0	5.098	5.098	5.098																																																			
4.0	5.093	5.093	5.093																																																			
6.0	5.087	5.087	5.087																																																			
8.0	5.082	5.082	5.082																																																			
10.0	5.077	5.077	5.077																																																			
11.0	5.074	5.074	5.074																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			

COSEL

Model		LEA50F-5	
Item		Ripple Voltage (by Load Current) リップル電圧 (負荷電流特性)	
Object		+5V10A	

1. Graph

□

Input Volt. 170V

△

Input Volt. 264V

[mV]

150

125

100

75

50

25

0

Ripple Voltage

0

2

4

6

8

10

12

Load Current

[A]

2. Values

Load Current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0	10	10
2	35	35
4	35	35
6	35	35
8	35	35
10	35	35
11	35	35
—	—	—
—	—	—
—	—	—
—	—	—

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p - p 値で示される。

(注) 斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
入力商用周期

T2: Due to Switching
スイッチング周期

Ripple [mVp-p]

T1

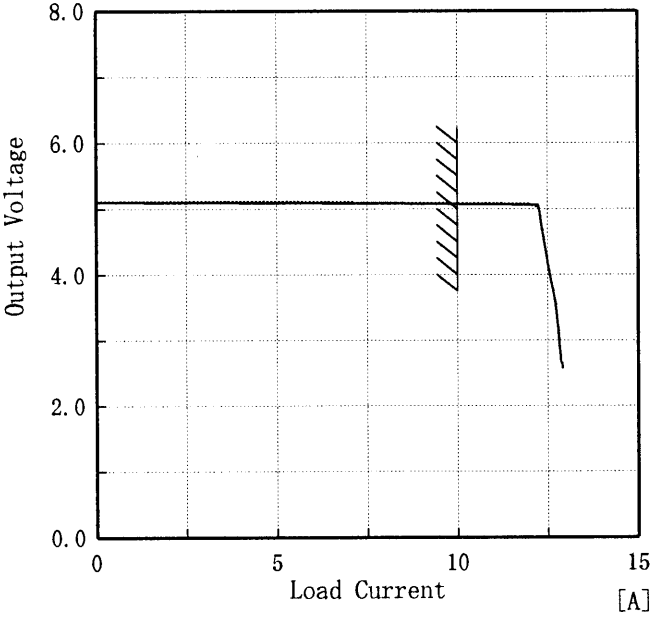
T2

Fig. Complex Ripple Wave Form

図 リップル波形詳細図

- 12 -

COSEL

Model		LEA50F-5	Temperature 25°C Testing Circuitry Figure A																																																			
Item		Overcurrent Protection 過電流保護																																																				
Object		+5V10A																																																				
1. Graph		<div> <div>Input Volt. 170 V</div> <div>Input Volt. 200 V</div> <div>Input Volt. 264 V</div> </div> 	2. Values																																																			
		<table border="1"> <thead> <tr> <th>Output Voltage [V]</th><th>Input Volt. 170[V] Load Current [A]</th><th>Input Volt. 200[V] Load Current [A]</th><th>Input Volt. 264[V] Load Current [A]</th></tr> </thead> <tbody> <tr><td>5.00</td><td>12.27</td><td>12.25</td><td>12.25</td></tr> <tr><td>4.75</td><td>12.33</td><td>12.32</td><td>12.32</td></tr> <tr><td>4.50</td><td>12.40</td><td>12.39</td><td>12.39</td></tr> <tr><td>4.00</td><td>12.56</td><td>12.55</td><td>12.55</td></tr> <tr><td>3.50</td><td>12.73</td><td>12.72</td><td>12.72</td></tr> <tr><td>3.00</td><td>12.81</td><td>12.80</td><td>12.80</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Output Voltage [V]	Input Volt. 170[V] Load Current [A]	Input Volt. 200[V] Load Current [A]	Input Volt. 264[V] Load Current [A]	5.00	12.27	12.25	12.25	4.75	12.33	12.32	12.32	4.50	12.40	12.39	12.39	4.00	12.56	12.55	12.55	3.50	12.73	12.72	12.72	3.00	12.81	12.80	12.80	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Output Voltage [V]	Input Volt. 170[V] Load Current [A]	Input Volt. 200[V] Load Current [A]	Input Volt. 264[V] Load Current [A]																																																			
5.00	12.27	12.25	12.25																																																			
4.75	12.33	12.32	12.32																																																			
4.50	12.40	12.39	12.39																																																			
4.00	12.56	12.55	12.55																																																			
3.50	12.73	12.72	12.72																																																			
3.00	12.81	12.80	12.80																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			
Note: Slanted line shows the range of the rated load current.																																																						
(注) 斜線は定格負荷電流範囲を示す。 3V以下は間欠状態。																																																						

COSEL

Model		LEA50F-5
Item		Overvoltage Protection 過電圧保護
Object		+5V10A

1. Graph

△

—

Input Volt. 170 V

□

- - -

Input Volt. 200 V

○

· · ·

Input Volt. 264 V

[V]

Operating Point

Ambient Temperature [°C]	Operating Point [V] (170V, 200V, 264V)
-20	6.50
-10	6.49
0	6.48
10	6.48
20	6.47
25	6.47
30	6.47
40	6.46
50	6.46
60	6.45

Ambient Temperature

[°C]

Load

0%

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temp.	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
[°C]	Operating Point [V]		
-20	6.50	6.50	6.50
-10	6.49	6.49	6.49
0	6.48	6.48	6.48
10	6.48	6.48	6.48
20	6.47	6.47	6.47
25	6.47	6.47	6.47
30	6.47	6.47	6.47
40	6.46	6.46	6.46
50	6.46	6.46	6.46
60	6.45	6.45	6.45
—	—	—	—


Testing Circuitry Figure A

2. Values

Ambient Temp.	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
[°C]	Operating Point [V]		
-20	6.50	6.50	6.50
-10	6.49	6.49	6.49
0	6.48	6.48	6.48
10	6.48	6.48	6.48
20	6.47	6.47	6.47
25	6.47	6.47	6.47
30	6.47	6.47	6.47
40	6.46	6.46	6.46
50	6.46	6.46	6.46
60	6.45	6.45	6.45
—	—	—	—

COSEL

Model	LEA50F-5	Temperature 25°C Testing Circuitry Figure A
Item	Inrush Current 突入電流	
Object		

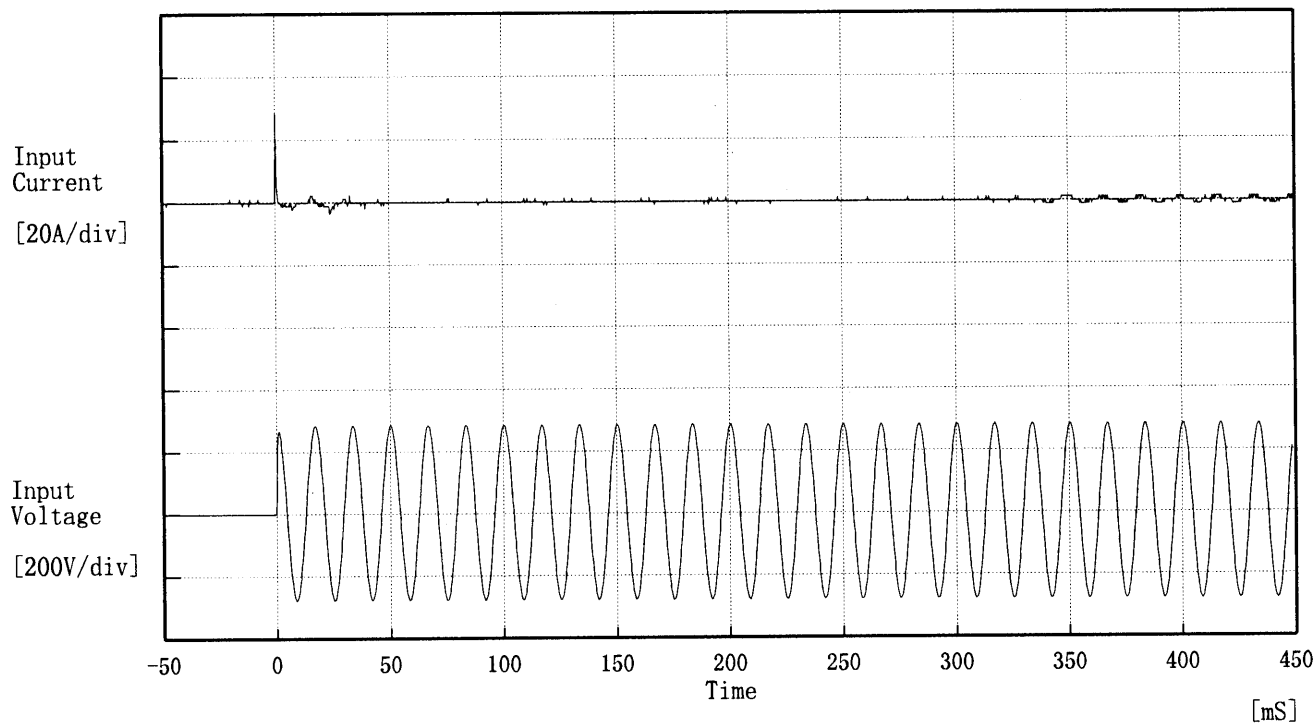

Input Voltage 200 V


Frequency 60 Hz

Load 100 %

Inrush Current

① 28.03 [A]

② 1.13 [A]

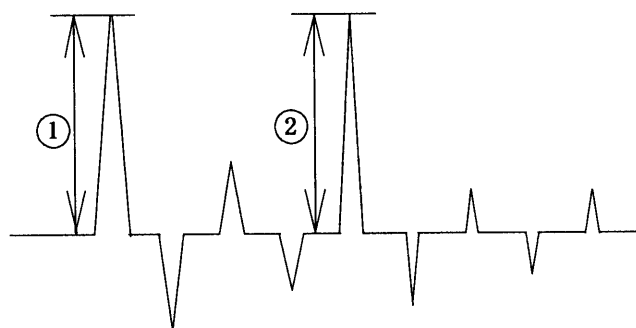

COSEL

Model	LEA50F-5	Temperature 25°C Testing Circuitry Figure A
Item	Dynamic Load Responce 動的負荷変動	
Object	+5V10A	



Input Volt. 200 V

Cycle 1000 mS



Load Current

Min. Load \longleftrightarrow

Load 100 %

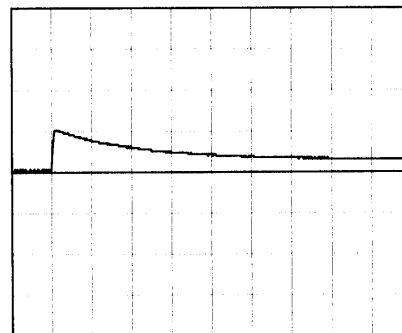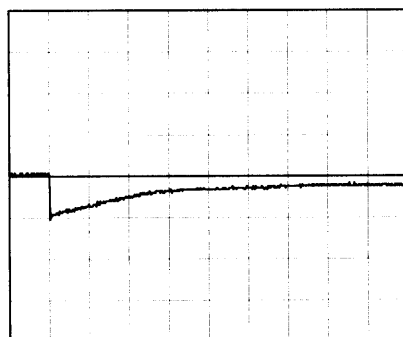Min. Load \longleftrightarrow

Load 50 %

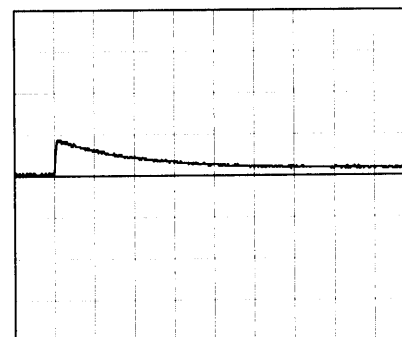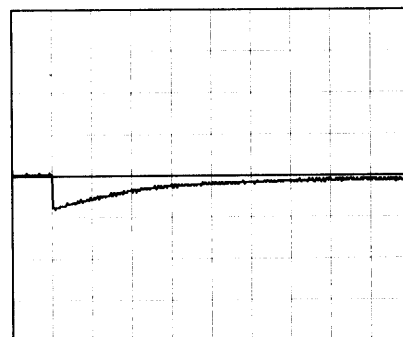

100 mV/div


10 ms/div

COSEL

Model	LEA50F-5	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+5V10A		

1. Graph


Input Volt. 170 V

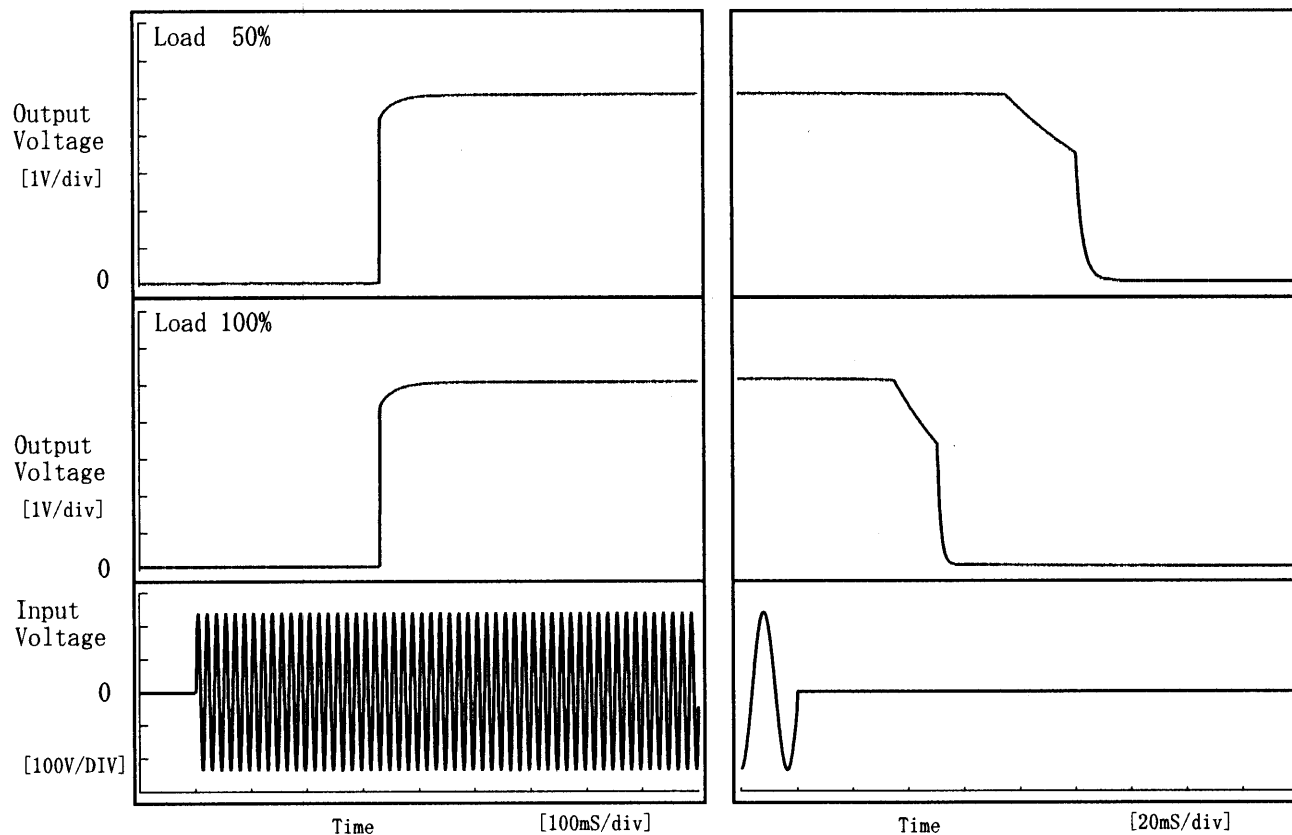

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	330.0	5.0	335.0	83.4	22.3
100 %	330.0	5.5	335.5	39.8	13.6

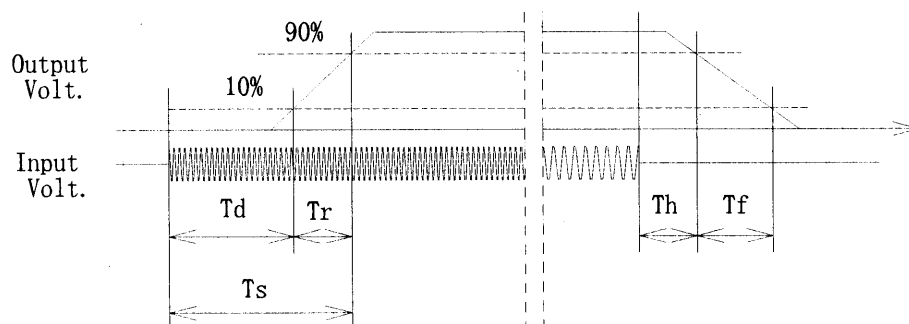

COSEL


Model LEA50F-5

Item Ambient Temperature Drift
周囲温度変動

Object +5V10A

Testing Circuitry Figure A

1. Graph

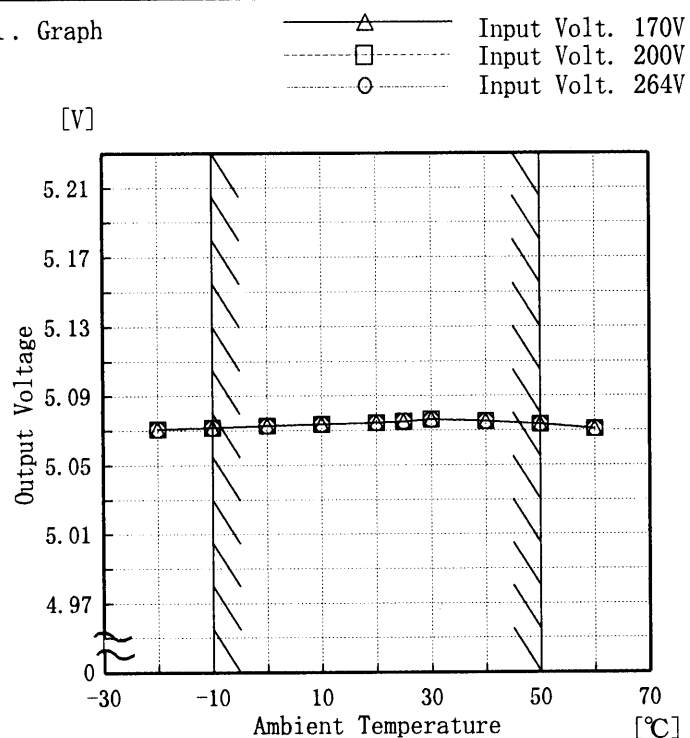

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

2. Values

Temperature	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
[°C]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
-20	5.071	5.071	5.071
-10	5.072	5.072	5.072
0	5.073	5.073	5.073
10	5.073	5.074	5.074
20	5.074	5.074	5.074
25	5.075	5.075	5.075
30	5.076	5.076	5.076
40	5.075	5.075	5.075
50	5.073	5.074	5.073
60	5.071	5.071	5.071
—	—	—	—

COSEL

Model

LEA50F-5

Item


Minimum Input Voltage for Regulated Output Voltage
最低レギュレーション電圧

Object

+5V10A

Testing Circuitry Figure A

1. Graph

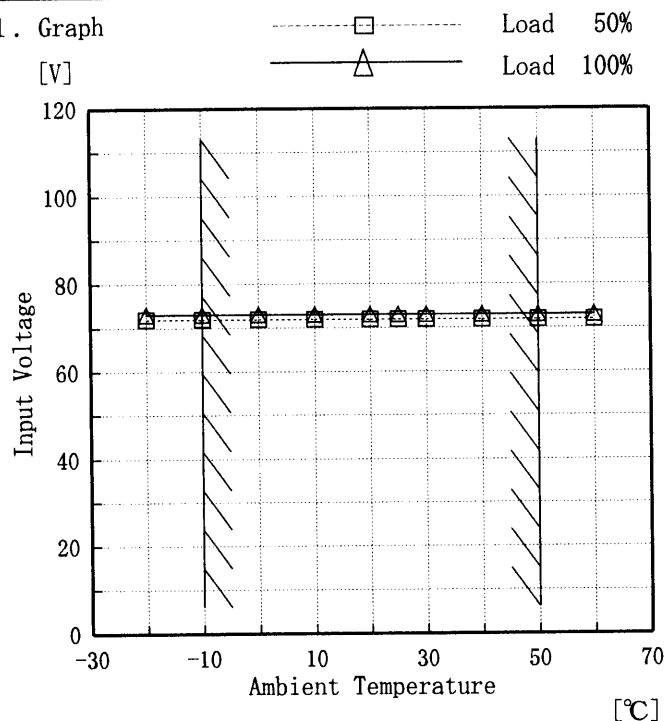

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]
-20	72	73
-10	72	73
0	72	73
10	72	73
20	72	73
25	72	73
30	72	73
40	72	73
50	72	73
60	72	73
—	—	—

COSEL


Model LEA50F-5

Item Ripple Voltage (by Ambient Temp.)
リップル電圧 (周囲温度特性)

Object +5V10A

Testing Circuitry Figure A


1. Graph

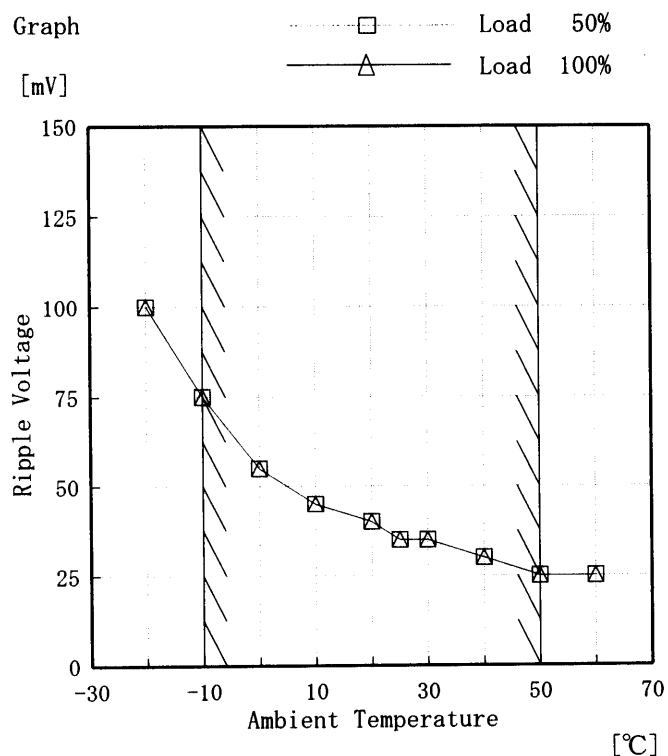

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
-20	100	100
-10	75	75
0	55	55
10	45	45
20	40	40
25	35	35
30	35	35
40	30	30
50	25	25
60	25	25
—	—	—

COSEL

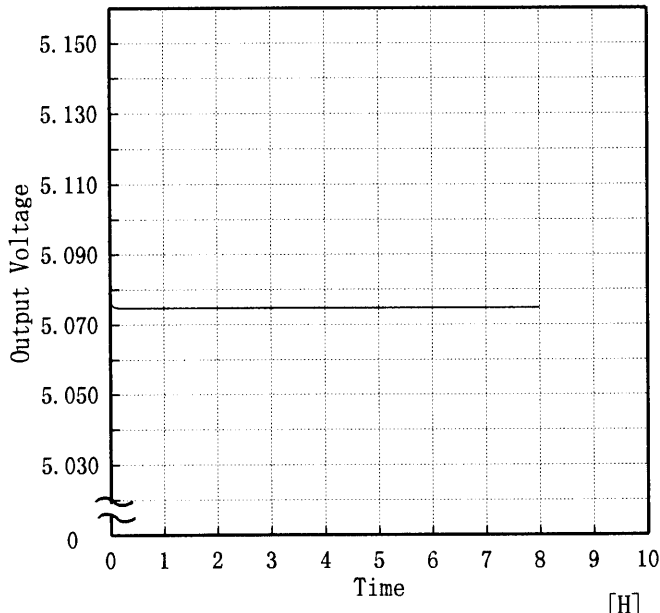COSEL																									
Model	LEA50F-5																								
Item	Time Lapse Drift 経時ドリフト																								
Object	+5V10A																								
1. Graph		2.Values																							
<div><div>[V]</div><div></div><div>Output Voltage</div><div>Time [H]</div><div>Input Volt. 200V</div><div>Load 100%</div></div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>5.077</td></tr><tr><td>0.5</td><td>5.075</td></tr><tr><td>1.0</td><td>5.075</td></tr><tr><td>2.0</td><td>5.075</td></tr><tr><td>3.0</td><td>5.075</td></tr><tr><td>4.0</td><td>5.075</td></tr><tr><td>5.0</td><td>5.075</td></tr><tr><td>6.0</td><td>5.075</td></tr><tr><td>7.0</td><td>5.075</td></tr><tr><td>8.0</td><td>5.075</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	5.077	0.5	5.075	1.0	5.075	2.0	5.075	3.0	5.075	4.0	5.075	5.0	5.075	6.0	5.075	7.0	5.075	8.0	5.075
Time since start [H]	Output Voltage [V]																								
0.0	5.077																								
0.5	5.075																								
1.0	5.075																								
2.0	5.075																								
3.0	5.075																								
4.0	5.075																								
5.0	5.075																								
6.0	5.075																								
7.0	5.075																								
8.0	5.075																								

COSEL

Model	LEA50F-5	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+5V10A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -10~50 °C

Input Voltage : 170~264 V

Load Current : 0.00~10 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -10~50 °C

入力電圧 : 170~264 V

負荷電流 : 0.00~10 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	25	264	0.00	5.104	±16	±0.4
Minimum Voltage	-10	170	10.00	5.072		


COSEL

Model	LEA50F-5	Temperature	25°C
Item	Harmonic Current 高調波電流	Testing Circuitry	Figure E
Object			


1. Input Current Waveform

— Input Current
 — Envelope of the input current to classify equipment as Class D
 クラスDの機器を決定するための入力電流包絡線

0.5 A/div

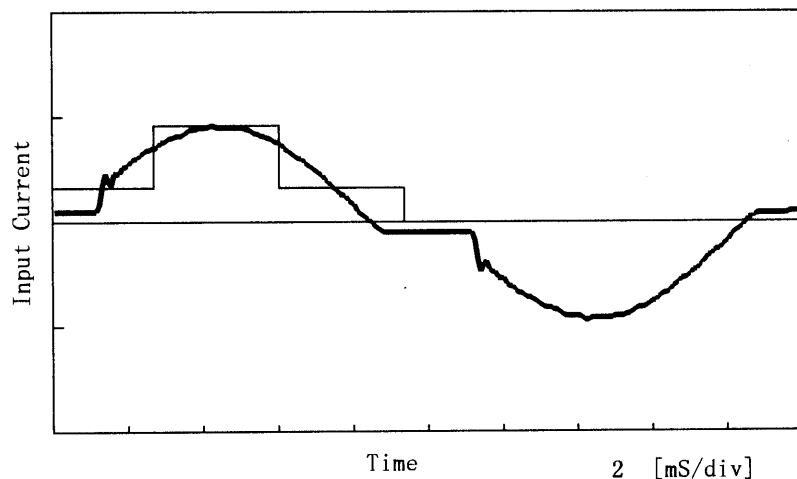

2. Harmonic Current

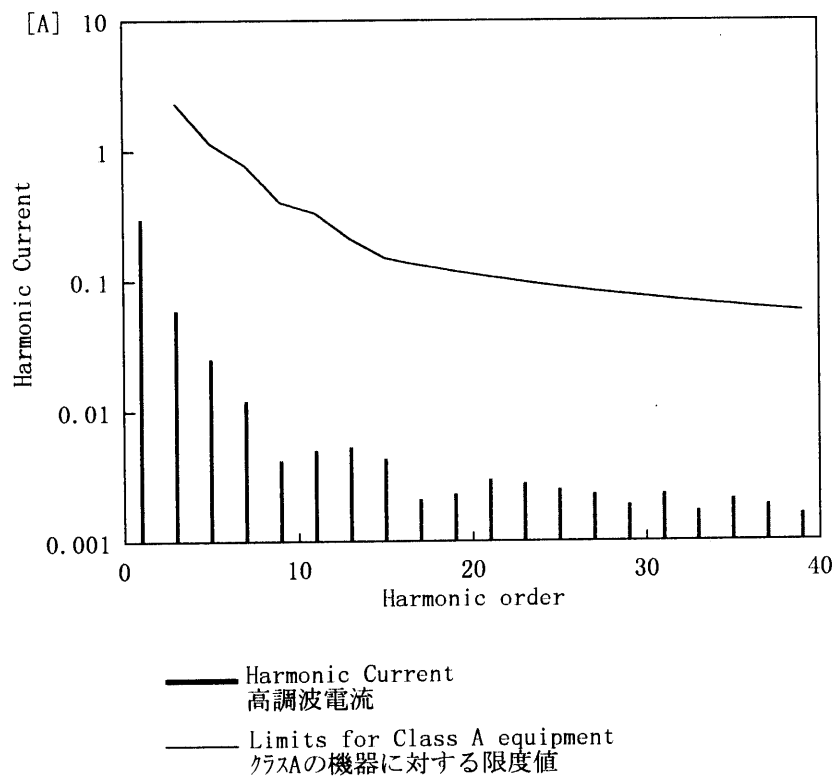

Conditions	Values
Input Voltage [V]	230.5
Input Current [A]	0.307
Active Power [W]	66
Apparent Power [VA]	70.9
Frequency [Hz]	50
Power Factor	0.931
Output Power [W]	50

Harmonics order 高調波次数	Limits 限度値 [A]	Values 測定値 [A]
1	—	0.30000
2	—	0.00030
3	2.29501	0.05950
4	—	0.00010
5	1.13753	0.02520
6	—	0.00000
7	0.76833	0.01200
8	—	0.00000
9	0.39913	0.00420
10	—	0.00000
11	0.32928	0.00500
12	—	0.00010
13	0.20954	0.00530
14	—	0.00010
15	0.14967	0.00430
16	—	0.00000
17	0.13207	0.00210
18	—	0.00010
19	0.11816	0.00230
20	—	0.00010
21	0.10691	0.00300
22	—	0.00010
23	0.09761	0.00280
24	—	0.00000
25	0.08980	0.00250
26	—	0.00000
27	0.08315	0.00230
28	—	0.00000
29	0.07742	0.00190
30	—	0.00010
31	0.07242	0.00230
32	—	0.00010
33	0.06803	0.00170
34	—	0.00010
35	0.06415	0.00210
36	—	0.00010
37	0.06068	0.00190
38	—	0.00000
39	0.05757	0.00160
40	—	0.00010


COSEL

Model	LEA50F-5	Temperature	25°C
Item	Harmonic Current 高調波電流	Testing Circuitry	Figure E
Object			


1. Input Current Waveform

— Input Current
 — Envelope of the input current to classify equipment as Class D
 クラスDの機器を決定するための入力電流包絡線

0.5 A/div

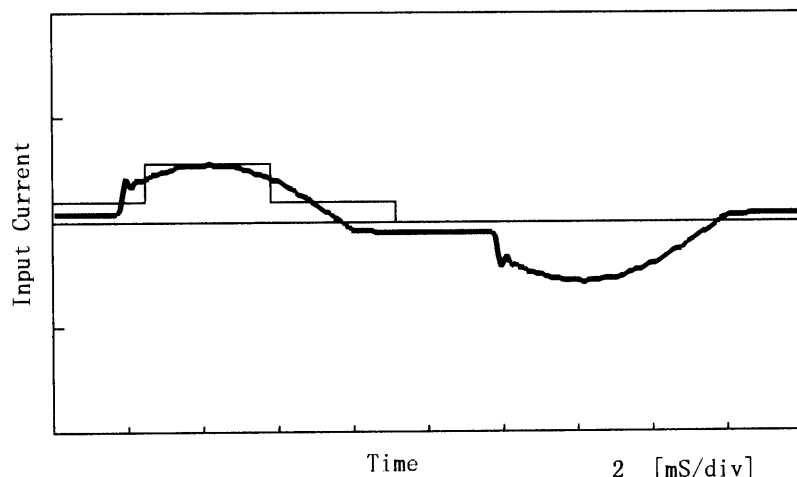

2. Harmonic Current

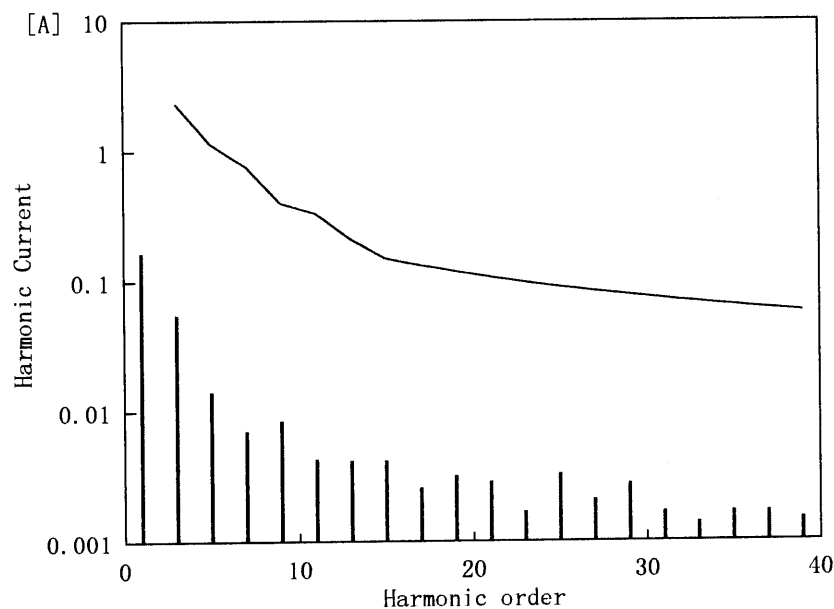

— Harmonic Current
 高調波電流
 — Limits for Class A equipment
 クラスAの機器に対する限度値

Conditions	Values
Input Voltage [V]	230.5
Input Current [A]	0.177
Active Power [W]	35
Apparent Power [VA]	41
Frequency [Hz]	50
Power Factor	0.854
Output Power [W]	25

Harmonics order 高調波次数	Limits 限度値 [A]	Values 測定値 [A]
1	—	0.16740
2	—	0.00040
3	2.29501	0.05520
4	—	0.00000
5	1.13753	0.01420
6	—	0.00010
7	0.76833	0.00710
8	—	0.00000
9	0.39913	0.00850
10	—	0.00000
11	0.32928	0.00430
12	—	0.00010
13	0.20954	0.00420
14	—	0.00010
15	0.14967	0.00420
16	—	0.00000
17	0.13207	0.00260
18	—	0.00000
19	0.11816	0.00320
20	—	0.00000
21	0.10691	0.00290
22	—	0.00010
23	0.09761	0.00170
24	—	0.00010
25	0.08980	0.00330
26	—	0.00010
27	0.08315	0.00210
28	—	0.00010
29	0.07742	0.00280
30	—	0.00000
31	0.07242	0.00170
32	—	0.00000
33	0.06803	0.00140
34	—	0.00000
35	0.06415	0.00170
36	—	0.00010
37	0.06068	0.00170
38	—	0.00010
39	0.05757	0.00150
40	—	0.00010

COSEL

LOREL

Model	LEA50F-5	Testing Circuitry	Figure A
Item	Condensation 結露特性		
Object	+5V10A		

1. Condensation test

Testing procedure is as follows.

① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.

② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.

③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で-10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。

2. Values

Item	Data	Testing Conditions
Output Voltage [V]	5.096	Input Volt.: 200V, Load Current:10A
Line Regulation [mV]	1	Input Volt.: 170~264V, Load Current:10A
Load Regulation [mV]	27	Input Volt.: 200V, Load Current:0~10A

COSEL

Model	LEA50F-5	Temperature	25℃
Item	Leakage Current 漏洩電流	Testing Circuitry	Figure B
Object	_____		

1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DENTORI	—	—	—
(B) IEC60950	—	—	—

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力 of 両相について測定し、その大きい方を漏洩電流測定値とする。

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 230 [V]	Input Volt. 264 [V]
(B) IEC60950	0.32	0.44	0.52

COSEL

Model	LEA50F-5		
Item	Line Noise Tolerance 入力雑音耐量	Temperature Testing Circuitry	25℃ Figure C
Object	+5V10A		

1. Results

Pulse Width [n S]	MODE	No protection failure should occur 保護回路の誤動作がない	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation
1000	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation

Conditions

Input Voltage : 200 V
 Pulse Voltage : 2000 V
 Pulse Cycle : 10 mS
 Pulse Input Duration: 1 min. or more
 Load : 100 %

COSEL

Model	LEA50F-5	Temperature	25°C
Item	Conducted Emission 雑音端子電圧	Testing Circuitry	Figure D
Object			

1. Graph


Remarks

Input Volt. 230V (CISPR Pub22 Class B)

Load 100 %

Limit1: [CISPR Pub22] Class B(QP)

Limit2: [CISPR Pub22] Class B(Ave.)

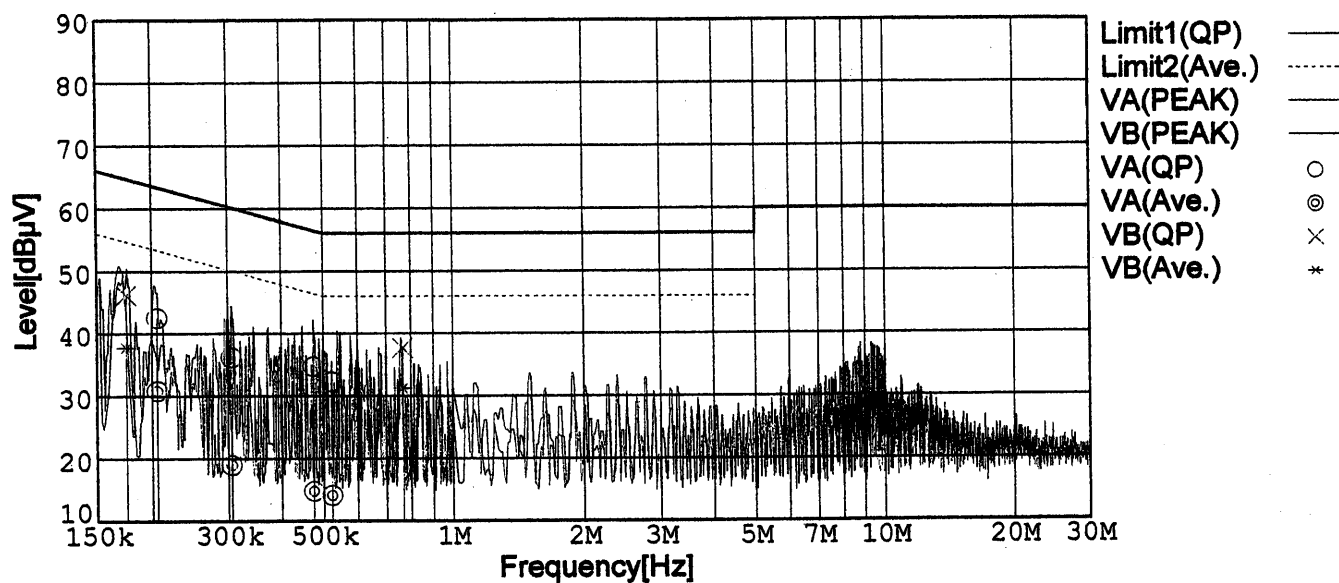

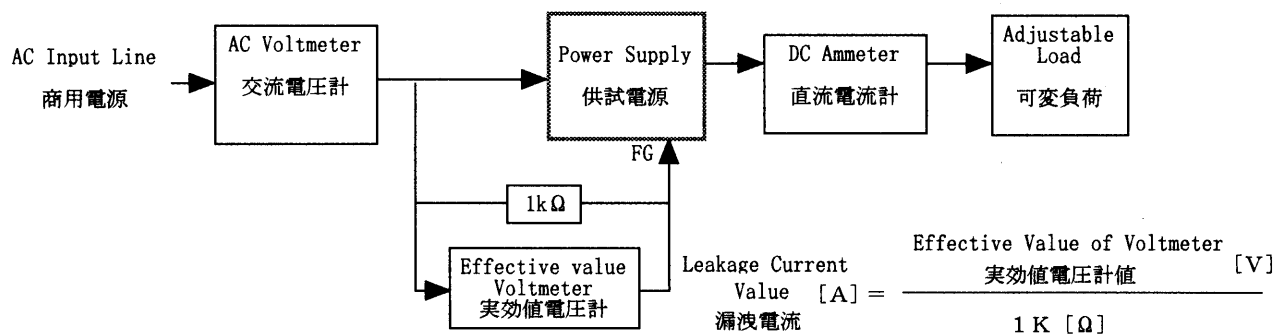
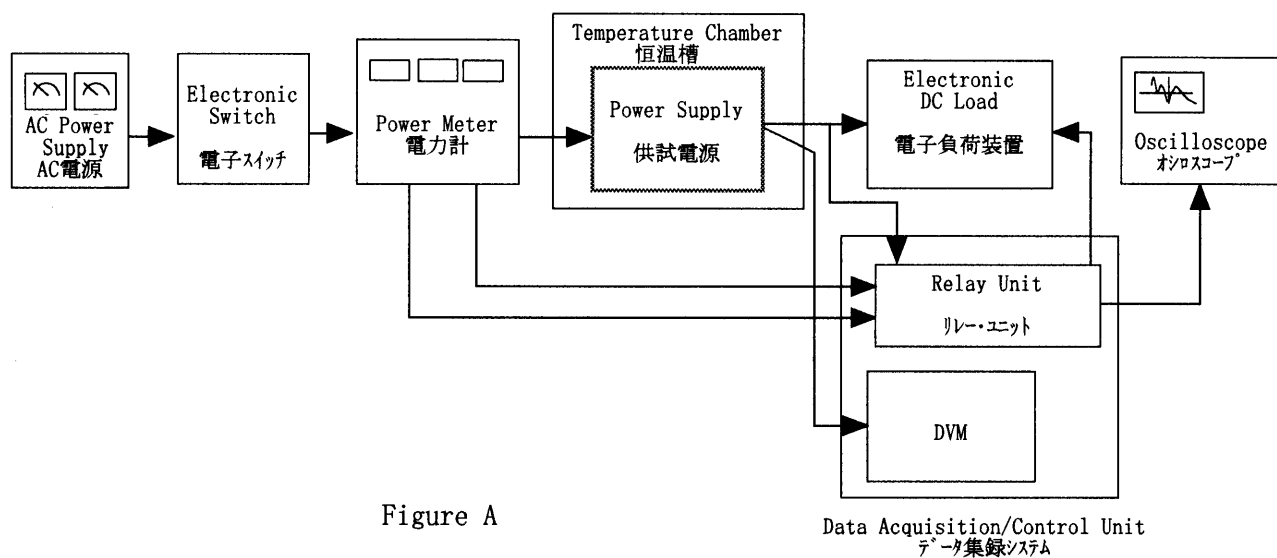


Figure B (DENTORI)

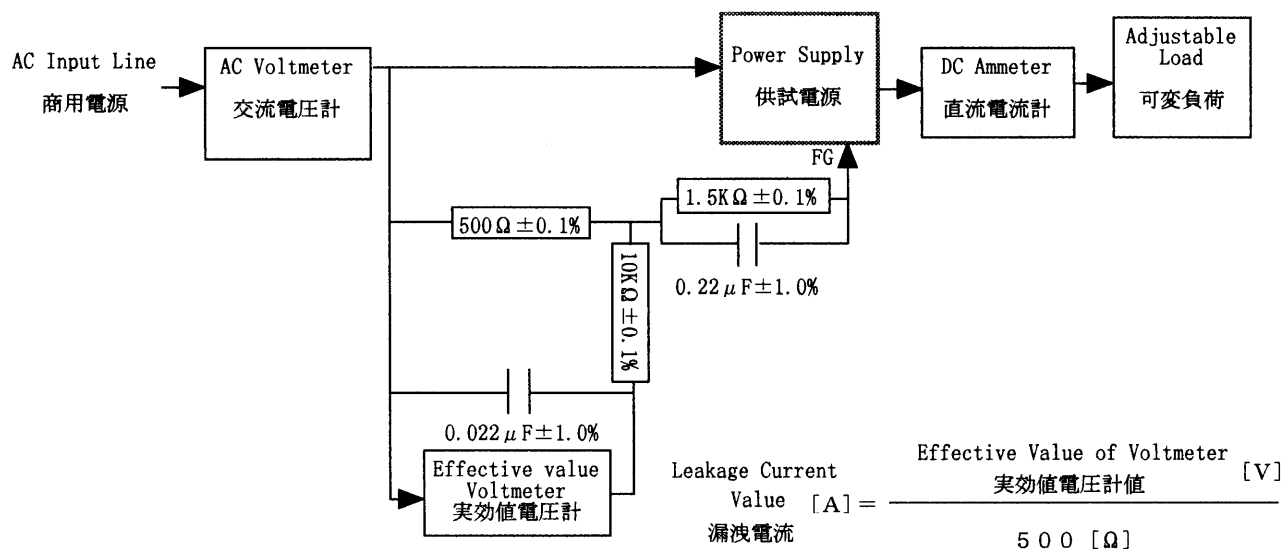


Figure B (IEC60950)

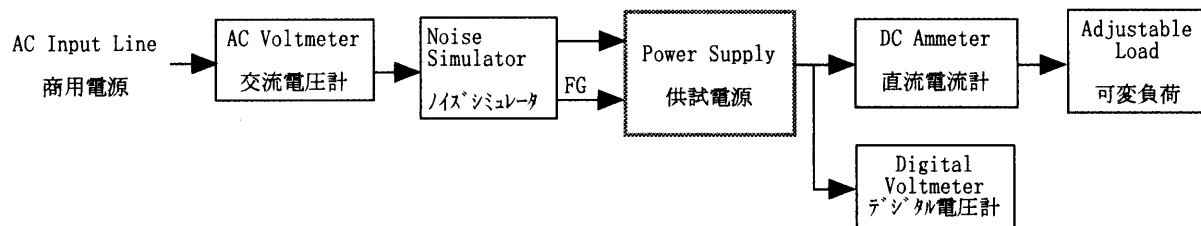


Figure C

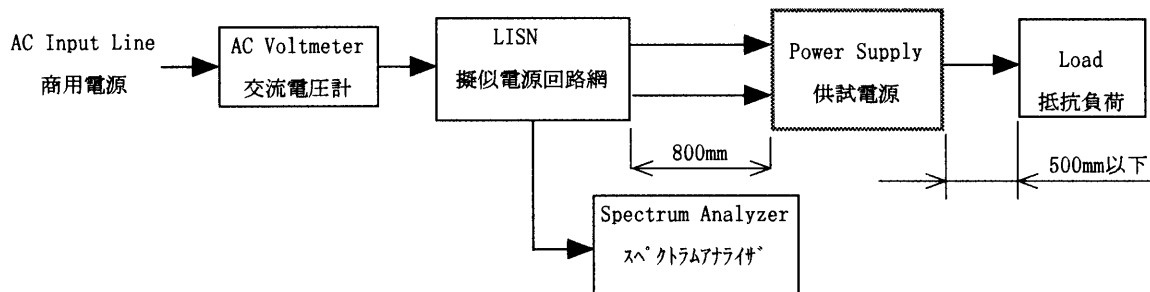


Figure D

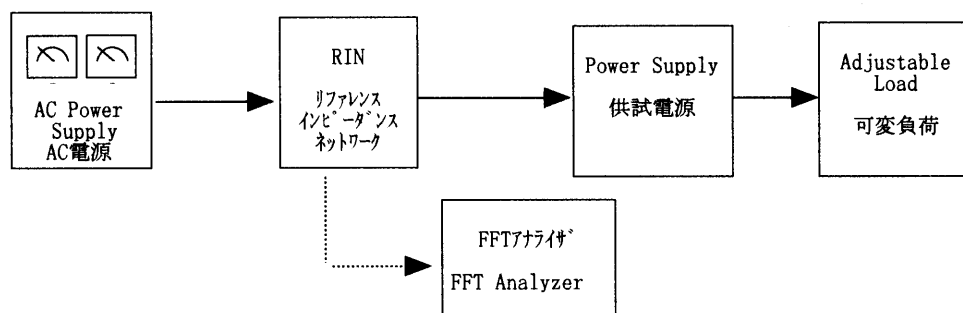


Figure E