

TEST DATA OF LHA50F-3R3-Y

Regulated DC Power Supply
September 19, 2019

Approved by : Junya Kaneda
Junya Kaneda Design Manager

Prepared by : Yasushi Fukumura
Yasushi Fukumura Design Engineer

COSEL CO.,LTD.

CONTENTS

1.Input Current (by Load Current)	1
2.Efficiency (by Load Current)	2
3.Power Factor (by Load Current)	3
4.Inrush Current	4
5.Leakage Current	5
6.Line Regulation	6
7.Load Regulation	7
8.Dynamic Load Response	8
9.Ripple-Noise(by Load Current)	9
10.Ambient Temperature Drift	10
11.Rise and Fall Time	11
12.Hold-Up Time	12
13.Instantaneous Interruption Compensation	13
14.Minimum Input Voltage for Regulated Output Voltage	14
15.Overcurrent Protection	15
16.Overvoltage Protection	16
17.Figure of Testing Circuitry	17


(Final Page 18)



Model	LHA50F-3R3-Y
Item	Input Current (by Load Current)
Object	_____

Temperature 25°C
Testing Circuitry Figure A

1.Graph
 —△— Input Volt. 100V
 - - □ - - Input Volt. 200V
 - · - ○ - · - Input Volt. 230V

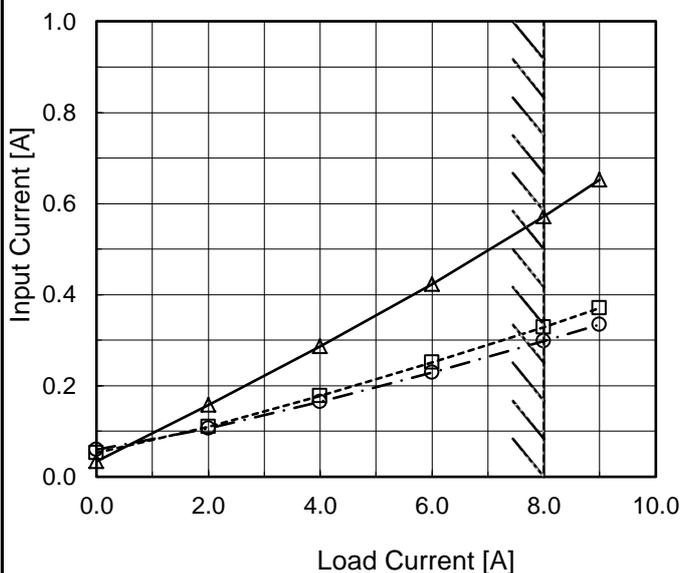

Note: Slanted line shows the range of the rated load current.

2.Values

Load Current [A]	Input Current [A]		
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]
0.0	0.034	0.052	0.059
2.0	0.158	0.110	0.106
4.0	0.286	0.178	0.165
6.0	0.423	0.251	0.229
8.0	0.572	0.328	0.297
9.0	0.652	0.371	0.334
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-






Model		LHA50F-3R3-Y	Temperature 25°C																																																				
Item		Efficiency (by Load Current)	Testing Circuitry Figure A																																																				
Object		_____																																																					
1.Graph		<p>—△— Input Volt. 100V</p> <p>- - □ - - Input Volt. 200V</p> <p>- · - ○ - · - Input Volt. 230V</p>	2.Values																																																				
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>2.0</td><td>83.1</td><td>81.0</td><td>79.4</td></tr> <tr><td>4.0</td><td>83.3</td><td>84.4</td><td>84.1</td></tr> <tr><td>6.0</td><td>81.8</td><td>84.2</td><td>84.2</td></tr> <tr><td>8.0</td><td>80.0</td><td>83.4</td><td>83.5</td></tr> <tr><td>9.0</td><td>78.9</td><td>82.8</td><td>83.0</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Efficiency [%]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.0	-	-	-	2.0	83.1	81.0	79.4	4.0	83.3	84.4	84.1	6.0	81.8	84.2	84.2	8.0	80.0	83.4	83.5	9.0	78.9	82.8	83.0	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Efficiency [%]																																																						
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																				
0.0	-	-	-																																																				
2.0	83.1	81.0	79.4																																																				
4.0	83.3	84.4	84.1																																																				
6.0	81.8	84.2	84.2																																																				
8.0	80.0	83.4	83.5																																																				
9.0	78.9	82.8	83.0																																																				
--	-	-	-																																																				
--	-	-	-																																																				
--	-	-	-																																																				
--	-	-	-																																																				
--	-	-	-																																																				
<p>Note: Slanted line shows the range of the rated load current.</p>																																																							



Model		LHA50F-3R3-Y	Temperature	25°C																																																							
Item		Power Factor (by Load Current)	Testing Circuitry	Figure A																																																							
Object		_____																																																									
1.Graph		<p>—△— Input Volt. 100V</p> <p>- - -□- - - Input Volt. 200V</p> <p>- · - ○ - · - - Input Volt. 230V</p>	2.Values																																																								
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Power Factor</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.244</td><td>0.091</td><td>0.081</td></tr> <tr><td>2.0</td><td>0.502</td><td>0.371</td><td>0.340</td></tr> <tr><td>4.0</td><td>0.554</td><td>0.439</td><td>0.414</td></tr> <tr><td>6.0</td><td>0.571</td><td>0.469</td><td>0.446</td></tr> <tr><td>8.0</td><td>0.577</td><td>0.482</td><td>0.462</td></tr> <tr><td>9.0</td><td>0.577</td><td>0.484</td><td>0.465</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Power Factor			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.0	0.244	0.091	0.081	2.0	0.502	0.371	0.340	4.0	0.554	0.439	0.414	6.0	0.571	0.469	0.446	8.0	0.577	0.482	0.462	9.0	0.577	0.484	0.465	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Power Factor																																																										
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																								
0.0	0.244	0.091	0.081																																																								
2.0	0.502	0.371	0.340																																																								
4.0	0.554	0.439	0.414																																																								
6.0	0.571	0.469	0.446																																																								
8.0	0.577	0.482	0.462																																																								
9.0	0.577	0.484	0.465																																																								
--	-	-	-																																																								
--	-	-	-																																																								
--	-	-	-																																																								
--	-	-	-																																																								
--	-	-	-																																																								
--	-	-	-																																																								
<p>Note: Slanted line shows the range of the rated load current.</p>																																																											



Model		LHA50F-3R3-Y	Temperature 25°C Testing Circuitry Figure A
Item		Inrush Current	
Object		_____	

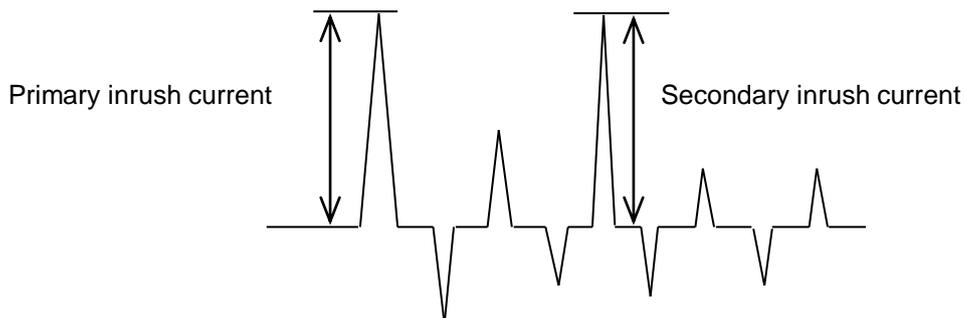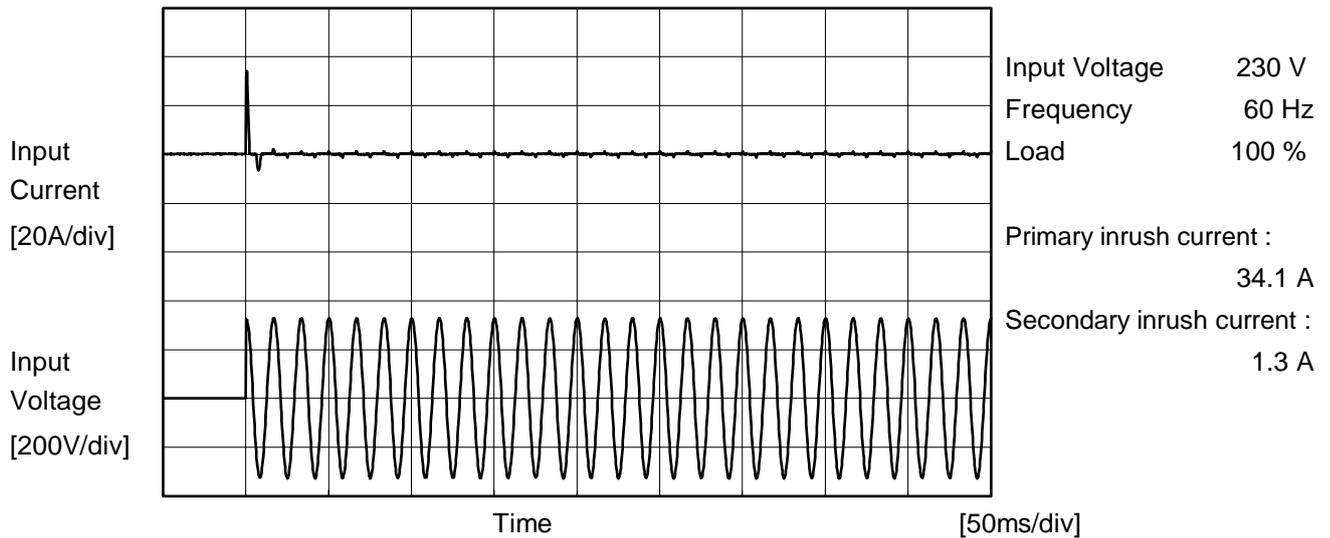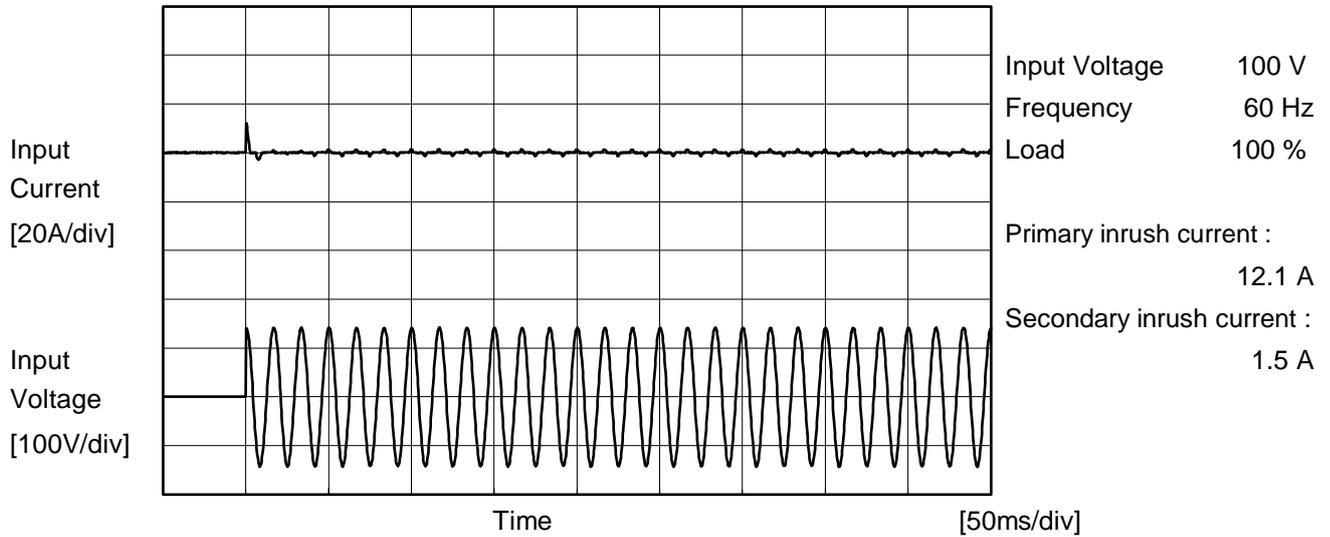



COSEL		
Model	LHA50F-3R3-Y	
Item	Leakage Current	Temperature 25°C Testing Circuitry Figure B
Object	_____	

1.Results

Standards	Testing Circuitry	Measuring Method	Input Volt.			Note
			100 [V]	230 [V]	240 [V]	
			[mA]			
DEN-AN	Figure B-1	Both phases	0.08	0.21	0.22	Operation
		One of phases	0.16	0.42	0.45	Stand by
IEC62368-1	Figure B-2	Both phases	0.11	0.26	0.26	Operation
		One of phases	0.16	0.38	0.40	Stand by
	Figure B-3	Both phases	0.11	0.26	0.27	Operation
		One of phases	0.16	0.38	0.40	Stand by

The value for "One of phases" is the reference value only.

2.Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.



COSEL																																		
Model	LHA50F-3R3-Y																																	
Item	Line Regulation	Temperature 25°C Testing Circuitry Figure A																																
Object	+3.3V8A																																	
<p>1.Graph</p> <div style="text-align: right;"> <p>---□--- Load 50%</p> <p>—△— Load 100%</p> </div> <p style="text-align: center;">Note: Slanted line shows the range of the rated input voltage.</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>85</td><td>3.300</td><td>-</td></tr> <tr><td>90</td><td>3.300</td><td>3.301</td></tr> <tr><td>100</td><td>3.300</td><td>3.301</td></tr> <tr><td>120</td><td>3.300</td><td>3.301</td></tr> <tr><td>200</td><td>3.300</td><td>3.301</td></tr> <tr><td>230</td><td>3.301</td><td>3.301</td></tr> <tr><td>264</td><td>3.300</td><td>3.301</td></tr> <tr><td>280</td><td>3.300</td><td>3.301</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	85	3.300	-	90	3.300	3.301	100	3.300	3.301	120	3.300	3.301	200	3.300	3.301	230	3.301	3.301	264	3.300	3.301	280	3.300	3.301	--	-	-
Input Voltage [V]	Output Voltage [V]																																	
	Load 50%	Load 100%																																
85	3.300	-																																
90	3.300	3.301																																
100	3.300	3.301																																
120	3.300	3.301																																
200	3.300	3.301																																
230	3.301	3.301																																
264	3.300	3.301																																
280	3.300	3.301																																
--	-	-																																



<p>Model LHA50F-3R3-Y</p> <p>Item Load Regulation</p> <p>Object +3.3V8A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																																			
<p>1.Graph</p> <p>—△— Input Volt. 100V</p> <p>---□--- Input Volt. 200V</p> <p>-·-○-·- Input Volt. 230V</p> <p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>3.303</td><td>3.303</td><td>3.303</td></tr> <tr><td>2.0</td><td>3.302</td><td>3.302</td><td>3.302</td></tr> <tr><td>4.0</td><td>3.302</td><td>3.302</td><td>3.302</td></tr> <tr><td>6.0</td><td>3.301</td><td>3.301</td><td>3.301</td></tr> <tr><td>8.0</td><td>3.301</td><td>3.301</td><td>3.301</td></tr> <tr><td>9.0</td><td>3.301</td><td>3.301</td><td>3.301</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Output Voltage [V]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.0	3.303	3.303	3.303	2.0	3.302	3.302	3.302	4.0	3.302	3.302	3.302	6.0	3.301	3.301	3.301	8.0	3.301	3.301	3.301	9.0	3.301	3.301	3.301	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																				
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																		
0.0	3.303	3.303	3.303																																																		
2.0	3.302	3.302	3.302																																																		
4.0	3.302	3.302	3.302																																																		
6.0	3.301	3.301	3.301																																																		
8.0	3.301	3.301	3.301																																																		
9.0	3.301	3.301	3.301																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		



Model		LHA50F-3R3-Y	Temperature 25°C Testing Circuitry Figure A
Item		Dynamic Load Response	
Object		+3.3V8A	


Input Volt. 230 V
Cycle 1000 ms

t1,t2 = 50 μs



Min.Load (0A) ←→
Load 100% (8A)

200 mV/div

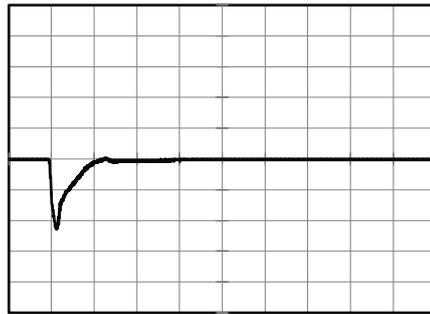


800 μs/div



4 ms/div

Min.Load (0A) ←→
Load 50% (4A)

200 mV/div

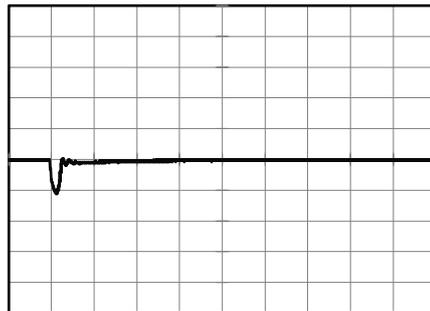


800 μs/div




4 ms/div

Load 50% (4A) ←→
Load 100% (8A)

200 mV/div

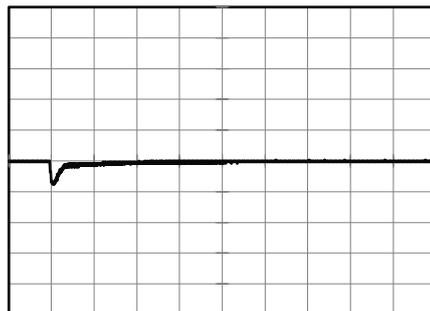

800 μs/div

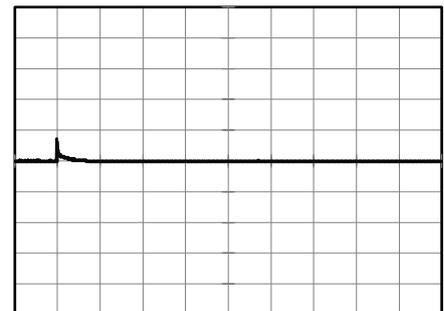


4 ms/div



Model	LHA50F-3R3-Y
Item	Ripple-Noise(by Load Current)
Object	+3.3V8A

Temperature 25°C
Testing Circuitry Figure C

1.Graph

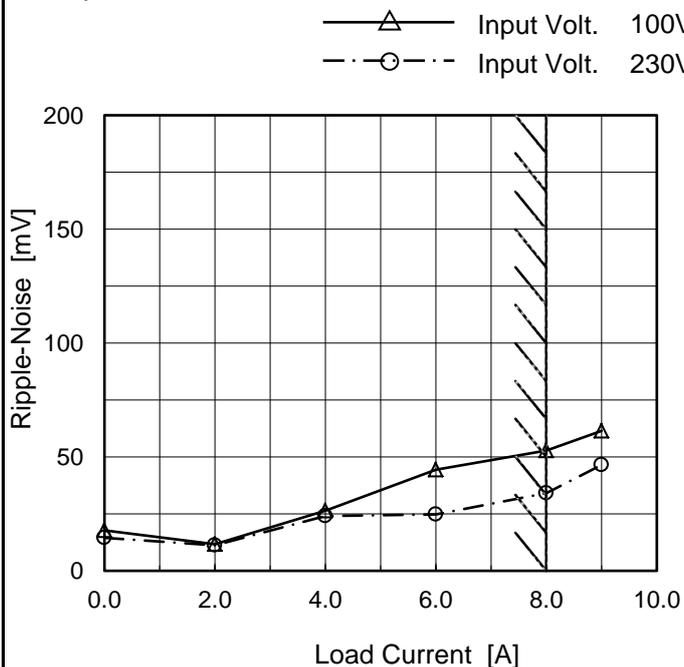

2.Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 100 [V]	Input Volt. 230 [V]
0.0	18	14
2.0	12	11
4.0	26	24
6.0	44	25
8.0	53	34
9.0	61	46
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-

Measured by 20 MHz Oscilloscope.
Ripple-Noise is shown as p-p in the figure below.
Note: Slanted line shows the range of the rated load current.

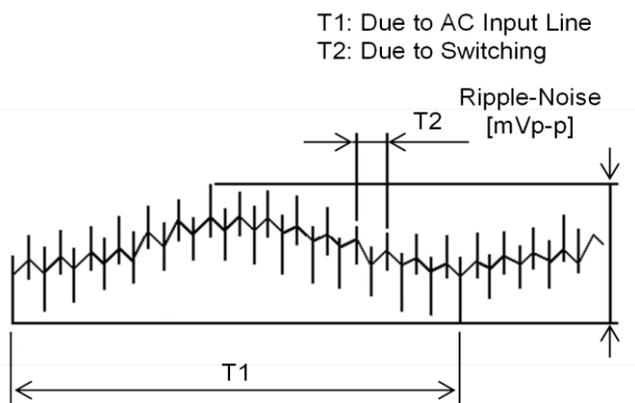


Fig. Complex Ripple Wave Form




Model	LHA50F-3R3-Y
Item	Ambient Temperature Drift
Object	+3.3V8A

Testing Circuitry Figure A

1.Graph

—△— Input Volt. 100V
 ---□--- Input Volt. 200V
 -·-○-·- Input Volt. 230V

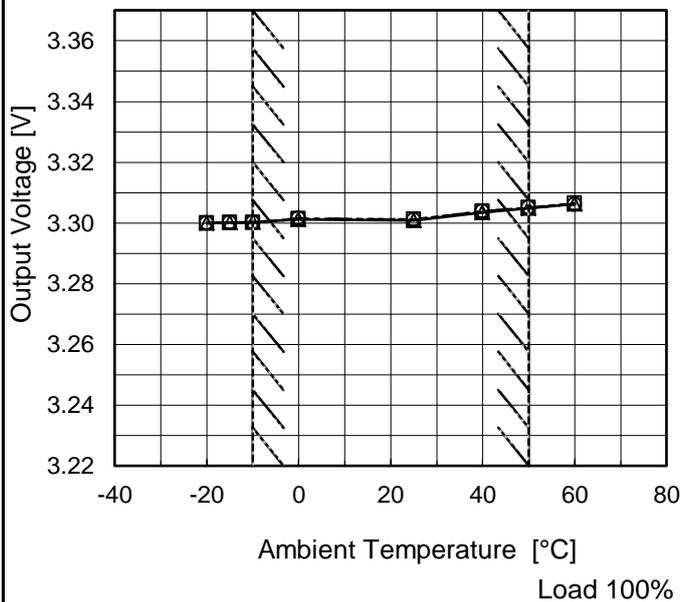

Note: Slanted line shows the range of the rated ambient temperature.


2.Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]
-20	3.300	3.300	3.300
-15	3.300	3.300	3.300
-10	3.300	3.300	3.300
0	3.301	3.301	3.302
25	3.301	3.301	3.301
40	3.304	3.304	3.304
50	3.305	3.305	3.305
60	3.306	3.306	3.306
--	-	-	-
--	-	-	-
--	-	-	-




Model		LHA50F-3R3-Y	Temperature 25°C Testing Circuitry Figure A
Item		Rise and Fall Time	
Object		+3.3V8A	

1. Graph

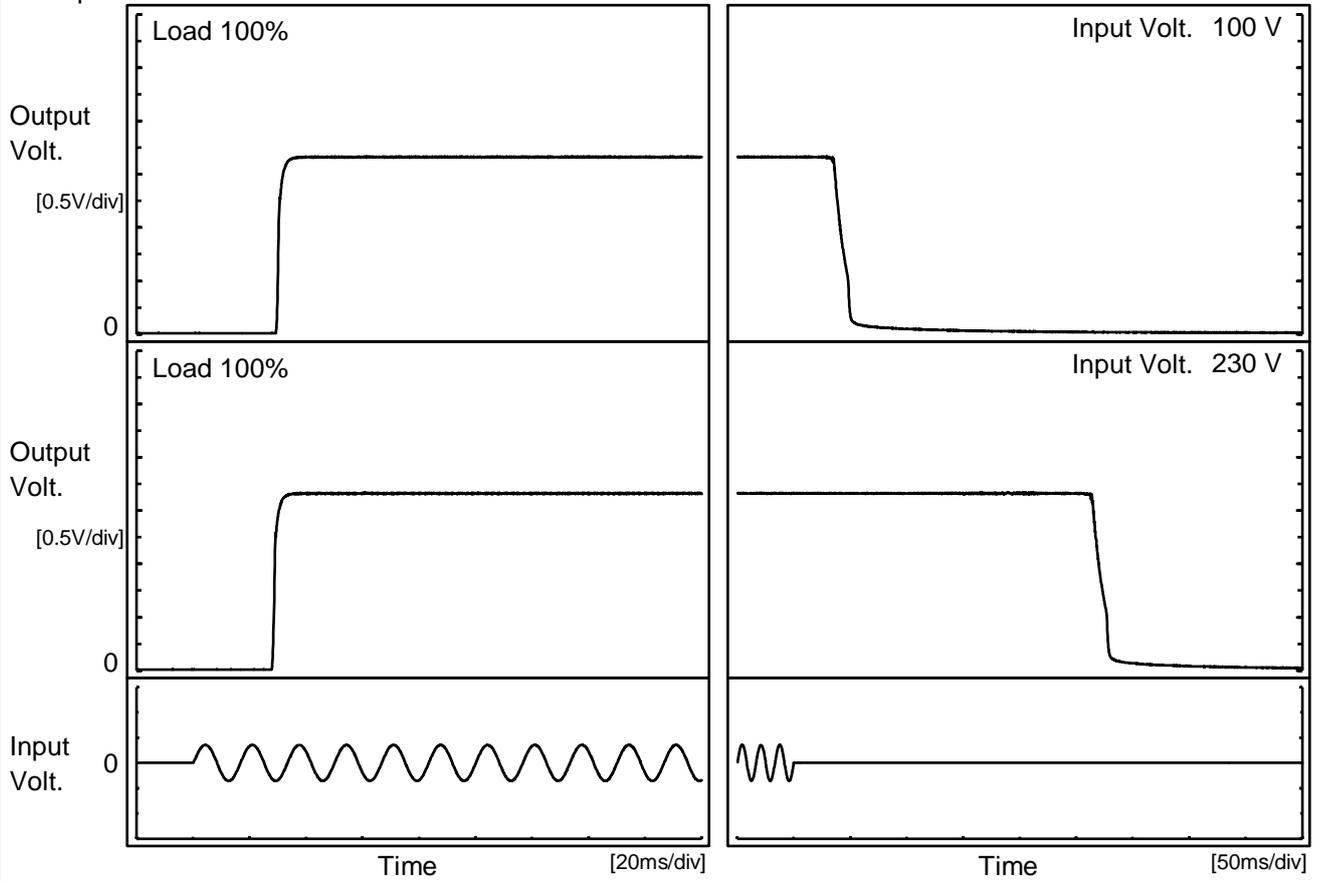

2. Values

		[ms]				
Input Volt.	Time	Td	Tr	Ts	Th	Tf
100 V		29.8	2.1	31.9	36.5	13.5
230 V		28.4	2.0	30.4	265.0	13.8

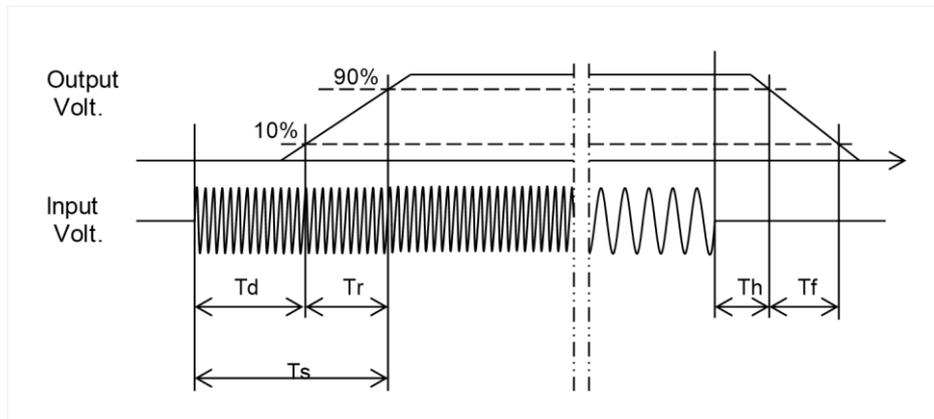



<p>Model LHA50F-3R3-Y</p> <p>Item Hold-Up Time</p> <p>Object +3.3V8A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																
<p>1.Graph</p> <p>---□--- Load 50%</p> <p>—△— Load 100%</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Hold-Up Time [ms]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr> <td>85</td> <td>60</td> <td>-</td> </tr> <tr> <td>90</td> <td>69</td> <td>28</td> </tr> <tr> <td>100</td> <td>89</td> <td>37</td> </tr> <tr> <td>120</td> <td>136</td> <td>60</td> </tr> <tr> <td>200</td> <td>422</td> <td>197</td> </tr> <tr> <td>230</td> <td>571</td> <td>268</td> </tr> <tr> <td>264</td> <td>764</td> <td>364</td> </tr> <tr> <td>280</td> <td>867</td> <td>415</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Input Voltage [V]	Hold-Up Time [ms]		Load 50%	Load 100%	85	60	-	90	69	28	100	89	37	120	136	60	200	422	197	230	571	268	264	764	364	280	867	415	--	-	-
Input Voltage [V]	Hold-Up Time [ms]																																	
	Load 50%	Load 100%																																
85	60	-																																
90	69	28																																
100	89	37																																
120	136	60																																
200	422	197																																
230	571	268																																
264	764	364																																
280	867	415																																
--	-	-																																
<p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy. Note: Slanted line shows the range of the rated input voltage.</p>																																		




<p>Model LHA50F-3R3-Y</p> <p>Item Instantaneous Interruption Compensation</p> <p>Object +3.3V8A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																																			
<p>1.Graph</p> <p> —△— Input Volt. 100V - - - □ - - - Input Volt. 200V - · - ○ - · - - Input Volt. 230V </p> <p>Instantaneous Compensation Time [ms]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Time [ms]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>2.0</td><td>189</td><td>836</td><td>1115</td></tr> <tr><td>4.0</td><td>89</td><td>420</td><td>566</td></tr> <tr><td>6.0</td><td>55</td><td>272</td><td>370</td></tr> <tr><td>8.0</td><td>37</td><td>195</td><td>266</td></tr> <tr><td>9.0</td><td>27</td><td>73</td><td>114</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Time [ms]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.0	-	-	-	2.0	189	836	1115	4.0	89	420	566	6.0	55	272	370	8.0	37	195	266	9.0	27	73	114	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Time [ms]																																																				
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																		
0.0	-	-	-																																																		
2.0	189	836	1115																																																		
4.0	89	420	566																																																		
6.0	55	272	370																																																		
8.0	37	195	266																																																		
9.0	27	73	114																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		



Model	LHA50F-3R3-Y
Item	Minimum Input Voltage for Regulated Output Voltage
Object	+3.3V8A

Testing Circuitry Figure A

1.Graph

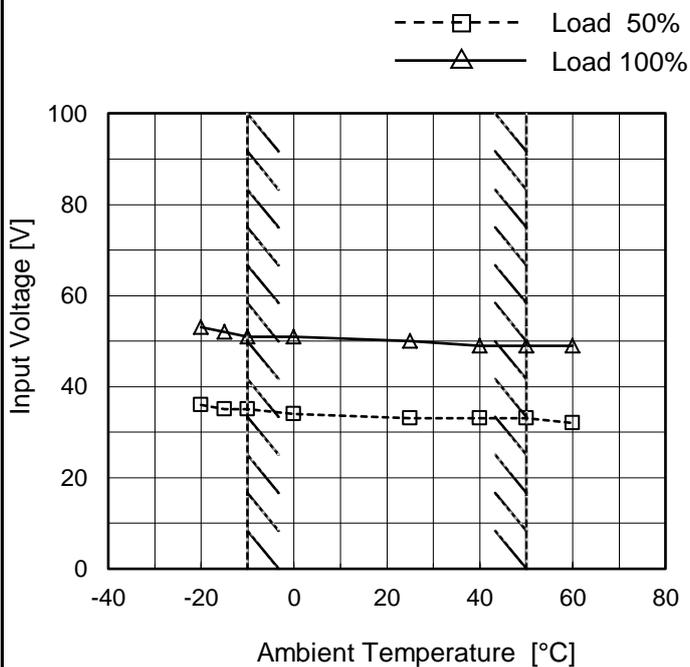

Note: Slanted line shows the range of the rated ambient temperature.

2.Values


Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-20	36	53
-15	35	52
-10	35	51
0	34	51
25	33	50
40	33	49
50	33	49
60	32	49
--	-	-
--	-	-
--	-	-



Model	LHA50F-3R3-Y
Item	Overvoltage Protection
Object	+3.3V8A

Testing Circuitry Figure A

1.Graph

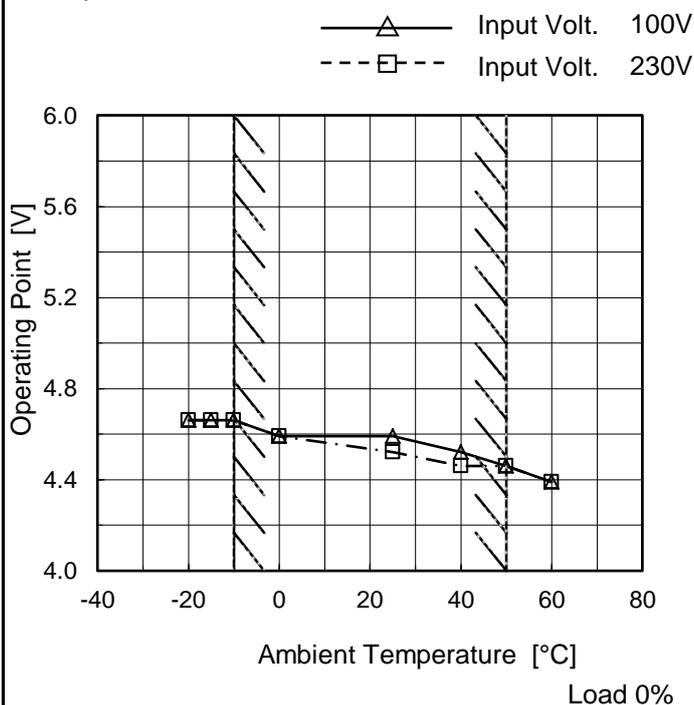

Note: Slanted line shows the range of the rated ambient temperature.

2.Values

Ambient Temperature [°C]	Operating Point [V]	
	Input Volt. 100[V]	Input Volt. 230[V]
-20	4.66	4.66
-15	4.66	4.66
-10	4.66	4.66
0	4.59	4.59
25	4.52	4.52
40	4.46	4.46
50	4.39	4.39
60	-	-
--	-	-
--	-	-
--	-	-


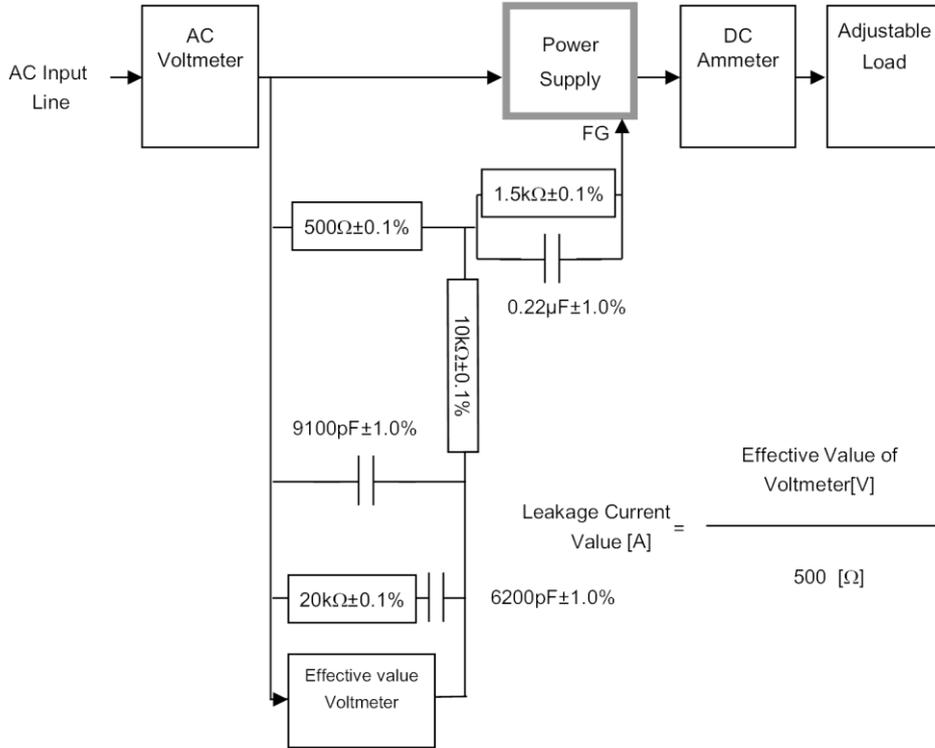


Figure B-3 (IEC62368-1 refer to IEC60990 Fig.5)

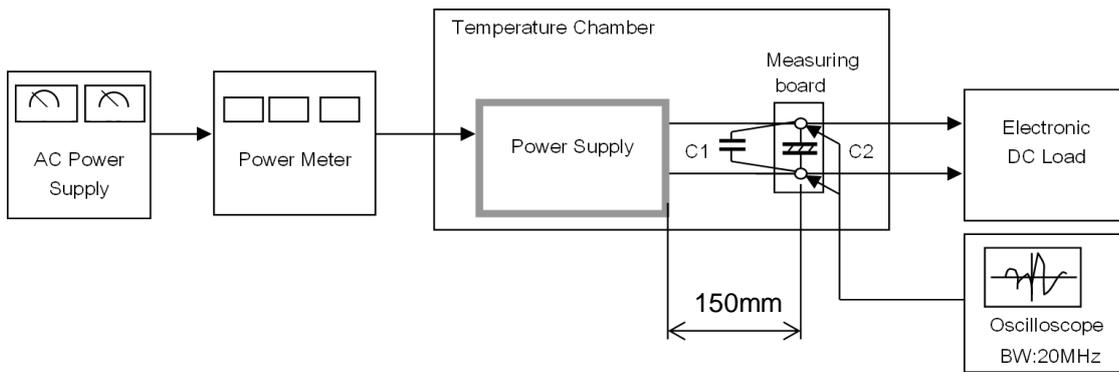

C1= 0.1 μF
(Film Capacitor)
C2= 22 μF
(Electrolytic capacitor)

Figure C