

Temperature increase of main components

Model: MGS624□□

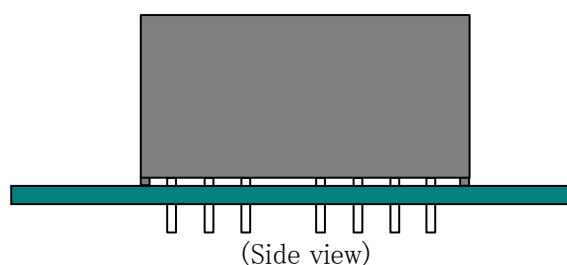
1. Conditions

- (1) Input :DC 24 [V]
 (2) Output :Rated output
 (3) Cooling method :Convection cooling
 (4) Mounting method :Shown as Fig.1.1

2. Result

Table 2.1 Temperature increase of main components

No.	Parts name	Symbol No.	Increase (ΔT)				Rate d temp. [°C]	Reference
			[deg]					
			3.3V	5V	12V	15V		
1	Switching MOS-FET	TR11	38	34	27	27	150	Junction Temp.
2	Power control IC	IC11	37	32	26	26	150	Junction Temp.
3	Rectified diode (Output)	D201	52	43	31	29	150	Junction Temp.
4	Photocoupler	PC11	37	32	26	26	125	Junction Temp.
5	Transformer (PCB)	P2	39	35	29	28	130	
6	CASE	CASE	34	32	27	26	105	Top Surface Center
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								

Fig.1.1 Mounting method
(Normal position)