

Temperature increase of main components

Model: MHFW324□□


1. Conditions

- (1) Input :DC 24 [V]
 (2) Output :Rated output
 (3) Cooling method :Convection cooling
 (4) Mounting method :Shown as Fig.1.1

2. Result

Table 2.1 Temperature increase of main components

No.	Parts name	Symbol No.	Increase (ΔT)					Rated temp. [°C]	Reference
			[deg]						
			$\pm 12V$	$\pm 15V$	-	-	-		
1	Switching MOS-FET	TR101	33	29	-	-	-	150	Junction Temp.
2	Switching MOS-FET	TR111	38	38	-	-	-	150	Junction Temp.
3	Input Choke Coil	L101	33	34	-	-	-	125	
4	Rectified diode(Output)	D201	31	31	-	-	-	150	Junction Temp.
5	Rectified diode(Output)	D202	33	32	-	-	-	150	Junction Temp.
6	Transformer	T11	35	36	-	-	-	130	
7	Photocoupler	PC11	29	29	-	-	-	125	Junction Temp.
8	Case	CASE	32	31	-	-	-	105	Top Surface Center
9									
10									
11									
12									
13									
14									
15									
16									
17									
18									
19									
20									

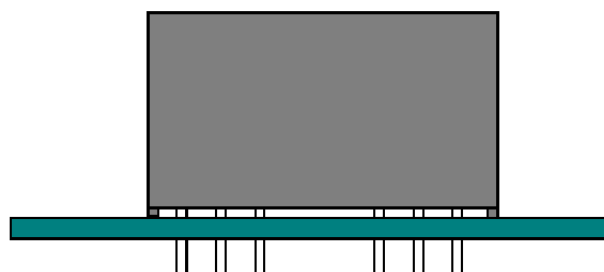

(Side view)

Fig.1.1 Mounting method
(Normal position)