



EXTRA TEST DATA OF PJA300F-12


Regulated DC Power Supply
Nov 20, 2021

COSEL CO.,LTD.

CONTENTS




1.Inrush Current (enlargement)	1
2.Dynamic Line Regulation	2
3.Overtoltage Protection (waveform)	3
4.Hiccup cycle (by Overcurrent Protection)	4
5.Power Consumption (by Input Voltage)	5
6.Figure of Testing Circuitry	6

(Final Page 6)

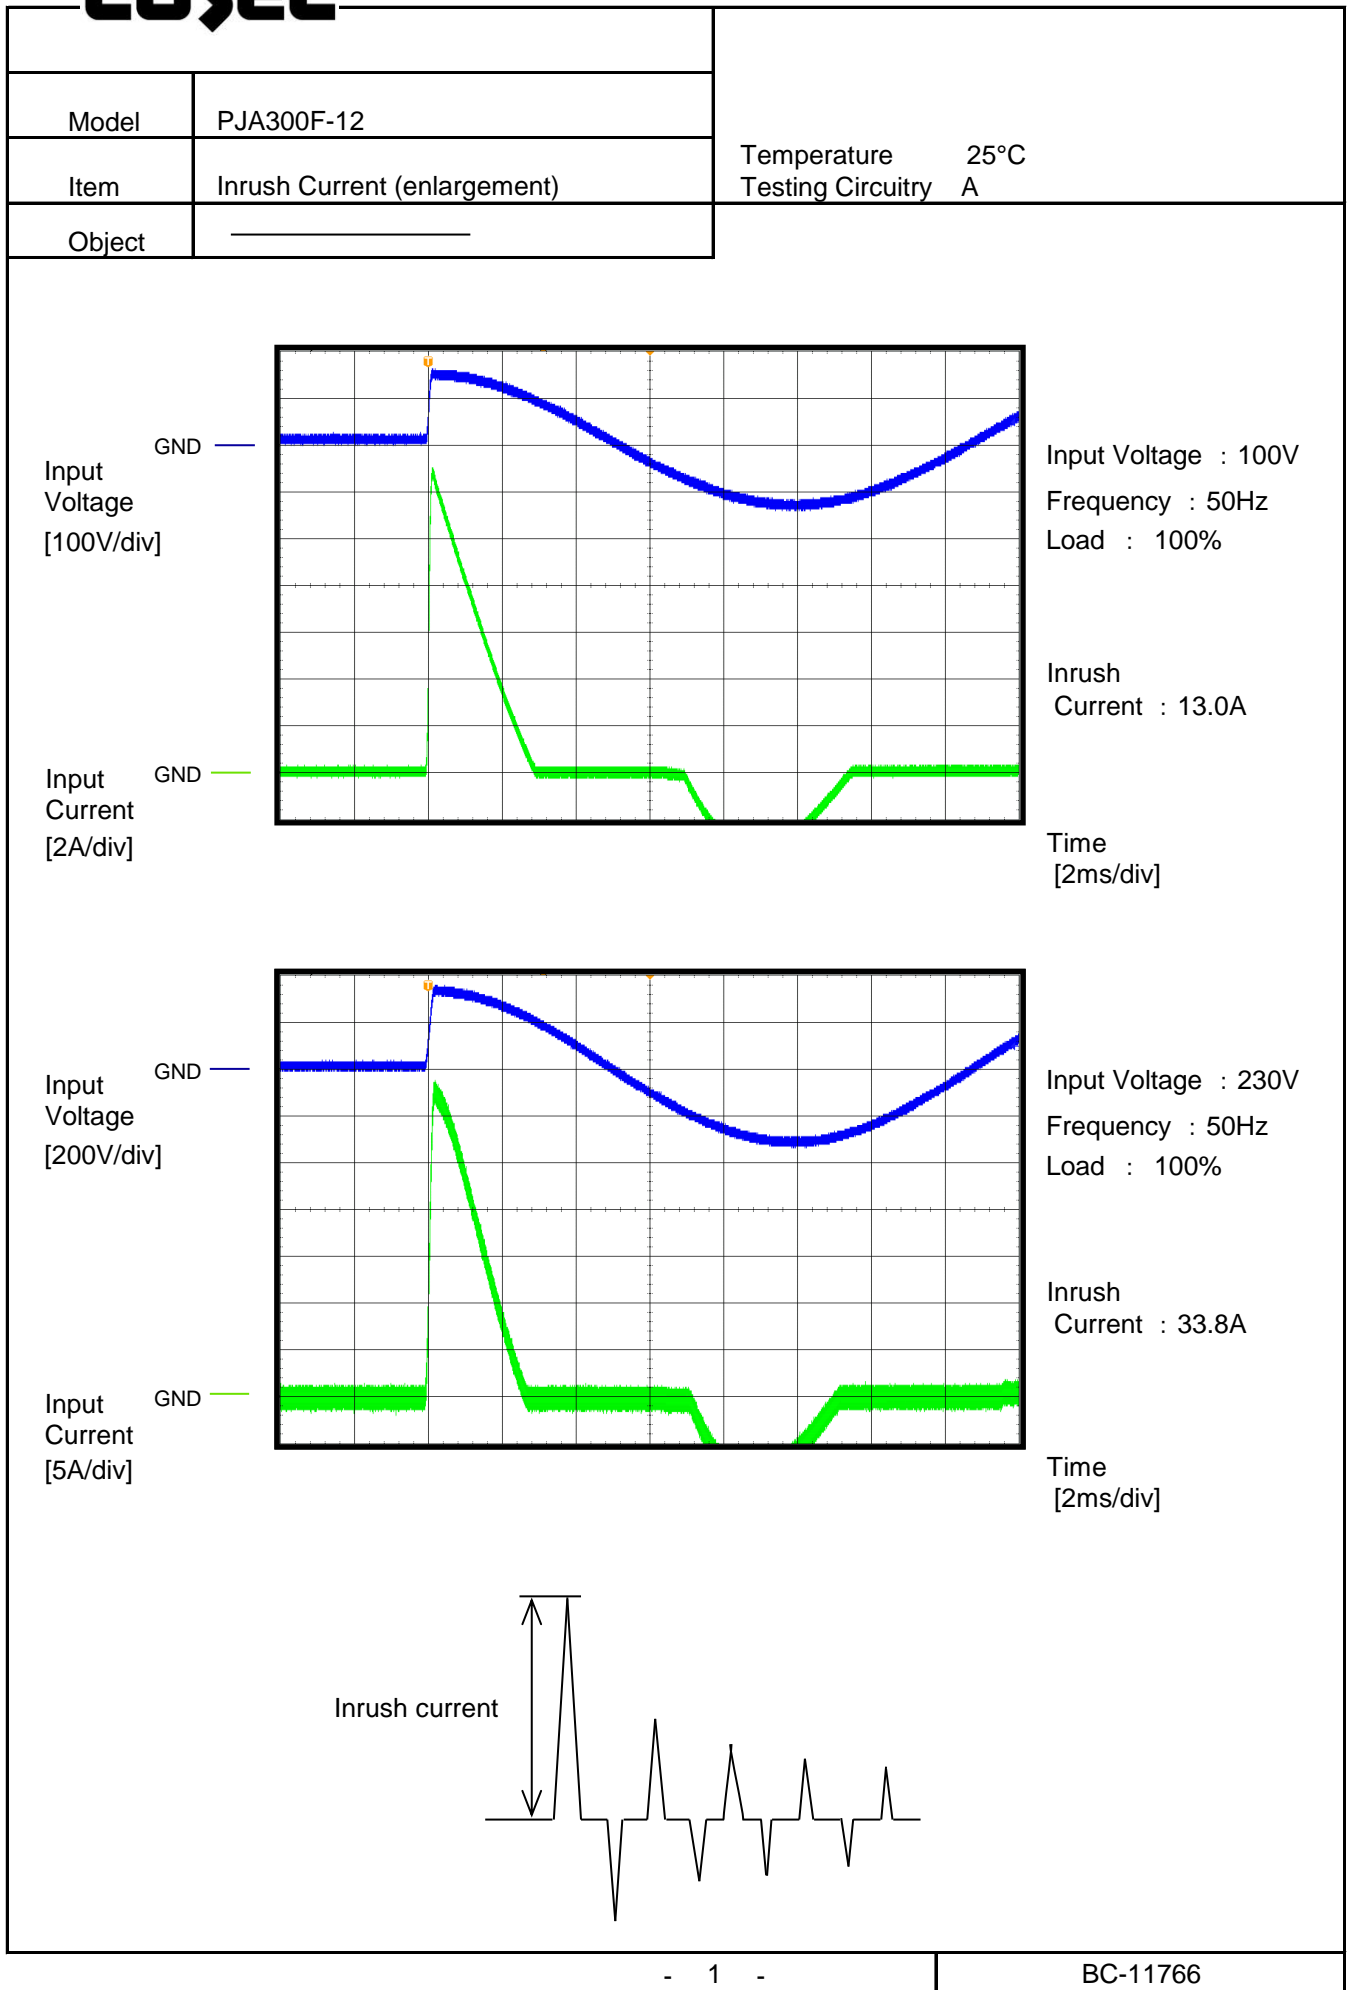COSEL

COSEL

Model	PJA300F-12	Temperature	25°C
Item	Dynamic Line Regulation	Testing Circuitry	A
Object	_____		

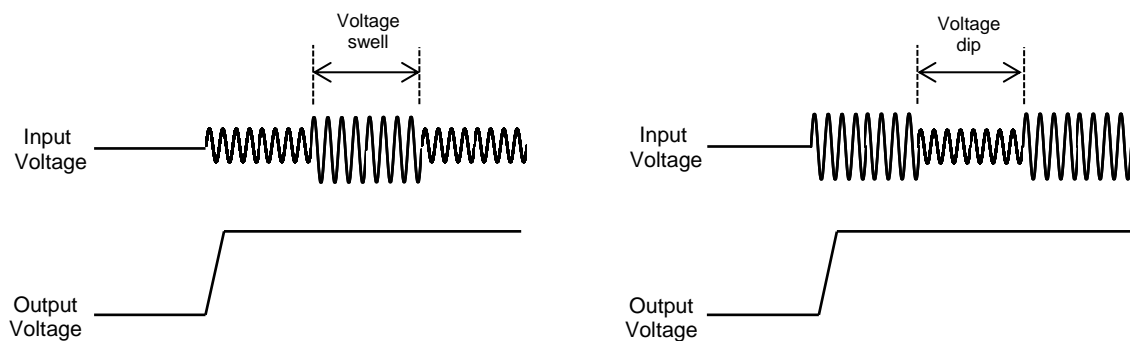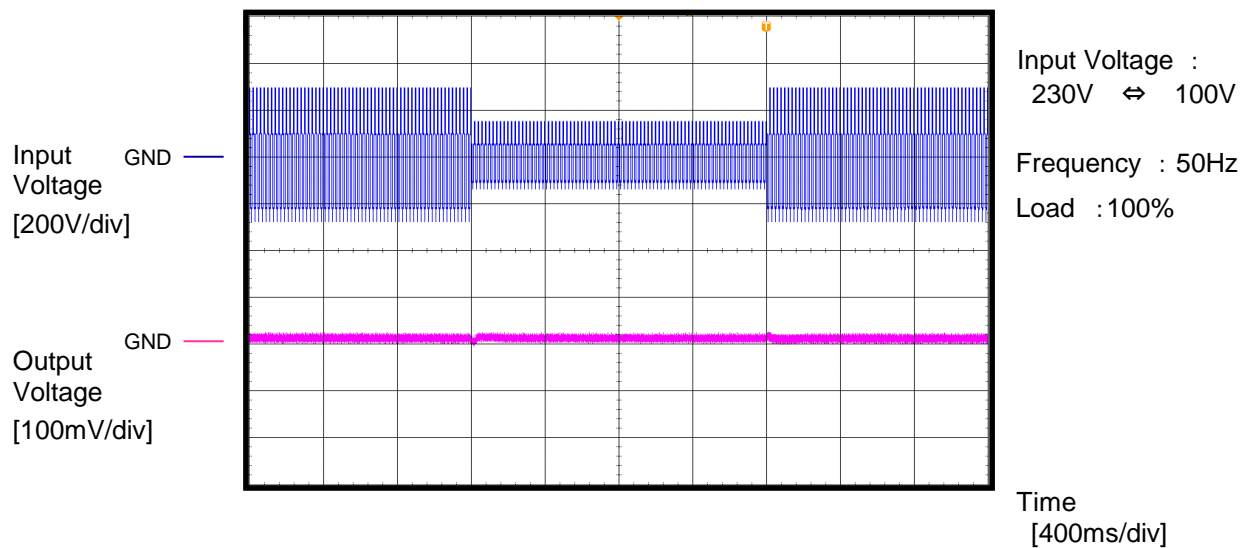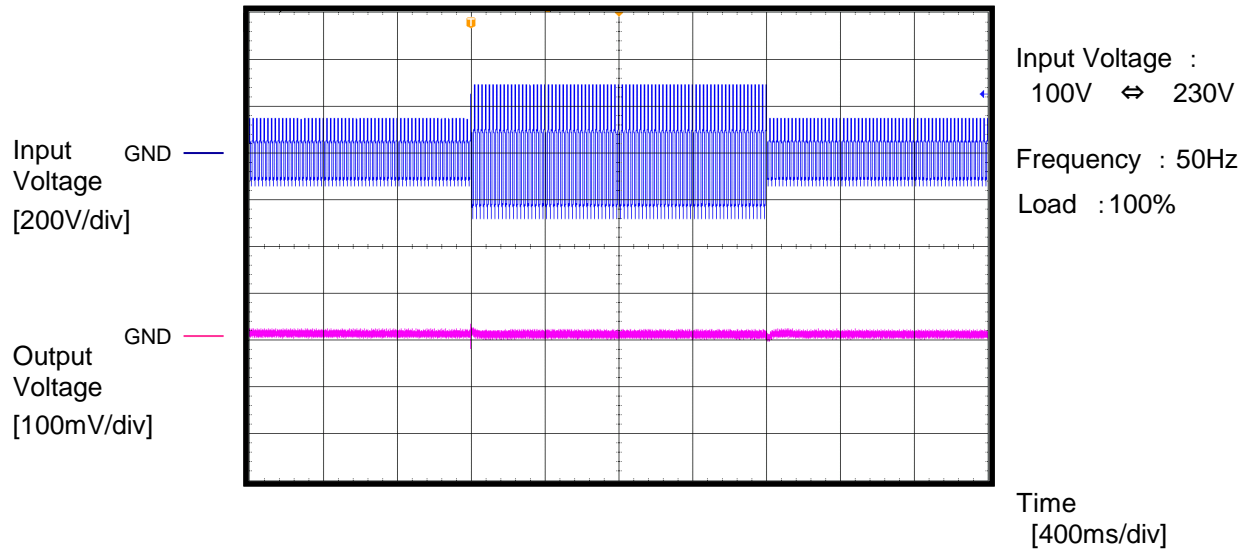


COSEL

Model	PJA300F-12	Temperature	25°C
Item	Over Voltage Protection	Testing Circuitry	A
Object	_____	Input Voltage	: 100V

Output
Voltage
[2V/div]

GND

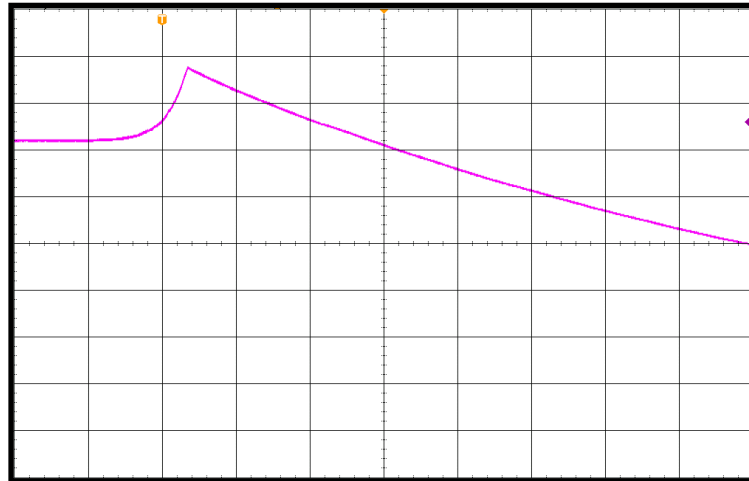


Load : 0%
Overvoltage protection
value : 15.6V

Time
[40ms/div]


Output
Voltage
[2V/div]

GND

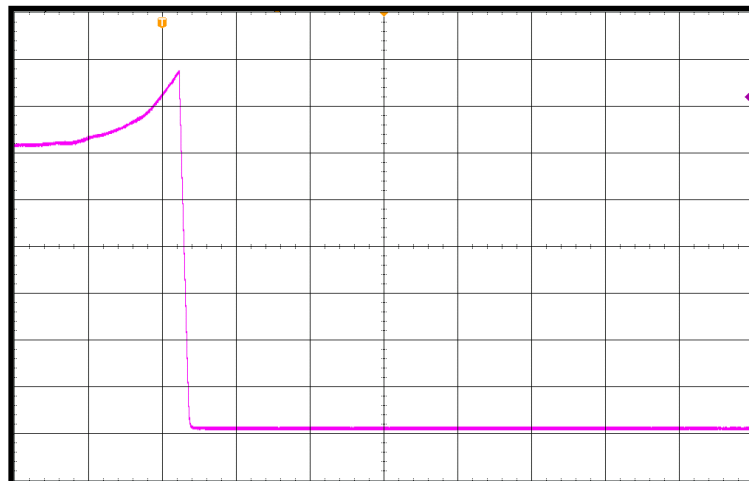


Load : 100%
Overvoltage protection
value : 15.5V

Time
[20ms/div]

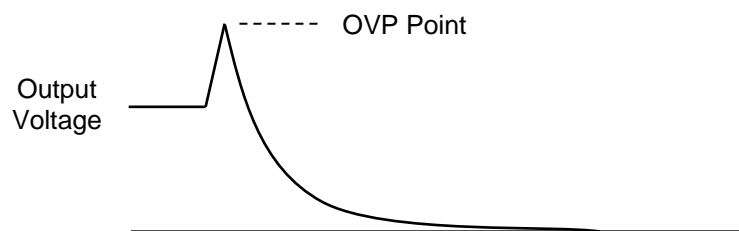

COSEL


Model	PJA300F-12	Temperature	25°C
Item	Hiccup cycle (by Overcurrent Protection)	Testing Circuitry	A
Object	_____	Load	: Short

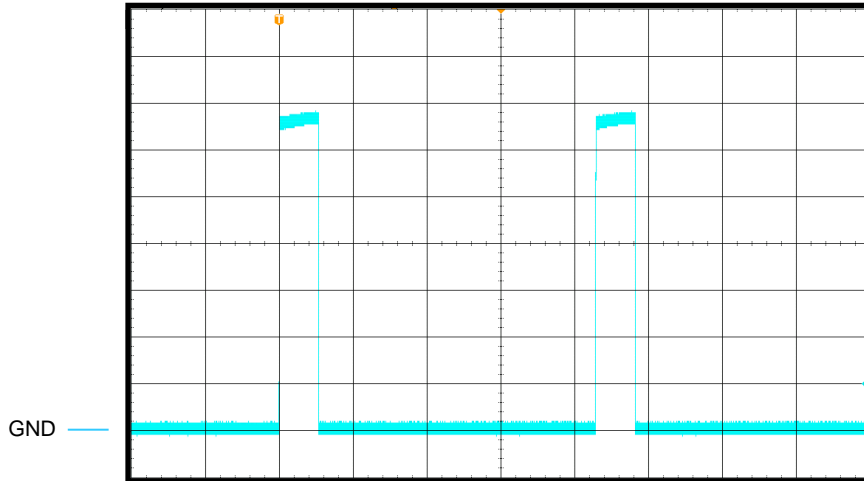Output Current
[5A/div]

Input Voltage : 100V

Short-circuit
current : 34.2A


ON Time : 1075ms

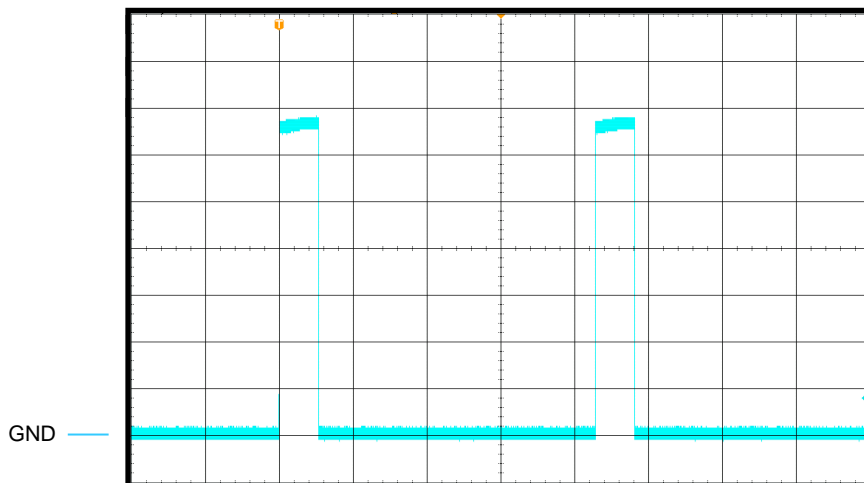
Short circuit
period : 8579msTime
[2000ms/div]Output Current
[5A/div]

Input Voltage : 230V

Short-circuit
current : 34.2A

ON Time : 1073ms

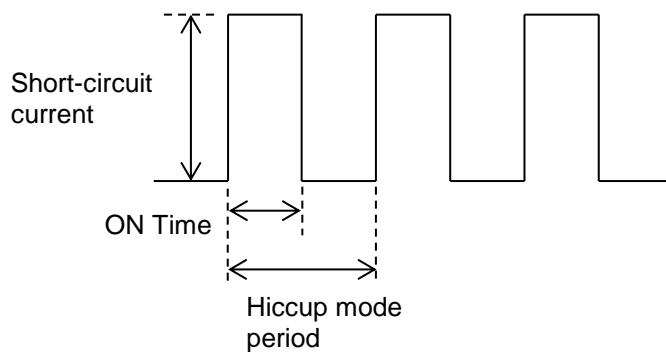Short circuit
period : 8567msTime
[2000ms/div]

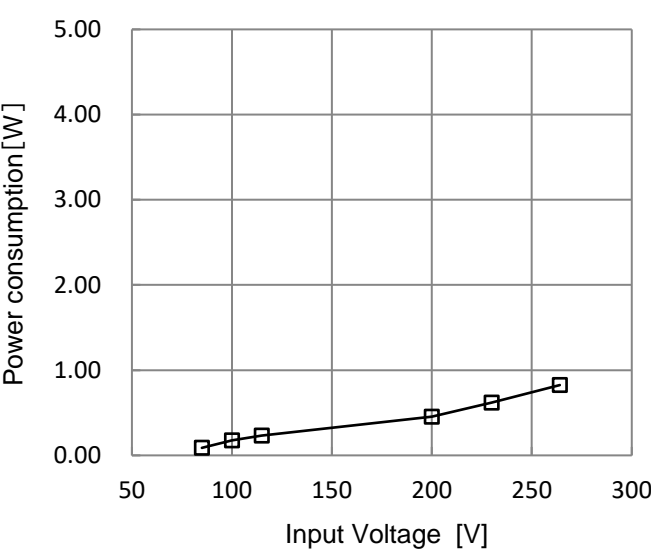Model	PJA300F-12-R																
Item	Input voltage - Power consumption	Temperature	25°C														
Object	_____	Testing Circuitry	-														
1.Graph		Load :0%															
		2.Values															
		<table><tr><th>Input voltage [V]</th><th>Power consumption [W]</th></tr><tr><td>85</td><td>0.09</td></tr><tr><td>100</td><td>0.18</td></tr><tr><td>115</td><td>0.23</td></tr><tr><td>200</td><td>0.46</td></tr><tr><td>230</td><td>0.62</td></tr><tr><td>264</td><td>0.83</td></tr></table>		Input voltage [V]	Power consumption [W]	85	0.09	100	0.18	115	0.23	200	0.46	230	0.62	264	0.83
Input voltage [V]	Power consumption [W]																
85	0.09																
100	0.18																
115	0.23																
200	0.46																
230	0.62																
264	0.83																
Reducing standby power is possible by OFF signal of the remote control.																	

