

COSEL

TEST DATA OF R10A-12
(100V INPUT)

Regulated DC Power Supply

Date : Apr. 28. 1999

Approved by : H. Goto
Design Manager

Prepared by : M. Sakahashi
Design Engineer

コーチセル株式会社
COSEL CO., LTD.



C O N T E N T S

1. Line Regulation	1
静的入力変動	
2. Input Current (by Load Current)	2
入力電流 (負荷特性)	
3. Input Power (by Load Current)	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage)	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current)	5
効率 (負荷特性)	
6. Power Factor (by Input Voltage)	6
力率 (入力電圧特性)	
7. Power Factor (by Load Current)	7
力率 (負荷特性)	
8. Hold-Up Time	8
出力保持時間	
9. Instantaneous Interruption Compensation	9
瞬時停電保障	
10. Load Regulation	10
静的負荷変動	
11. Ripple Voltage (by Load Current)	11
リップル電圧 (負荷特性)	
12. Ripple-Noise	12
リップルノイズ	
13. Overcurrent Protection	13
過電流保護	
14. Inrush Current	14
突入電流	
15. Dynamic Load Response	15
動的負荷変動	
16. Rise and Fall Time	16
立ち上り、立下がり時間	
17. Ambient Temperature Drift	17
周囲温度変動	
18. Minimum Input Voltage for Regulated Output Voltage	18
最低レギュレーション電圧	
19. Ripple Voltage (by Ambient Temperature)	19
リップル電圧 (周囲温度特性)	
20. Time Lapse Drift	20
経時ドリフト	
21. Output Voltage Accuracy	21
定電圧精度	
22. Oscillator Frequency	22
発振周波数	
23. Condensation	23
結露特性	
24. Leakage Current	24
漏洩電流	
25. Line Noise Tolerance	25
入力雑音耐量	
26. Conducted Emission	26
雑音端子電圧	
27. Figure of Testing Circuitry	27
測定回路図	

(Final Page 28)

COSEL

Model	R10A-12	Temperature	25°C																																
Item	Line Regulation 静的入力変動	Testing Circuitry	Figure A																																
Object	+12V 0.9A																																		
1. Graph		2. Values																																	
		<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th>Load 50%</th> <th>Load 100%</th> </tr> <tr> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> </tr> </thead> <tbody> <tr><td>75</td><td>12.046</td><td>12.043</td></tr> <tr><td>80</td><td>12.046</td><td>12.043</td></tr> <tr><td>85</td><td>12.046</td><td>12.043</td></tr> <tr><td>90</td><td>12.046</td><td>12.043</td></tr> <tr><td>100</td><td>12.046</td><td>12.044</td></tr> <tr><td>110</td><td>12.046</td><td>12.044</td></tr> <tr><td>120</td><td>12.046</td><td>12.043</td></tr> <tr><td>132</td><td>12.046</td><td>12.044</td></tr> <tr><td>140</td><td>12.046</td><td>12.043</td></tr> </tbody> </table>		Input Voltage [V]	Load 50%	Load 100%	Output Volt. [V]	Output Volt. [V]	75	12.046	12.043	80	12.046	12.043	85	12.046	12.043	90	12.046	12.043	100	12.046	12.044	110	12.046	12.044	120	12.046	12.043	132	12.046	12.044	140	12.046	12.043
Input Voltage [V]	Load 50%	Load 100%																																	
	Output Volt. [V]	Output Volt. [V]																																	
75	12.046	12.043																																	
80	12.046	12.043																																	
85	12.046	12.043																																	
90	12.046	12.043																																	
100	12.046	12.044																																	
110	12.046	12.044																																	
120	12.046	12.043																																	
132	12.046	12.044																																	
140	12.046	12.043																																	


Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

COSEL

Model	R10A-12
Item	Input Current (by Load Current) 入力電流（負荷特性）
Output	—

1. Graph

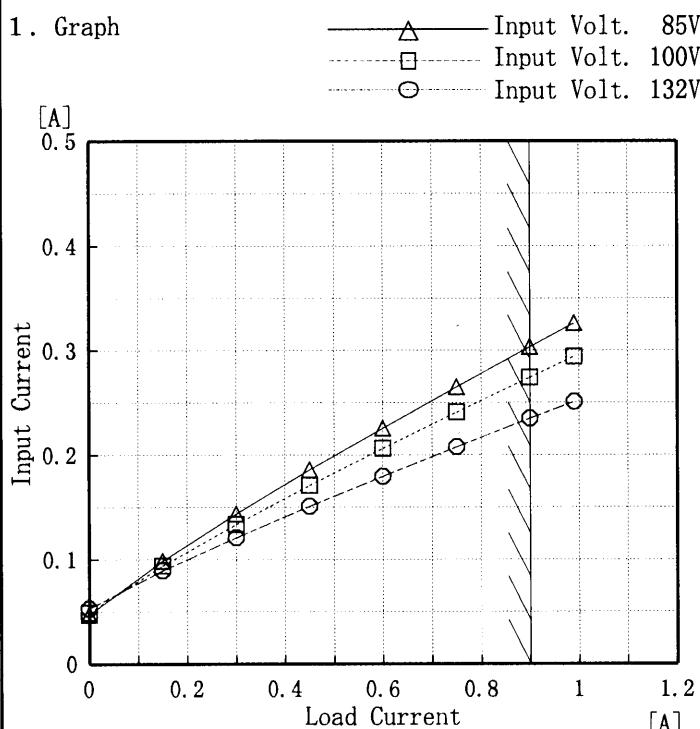

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。


Temperature 25°C
Testing Circuitry Figure A

2. Values

Load Current [A]	Input Current [A]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
0.00	0.047	0.049	0.053
0.15	0.099	0.094	0.090
0.30	0.144	0.134	0.121
0.45	0.186	0.171	0.151
0.60	0.225	0.206	0.180
0.75	0.265	0.241	0.208
0.90	0.303	0.274	0.235
0.99	0.326	0.294	0.251
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

COSSEL

Model	R10A-12
Item	Input Power (by Load Current) 入力電力 (負荷特性)
Output	—

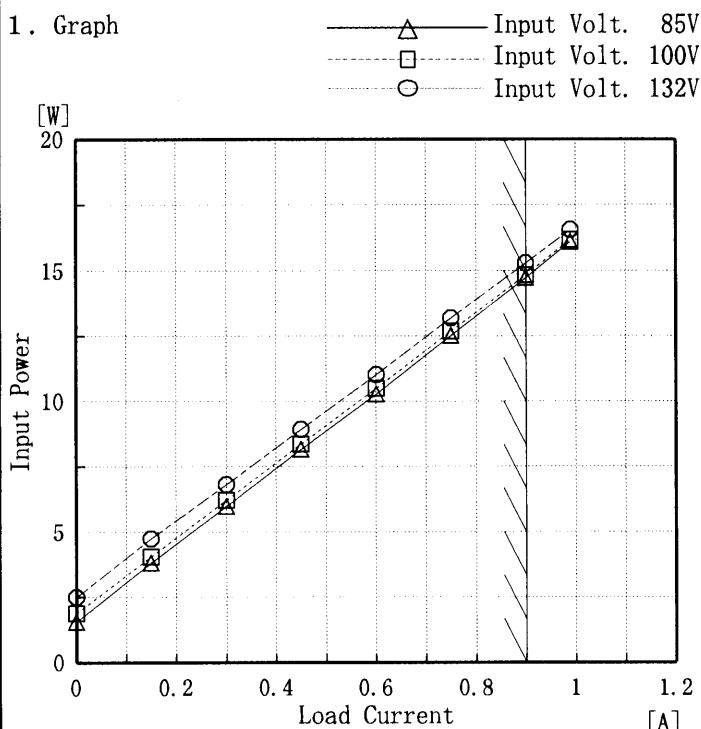

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。

Temperature 25°C
Testing Circuitry Figure A

2. Values

Load Current [A]	Input Power [W]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
0.00	1.56	1.88	2.51
0.15	3.81	4.05	4.74
0.30	5.98	6.22	6.81
0.45	8.17	8.37	8.93
0.60	10.28	10.50	11.02
0.75	12.51	12.67	13.18
0.90	14.72	14.83	15.28
0.99	16.10	16.18	16.55
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

COSSEL


Model	R10A-12	Temperature	25°C																																
Item	Efficiency (by Input Voltage) 効率(入力電圧特性)	Testing Circuitry	Figure A																																
Object																																			
1. Graph	<p>Efficiency [%]</p> <p>Input Voltage [V]</p> <p>Legend: Load 50% (dashed line with open squares), Load 100% (solid line with open triangles)</p>																																		
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th>Load 50%</th> <th>Load 100%</th> </tr> <tr> <th>Efficiency [%]</th> <th>Efficiency [%]</th> </tr> </thead> <tbody> <tr><td>75</td><td>70.6</td><td>75.9</td></tr> <tr><td>80</td><td>69.8</td><td>76.1</td></tr> <tr><td>85</td><td>69.1</td><td>76.0</td></tr> <tr><td>90</td><td>68.6</td><td>75.8</td></tr> <tr><td>100</td><td>67.6</td><td>75.3</td></tr> <tr><td>110</td><td>66.0</td><td>74.8</td></tr> <tr><td>120</td><td>65.0</td><td>74.2</td></tr> <tr><td>132</td><td>63.0</td><td>73.3</td></tr> <tr><td>140</td><td>62.0</td><td>72.6</td></tr> </tbody> </table>			Input Voltage [V]	Load 50%	Load 100%	Efficiency [%]	Efficiency [%]	75	70.6	75.9	80	69.8	76.1	85	69.1	76.0	90	68.6	75.8	100	67.6	75.3	110	66.0	74.8	120	65.0	74.2	132	63.0	73.3	140	62.0	72.6
Input Voltage [V]	Load 50%	Load 100%																																	
	Efficiency [%]	Efficiency [%]																																	
75	70.6	75.9																																	
80	69.8	76.1																																	
85	69.1	76.0																																	
90	68.6	75.8																																	
100	67.6	75.3																																	
110	66.0	74.8																																	
120	65.0	74.2																																	
132	63.0	73.3																																	
140	62.0	72.6																																	

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

COSEL

Model	R10A-12
Item	Efficiency (by Load Current) 効率(負荷電流特性)
Output	—

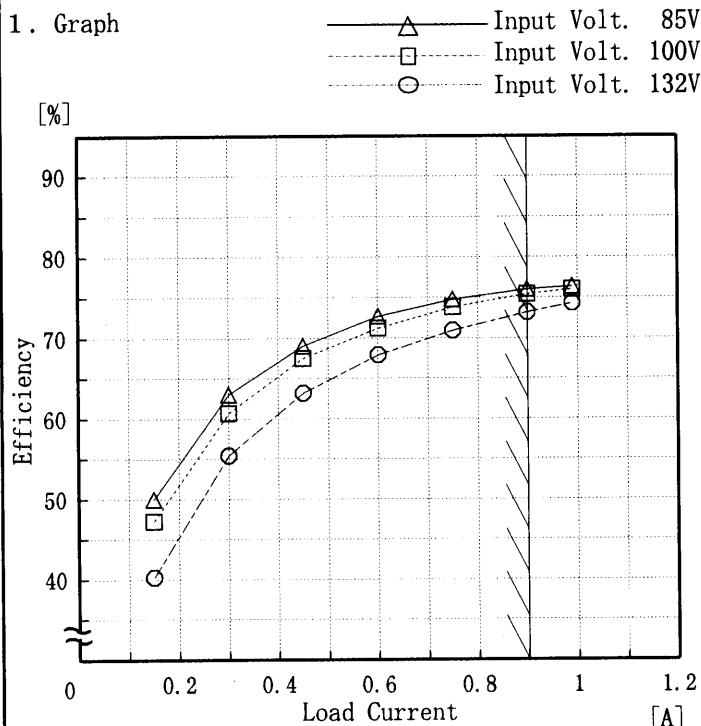

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。

Temperature 25°C
Testing Circuitry Figure A

2. Values

Load Current [A]	Efficiency [%]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
0.15	50.0	47.3	40.3
0.30	63.0	60.7	55.4
0.45	69.0	67.5	63.2
0.60	72.7	71.2	67.9
0.75	74.7	73.8	70.9
0.90	76.0	75.4	73.2
0.99	76.4	76.0	74.3
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

COSSEL

Model


R10A-12

Item

Power Factor (by Input Voltage)
力率(入力電圧特性)

Object

1. Graph

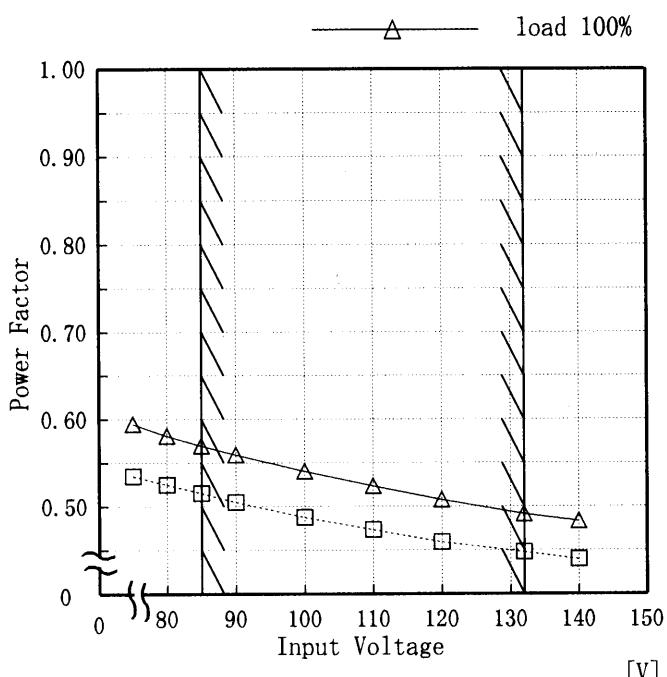

Note: Slanted line shows the range of the rated input voltage.


(注)斜線は定格入力電圧範囲を示す。

Temperature 25°C
Testing Circuitry Figure A

2. Values

Input Voltage [V]	load 50%	load 100%
	Power Factor	Power Factor
75	0.53	0.59
80	0.52	0.58
85	0.52	0.57
90	0.50	0.56
100	0.49	0.54
110	0.47	0.52
120	0.46	0.51
132	0.45	0.49
140	0.44	0.48

COSEL

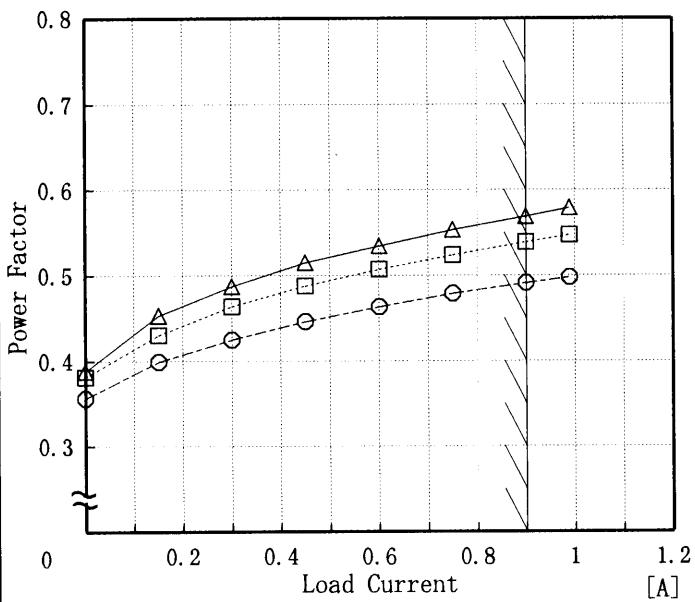Model	R10A-12	Temperature	25°C																																																							
Item	Power Factor (by Load Current) 力率(負荷電流特性)	Testing Circuitry	Figure A																																																							
Output																																																										
1. Graph																																																										
—△— Input Volt. 85V -□- Input Volt. 100V ○ Input Volt. 132V			2. Values																																																							
			<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Power Factor</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.39</td><td>0.38</td><td>0.36</td></tr> <tr><td>0.15</td><td>0.45</td><td>0.43</td><td>0.40</td></tr> <tr><td>0.30</td><td>0.49</td><td>0.46</td><td>0.43</td></tr> <tr><td>0.45</td><td>0.52</td><td>0.49</td><td>0.45</td></tr> <tr><td>0.60</td><td>0.53</td><td>0.51</td><td>0.46</td></tr> <tr><td>0.75</td><td>0.55</td><td>0.52</td><td>0.48</td></tr> <tr><td>0.90</td><td>0.57</td><td>0.54</td><td>0.49</td></tr> <tr><td>0.99</td><td>0.58</td><td>0.55</td><td>0.50</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Load Current [A]	Power Factor			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.00	0.39	0.38	0.36	0.15	0.45	0.43	0.40	0.30	0.49	0.46	0.43	0.45	0.52	0.49	0.45	0.60	0.53	0.51	0.46	0.75	0.55	0.52	0.48	0.90	0.57	0.54	0.49	0.99	0.58	0.55	0.50	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Power Factor																																																									
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																							
0.00	0.39	0.38	0.36																																																							
0.15	0.45	0.43	0.40																																																							
0.30	0.49	0.46	0.43																																																							
0.45	0.52	0.49	0.45																																																							
0.60	0.53	0.51	0.46																																																							
0.75	0.55	0.52	0.48																																																							
0.90	0.57	0.54	0.49																																																							
0.99	0.58	0.55	0.50																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
Note: Slanted line shows the range of the rated load current																																																										
(注)斜線は定格負荷電流範囲を示す。																																																										

COSEL

Model	R10A-12	Temperature Testing Circuitry	25°C Figure A																																
Item	Hold-Up Time 出力保持時間																																		
Object	+12V 0.9A																																		
1. Graph	<p style="text-align: center;">—△— Load 50% ---□--- Load 100%</p>																																		
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th>Load 50%</th> <th>Load 100%</th> </tr> <tr> <th>Hold-Up Time [mS]</th> <th>Hold-Up Time [mS]</th> </tr> </thead> <tbody> <tr><td>75</td><td>30</td><td>6</td></tr> <tr><td>80</td><td>35</td><td>8</td></tr> <tr><td>85</td><td>40</td><td>10</td></tr> <tr><td>90</td><td>44</td><td>14</td></tr> <tr><td>100</td><td>57</td><td>20</td></tr> <tr><td>110</td><td>70</td><td>29</td></tr> <tr><td>120</td><td>83</td><td>37</td></tr> <tr><td>132</td><td>104</td><td>47</td></tr> <tr><td>140</td><td>120</td><td>56</td></tr> </tbody> </table>			Input Voltage [V]	Load 50%	Load 100%	Hold-Up Time [mS]	Hold-Up Time [mS]	75	30	6	80	35	8	85	40	10	90	44	14	100	57	20	110	70	29	120	83	37	132	104	47	140	120	56
Input Voltage [V]	Load 50%	Load 100%																																	
	Hold-Up Time [mS]	Hold-Up Time [mS]																																	
75	30	6																																	
80	35	8																																	
85	40	10																																	
90	44	14																																	
100	57	20																																	
110	70	29																																	
120	83	37																																	
132	104	47																																	
140	120	56																																	
<p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</p> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>																																			

COSEL

Model	R10A-12
Item	Instantaneous Interruption Compensation 瞬時停電保障
Object	+12V 0.9A

1. Graph

Legend:

- Input Volt. 85 V (solid line with open triangle)
- Input Volt. 100 V (dashed line with open square)
- Input Volt. 132 V (dash-dot line with open circle)

Load Current [A]	85[V] [mS]	100[V] [mS]	132[V] [mS]
0.00	—	—	—
0.15	104	142	235
0.30	60	85	147
0.45	39	57	104
0.60	27	40	78
0.75	15	29	60
0.90	10	20	47
0.99	5	14	39
—	—	—	—
—	—	—	—
—	—	—	—

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note: Slanted line shows the range of the rated load current.

瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間をいう。
(注)斜線は定格負荷電流範囲を示す。

Temperature 25°C
Testing Circuitry Figure A

2. Values

Load Current [A]	Input Volt.	Input Volt.	Input Volt.
	85[V]	100[V]	132[V]
Time [mS]			
0.00	—	—	—
0.15	104	142	235
0.30	60	85	147
0.45	39	57	104
0.60	27	40	78
0.75	15	29	60
0.90	10	20	47
0.99	5	14	39
—	—	—	—
—	—	—	—
—	—	—	—

COSSEL

Model	R10A-12	Temperature Testing Circuitry	25°C Figure A
Item	Load Regulation 靜的負荷変動		
Object	+12V 0.9A		
1. Graph		2. Values	
		Load Current	Input Volt. 85[V]
		[A]	100[V]
			132[V]
		Output Volt. [V]	Output Volt. [V]
		0.00	12.049
		0.15	12.048
		0.30	12.047
		0.45	12.046
		0.60	12.046
		0.75	12.045
		0.90	12.044
		0.99	12.043
		—	—
		—	—

1. Graph

Legend:

- △ Input Volt. 85V
- Input Volt. 100V
- Input Volt. 132V

Output Voltage [V] vs Load Current [A]

Load Current [A]	Output Volt. 85V [V]	Output Volt. 100V [V]	Output Volt. 132V [V]
0.00	12.049	12.050	12.050
0.15	12.048	12.048	12.048
0.30	12.047	12.047	12.047
0.45	12.046	12.046	12.046
0.60	12.046	12.046	12.046
0.75	12.045	12.045	12.045
0.90	12.044	12.044	12.044
0.99	12.043	12.044	12.044

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

COSEL

Model	R10A-12	Temperature	25°C																																						
Item	Ripple Voltage(by Load Current) リップル電圧(負荷電流特性)	Testing Circuitry	Figure A																																						
Object	+12V 0.9A																																								
1. Graph		2. Values																																							
<p style="text-align: center;">□ Input Volt. 85V [mV]</p>		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 85 [V]</th> <th>Input Volt. 132 [V]</th> </tr> <tr> <th>Ripple Output Volt. [mV]</th> <th>Ripple Output Volt. [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>5</td><td>5</td></tr> <tr><td>0.15</td><td>5</td><td>5</td></tr> <tr><td>0.30</td><td>5</td><td>5</td></tr> <tr><td>0.45</td><td>10</td><td>5</td></tr> <tr><td>0.60</td><td>10</td><td>5</td></tr> <tr><td>0.75</td><td>10</td><td>5</td></tr> <tr><td>0.90</td><td>15</td><td>5</td></tr> <tr><td>0.99</td><td>20</td><td>5</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Load Current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	0.00	5	5	0.15	5	5	0.30	5	5	0.45	10	5	0.60	10	5	0.75	10	5	0.90	15	5	0.99	20	5	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]																																							
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																							
0.00	5	5																																							
0.15	5	5																																							
0.30	5	5																																							
0.45	10	5																																							
0.60	10	5																																							
0.75	10	5																																							
0.90	15	5																																							
0.99	20	5																																							
—	—	—																																							
—	—	—																																							
—	—	—																																							
<p style="text-align: center;">Load Current [A]</p>																																									
<p style="text-align: center;">Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップル電圧は、下図 p - p 値で示される。 (注)斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line T2: Due to Switching</p>																																									
<p style="text-align: center;">Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																									

COSEL


Model	R10A-12	Temperature Testing Circuitry 25°C Figure A																																						
Item	Ripple-Noise リップルノイズ																																							
Object	+12V 0.9A																																							
1. Graph	<p style="text-align: center;">□ Input Volt. 85V [mV] △ Input Volt. 132V</p> <table border="1"> <caption>Data extracted from Graph 1.1</caption> <thead> <tr> <th>Load Current [A]</th> <th>Ripple-Noise 85V [mV]</th> <th>Ripple-Noise 132V [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>10</td><td>10</td></tr> <tr><td>0.15</td><td>10</td><td>10</td></tr> <tr><td>0.30</td><td>10</td><td>10</td></tr> <tr><td>0.45</td><td>15</td><td>15</td></tr> <tr><td>0.60</td><td>20</td><td>15</td></tr> <tr><td>0.75</td><td>25</td><td>15</td></tr> <tr><td>0.90</td><td>30</td><td>20</td></tr> <tr><td>0.99</td><td>35</td><td>20</td></tr> </tbody> </table>	Load Current [A]	Ripple-Noise 85V [mV]	Ripple-Noise 132V [mV]	0.00	10	10	0.15	10	10	0.30	10	10	0.45	15	15	0.60	20	15	0.75	25	15	0.90	30	20	0.99	35	20												
Load Current [A]	Ripple-Noise 85V [mV]	Ripple-Noise 132V [mV]																																						
0.00	10	10																																						
0.15	10	10																																						
0.30	10	10																																						
0.45	15	15																																						
0.60	20	15																																						
0.75	25	15																																						
0.90	30	20																																						
0.99	35	20																																						
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load current [A]</th> <th>Input Volt. 85 [V]</th> <th>Input Volt. 132 [V]</th> </tr> <tr> <th>Ripple-Noise [mV]</th> <th>Ripple-Noise [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>10</td><td>10</td></tr> <tr><td>0.15</td><td>10</td><td>10</td></tr> <tr><td>0.30</td><td>10</td><td>10</td></tr> <tr><td>0.45</td><td>15</td><td>15</td></tr> <tr><td>0.60</td><td>20</td><td>15</td></tr> <tr><td>0.75</td><td>25</td><td>15</td></tr> <tr><td>0.90</td><td>30</td><td>20</td></tr> <tr><td>0.99</td><td>35</td><td>20</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Load current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]	Ripple-Noise [mV]	Ripple-Noise [mV]	0.00	10	10	0.15	10	10	0.30	10	10	0.45	15	15	0.60	20	15	0.75	25	15	0.90	30	20	0.99	35	20	—	—	—	—	—	—	—	—	—
Load current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]																																						
	Ripple-Noise [mV]	Ripple-Noise [mV]																																						
0.00	10	10																																						
0.15	10	10																																						
0.30	10	10																																						
0.45	15	15																																						
0.60	20	15																																						
0.75	25	15																																						
0.90	30	20																																						
0.99	35	20																																						
—	—	—																																						
—	—	—																																						
—	—	—																																						
3. Definition	<p>Ripple-Noise is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップルノイズは、下図 p - p 値で示される。</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>																																							
4. Waveform	<p>T1: Due to AC Input Line 入力商用周期</p> <p>T2: Due to Switching スイッチング周期</p>																																							
<p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																								

COSEL

Model R10A-12

Item Overcurrent Protection
過電流保護

Object +12V 0.9A

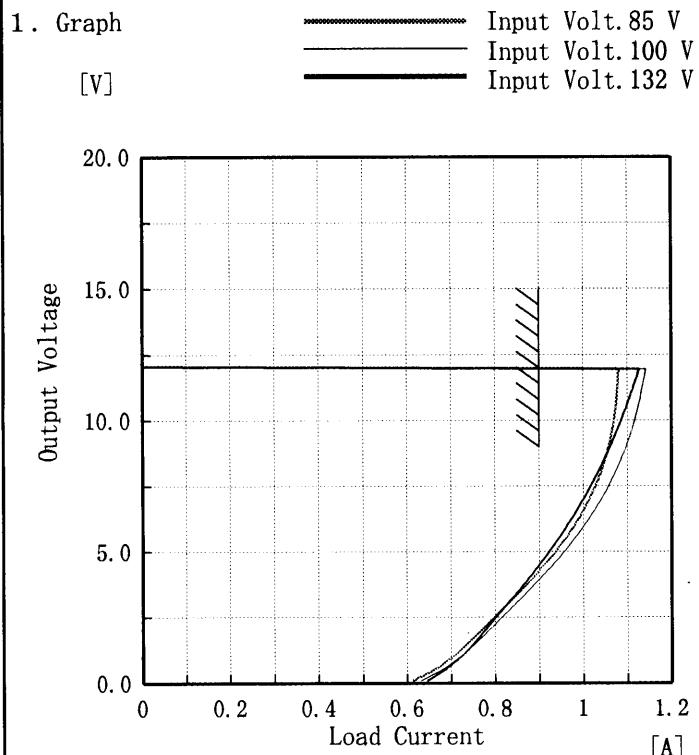

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。


Temperature 25°C
Testing Circuitry Figure A

2. Values

Output Voltage [V]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
	Load Current [A]	Load Current [A]	Load Current [A]
12.00	1.08	1.14	1.13
11.40	1.08	1.14	1.12
10.80	1.08	1.13	1.10
9.60	1.07	1.11	1.08
8.40	1.05	1.08	1.05
7.20	1.02	1.05	1.01
6.00	0.98	1.00	0.97
4.80	0.93	0.95	0.92
3.60	0.86	0.88	0.86
2.40	0.79	0.81	0.80
1.20	0.72	0.73	0.73
0.00	0.61	0.63	0.64

COSEL

Model	R10A-12	Temperature Testing Circuitry Figure A	25°C
Item	Inrush Current 突入電流		
Object	_____		

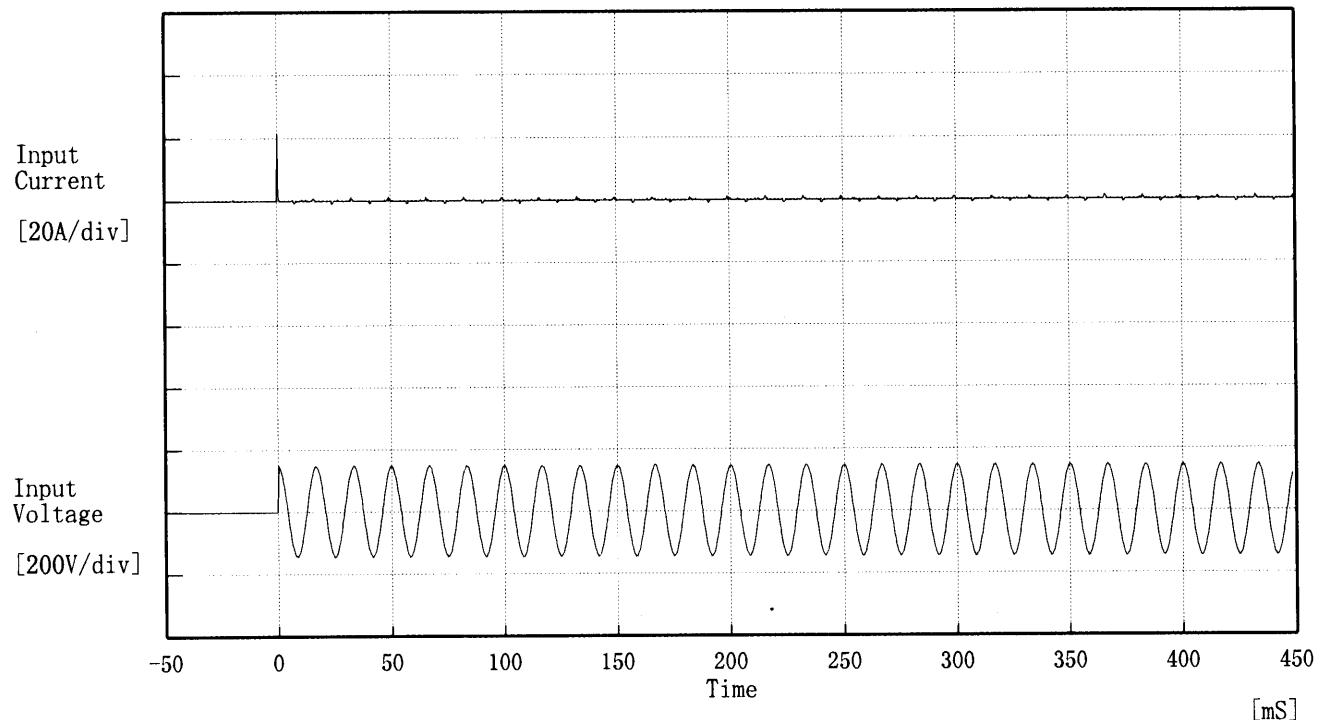

Input Voltage 100 V


Frequency 60 Hz

Load 100 %

Inrush Current

① 21.59 [A]

② 1.21 [A]

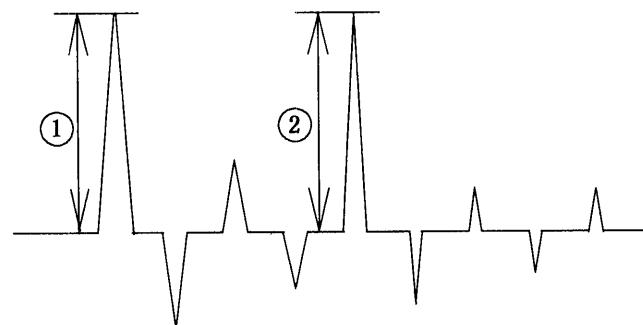


COSEL

Model	R10A-12	Temperature Testing Circuitry Figure A	25°C
Item	Dynamic Load Response 動的負荷變動		
Object	+12V 0.9A		


Input Volt. 100 V

Cycle 1000 mS




Min. Load ↔

Load 100 %

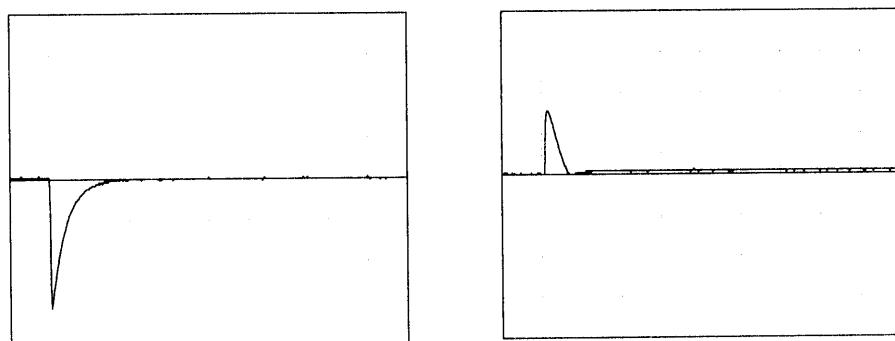

Min. Load ↔

Load 50 %

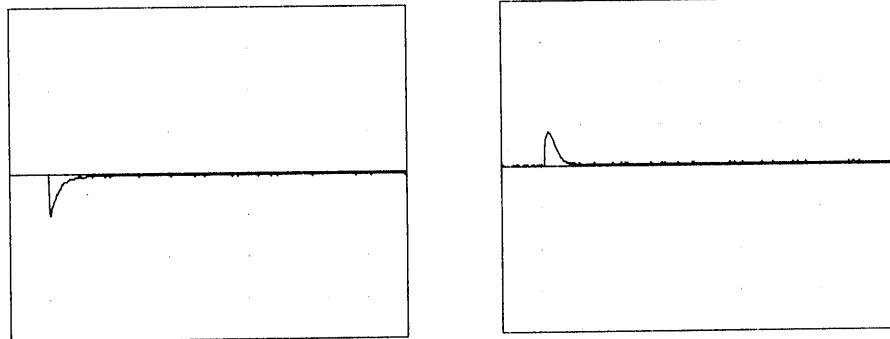


100 mV/div

20 ms/div

COSEL


Model	R10A-12	Temperature Testing Circuitry Figure A	25°C
Item	Rise and Fall Time 立上り、立下り時間		
Object	+12V 0.9A		

1. Graph

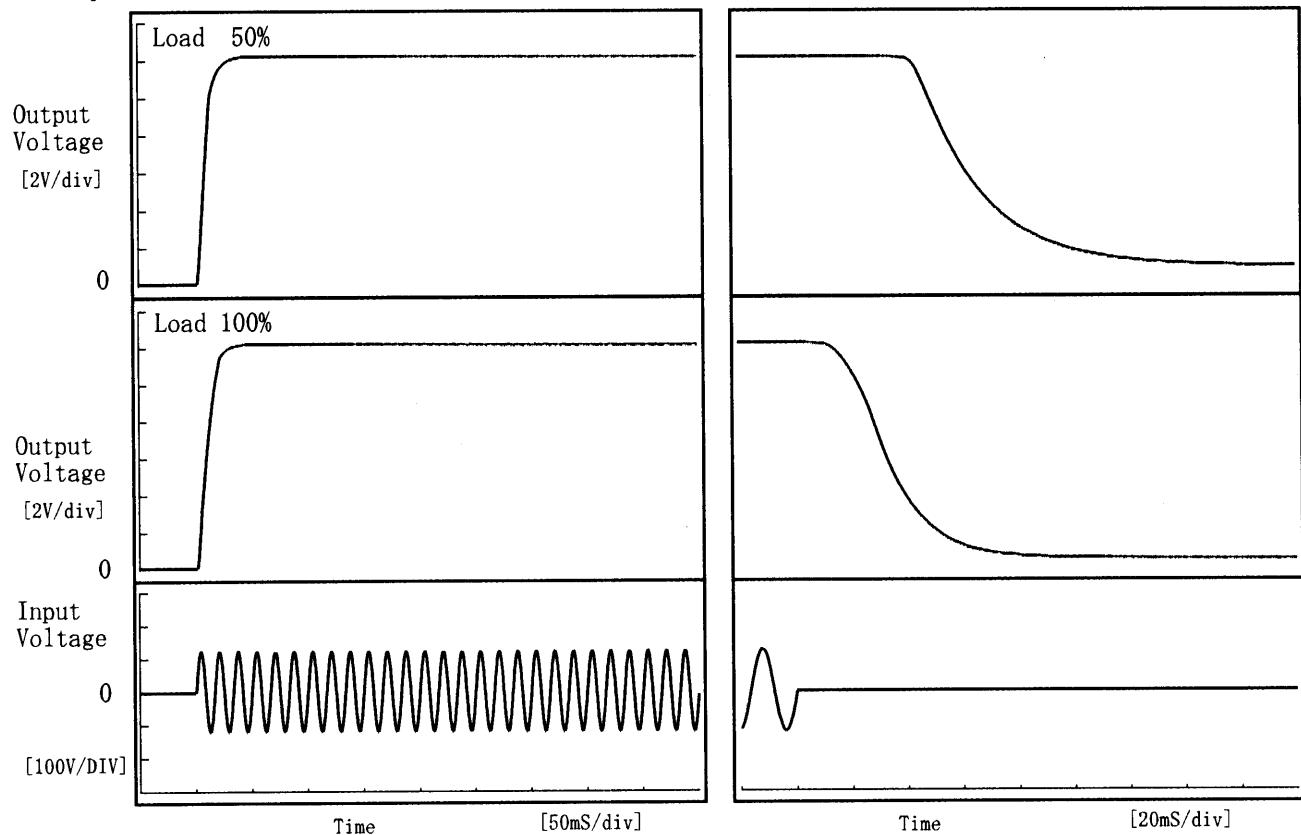

2. Values

Load	Time	T _d	T _r	T _s	T _h	T _f	[mS]
50 %		3.5	13.5	17.0	45.9	78.9	
100 %		3.8	16.8	20.5	19.2	40.8	

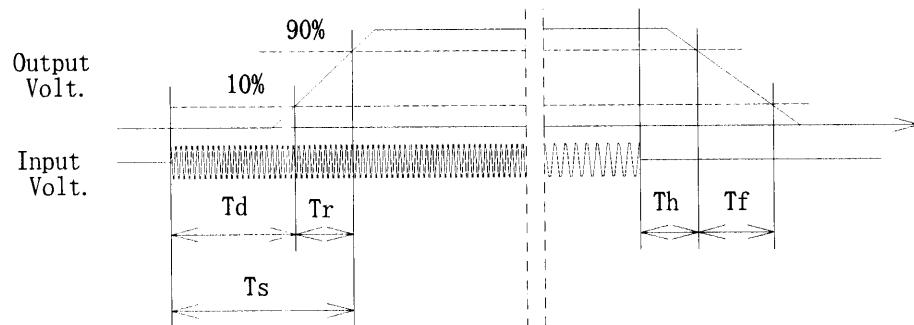

COSEL



Model	R10A-12
Item	Ambient Temperature Drift 周囲温度変動
Object	+12V 0.9A
1. Graph	
<p style="text-align: center;"> △ Input Volt. 85V □ Input Volt. 100V ○ Input Volt. 132V </p> <p style="text-align: center;">Output Voltage [V]</p> <p style="text-align: center;">Ambient Temperature [°C]</p> <p style="text-align: center;">Load 100%</p>	
<p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注)斜線は定格周囲温度範囲を示す。</p>	

Testing Circuitry Figure A

2. Values

Temperature [°C]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
-20	12.059	12.059	12.059
-10	12.056	12.056	12.056
0	12.052	12.052	12.052
10	12.048	12.048	12.048
20	12.044	12.044	12.044
25	12.042	12.042	12.042
30	12.042	12.042	12.042
40	12.034	12.034	12.034
50	12.027	12.027	12.027
60	12.018	12.018	12.018
—	—	—	—

COSEL

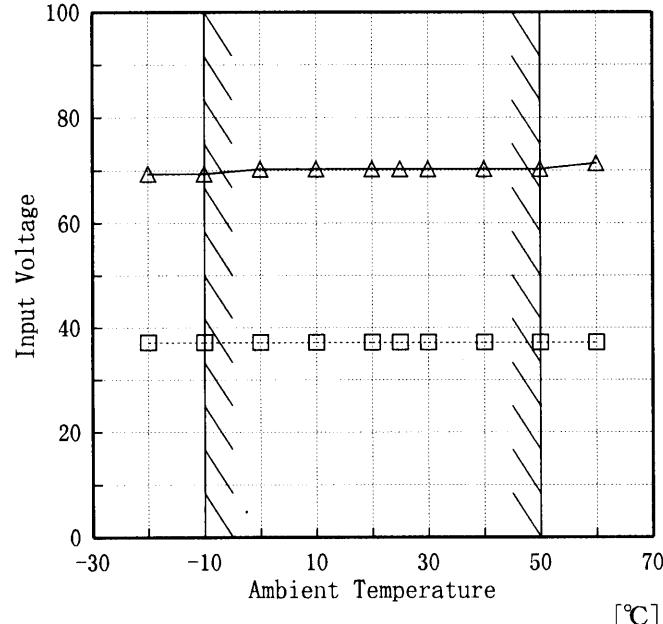Model	R10A-12			
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧			
Object	+12V 0.9A			
1. Graph				
[V]				
Input Voltage [V]				
Ambient Temperature [°C]				
Note: Slanted line shows the range of the rated ambient temperature.				
(注)斜線は定格周囲温度範囲を示す。				
Testing Circuitry Figure A				
2. Values				
Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]		
-20	37	69		
-10	37	69		
0	37	70		
10	37	70		
20	37	70		
25	37	70		
30	37	70		
40	37	70		
50	37	70		
60	37	71		
—	—	—		

COSEL

Model

R10A-12


Item

Ripple Voltage (by Ambient Temp.)
リップル電圧 (周囲温度特性)

Object

+12V 0.9A

1. Graph

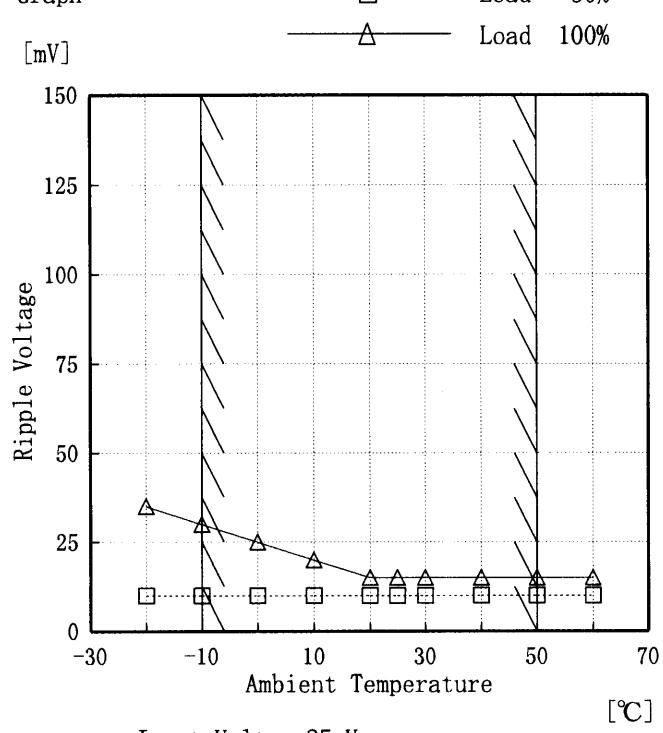

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

Testing Circuitry Figure A

2. Values

Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]
-20	10	35
-10	10	30
0	10	25
10	10	20
20	10	15
25	10	15
30	10	15
40	10	15
50	10	15
60	10	15
—	—	—

COSEL

Model	R10A-12	Temperature Testing Circuitry	25 °C Figure A																						
Item	Time Lapse Drift 経時ドリフト																								
Object	+12V 0.9A																								
1. Graph			2. Values																						
<p>[V]</p> <p>Output Voltage [V]</p> <p>Time [H]</p> <p>Input Volt. 100V Load 100%</p>			<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>12.048</td></tr> <tr><td>0.5</td><td>12.043</td></tr> <tr><td>1.0</td><td>12.043</td></tr> <tr><td>2.0</td><td>12.043</td></tr> <tr><td>3.0</td><td>12.043</td></tr> <tr><td>4.0</td><td>12.043</td></tr> <tr><td>5.0</td><td>12.043</td></tr> <tr><td>6.0</td><td>12.043</td></tr> <tr><td>7.0</td><td>12.043</td></tr> <tr><td>8.0</td><td>12.044</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	12.048	0.5	12.043	1.0	12.043	2.0	12.043	3.0	12.043	4.0	12.043	5.0	12.043	6.0	12.043	7.0	12.043	8.0	12.044
Time since start [H]	Output Voltage [V]																								
0.0	12.048																								
0.5	12.043																								
1.0	12.043																								
2.0	12.043																								
3.0	12.043																								
4.0	12.043																								
5.0	12.043																								
6.0	12.043																								
7.0	12.043																								
8.0	12.044																								



Model	R10A-12	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+12V 0.9A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -10~50 °C

Input Voltage : 85~132 V

Load Current : 0.00~0.9 A

* Output Voltage Accuracy = ±(Maximum of Output Voltage - Minimum of Output Voltage) / 2

$$* \text{ Output Voltage Accuracy (Ration)} = \frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -10~50 °C

入力電圧 85~132 V

負荷電流 0.00~0.9 A

* 定電圧精度(変動値) = ±(出力電圧の最高値 - 出力電圧の最低値) / 2

$$* \text{ 定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	-10	132	0.00	12.062	±19	±0.2
Minimum Voltage	50	132	0.90	12.026		

COSEL

Model	R10A-12	Temperature	25°C																																																			
Item	Oscillator Frequency 発振周波数	Testing Circuitry	Figure A																																																			
Object	+12V 0.9A																																																					
1. Graph																																																						
<p>Legend: ▲ Input Volt. 85 V □ Input Volt. 100 V ○ Input Volt. 132 V</p>																																																						
2. Values																																																						
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt.</th> <th>Input Volt.</th> <th>Input Volt.</th> </tr> <tr> <th>85[V]</th> <th>100[V]</th> <th>132[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td> <td>444</td> <td>450</td> <td>456</td> </tr> <tr> <td>0.15</td> <td>250</td> <td>280</td> <td>310</td> </tr> <tr> <td>0.30</td> <td>183</td> <td>200</td> <td>228</td> </tr> <tr> <td>0.45</td> <td>140</td> <td>158</td> <td>177</td> </tr> <tr> <td>0.60</td> <td>115</td> <td>126</td> <td>146</td> </tr> <tr> <td>0.75</td> <td>95</td> <td>106</td> <td>123</td> </tr> <tr> <td>0.90</td> <td>82</td> <td>92</td> <td>106</td> </tr> <tr> <td>0.99</td> <td>72</td> <td>85</td> <td>100</td> </tr> <tr> <td>—</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>—</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>—</td> <td>—</td> <td>—</td> <td>—</td> </tr> </tbody> </table>				Load Current [A]	Input Volt.	Input Volt.	Input Volt.	85[V]	100[V]	132[V]	0.00	444	450	456	0.15	250	280	310	0.30	183	200	228	0.45	140	158	177	0.60	115	126	146	0.75	95	106	123	0.90	82	92	106	0.99	72	85	100	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Volt.	Input Volt.	Input Volt.																																																			
	85[V]	100[V]	132[V]																																																			
0.00	444	450	456																																																			
0.15	250	280	310																																																			
0.30	183	200	228																																																			
0.45	140	158	177																																																			
0.60	115	126	146																																																			
0.75	95	106	123																																																			
0.90	82	92	106																																																			
0.99	72	85	100																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			
<p>Note: Slanted line shows the range of the rated load current.</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>																																																						



Model	R10A-12	
Item	Condensation 結露特性	Testing Circuitry Figure A
Object	+12V 0.9A	

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。

2. Values

Item	Data	Testing Conditions
Output Voltage [V]	12.044	Input Volt.: 100V, Load Current:0.9A
Line Regulation [mV]	1	Input Volt.: 85~100V, Load Current:0.9A
Load Regulation [mV]	6	Input Volt.: 100V, Load Current:0.0~0.9A



Model	R10A-12	Temperature	25°C
Item	Leakage Current 漏洩電流	Testing Circuitry	Figure B
Object	_____		

1. Results

Standards	Leakage Current [mA]		
	Input Volt.	Input Volt.	Input Volt.
85 [V]	100 [V]	132 [V]	
(A) DENTORI	0.08	0.09	0.12
(B) IEC60950	0.08	0.09	0.12

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力の両相について測定し、その大きい方を漏洩電流測定値とする。

Standards	Leakage Current [mA]		
	Input Volt.	Input Volt.	Input Volt.
170 [V]	230 [V]	264 [V]	
(B) IEC60950	—	—	—



Model	R10A-12	Temperature Testing Circuitry 25°C Figure C
Item	Line Noise Tolerance 入力雑音耐量	
Object	+12V 0.9A	

1. Results

Pulse Width [nS]	MODE	No protection failure should occur 保護回路の誤動作がない	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation
1000	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation

Conditions

Input Voltage : 100 V
 Pulse Voltage : 1000 V
 Pulse Cycle : 10 mS
 Pulse Input Duration: 1 min. or more
 Load : 100 %

COSEL

Model	R10A-12	Temperature Testing Circuitry	25°C Figure D
Item	Conducted Emission 雜音端子電壓		
Object	<hr/>		

1. Graph

Remarks


Input Volt. 100V (VCCI Class B)

120V (FCC Class B)


Load 100 %

Limit1: [VCCI] Class B(QP)

Limit2: [VCCI] Class B(Ave.)

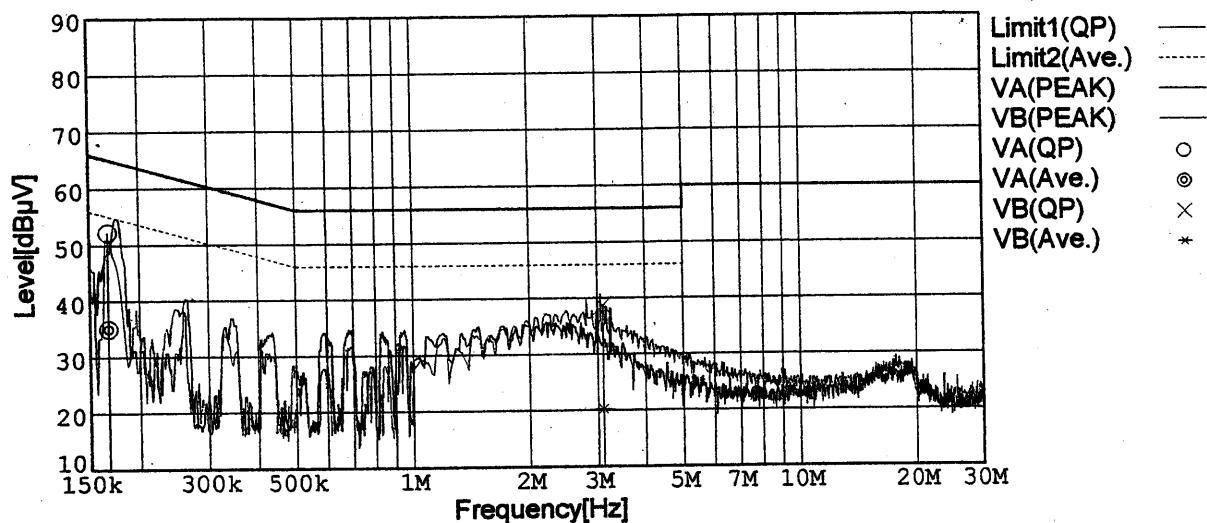

Limit1: [FCC Part15] Class B

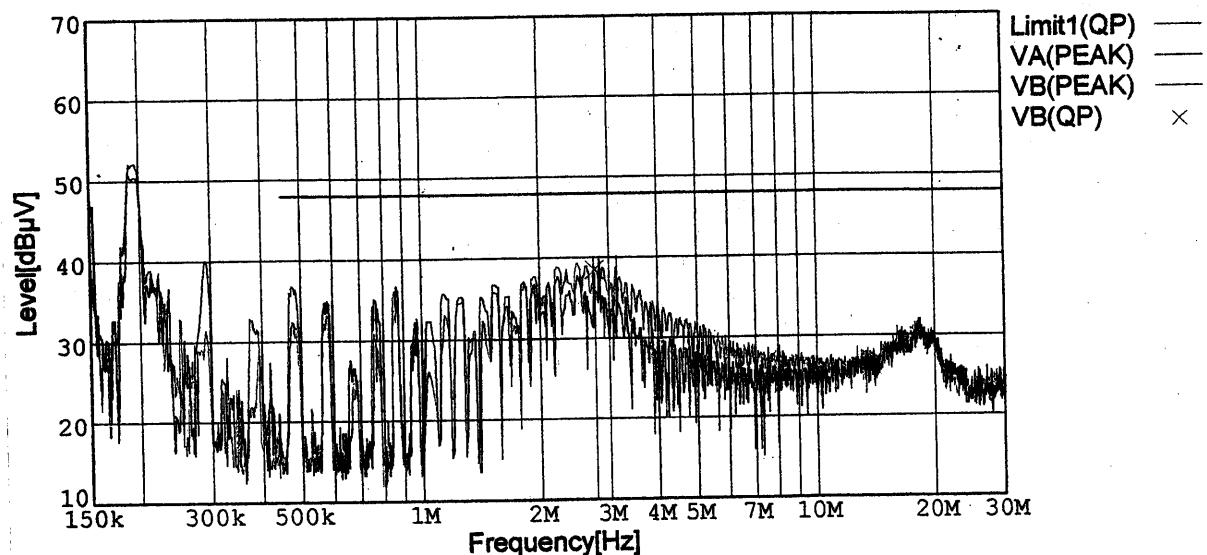

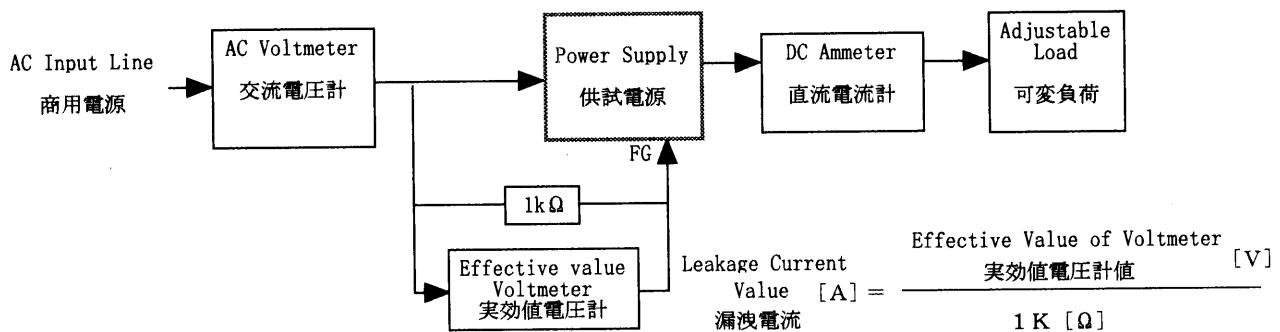
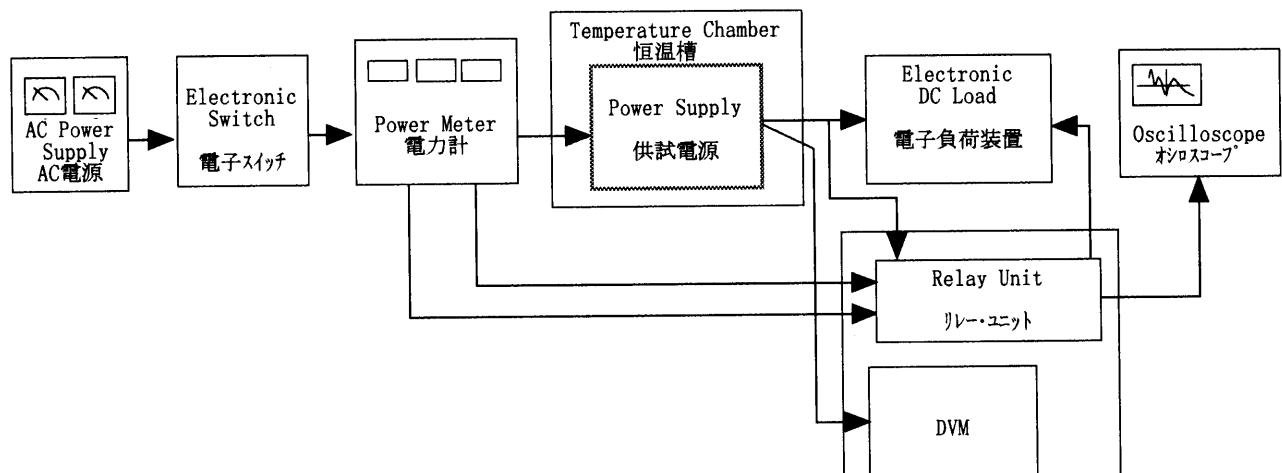


Figure B (DENTORI)

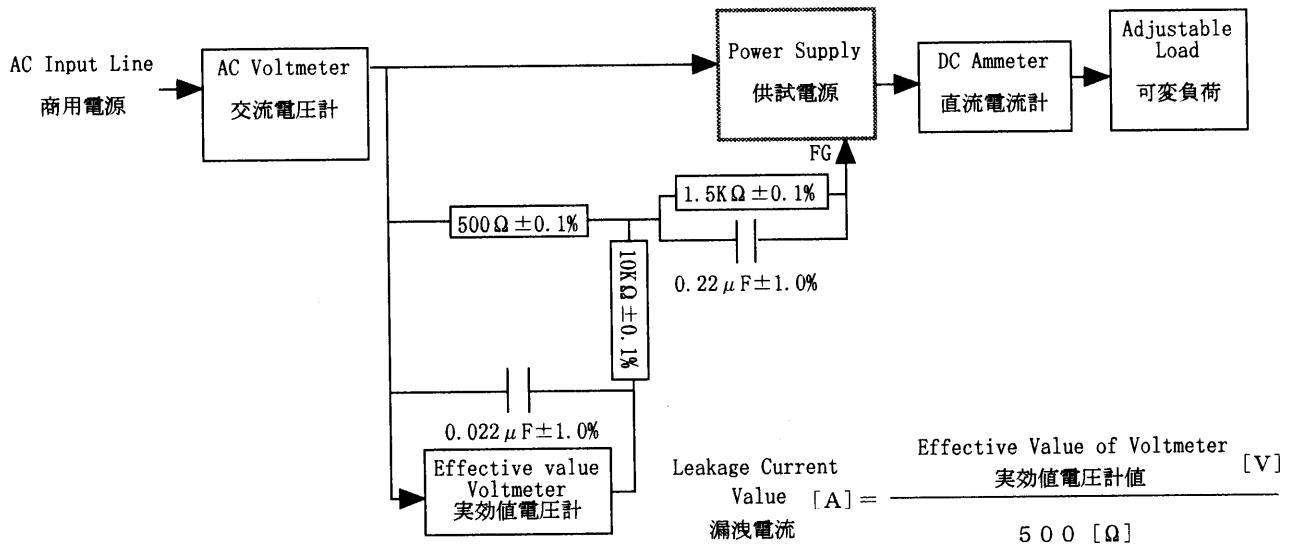


Figure B (IEC60950)

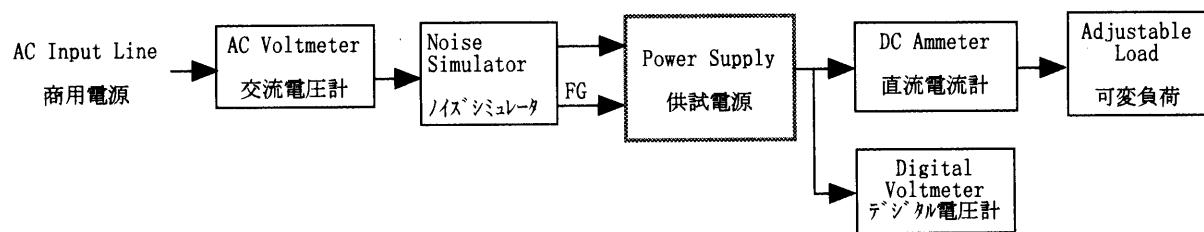


Figure C

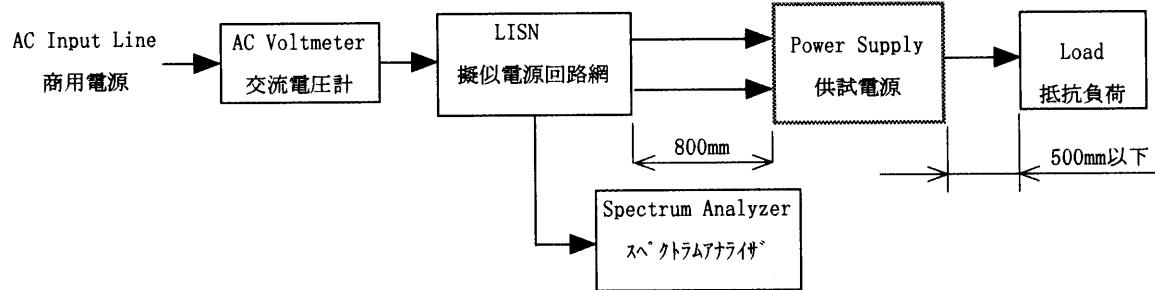


Figure D

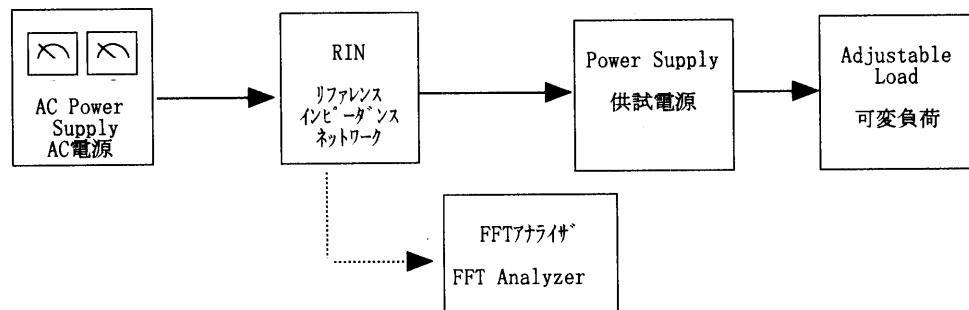


Figure E