



# TEST DATA OF R50A-24 (100V INPUT)

Regulated DC Power Supply

Date : Sep. 28. 1998

Approved by : Hisanori Oshii  
Design Manager

Prepared by : Jun Uchida  
Design Engineer

コーセル株式会社

COSEL CO., LTD.

## CONTENTS

1. Line Regulation . . . . .	1
静的入力変動	
2. Input Current (by Load Current) . . . . .	2
入力電流 (負荷特性)	
3. Input Power (by Load Current) . . . . .	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage) . . . . .	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current) . . . . .	5
効率 (負荷特性)	
6. Power Factor (by Input Voltage) . . . . .	6
力率 (入力電圧特性)	
7. Power Factor (by Load Current) . . . . .	7
力率 (負荷特性)	
8. Hold-Up Time . . . . .	8
出力保持時間	
9. Instantaneous Interruption Compensation . . . . .	9
瞬時停電保障	
10. Load Regulation . . . . .	10
静的負荷変動	
11. Ripple Voltage (by Load Current) . . . . .	11
リップル電圧 (負荷特性)	
12. Ripple-Noise . . . . .	12
リップルノイズ	
13. Overcurrent Protection . . . . .	13
過電流保護	
14. Overvoltage Protection . . . . .	14
過電圧保護	
15. Inrush Current . . . . .	15
突入電流	
16. Dynamic Load Responce . . . . .	16
動的負荷変動	
17. Rise and Fall Time . . . . .	17
立上り、立下がり時間	
18. Ambient Temperature Drift . . . . .	18
周囲温度変動	
19. Minimum Input Voltage for Regulated Output Voltage . . . . .	19
最低レギュレーション電圧	
20. Ripple Voltage (by Ambient Temperature) . . . . .	20
リップル電圧 (周囲温度特性)	
21. Time Lapse Drift . . . . .	21
経時ドリフト	
22. Output Voltage Accuracy . . . . .	22
定電圧精度	
23. Condensation . . . . .	23
結露特性	
24. Leakage Current . . . . .	24
漏洩電流	
25. Line Noise Tolerance . . . . .	25
入力雑音耐量	
26. Conducted Emission . . . . .	26
雑音端子電圧	
27. Figure of Testing Circuitry . . . . .	27
測定回路図	

(Final Page 28 )

**COSEL**

Model		R50A-24	
Item		Line Regulation  静的入力変動	
Object		+24.0V2.20A	
1. Graph		2. Values	

□

Load 50%

△

Load 100%

Output Voltage

[V]

24.21

24.19

24.17

24.15

24.13

24.11

24.09

0

24.141

24.142

24.142

24.142

24.142

24.142

24.142

24.142

24.142

24.142

24.139

24.139

24.139

24.139

24.139

24.139

24.139

24.139

24.139

0

80

90

100

110

120

130

140

150

Input Voltage

[V]

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]
75	24.141	24.139
80	24.142	24.139
85	24.142	24.139
90	24.142	24.139
100	24.142	24.139
110	24.142	24.139
120	24.142	24.139
132	24.142	24.139
140	24.142	24.139

# COSEL

Model		R50A-24		Temperature		25℃																																																								
Item		Input Current (by Load Current) 入力電流 (負荷特性)		Testing Circuitry		Figure A																																																								
Output		_____																																																												
1. Graph				2. Values																																																										
<div><div><div>—△—</div><div>Input Volt. 85V</div></div><div><div>- - -□- - -</div><div>Input Volt. 100V</div></div><div><div>- - -○- - -</div><div>Input Volt. 132V</div></div></div> <div>Input Current [A]</div> <div>Load Current [A]</div> <div>Note: Slanted line shows the range of the rated load current</div> <div>(注)斜線は定格負荷電流範囲を示す。</div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Current [A]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>0.00</td><td>0.060</td><td>0.060</td><td>0.065</td></tr><tr><td>0.40</td><td>0.307</td><td>0.282</td><td>0.248</td></tr><tr><td>0.80</td><td>0.531</td><td>0.477</td><td>0.405</td></tr><tr><td>1.20</td><td>0.751</td><td>0.669</td><td>0.558</td></tr><tr><td>1.60</td><td>0.974</td><td>0.863</td><td>0.713</td></tr><tr><td>2.00</td><td>1.197</td><td>1.058</td><td>0.866</td></tr><tr><td>2.20</td><td>1.308</td><td>1.153</td><td>0.942</td></tr><tr><td>2.42</td><td>1.429</td><td>1.246</td><td>1.013</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Input Current [A]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.00	0.060	0.060	0.065	0.40	0.307	0.282	0.248	0.80	0.531	0.477	0.405	1.20	0.751	0.669	0.558	1.60	0.974	0.863	0.713	2.00	1.197	1.058	0.866	2.20	1.308	1.153	0.942	2.42	1.429	1.246	1.013	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Current [A]																																																													
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																											
0.00	0.060	0.060	0.065																																																											
0.40	0.307	0.282	0.248																																																											
0.80	0.531	0.477	0.405																																																											
1.20	0.751	0.669	0.558																																																											
1.60	0.974	0.863	0.713																																																											
2.00	1.197	1.058	0.866																																																											
2.20	1.308	1.153	0.942																																																											
2.42	1.429	1.246	1.013																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											

# COSEL

Model

R50A-24

Item

Input Power (by Load Current)  
入力電力 (負荷特性)

Output

1. Graph

—△—

Input Volt. 85V

-□-

Input Volt. 100V

-○-

Input Volt. 132V

Input Power [W]

100

80

60

40

20

0

0

0.5

1

1.5

2

2.5

3

Load Current [A]

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。

2. Values

Load Current [A]	Input Power [W]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
0.00	1.95	2.24	2.98
0.40	13.31	13.79	14.97
0.80	24.36	24.75	25.90
1.20	35.52	35.79	36.77
1.60	47.15	47.24	48.00
2.00	59.10	58.95	59.50
2.20	65.13	64.87	65.20
2.42	71.99	71.65	71.80
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

**COSEL**

Model		R50A-24	
Item	Efficiency 効率	Temperature	25℃
		Testing Circuitry	Figure A
Object			

1. Graph

□

Load 50%

△

Load 100%

Efficiency [%]

86

82

78

74

70

66

62

0

0

80

90

100

110

120

130

140

150

Input Voltage [V]

Input Voltage [V]	Load 50% Efficiency [%]	Load 100% Efficiency [%]
75	82.1	81.3
80	82.1	81.8
85	81.9	82.2
90	81.6	82.3
100	81.1	82.6
110	80.5	82.6
120	79.7	82.5
132	78.6	82.1
140	77.9	81.8

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

2. Values

Input Voltage [V]	Load 50% Efficiency [%]	Load 100% Efficiency [%]
75	82.1	81.3
80	82.1	81.8
85	81.9	82.2
90	81.6	82.3
100	81.1	82.6
110	80.5	82.6
120	79.7	82.5
132	78.6	82.1
140	77.9	81.8

# COSEL

Model		R50A-24	Temperature25℃ Testing CircuitryFigure A
Item	Efficiency (by Load Current) 効率（負荷電流特性）		
Output	_____		

1. Graph

—△— Input Volt. 85V  
- -□- - Input Volt. 100V  
- -○- - Input Volt. 132V

Efficiency [%]

Load Current [A]

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。

2. Values

Load Current [A]	Efficiency [%]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
0.40	73.8	71.2	65.6
0.80	80.4	79.1	75.6
1.20	82.2	81.6	79.4
1.60	82.6	82.5	81.2
2.00	82.4	82.6	81.9
2.20	82.2	82.5	82.1
2.42	81.8	82.2	82.0
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—





# COSEL

Model		R50A-24		Temperature		25℃																																																												
Item		Power Factor (by Load Current) 力率（負荷電流特性）		Testing Circuitry		Figure A																																																												
Output		_____																																																																
1. Graph				2. Values																																																														
<div><div><div>—△—</div><div>Input Volt. 85V</div></div><div><div>—□—</div><div>Input Volt. 100V</div></div><div><div>—○—</div><div>Input Volt. 132V</div></div></div> <p>Note: Slanted line shows the range of the rated load current</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>				<table><tr><th rowspan="2">Load Current</th><th colspan="3">Power Factor</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>[A]</td><td></td><td></td><td></td></tr><tr><td>—</td><td>0.39</td><td>0.37</td><td>0.35</td></tr><tr><td>0.40</td><td>0.51</td><td>0.49</td><td>0.46</td></tr><tr><td>0.80</td><td>0.54</td><td>0.52</td><td>0.48</td></tr><tr><td>1.20</td><td>0.56</td><td>0.53</td><td>0.50</td></tr><tr><td>1.60</td><td>0.57</td><td>0.55</td><td>0.51</td></tr><tr><td>2.00</td><td>0.58</td><td>0.56</td><td>0.52</td></tr><tr><td>2.20</td><td>0.58</td><td>0.56</td><td>0.52</td></tr><tr><td>2.42</td><td>0.59</td><td>0.57</td><td>0.53</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current	Power Factor			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	[A]				—	0.39	0.37	0.35	0.40	0.51	0.49	0.46	0.80	0.54	0.52	0.48	1.20	0.56	0.53	0.50	1.60	0.57	0.55	0.51	2.00	0.58	0.56	0.52	2.20	0.58	0.56	0.52	2.42	0.59	0.57	0.53	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current	Power Factor																																																																	
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																															
[A]																																																																		
—	0.39	0.37	0.35																																																															
0.40	0.51	0.49	0.46																																																															
0.80	0.54	0.52	0.48																																																															
1.20	0.56	0.53	0.50																																																															
1.60	0.57	0.55	0.51																																																															
2.00	0.58	0.56	0.52																																																															
2.20	0.58	0.56	0.52																																																															
2.42	0.59	0.57	0.53																																																															
—	—	—	—																																																															
—	—	—	—																																																															
—	—	—	—																																																															
—	—	—	—																																																															

# COSEL

Model		R50A-24	
Item		Hold-Up Time 出力保持時間	
Object		+24.0V2.2A	
1. Graph		2. Values	

—△— Load 50%

□ Load 100%

[mS]

1000

100

10

1

0 80 90 100 110 120 130 140 150

Input Voltage [V]

Hold-Up Time

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note: Slanted line shows the range of the rated input voltage.

出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。

(注)斜線は定格入力電圧範囲を示す。

Input Voltage [V]	Load 50%	Load 100%
	Hold-Up Time [mS]	Hold-Up Time [mS]
75	21	9
80	27	12
85	34	15
90	41	19
100	56	27
110	73	36
120	91	45
132	116	58
140	134	68

# COSEL

# COSEL

Model	R50A-24
Item	Instantaneous Interruption Compensation 瞬時停電保障
Object	+24.0V2.20A

1. Graph

—△— Input Volt. 85V  
- -□- - Input Volt. 100V  
- -○- - Input Volt. 132V

Instantaneous Compensation Time [mS]

Load Current [A]

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.  
Note: Slanted line shows the range of the rated load current.

瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間をいう。  
(注)斜線は定格負荷電流範囲を示す。

Testing Circuitry Figure A

2. Values

Load Current [A]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
	Time [mS]		
0.00	—	—	—
0.40	81	139	288
0.80	39	71	154
1.20	22	46	102
1.60	14	31	77
2.00	13	26	62
2.20	11	22	55
2.42	5	20	48
—	—	—	—
—	—	—	—
—	—	—	—

# COSEL

COSEL																																																		
Model	R50A-24																																																	
Item	Load Regulation 静的負荷変動																																																	
Object	+24.0V2.20A																																																	
1. Graph		Temperature 25℃ Testing Circuitry Figure A																																																
<div><div><div>—△—</div><div>- -□- -</div><div>- -○- -</div></div><div>Input Volt. 85V Input Volt. 100V Input Volt. 132V</div></div> <p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>		2. Values																																																
		<table><tr><th rowspan="2">Load Current [A]</th><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>0.00</td><td>24.146</td><td>24.147</td><td>24.147</td></tr><tr><td>0.40</td><td>24.145</td><td>24.145</td><td>24.145</td></tr><tr><td>0.80</td><td>24.144</td><td>24.144</td><td>24.144</td></tr><tr><td>1.20</td><td>24.143</td><td>24.143</td><td>24.143</td></tr><tr><td>1.60</td><td>24.143</td><td>24.143</td><td>24.142</td></tr><tr><td>2.00</td><td>24.142</td><td>24.142</td><td>24.142</td></tr><tr><td>2.20</td><td>24.141</td><td>24.141</td><td>24.141</td></tr><tr><td>2.42</td><td>24.141</td><td>24.141</td><td>24.141</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>		Load Current [A]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.00	24.146	24.147	24.147	0.40	24.145	24.145	24.145	0.80	24.144	24.144	24.144	1.20	24.143	24.143	24.143	1.60	24.143	24.143	24.142	2.00	24.142	24.142	24.142	2.20	24.141	24.141	24.141	2.42	24.141	24.141	24.141	—	—	—	—	—	—	—	—
Load Current [A]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																															
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																															
0.00	24.146	24.147	24.147																																															
0.40	24.145	24.145	24.145																																															
0.80	24.144	24.144	24.144																																															
1.20	24.143	24.143	24.143																																															
1.60	24.143	24.143	24.142																																															
2.00	24.142	24.142	24.142																																															
2.20	24.141	24.141	24.141																																															
2.42	24.141	24.141	24.141																																															
—	—	—	—																																															
—	—	—	—																																															

# COSEL

Model		R50A-24																																							
Item	Ripple Voltage (by Load Current) リップル電圧 (負荷電流特性)		Temperature 25°C Testing Circuitry Figure A																																						
Object	+24.0V 2.20A																																								
1. Graph		2. Values																																							
<div><div>-----□----- Input Volt. 85V</div><div>-----△----- Input Volt. 132V</div><div>Ripple Voltage [mV]</div><div>Load Current [A]</div></div>		<table><tr><th rowspan="2">Load Current [A]</th><th>Input Volt. 85 [V]</th><th>Input Volt. 132 [V]</th></tr><tr><th>Ripple Output Volt. [mV]</th><th>Ripple Output Volt. [mV]</th></tr><tr><td>0.0</td><td>20</td><td>20</td></tr><tr><td>0.4</td><td>20</td><td>30</td></tr><tr><td>0.8</td><td>30</td><td>40</td></tr><tr><td>1.2</td><td>40</td><td>40</td></tr><tr><td>1.6</td><td>40</td><td>50</td></tr><tr><td>2.0</td><td>50</td><td>50</td></tr><tr><td>2.2</td><td>50</td><td>50</td></tr><tr><td>2.4</td><td>60</td><td>60</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>		Load Current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	0.0	20	20	0.4	20	30	0.8	30	40	1.2	40	40	1.6	40	50	2.0	50	50	2.2	50	50	2.4	60	60	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]																																							
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																							
0.0	20	20																																							
0.4	20	30																																							
0.8	30	40																																							
1.2	40	40																																							
1.6	40	50																																							
2.0	50	50																																							
2.2	50	50																																							
2.4	60	60																																							
—	—	—																																							
—	—	—																																							
—	—	—																																							
<p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップル電圧は、下図 p-p 値で示される。</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p> <div><div>T1: Due to AC Input Line 入力商用周期</div><div>T2: Due to Switching スイッチング周期</div><div>Ripple [mVp-p]</div><div>T1</div><div>T2</div></div>																																									
Fig. Complex Ripple Wave Form 図 リップル波形詳細図																																									

# COSEL

LOVEL

Model	R50A-24
Item	Ripple-Noise   リップルノイズ
Object	+24.0V 2.20A

Temperature	25℃
Testing Circuitry	Figure A

1. Graph

□

Input Volt. 85V

△

Input Volt. 132V

[mV]

200

175

150

125

100

75

50

25

0

0

0.5

1

1.5

2

2.5

3

Ripple-Noise

Load Current

[A]

Load Current [A]	Input Volt. 85V [mV]	Input Volt. 132V [mV]
0.0	30	30
0.4	40	40
0.8	50	50
1.2	60	60
1.6	60	60
2.0	60	70
2.2	70	70
2.4	70	70

2. Values

Load current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]
	Ripple-Noise [mV]	Ripple-Noise [mV]
0.0	30	30
0.4	40	40
0.8	50	50
1.2	60	60
1.6	60	60
2.0	60	70
2.2	70	70
2.4	70	70
—	—	—
—	—	—
—	—	—

Ripple-Noise is shown as p-p in the figure below.  
 Note: Slanted line shows the range of the rated load current.

リップルノイズは、下図 p - p 値で示される。  
 (注) 斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line  
 入力商用周期  
 T2: Due to Switching  
 スイッチング周期

T2

Ripple-Noise

[mVp-p]

T1

Fig. Complex Ripple Wave Form  
 図 リップル波形詳細図

**COSEL**

Model		R50A-24	
Item		Overcurrent Protection 過電流保護	
Object		+24.0V2.20A	

1. Graph

Input Volt. 85 V

Input Volt. 100 V

Input Volt. 132 V

Output Voltage [V]

40.00

30.00

20.00

10.00

0.00

0

1

2

3

4

Load Current [A]

2. Values

Output Voltage [V]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
	Load Current [A]	Load Current [A]	Load Current [A]
24.00	2.93	2.92	2.90
22.80	2.93	2.92	2.90
21.60	2.93	2.92	2.92
19.20	2.94	2.93	2.91
16.80	2.94	2.92	2.91
14.40	2.94	2.92	2.91
12.00	2.94	2.93	2.91
9.60	2.94	2.93	2.91
7.20	2.93	2.92	2.90
4.80	2.92	2.90	2.88
2.40	2.88	2.86	2.83
0.00	2.91	2.91	2.93

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

# COSEL

COSEL

Model	R50A-24
Item	Overvoltage Protection 過電圧保護
Object	+24.0V2.20A

1. Graph

△

Input Volt. 85 V

□

Input Volt. 100 V

○

Input Volt. 132 V

[V]

Ambient Temperature [°C]

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

Testing Circuitry      Figure A


2. Values

Ambient Temp.	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
[°C]	Operating Point [V]		
-20	29.9	29.9	29.9
-10	30.2	30.2	30.2
0	30.5	30.5	30.5
10	30.7	30.7	30.7
20	31.0	31.0	31.0
25	31.1	31.1	31.1
30	31.3	31.3	31.3
40	31.5	31.5	31.5
50	31.8	31.8	31.8
60	32.0	32.0	32.0
—	—	—	—



**COSEL**

Model	R50A-24	Temperature 25°C Testing Circuitry Figure A
Item	Inrush Current 突入電流	
Object		

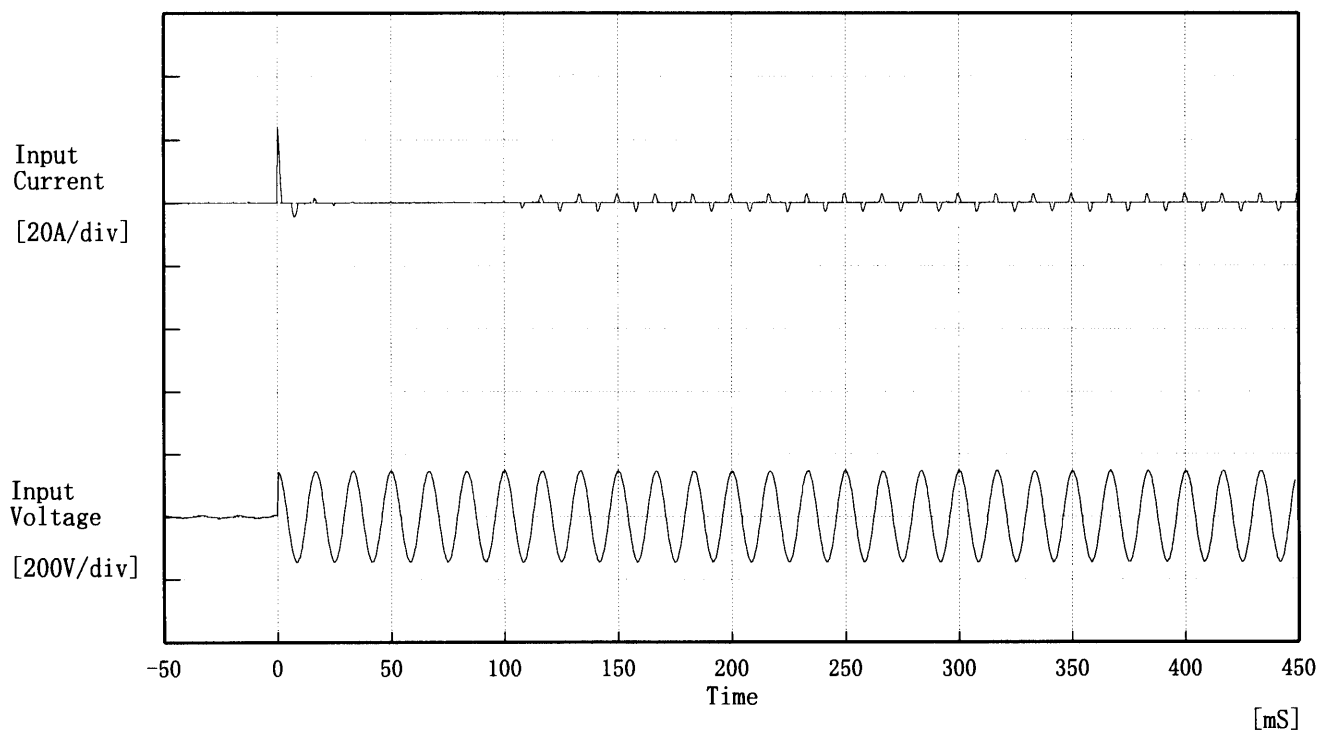


Input Voltage 100 V  
Frequency 60 Hz  
Load 100 %

Inrush Current

① 24.00 [A]

② 2.80 [A]

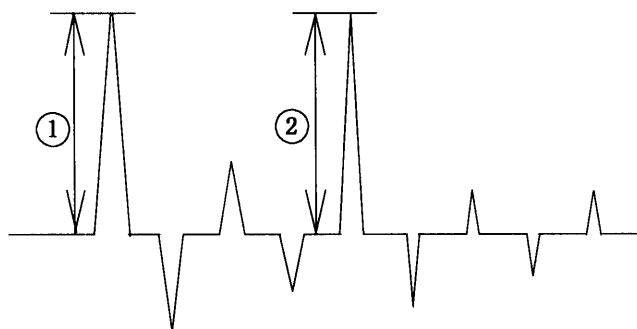

# COSEL



Model	R50A-24	Temperature 25°C Testing Circuitry Figure A
Item	Dynamic Load Responce 動的負荷変動	
Object	+24.0V 2.20A	

Input Volt. 100 V  
Cycle 200 mS

Load Current



Min. Load ↔

Load 100 %

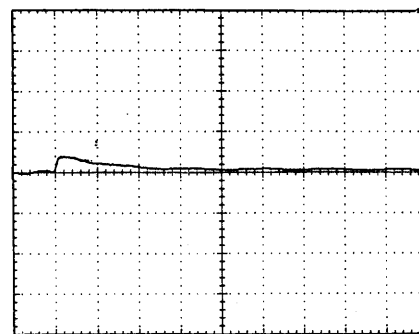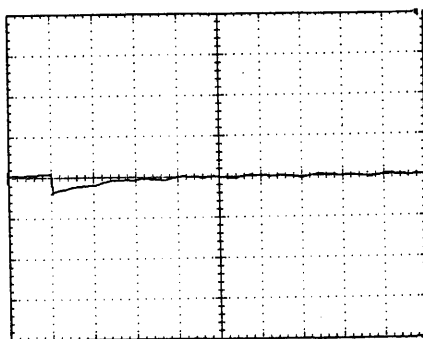


Min. Load ↔

Load 50 %

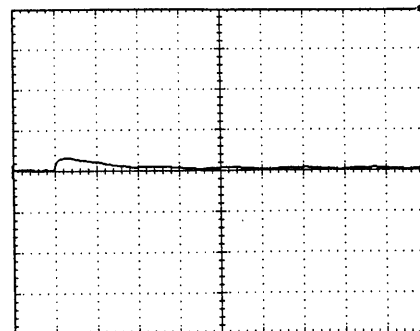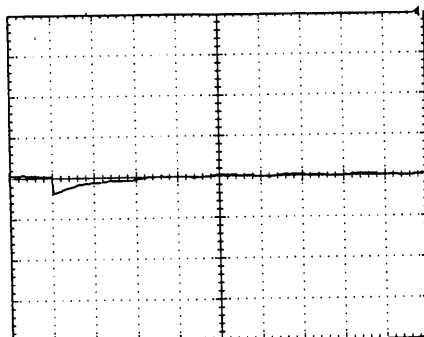

100 mV/div

10 mS/div

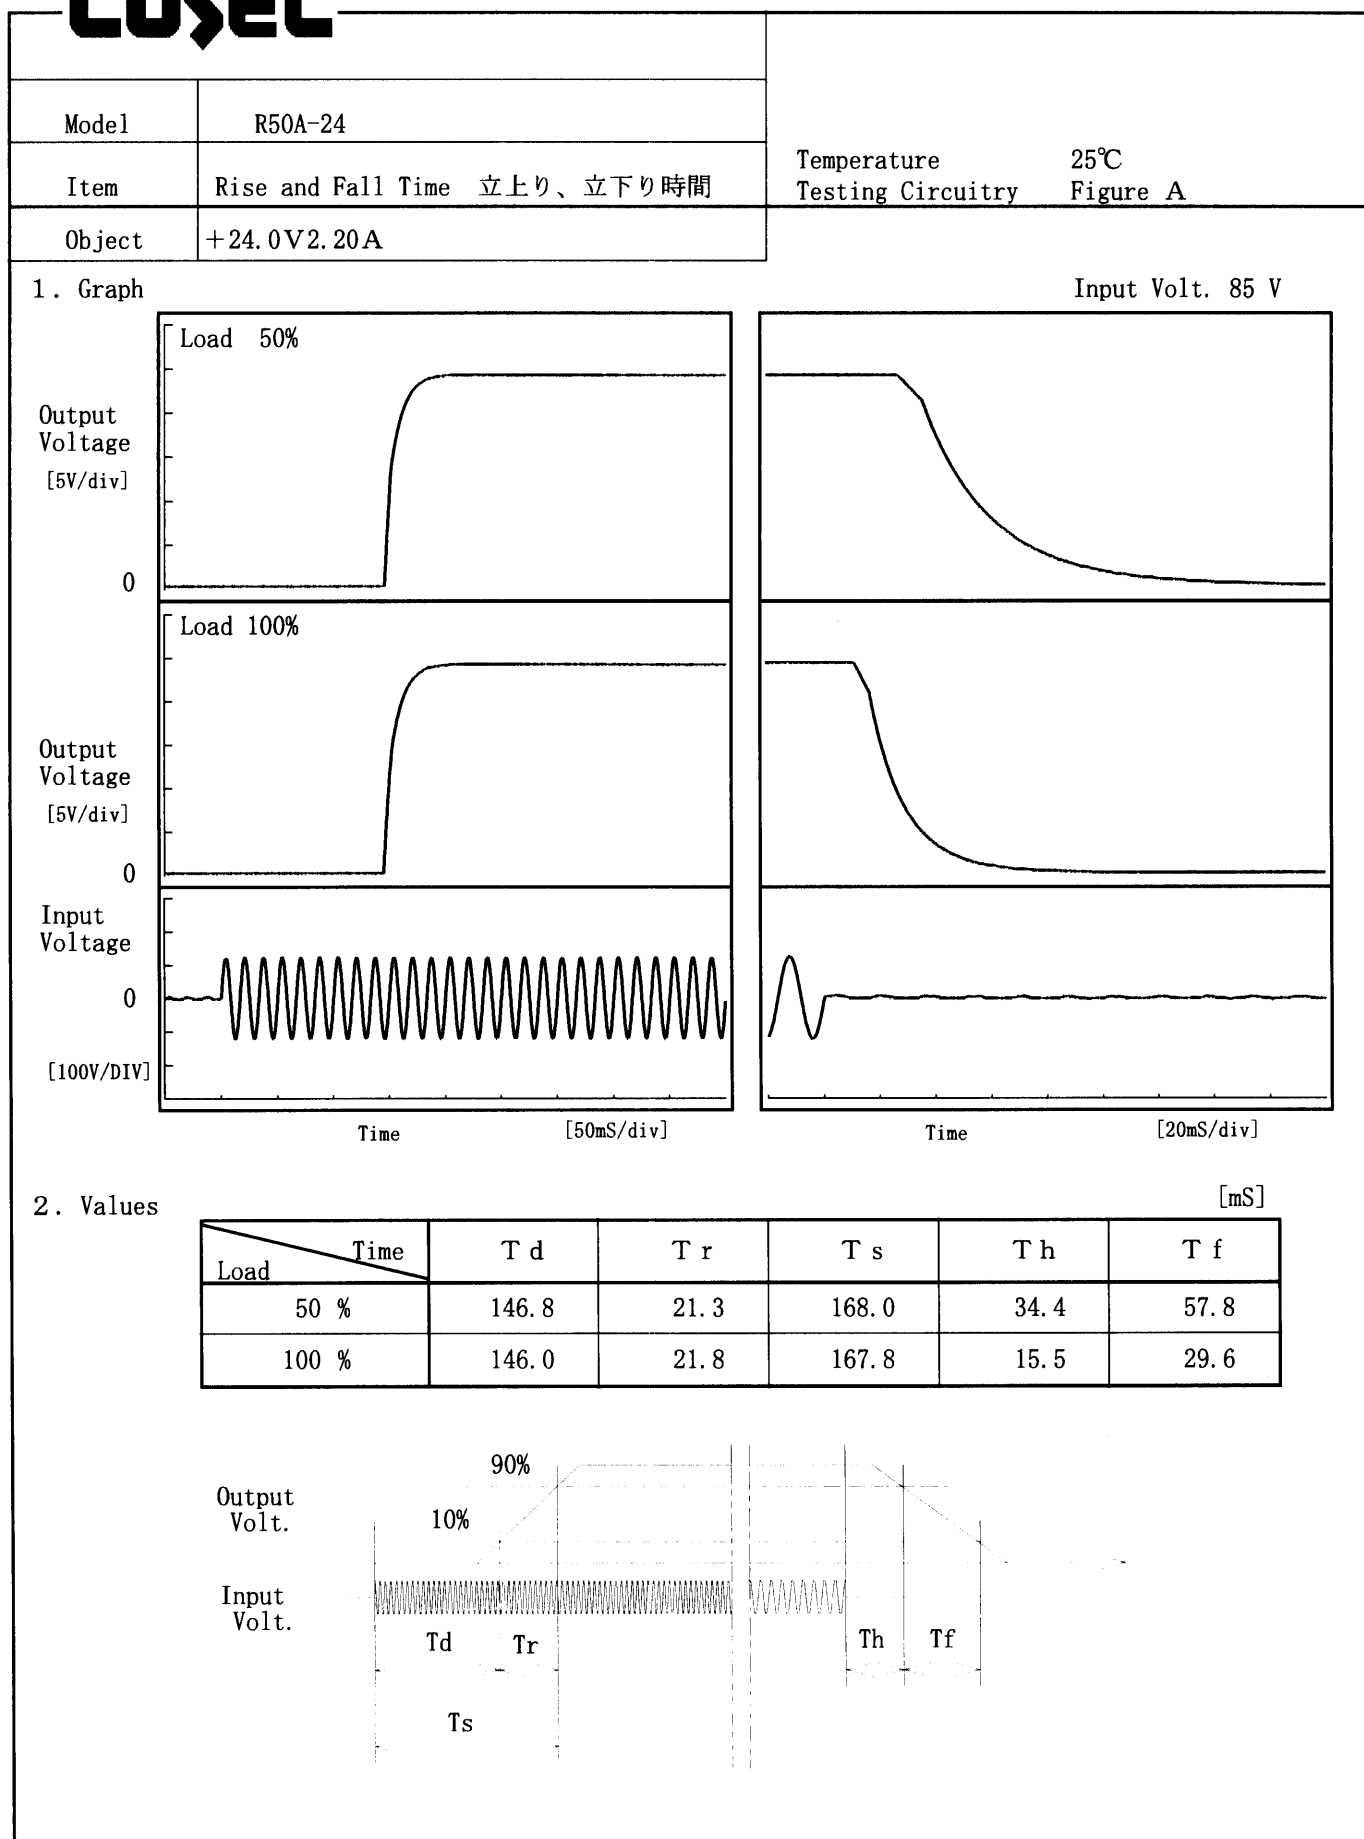**COSEL**

BC-4020


# COSEL

Model R50A-24		Testing Circuitry Figure A																																				
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧																																					
Object	+24.0V2.20A																																					
1. Graph <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">□ Load 50%</div> <div style="text-align: center;">△ Load 100%</div> </div> <p style="text-align: center;">Ambient Temperature [°C]</p>		2. Values <table border="1"> <thead> <tr> <th>Ambient Temp. [°C]</th><th>Load 50% Input Volt. [V]</th><th>Load 100% Input Volt. [V]</th></tr> </thead> <tbody> <tr><td>-20</td><td>61</td><td>67</td></tr> <tr><td>-10</td><td>60</td><td>66</td></tr> <tr><td>0</td><td>60</td><td>66</td></tr> <tr><td>10</td><td>59</td><td>66</td></tr> <tr><td>20</td><td>59</td><td>66</td></tr> <tr><td>25</td><td>59</td><td>66</td></tr> <tr><td>30</td><td>59</td><td>66</td></tr> <tr><td>40</td><td>59</td><td>66</td></tr> <tr><td>50</td><td>59</td><td>66</td></tr> <tr><td>60</td><td>59</td><td>66</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]	-20	61	67	-10	60	66	0	60	66	10	59	66	20	59	66	25	59	66	30	59	66	40	59	66	50	59	66	60	59	66	—	—	—
Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]																																				
-20	61	67																																				
-10	60	66																																				
0	60	66																																				
10	59	66																																				
20	59	66																																				
25	59	66																																				
30	59	66																																				
40	59	66																																				
50	59	66																																				
60	59	66																																				
—	—	—																																				
Note: Slanted line shows the range of the rated ambient temperature.  (注)斜線は定格周囲温度範囲を示す。																																						

**COSEL**

Model R50A-24		Testing Circuitry Figure A																																						
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)																																							
Object	+24.0V2.20A																																							
1. Graph <div> <div> <div>□</div> <div>Load 50%</div> </div> <div> <div>△</div> <div>Load 100%</div> </div> </div> <div> <div> <div>[mV]</div> <div>150</div> <div>125</div> <div>100</div> <div>75</div> <div>50</div> <div>25</div> <div>0</div> </div> <div> <div>Ripple Voltage</div> <div> <div>40</div> <div>20</div> <div>0</div> <div>20</div> <div>40</div> <div>60</div> <div>80</div> </div> <div>Ambient Temperature [°C]</div> </div> </div> <div> <div>Input Volt. 85 V</div> <div>Note: Slanted line shows the range of the rated ambient temperature.</div> <div>(注)斜線は定格周囲温度範囲を示す。</div> </div>		2. Values <table> <tr> <th rowspan="2">Ambient Temp. [°C]</th><th>Load 50%</th><th>Load 100%</th></tr> <tr> <th>Ripple Output Volt. [mV]</th><th>Ripple Output Volt. [mV]</th></tr> <tr><td>-20</td><td>60</td><td>65</td></tr> <tr><td>-10</td><td>60</td><td>60</td></tr> <tr><td>0</td><td>55</td><td>55</td></tr> <tr><td>10</td><td>50</td><td>55</td></tr> <tr><td>20</td><td>50</td><td>50</td></tr> <tr><td>25</td><td>50</td><td>50</td></tr> <tr><td>30</td><td>50</td><td>50</td></tr> <tr><td>40</td><td>45</td><td>45</td></tr> <tr><td>50</td><td>40</td><td>40</td></tr> <tr><td>60</td><td>40</td><td>40</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </table>	Ambient Temp. [°C]	Load 50%	Load 100%	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	-20	60	65	-10	60	60	0	55	55	10	50	55	20	50	50	25	50	50	30	50	50	40	45	45	50	40	40	60	40	40	—	—	—
Ambient Temp. [°C]	Load 50%	Load 100%																																						
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																						
-20	60	65																																						
-10	60	60																																						
0	55	55																																						
10	50	55																																						
20	50	50																																						
25	50	50																																						
30	50	50																																						
40	45	45																																						
50	40	40																																						
60	40	40																																						
—	—	—																																						

**COSEL**

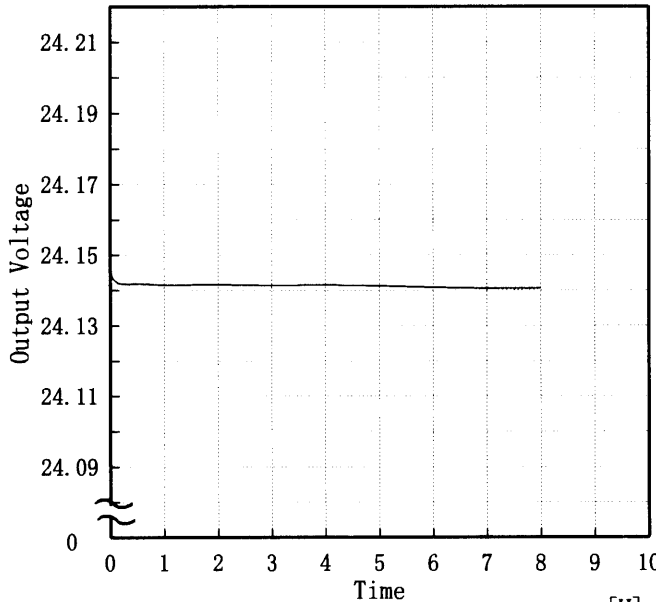COSEL																									
Model	R50A-24																								
Item	Time Lapse Drift 経時ドリフト	Temperature	25 ℃																						
		Testing Circuitry	Figure A																						
Object	+24.0V2.20A																								
1. Graph		2.Values																							
<div>[V]</div> <div></div> <div>Output Voltage</div> <div>Time [H]</div> <div>Input Volt. 100V</div> <div>Load 100%</div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>24.148</td></tr><tr><td>0.5</td><td>24.142</td></tr><tr><td>1.0</td><td>24.142</td></tr><tr><td>2.0</td><td>24.142</td></tr><tr><td>3.0</td><td>24.141</td></tr><tr><td>4.0</td><td>24.141</td></tr><tr><td>5.0</td><td>24.141</td></tr><tr><td>6.0</td><td>24.141</td></tr><tr><td>7.0</td><td>24.140</td></tr><tr><td>8.0</td><td>24.140</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	24.148	0.5	24.142	1.0	24.142	2.0	24.142	3.0	24.141	4.0	24.141	5.0	24.141	6.0	24.141	7.0	24.140	8.0	24.140
Time since start [H]	Output Voltage [V]																								
0.0	24.148																								
0.5	24.142																								
1.0	24.142																								
2.0	24.142																								
3.0	24.141																								
4.0	24.141																								
5.0	24.141																								
6.0	24.141																								
7.0	24.140																								
8.0	24.140																								

# COSEL

Model		R50A-24	Testing Circuitry Figure A
Item		Output Voltage Accuracy 定電圧精度	
Object		+24.0V 2.20A	

## Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -10~50 °C

Input Voltage : 85~132 V

Load Current : 0.00~2.20 A

\* Output Voltage Accuracy =  $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

\* Output Voltage Accuracy (Ration) =  $\frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

## 定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -10~50 °C

入力電圧 : 85~132 V

負荷電流 : 0.00~2.20 A

\* 定電圧精度(変動値) =  $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

\* 定電圧精度(変動率) =  $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	-10	100	0.00	24.152	±17	±0.1
Minimum Voltage	50	132	2.20	24.118		



# COSEL

LOGEL

Model	R50A-24
Item	Condensation 結露特性
Object	+24.0V2.20A

Testing Circuitry      Figure A

1. Condensation test

Testing procedure is as follows.

① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.

② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.

③ Testing electrical characteristics(Output Voltage,Ripple Voltage,Ripple noise) of the unit to confirm there be no fault.

④ Repeating ①,② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で－10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性（出力電圧、リップル、リップルノイズ）の測定を3度行い、異常のないことを確認する。

2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50 %	1	24.142	40	60
	2	24.142	40	60
	3	24.142	40	60
Load 100 %	1	24.135	50	60
	2	24.135	50	60
	3	24.136	50	60

Input Volt. 100 V

-23-

BC - 4020

**COSEL**

Model		R50A-24	Testing Circuitry      Figure A
Item		Leakage Current    漏洩電流	
Object		+24.0V2.20A	

## 1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132[V]
(A) DENTORI	0.19	0.23	0.31
(B) U L	0.18	0.23	0.31
(C) C S A	0.18	0.23	0.31

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 220 [V]	Input Volt. 264 [V]
(D) V D E	—	—	—

## 2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力両相について測定し、その大きい方を漏洩電流測定値とする。

Load 100 %

(A) Input Resistance :1K $\Omega$

(B) Input Resistance :1.5K $\Omega$   
Input Capacitance :0.15 $\mu$ F

(C) Input Resistance :1.5K $\Omega$   
Input Capacitance :0.15 $\mu$ F

(D) Input Resistance :2K $\Omega$   
Input Capacitance :0.1 $\mu$ F

**COSEL**

Model		R50A-24	Testing Circuitry      Figure A
Item		Line Noise Tolerance 入力雑音耐量	
Object		+24.0V 2.20A	

## 1. Results

Pulse Width [n S]	MODE	Operating Point of Overvoltage Protection [V] 過電圧保護動作値	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	31.3	no regulation
	NORMAL	31.4	no regulation
1000	COMMON	31.4	no regulation
	NORMAL	31.4	no regulation

## Conditions

Input Voltage           :100 V  
 Pulse Voltage          :2000 V  
 Pulse Cycle            :10 mS  
 Pulse Input Duration:1 min. or more  
 Load                   :100 %

# COSEL

Model

R50A-24

Item

Conducted Emission  
雑音端子電圧

Object

+24.0V 2.20A

Testing Circuitry

Figure D

## 1. Graph

## Remarks



Input Volt. 120 V

Load 100 %

Note: Slanted line shows the range of Tolerance.

(注) 斜線は許容値を示す。

NO	Standards	Standards Complied	Frequency [MHz]	Tolerance [dB/μV]
1	FCC class A		0.45~1.6	60
			1.6~30	69.5
2	FCC class B	○	0.45~30	48
3	VCCI -1		0.15~0.5	79
			0.5~30	73
4	VCCI -2	○	0.15~0.5	66-56
			0.5~5	56
			5~30	60
5	CISPR22-A		0.01~0.15	91-69.5
			0.15~0.5	66
			0.5~30	60
6	CISPR22-B		0.01~0.05	110
			0.05~0.15	90-80
			0.15~0.5	66-56
			0.5~5	56
			5~30	60

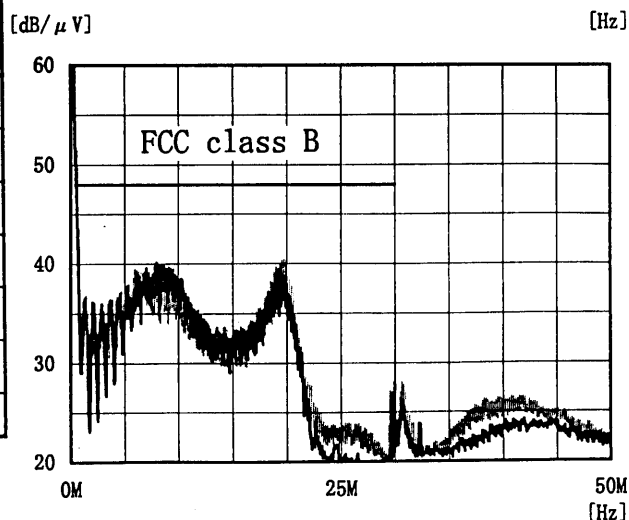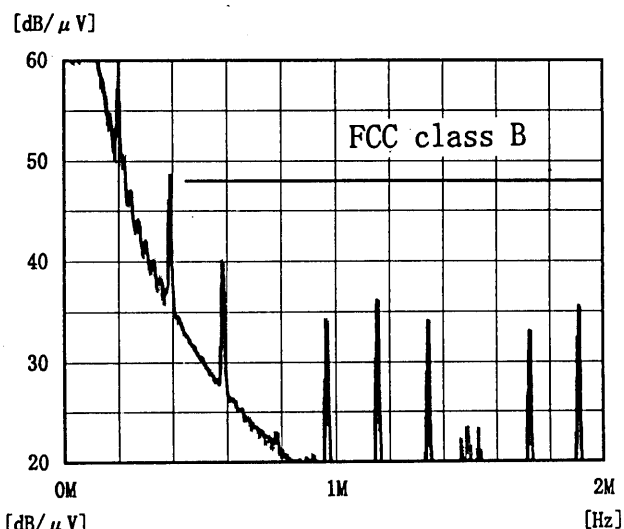

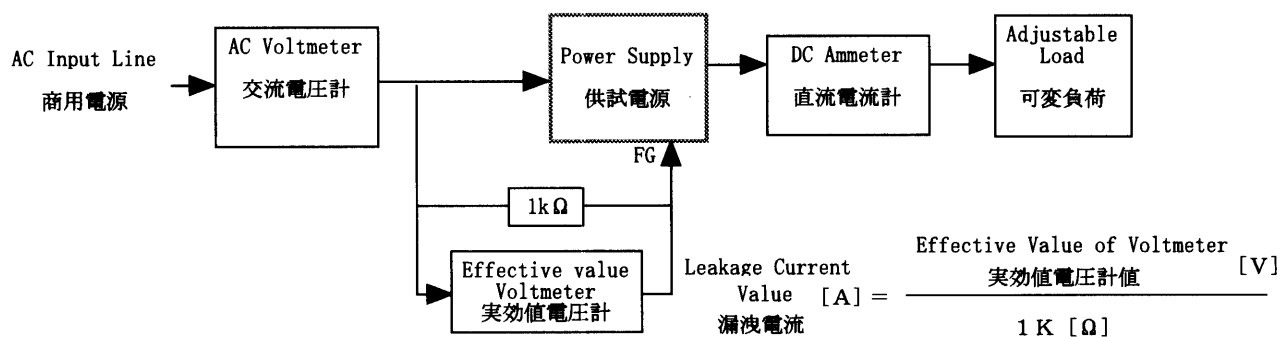
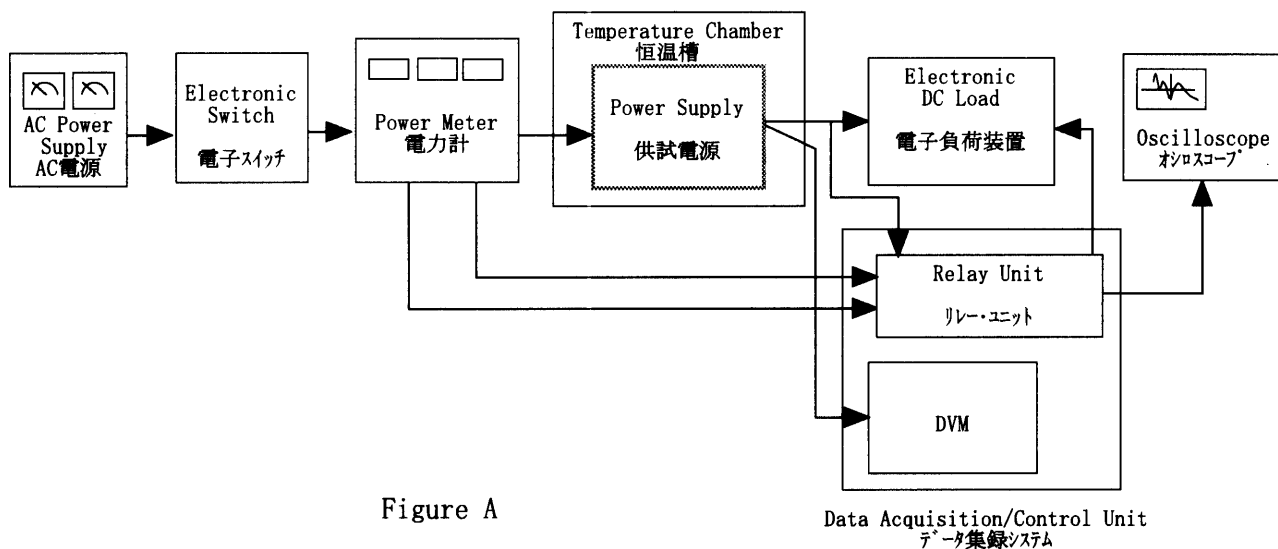


Figure B (DENTORI)

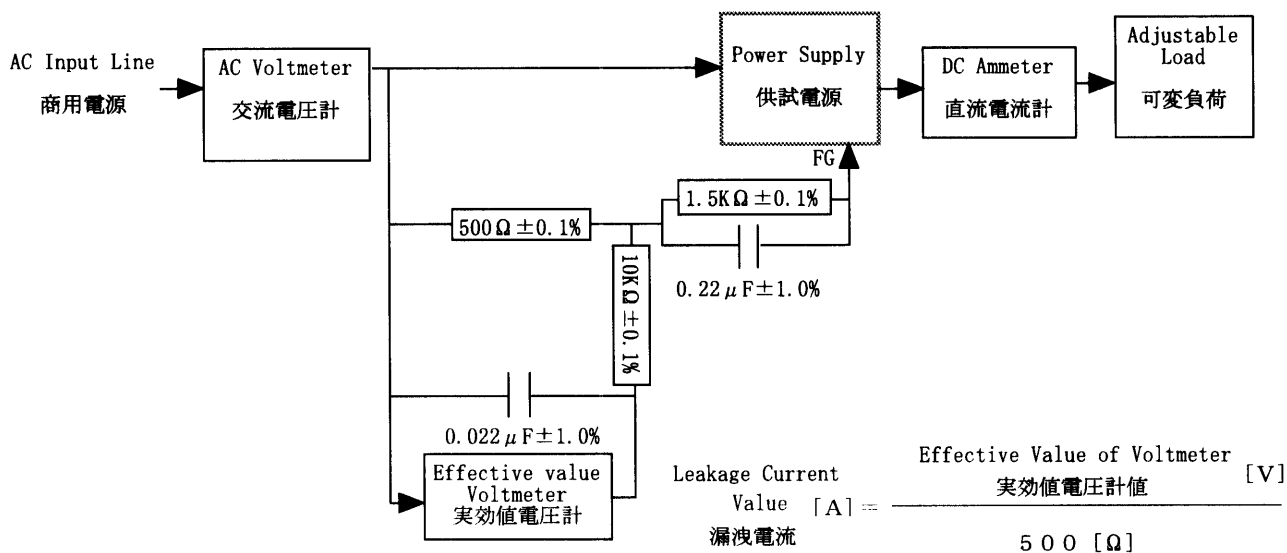


Figure B (UL, CSA, VDE)

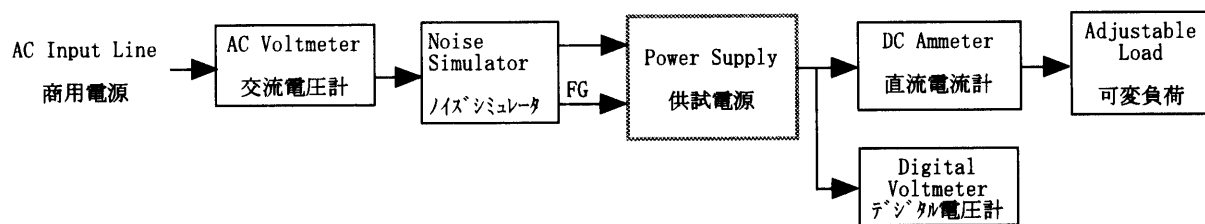


Figure C

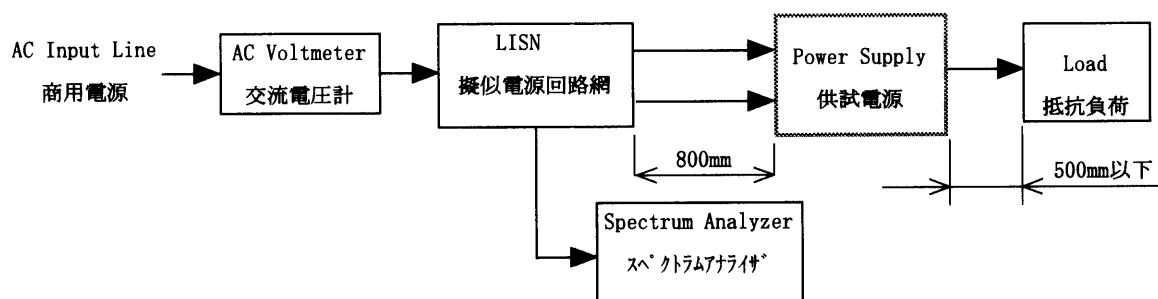


Figure D

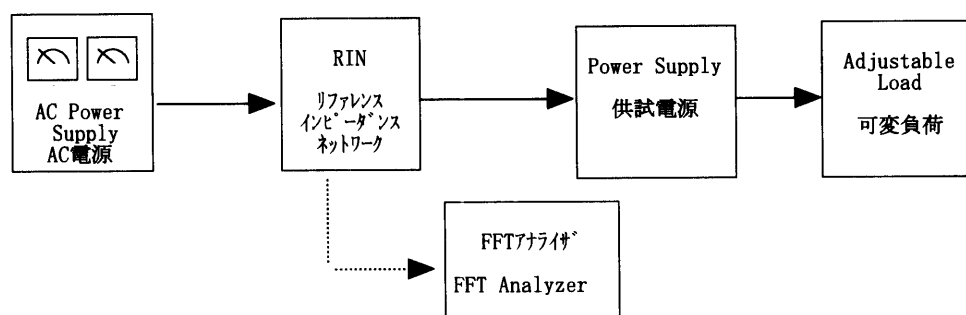


Figure E