



# TEST DATA OF SFS15482R5

Regulated DC Power Supply  
Sep.2. 2003

Approved by : Isao Yasuda  
Isao Yasuda Design Manager

Prepared by : Kenichi Tsukada  
Kenichi Tsukada Design Engineer

COSEL CO.,LTD.



## CONTENTS

1. Input Current (by Input Voltage) . . . . .	1
2. Input Current (by Load Current) . . . . .	2
3. Input Power (by Load Current) . . . . .	3
4. Efficiency (by Input Voltage) . . . . .	4
5. Efficiency (by Load Current) . . . . .	5
6. Line Regulation . . . . .	6
7. Load Regulation . . . . .	7
8. Dynamic Load Response . . . . .	8
9. Ripple Voltage (by Load Current) . . . . .	9
10. Ripple-Noise . . . . .	10
11. Ripple Voltage (by Ambient Temperature) . . . . .	11
12. Ambient Temperature Drift . . . . .	12
13. Output Voltage Accuracy . . . . .	13
14. Time Lapse Drift . . . . .	14
15. Rise and Fall Time . . . . .	15
16. Minimum Input Voltage for Regulated Output Voltage . . . . .	16
17. Overcurrent Protection . . . . .	17
18. Overvoltage Protection . . . . .	18
19. Figure of Testing Circuitry . . . . .	19

(Final Page 19)

**COSEL**

Model	SFS15482R5	Temperature	25°C																																																																							
Item	Input Current (by Input Voltage)	Testing Circuitry	Figure A																																																																							
Object																																																																										
1.Graph	<p>—△— Load 100%</p> <p>- - -□--- Load 50%</p> <p>- - -○--- Load 0%</p> <table border="1"> <caption>Data points estimated from Figure A Graph</caption> <thead> <tr> <th>Input Voltage [V]</th> <th>Load 0% [A]</th> <th>Load 50% [A]</th> <th>Load 100% [A]</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>8</td><td>0.002</td><td>0.000</td><td>0.000</td></tr> <tr><td>16</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>24</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>33</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>34</td><td>0.013</td><td>0.179</td><td>0.362</td></tr> <tr><td>36</td><td>0.013</td><td>0.172</td><td>0.347</td></tr> <tr><td>40</td><td>0.013</td><td>0.157</td><td>0.311</td></tr> <tr><td>48</td><td>0.013</td><td>0.132</td><td>0.260</td></tr> <tr><td>60</td><td>0.013</td><td>0.108</td><td>0.209</td></tr> <tr><td>70</td><td>0.013</td><td>0.094</td><td>0.181</td></tr> <tr><td>76</td><td>0.013</td><td>0.088</td><td>0.167</td></tr> <tr><td>80</td><td>0.013</td><td>0.084</td><td>0.160</td></tr> </tbody> </table>			Input Voltage [V]	Load 0% [A]	Load 50% [A]	Load 100% [A]	0	0.000	0.000	0.000	8	0.002	0.000	0.000	16	0.000	0.000	0.000	24	0.000	0.000	0.000	33	0.000	0.000	0.000	34	0.013	0.179	0.362	36	0.013	0.172	0.347	40	0.013	0.157	0.311	48	0.013	0.132	0.260	60	0.013	0.108	0.209	70	0.013	0.094	0.181	76	0.013	0.088	0.167	80	0.013	0.084	0.160															
Input Voltage [V]	Load 0% [A]	Load 50% [A]	Load 100% [A]																																																																							
0	0.000	0.000	0.000																																																																							
8	0.002	0.000	0.000																																																																							
16	0.000	0.000	0.000																																																																							
24	0.000	0.000	0.000																																																																							
33	0.000	0.000	0.000																																																																							
34	0.013	0.179	0.362																																																																							
36	0.013	0.172	0.347																																																																							
40	0.013	0.157	0.311																																																																							
48	0.013	0.132	0.260																																																																							
60	0.013	0.108	0.209																																																																							
70	0.013	0.094	0.181																																																																							
76	0.013	0.088	0.167																																																																							
80	0.013	0.084	0.160																																																																							
2.Values	<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>8</td><td>0.002</td><td>0.000</td><td>0.000</td></tr> <tr><td>16</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>24</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>33</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>34</td><td>0.013</td><td>0.179</td><td>0.362</td></tr> <tr><td>36</td><td>0.013</td><td>0.172</td><td>0.347</td></tr> <tr><td>40</td><td>0.013</td><td>0.157</td><td>0.311</td></tr> <tr><td>48</td><td>0.013</td><td>0.132</td><td>0.260</td></tr> <tr><td>60</td><td>0.013</td><td>0.108</td><td>0.209</td></tr> <tr><td>70</td><td>0.013</td><td>0.094</td><td>0.181</td></tr> <tr><td>76</td><td>0.013</td><td>0.088</td><td>0.167</td></tr> <tr><td>80</td><td>0.013</td><td>0.084</td><td>0.160</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0	0.000	0.000	0.000	8	0.002	0.000	0.000	16	0.000	0.000	0.000	24	0.000	0.000	0.000	33	0.000	0.000	0.000	34	0.013	0.179	0.362	36	0.013	0.172	0.347	40	0.013	0.157	0.311	48	0.013	0.132	0.260	60	0.013	0.108	0.209	70	0.013	0.094	0.181	76	0.013	0.088	0.167	80	0.013	0.084	0.160	--	-	-	-	--	-	-	-	--	-	-	-
Input Voltage [V]	Input Current [A]																																																																									
	Load 0%	Load 50%	Load 100%																																																																							
0	0.000	0.000	0.000																																																																							
8	0.002	0.000	0.000																																																																							
16	0.000	0.000	0.000																																																																							
24	0.000	0.000	0.000																																																																							
33	0.000	0.000	0.000																																																																							
34	0.013	0.179	0.362																																																																							
36	0.013	0.172	0.347																																																																							
40	0.013	0.157	0.311																																																																							
48	0.013	0.132	0.260																																																																							
60	0.013	0.108	0.209																																																																							
70	0.013	0.094	0.181																																																																							
76	0.013	0.088	0.167																																																																							
80	0.013	0.084	0.160																																																																							
--	-	-	-																																																																							
--	-	-	-																																																																							
--	-	-	-																																																																							

Note: Slanted line shows the range of the rated input voltage.

**COSEL**

Model	SFS15482R5	Temperature	25°C																																																		
Item	Input Current (by Load Current)	Testing Circuitry	Figure A																																																		
Object	—																																																				
1.Graph	—△— Input Volt. 36V - - -□- - - Input Volt. 48V - - ○- - - Input Volt. 76V																																																				
			2.Values																																																		
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr> <td>0.0</td><td>0.013</td><td>0.013</td><td>0.013</td></tr> <tr> <td>0.8</td><td>0.070</td><td>0.056</td><td>0.040</td></tr> <tr> <td>1.6</td><td>0.129</td><td>0.099</td><td>0.067</td></tr> <tr> <td>2.4</td><td>0.189</td><td>0.144</td><td>0.095</td></tr> <tr> <td>3.2</td><td>0.250</td><td>0.189</td><td>0.123</td></tr> <tr> <td>4.0</td><td>0.312</td><td>0.235</td><td>0.152</td></tr> <tr> <td>4.5</td><td>0.351</td><td>0.264</td><td>0.170</td></tr> <tr> <td>4.6</td><td>0.359</td><td>0.270</td><td>0.174</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Input Current [A]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	0.013	0.013	0.013	0.8	0.070	0.056	0.040	1.6	0.129	0.099	0.067	2.4	0.189	0.144	0.095	3.2	0.250	0.189	0.123	4.0	0.312	0.235	0.152	4.5	0.351	0.264	0.170	4.6	0.359	0.270	0.174	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Current [A]																																																				
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																		
0.0	0.013	0.013	0.013																																																		
0.8	0.070	0.056	0.040																																																		
1.6	0.129	0.099	0.067																																																		
2.4	0.189	0.144	0.095																																																		
3.2	0.250	0.189	0.123																																																		
4.0	0.312	0.235	0.152																																																		
4.5	0.351	0.264	0.170																																																		
4.6	0.359	0.270	0.174																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		
<p>Note: Slanted line shows the range of the rated load current.</p>																																																					

**COSEL**

Model	SFS15482R5					
Item	Input Power (by Load Current)					
Object	_____					
1.Graph	—△— Input Volt. 36V - - -□- - Input Volt. 48V - - ○- - Input Volt. 76V					
Note: Slanted line shows the range of the rated load current.						
Temperature	25°C					
Testing Circuitry	Figure A					
2.Values						
Load Current [A]	Input Power [W]					
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]			
0.0	0.48	0.61	0.97			
0.8	2.54	2.67	3.03			
1.6	4.64	4.77	5.12			
2.4	6.79	6.91	7.24			
3.2	8.98	9.08	9.38			
4.0	11.21	11.27	11.55			
4.5	12.63	12.67	12.92			
4.6	12.91	12.95	13.19			
--	-	-	-			
--	-	-	-			
--	-	-	-			

**COSSEL**

Model	SFS15482R5																																	
Item	Efficiency (by Input Voltage)	Temperature 25°C Testing Circuitry Figure A																																
Object	_____	_____																																
1. Graph																																		
<p>Efficiency [%]</p> <p>Input Voltage [V]</p> <p>Legend: Load 50% (dashed line with squares), Load 100% (solid line with triangles)</p>																																		
Note: Slanted line shows the range of the rated input voltage.																																		
2. Values																																		
<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr> <td>34</td> <td>88.8</td> <td>88.6</td> </tr> <tr> <td>36</td> <td>88.6</td> <td>88.7</td> </tr> <tr> <td>40</td> <td>88.1</td> <td>88.7</td> </tr> <tr> <td>48</td> <td>87.1</td> <td>88.5</td> </tr> <tr> <td>55</td> <td>86.1</td> <td>88.2</td> </tr> <tr> <td>60</td> <td>85.4</td> <td>87.8</td> </tr> <tr> <td>70</td> <td>83.6</td> <td>86.9</td> </tr> <tr> <td>76</td> <td>82.8</td> <td>86.5</td> </tr> <tr> <td>78</td> <td>82.3</td> <td>86.2</td> </tr> </tbody> </table>			Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	34	88.8	88.6	36	88.6	88.7	40	88.1	88.7	48	87.1	88.5	55	86.1	88.2	60	85.4	87.8	70	83.6	86.9	76	82.8	86.5	78	82.3	86.2
Input Voltage [V]	Efficiency [%]																																	
	Load 50%	Load 100%																																
34	88.8	88.6																																
36	88.6	88.7																																
40	88.1	88.7																																
48	87.1	88.5																																
55	86.1	88.2																																
60	85.4	87.8																																
70	83.6	86.9																																
76	82.8	86.5																																
78	82.3	86.2																																

**COSEL**

Model	SFS15482R5	Temperature	25°C																																																			
Item	Efficiency (by Load Current)	Testing Circuitry	Figure A																																																			
Object																																																						
1.Graph	—△— Input Volt. 36V - - -□--- Input Volt. 48V - - -○--- Input Volt. 76V																																																					
	<p>The graph shows efficiency increasing with load current for all input voltages. A slanted line is drawn through the data points, representing the rated load current range.</p> <table border="1"> <thead> <tr> <th>Load Current [A]</th> <th>Efficiency [36V] (%)</th> <th>Efficiency [48V] (%)</th> <th>Efficiency [76V] (%)</th> </tr> </thead> <tbody> <tr><td>0.8</td><td>79.8</td><td>76.1</td><td>67.0</td></tr> <tr><td>1.6</td><td>86.8</td><td>84.7</td><td>78.9</td></tr> <tr><td>2.4</td><td>88.8</td><td>87.4</td><td>83.4</td></tr> <tr><td>3.2</td><td>89.2</td><td>88.4</td><td>85.4</td></tr> <tr><td>4.0</td><td>89.1</td><td>88.7</td><td>86.2</td></tr> <tr><td>4.5</td><td>88.8</td><td>88.5</td><td>86.5</td></tr> <tr><td>4.6</td><td>88.7</td><td>88.5</td><td>86.5</td></tr> </tbody> </table>	Load Current [A]	Efficiency [36V] (%)	Efficiency [48V] (%)	Efficiency [76V] (%)	0.8	79.8	76.1	67.0	1.6	86.8	84.7	78.9	2.4	88.8	87.4	83.4	3.2	89.2	88.4	85.4	4.0	89.1	88.7	86.2	4.5	88.8	88.5	86.5	4.6	88.7	88.5	86.5	2.Values																				
Load Current [A]	Efficiency [36V] (%)	Efficiency [48V] (%)	Efficiency [76V] (%)																																																			
0.8	79.8	76.1	67.0																																																			
1.6	86.8	84.7	78.9																																																			
2.4	88.8	87.4	83.4																																																			
3.2	89.2	88.4	85.4																																																			
4.0	89.1	88.7	86.2																																																			
4.5	88.8	88.5	86.5																																																			
4.6	88.7	88.5	86.5																																																			
			<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.8</td><td>79.8</td><td>76.1</td><td>67.0</td></tr> <tr><td>1.6</td><td>86.8</td><td>84.7</td><td>78.9</td></tr> <tr><td>2.4</td><td>88.8</td><td>87.4</td><td>83.4</td></tr> <tr><td>3.2</td><td>89.2</td><td>88.4</td><td>85.4</td></tr> <tr><td>4.0</td><td>89.1</td><td>88.7</td><td>86.2</td></tr> <tr><td>4.5</td><td>88.8</td><td>88.5</td><td>86.5</td></tr> <tr><td>4.6</td><td>88.7</td><td>88.5</td><td>86.5</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Efficiency [%]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	-	-	-	0.8	79.8	76.1	67.0	1.6	86.8	84.7	78.9	2.4	88.8	87.4	83.4	3.2	89.2	88.4	85.4	4.0	89.1	88.7	86.2	4.5	88.8	88.5	86.5	4.6	88.7	88.5	86.5	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Efficiency [%]																																																					
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																			
0.0	-	-	-																																																			
0.8	79.8	76.1	67.0																																																			
1.6	86.8	84.7	78.9																																																			
2.4	88.8	87.4	83.4																																																			
3.2	89.2	88.4	85.4																																																			
4.0	89.1	88.7	86.2																																																			
4.5	88.8	88.5	86.5																																																			
4.6	88.7	88.5	86.5																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			


Note: Slanted line shows the range of the rated load current.

**COSEL**

Model	SFS15482R5
Item	Line Regulation
Object	+2.5V4.5A

Temperature 25°C  
Testing Circuitry Figure A

## 1.Graph

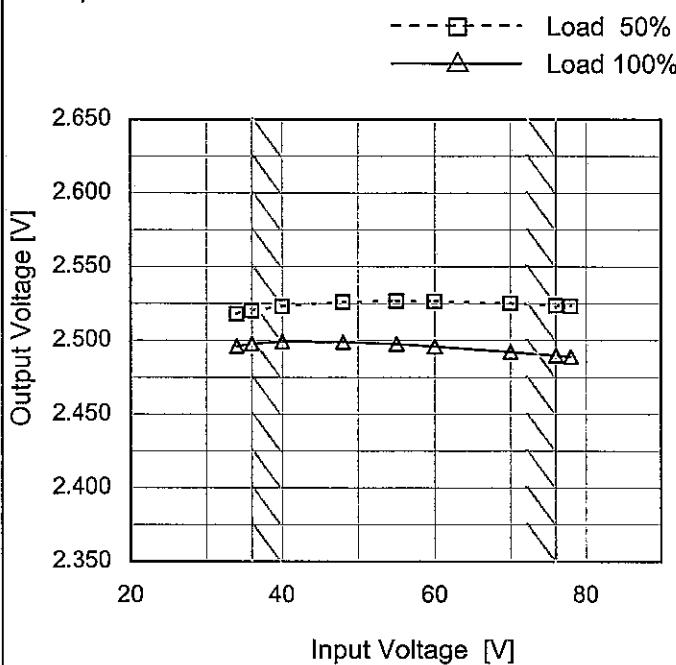

Note: Slanted line shows the range of the rated input voltage.

## 2.Values


Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
34	2.518	2.496
36	2.520	2.498
40	2.523	2.499
48	2.526	2.499
55	2.527	2.498
60	2.527	2.496
70	2.525	2.492
76	2.524	2.490
78	2.523	2.489

**COSSEL**

Model SFS15482R5

Item Load Regulation

Object +2.5V4.5A

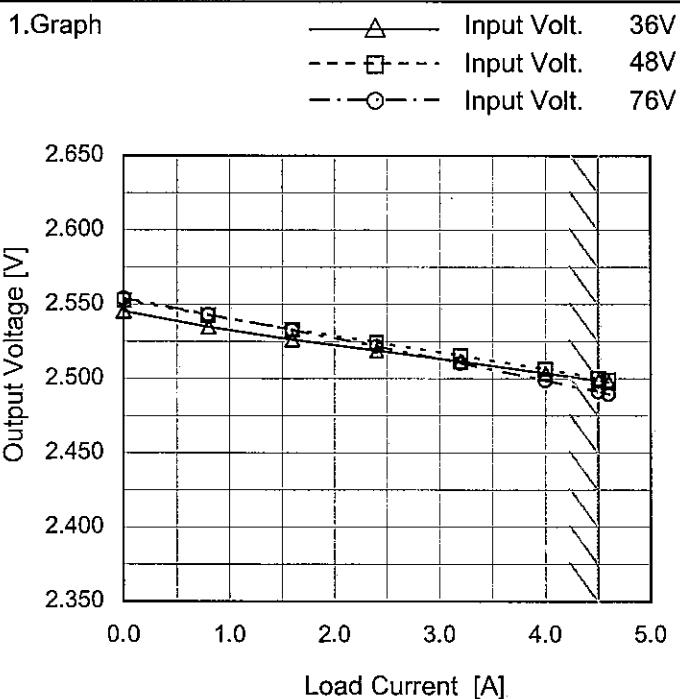Temperature 25°C  
Testing Circuitry Figure A

## 2. Values

Load Current [A]	Output Voltage [V]		
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]
0.0	2.545	2.553	2.554
0.8	2.535	2.543	2.543
1.6	2.526	2.533	2.533
2.4	2.519	2.524	2.522
3.2	2.512	2.516	2.510
4.0	2.504	2.506	2.499
4.5	2.499	2.500	2.491
4.6	2.497	2.499	2.490
--	-	-	-
--	-	-	-
--	-	-	-

Note: Slanted line shows the range of the rated load current.

**COSEL**


Model	SFS15482R5
Item	Dynamic Load Response
Object	+2.5V4.5A

Temperature  
Testing Circuitry25°C  
Figure AInput Volt. 48 V  
Cycle 1000 msLoad Current 4.5A/200  $\mu$  sec

Min. Load (0A) ↔

Load 100% (4.5A)


100 mV/div

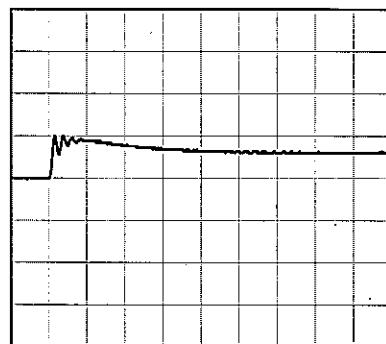200  $\mu$ s/div200  $\mu$ s/div

Min. Load (0A) ↔

Load 50% (2.25A)


100 mV/div

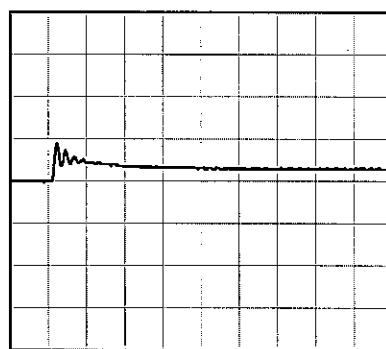200  $\mu$ s/div200  $\mu$ s/div

Load 50% (2.25A) ↔

Load 100% (4.5A)

100 mV/div

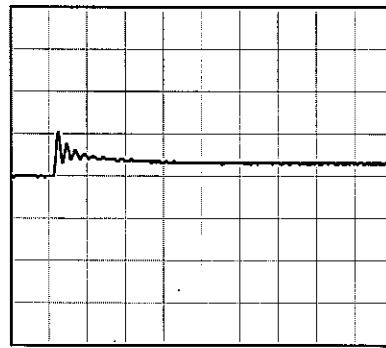
200  $\mu$ s/div200  $\mu$ s/div

**COSSEL**

Model	SFS15482R5
Item	Ripple Voltage (by Load Current)
Object	+2.5V4.5A

Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

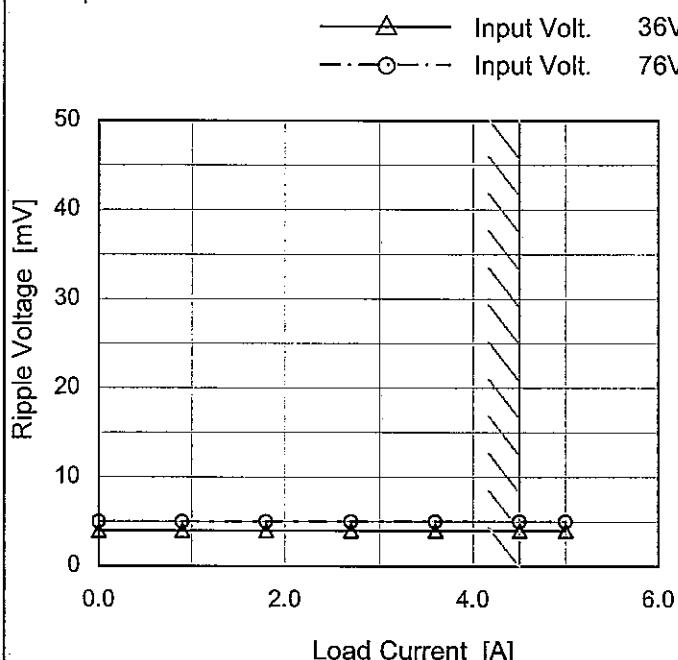

## 2. Values

Load Current [A]	Ripple Voltage [mV]	
	Input Volt. 36 [V]	Input Volt. 76 [V]
0.0	4	5
0.9	4	5
1.8	4	5
2.7	4	5
3.6	4	5
4.5	4	5
5.0	4	5
--	-	-
--	-	-
--	-	-
--	-	-

Measured by 100 MHz Oscilloscope.  
Ripple Voltage is shown as p-p in the figure below.  
Note: Slanted line shows the range of the rated load current.

Ripple [mVp-p]

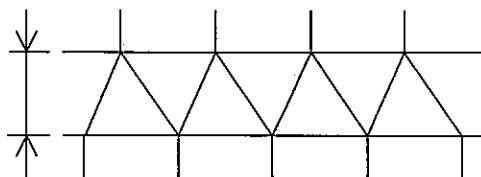



Fig.Complex Ripple Wave Form

**COSSEL**

Model	SFS15482R5
Item	Ripple-Noise
Object	+2.5V4.5A

Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

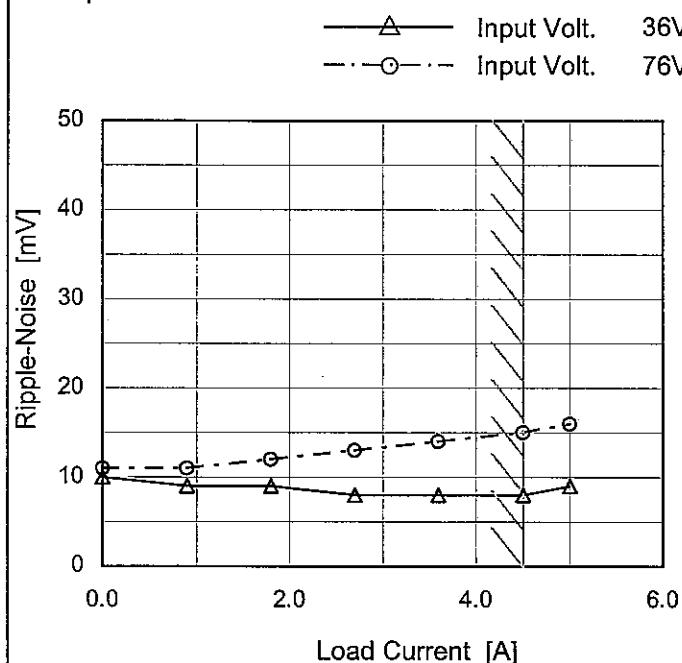

Measured by 100 MHz Oscilloscope.  
Ripple-Noise is shown as p-p in the figure below.  
Note: Slanted line shows the range of the rated load current.

## 2. Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 36 [V]	Input Volt. 76 [V]
0.0	10	11
0.9	9	11
1.8	9	12
2.7	8	13
3.6	8	14
4.5	8	15
5.0	9	16
--	-	-
--	-	-
--	-	-
--	-	-


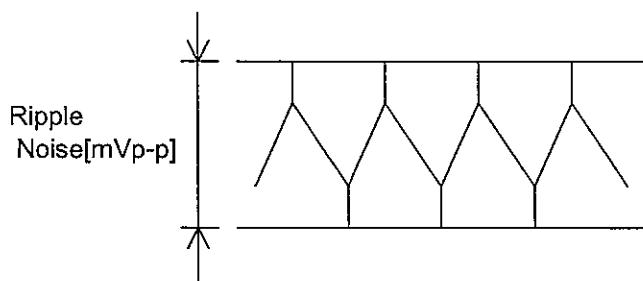


Fig.Complex Ripple Noise Wave Form

**COSSEL**

Model	SFS15482R5
Item	Ripple Voltage (by Ambient Temp.)
Object	+2.5V4.5A

## 1. Graph

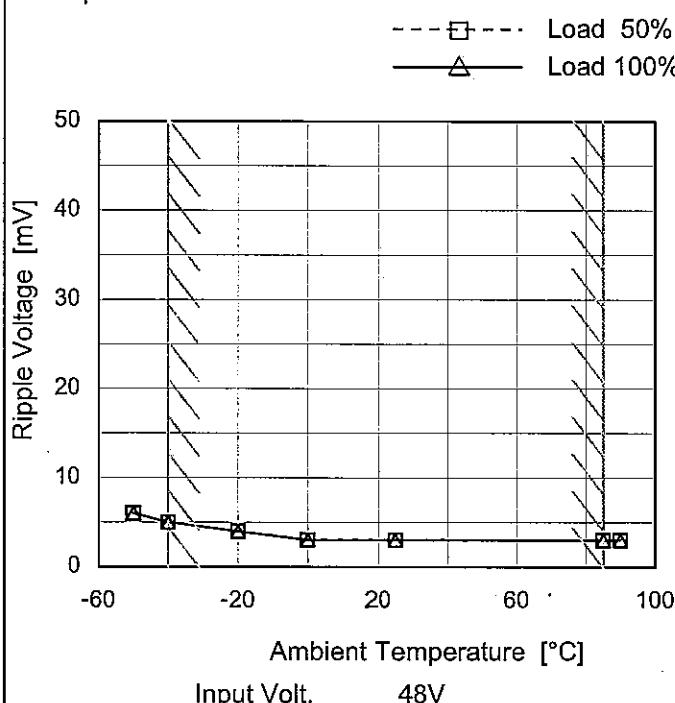

Measured by 100 MHz Oscilloscope.  
Note: Slanted line shows the range of the rated ambient temperature.

## Testing Circuitry Figure A


## 2. Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-50	6	6
-40	5	5
-20	4	4
0	3	3
25	3	3
85	3	3
90	3	3
--	-	-
--	-	-
--	-	-
--	-	-

Model SFS15482R5

Item Ambient Temperature Drift

Object +2.5V4.5A

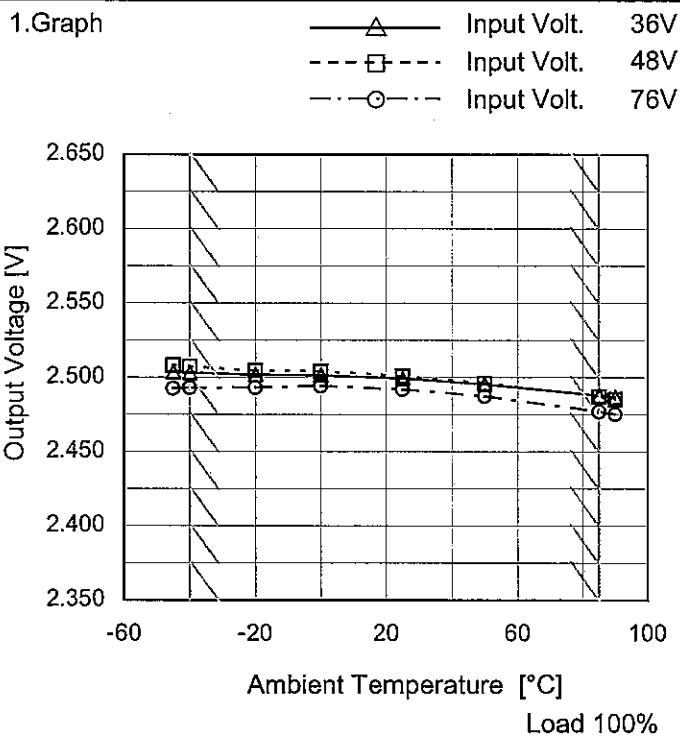

Note: Slanted line shows the range of the rated ambient temperature.

Testing Circuitry Figure A

2.Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]
-45	2.504	2.508	2.493
-40	2.503	2.507	2.493
-20	2.502	2.505	2.493
0	2.502	2.504	2.494
25	2.499	2.501	2.492
50	2.495	2.496	2.487
85	2.488	2.487	2.477
90	2.487	2.485	2.475
--	-	-	-
--	-	-	-
--	-	-	-



Model	SFS15482R5	Testing Circuitry Figure A
Item	Output Voltage Accuracy	
Object	+2.5V4.5A	

### 1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 85°C

Input Voltage : 36 - 76V

Load Current : 0 - 4.5A

\* Output Voltage Accuracy =  $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

$$\text{* Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

### 2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	85	48	0	2.561	$\pm 42$	$\pm 1.7$
Minimum Voltage	85	76	4.5	2.477		

**CSEL**

Model	SFS15482R5	Temperature Testing Circuitry	25°C Figure A																						
Item	Time Lapse Drift																								
Object	+2.5V4.5A																								
1.Graph			2.Values																						
<p>Output Voltage [V]</p> <p>Time [H]</p> <p>Input Volt. 48V</p> <p>Load 100%</p>			<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>2.497</td></tr> <tr><td>0.5</td><td>2.494</td></tr> <tr><td>1.0</td><td>2.493</td></tr> <tr><td>2.0</td><td>2.493</td></tr> <tr><td>3.0</td><td>2.494</td></tr> <tr><td>4.0</td><td>2.494</td></tr> <tr><td>5.0</td><td>2.493</td></tr> <tr><td>6.0</td><td>2.494</td></tr> <tr><td>7.0</td><td>2.494</td></tr> <tr><td>8.0</td><td>2.493</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	2.497	0.5	2.494	1.0	2.493	2.0	2.493	3.0	2.494	4.0	2.494	5.0	2.493	6.0	2.494	7.0	2.494	8.0	2.493
Time since start [H]	Output Voltage [V]																								
0.0	2.497																								
0.5	2.494																								
1.0	2.493																								
2.0	2.493																								
3.0	2.494																								
4.0	2.494																								
5.0	2.493																								
6.0	2.494																								
7.0	2.494																								
8.0	2.493																								

COSEL


Model SFS15482R5

Item Rise and Fall Time

Object +2.5V4.5A


Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

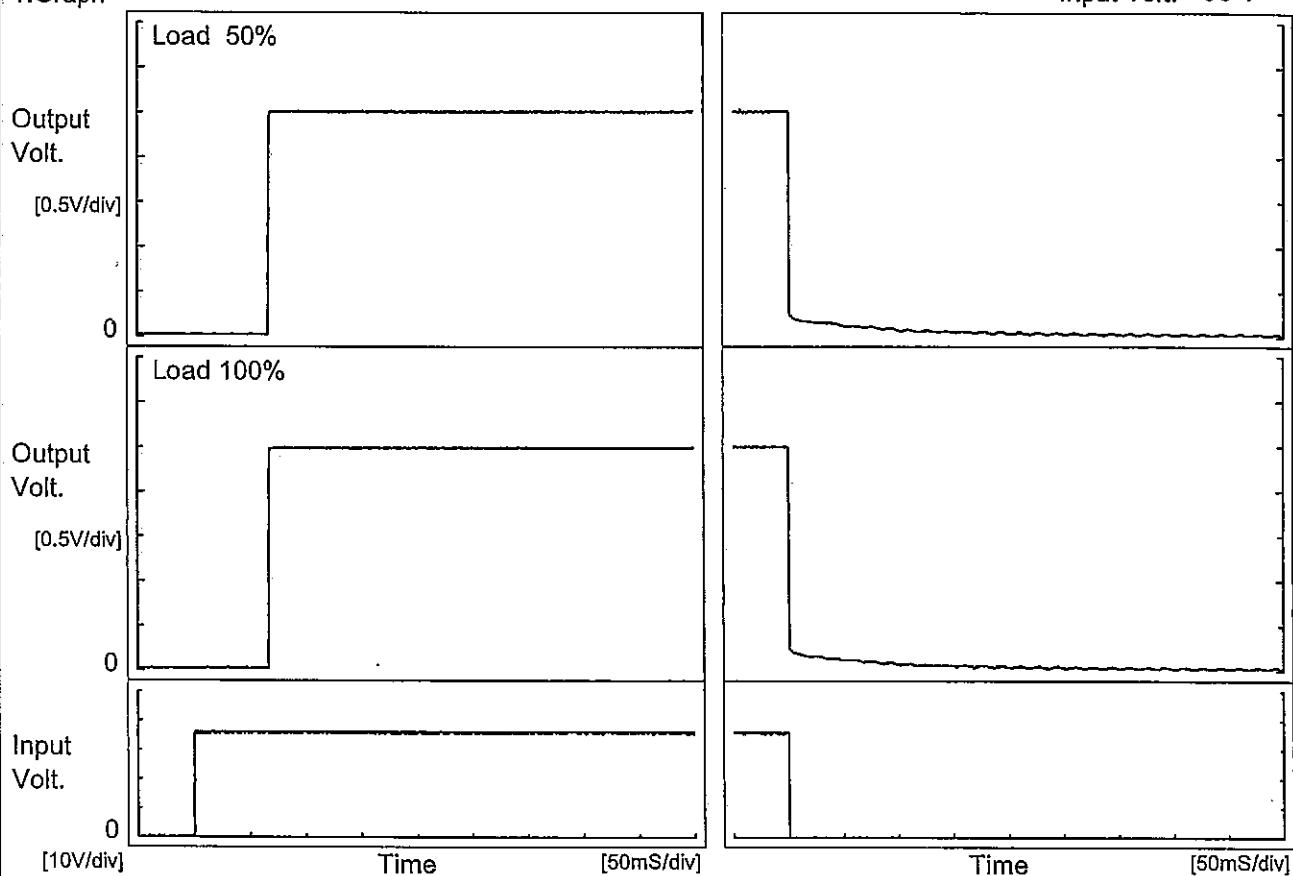

## 2. Values


Load	Time	Td	Tr	Ts	Th	Tf	[mS]
50 %		67.3	0.4	67.7	0.3	0.5	
100 %		65.8	0.5	66.3	0.3	0.5	

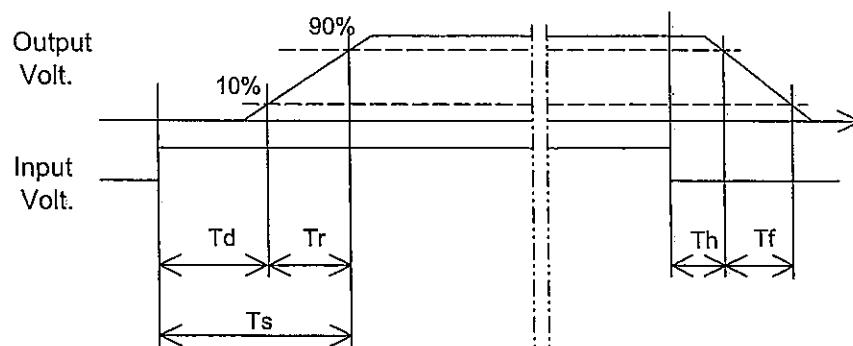

Model	SFS15482R5
Item	Minimum Input Voltage for Regulated Output Voltage
Object	+2.5V4.5A

## Testing Circuitry Figure A

## 1. Graph

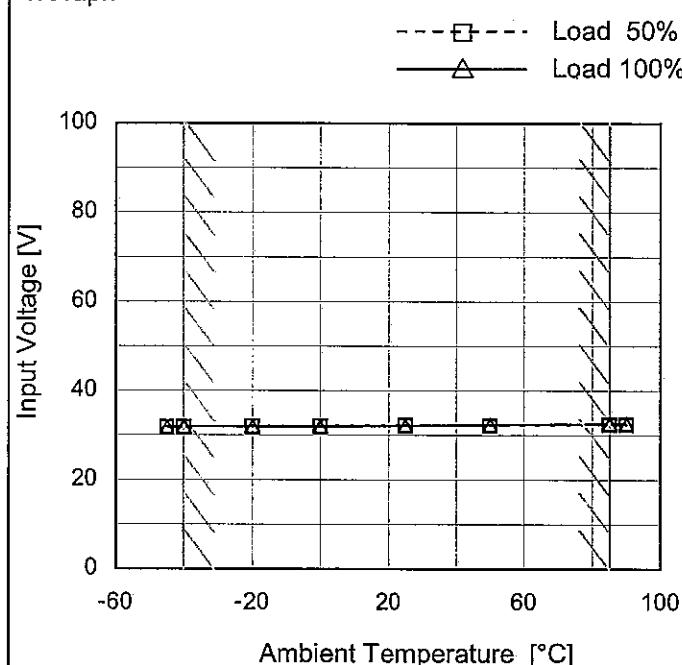

Note: Slanted line shows the range of the rated ambient temperature.

## 2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-45	31.9	31.8
-40	31.9	32.0
-20	32.1	32.0
0	32.1	32.0
25	32.3	32.2
50	32.3	32.4
85	32.5	32.6
90	32.5	32.6
--	-	-
--	-	-
--	-	-

Model	SFS15482R5
Item	Overcurrent Protection
Object	+2.5V4.5A

1. Graph

Input Volt.	36V	48V	76V
Output Voltage [V]	2.25	2.25	2.25
Load Current [A]	4.5	4.5	4.5

Note: Slanted line shows the range of the rated load current.

When the output voltage fell to less than 2.25V, the unit shuts off the output by operating low voltage protection.


Temperature 25°C  
Testing Circuitry Figure A

## 2. Values

Output Voltage [V]	Load Current [A]		
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]
2.50	4.70	5.00	4.65
2.38	5.12	5.17	5.29
2.25	5.12	5.18	5.31
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

Model	SFS15482R5
Item	Overvoltage Protection
Object	+2.5V4.5A

1. Graph      —— △ — Input Volt. 48V

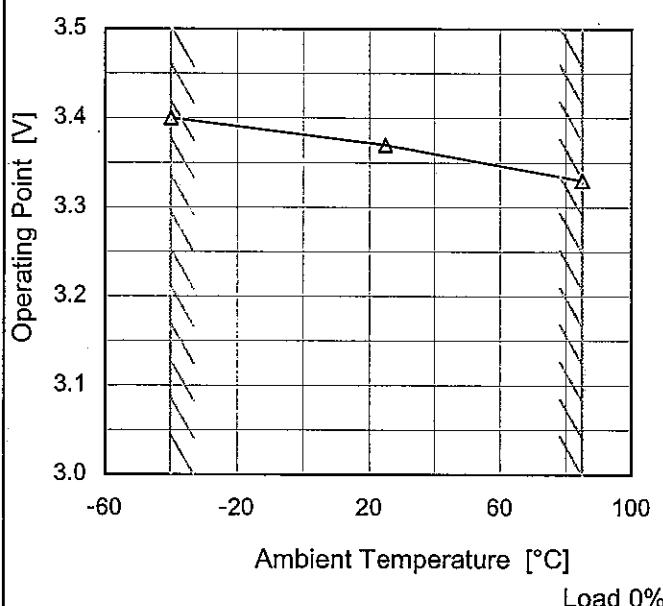

Note: Slanted line shows the range of the rated ambient temperature.

#### Testing Circuitry Figure A

#### 2. Values

Ambient Temperature [°C]	Operating Point [V]		
	Input Volt. 48[V]	Input Volt.	Input Volt.
-40	3.40	-	-
25	3.37	-	-
85	3.33	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

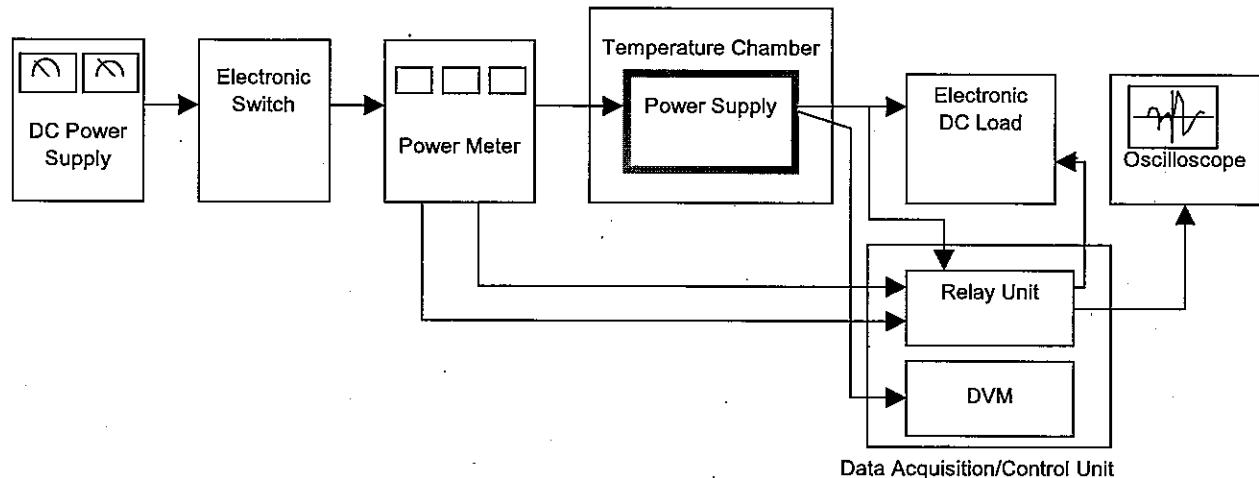


Figure A

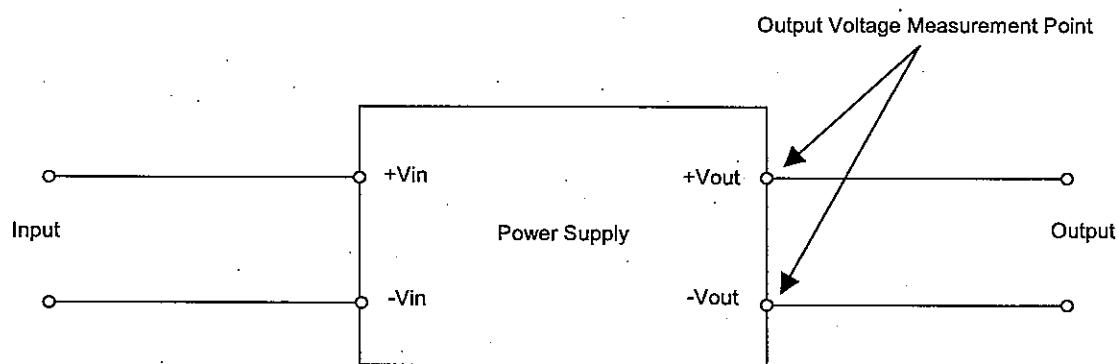


Figure B (General Electric Characteristic)

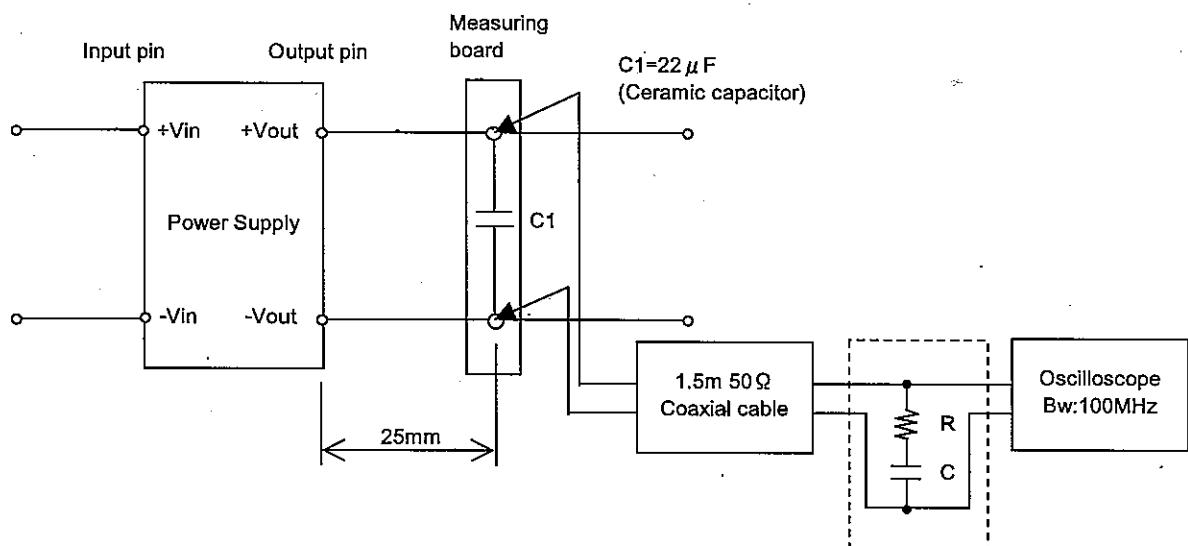


Figure C (Ripple and Ripple noise Characteristic)