



TEST DATA OF SUS1R52405

Regulated DC Power Supply
Sep 17, 2004

Approved by : Tetsuo Sugimori
Tetsuo Sugimori Design Manager

Prepared by : Masahiro Shima
Masahiro Shima Design Engineer

COSEL CO.,LTD.



CONTENTS

1. Input Current (by Input Voltage)	1
2. Input Current (by Load Current)	2
3. Input Power (by Load Current)	3
4. Efficiency (by Input Voltage)	4
5. Efficiency (by Load Current)	5
6. Line Regulation	6
7. Load Regulation	7
8. Dynamic Load Response	8
9. Ripple Voltage (by Load Current)	9
10. Ripple-Noise	10
11. Ripple Voltage (by Ambient Temperature)	11
12. Ambient Temperature Drift	12
13. Output Voltage Accuracy	13
14. Time Lapse Drift	14
15. Rise and Fall Time	15
16. Minimum Input Voltage for Regulated Output Voltage	16
17. Overcurrent Protection	17
18. Figure of Testing Circuitry	18

(Final Page 18)

COSEL


Model SUS1R52405

Item Input Current (by Input Voltage)

Object _____

1. Graph

—△— Load 100%
 - -□--- Load 50%
 - -○--- Load 0%

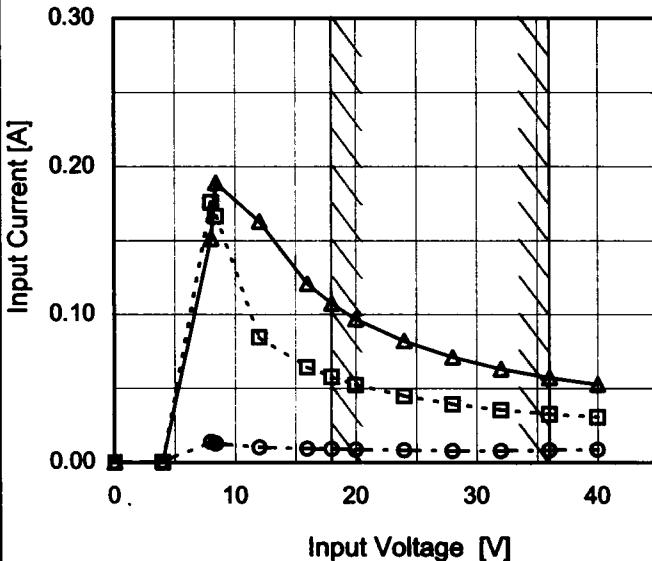

Note: Slanted line shows the range of the rated input voltage.

 Temperature 25°C
 Testing Circuitry Figure A

2. Values

Input Voltage [V]	Input Current [A]		
	Load 0%	Load 50%	Load 100%
0	0.000	0.000	0.000
4.0	0.000	0.000	0.000
8.0	0.014	0.176	0.152
8.4	0.013	0.167	0.189
12.0	0.010	0.085	0.163
16.0	0.009	0.064	0.121
18.0	0.009	0.058	0.108
20.0	0.009	0.052	0.097
24.0	0.008	0.045	0.082
28.0	0.008	0.039	0.071
32.0	0.008	0.035	0.063
36.0	0.008	0.033	0.057
40.0	0.009	0.031	0.053
--	-	-	-
--	-	-	-
--	-	-	-

COSEL

Model	SUS1R52405	Temperature Testing Circuitry	25°C Figure A																																																			
Item	Input Current (by Load Current)																																																					
Object	_____																																																					
1.Graph		2.Values																																																				
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>18[V]</th> <th>24[V]</th> <th>36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.009</td><td>0.008</td><td>0.008</td></tr> <tr><td>0.06</td><td>0.028</td><td>0.023</td><td>0.018</td></tr> <tr><td>0.12</td><td>0.048</td><td>0.038</td><td>0.028</td></tr> <tr><td>0.18</td><td>0.068</td><td>0.052</td><td>0.038</td></tr> <tr><td>0.24</td><td>0.088</td><td>0.067</td><td>0.048</td></tr> <tr><td>0.30</td><td>0.108</td><td>0.083</td><td>0.058</td></tr> <tr><td>0.33</td><td>0.119</td><td>0.090</td><td>0.063</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Input Current [A]			18[V]	24[V]	36[V]	0.00	0.009	0.008	0.008	0.06	0.028	0.023	0.018	0.12	0.048	0.038	0.028	0.18	0.068	0.052	0.038	0.24	0.088	0.067	0.048	0.30	0.108	0.083	0.058	0.33	0.119	0.090	0.063	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Load Current [A]	Input Current [A]																																																					
	18[V]	24[V]	36[V]																																																			
0.00	0.009	0.008	0.008																																																			
0.06	0.028	0.023	0.018																																																			
0.12	0.048	0.038	0.028																																																			
0.18	0.068	0.052	0.038																																																			
0.24	0.088	0.067	0.048																																																			
0.30	0.108	0.083	0.058																																																			
0.33	0.119	0.090	0.063																																																			
-	-	-	-																																																			
-	-	-	-																																																			
-	-	-	-																																																			
-	-	-	-																																																			
<p>Note: Slanted line shows the range of the rated load current.</p>																																																						


COSEL

Model	SUS1R52405																																																					
Item	Input Power (by Load Current)																																																					
Object	_____																																																					
1.Graph	—▲— Input Volt. 18V - - □ - - Input Volt. 24V - - ○ - - Input Volt. 36V																																																					
	Temperature 25°C Testing Circuitry Figure A																																																					
2.Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.16</td><td>0.20</td><td>0.29</td></tr> <tr><td>0.06</td><td>0.51</td><td>0.55</td><td>0.65</td></tr> <tr><td>0.12</td><td>0.87</td><td>0.90</td><td>1.01</td></tr> <tr><td>0.18</td><td>1.22</td><td>1.26</td><td>1.36</td></tr> <tr><td>0.24</td><td>1.58</td><td>1.61</td><td>1.72</td></tr> <tr><td>0.30</td><td>1.95</td><td>1.97</td><td>2.07</td></tr> <tr><td>0.33</td><td>2.14</td><td>2.16</td><td>2.25</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Input Power [W]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	0.16	0.20	0.29	0.06	0.51	0.55	0.65	0.12	0.87	0.90	1.01	0.18	1.22	1.26	1.36	0.24	1.58	1.61	1.72	0.30	1.95	1.97	2.07	0.33	2.14	2.16	2.25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Load Current [A]	Input Power [W]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
0.00	0.16	0.20	0.29																																																			
0.06	0.51	0.55	0.65																																																			
0.12	0.87	0.90	1.01																																																			
0.18	1.22	1.26	1.36																																																			
0.24	1.58	1.61	1.72																																																			
0.30	1.95	1.97	2.07																																																			
0.33	2.14	2.16	2.25																																																			
-	-	-	-																																																			
-	-	-	-																																																			
-	-	-	-																																																			
-	-	-	-																																																			
	Note: Slanted line shows the range of the rated load current.																																																					

COSEL

Model	SUS1R52405
Item	Efficiency (by Input Voltage)
Object	_____

1.Graph

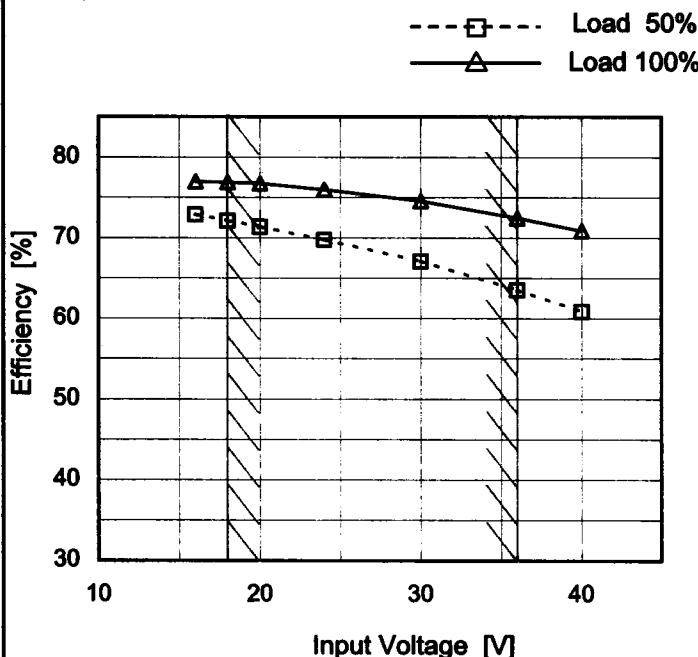


Note: Slanted line shows the range of the rated input voltage.

Temperature 25°C
Testing Circuitry Figure A

2.Values

Input Voltage [V]	Efficiency [%]	
	Load 50%	Load 100%
16	72.9	77.0
18	72.1	76.9
20	71.4	76.7
24	69.8	76.0
30	67.1	74.6
36	63.6	72.5
40	60.9	70.9
-	-	-
-	-	-

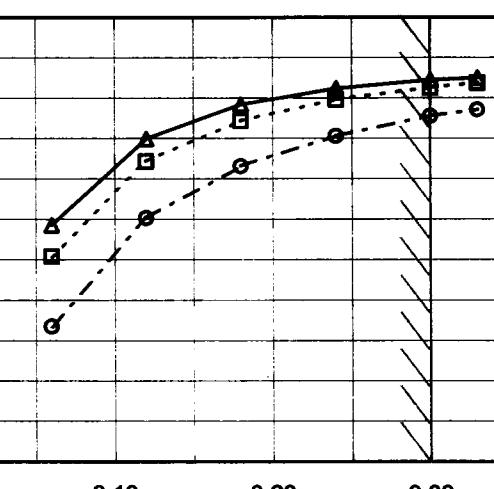


Model	SUS1R52405	Temperature	25°C																																																		
Item	Efficiency (by Load Current)	Testing Circuitry	Figure A																																																		
Object	_____																																																				
1. Graph		—△— Input Volt. 18V - -□- - Input Volt. 24V - -○- - Input Volt. 36V																																																			
			2. Values																																																		
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>0.06</td><td>59.3</td><td>55.4</td><td>46.7</td></tr> <tr> <td>0.12</td><td>69.9</td><td>67.1</td><td>60.1</td></tr> <tr> <td>0.18</td><td>74.2</td><td>72.2</td><td>66.5</td></tr> <tr> <td>0.24</td><td>76.2</td><td>74.8</td><td>70.3</td></tr> <tr> <td>0.30</td><td>77.3</td><td>76.3</td><td>72.8</td></tr> <tr> <td>0.33</td><td>77.5</td><td>76.9</td><td>73.6</td></tr> <tr> <td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Efficiency [%]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	-	-	-	0.06	59.3	55.4	46.7	0.12	69.9	67.1	60.1	0.18	74.2	72.2	66.5	0.24	76.2	74.8	70.3	0.30	77.3	76.3	72.8	0.33	77.5	76.9	73.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Load Current [A]	Efficiency [%]																																																				
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																		
0.00	-	-	-																																																		
0.06	59.3	55.4	46.7																																																		
0.12	69.9	67.1	60.1																																																		
0.18	74.2	72.2	66.5																																																		
0.24	76.2	74.8	70.3																																																		
0.30	77.3	76.3	72.8																																																		
0.33	77.5	76.9	73.6																																																		
-	-	-	-																																																		
-	-	-	-																																																		
-	-	-	-																																																		
-	-	-	-																																																		
<p>Note: Slanted line shows the range of the rated load current.</p>																																																					

COSEL

Model	SUS1R52405
Item	Line Regulation
Object	+5V0.3A

Temperature 25°C
 Testing Circuitry Figure A

1. Graph

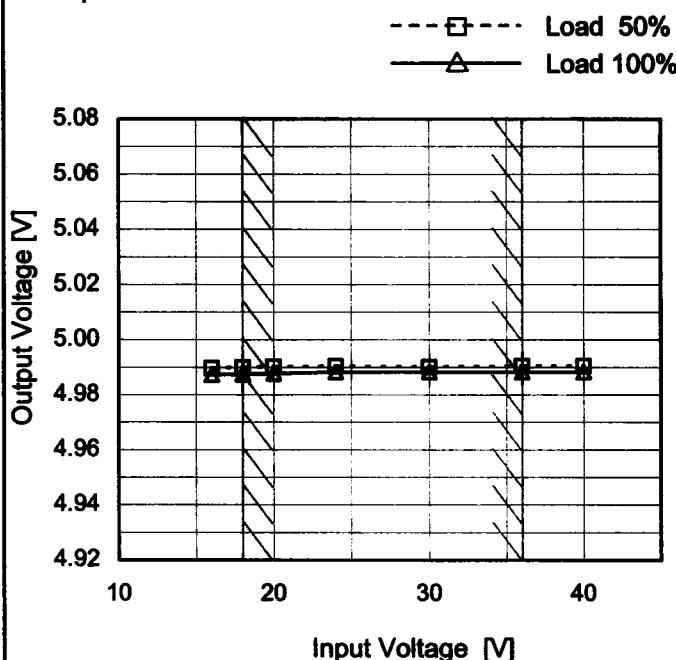



Note: Slanted line shows the range of the rated input voltage.

2. Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
16	4.990	4.987
18	4.990	4.988
20	4.990	4.988
24	4.990	4.988
30	4.990	4.988
36	4.991	4.988
40	4.991	4.988
-	-	-
-	-	-

COSEL

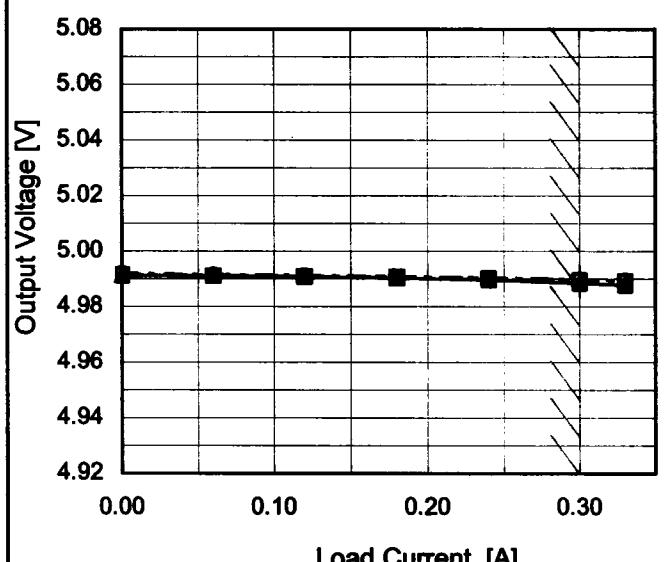Model	SUS1R52405	Temperature	25°C																																																			
Item	Load Regulation	Testing Circuitry	Figure A																																																			
Object	+5V0.3A																																																					
1.Graph																																																						
—△— Input Volt. 18V - - -□- - - Input Volt. 24V - - -○- - - Input Volt. 36V			2.Values																																																			
																																																						
Note: Slanted line shows the range of the rated load current.																																																						
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td> <td>4.991</td> <td>4.992</td> <td>4.992</td> </tr> <tr> <td>0.06</td> <td>4.991</td> <td>4.991</td> <td>4.992</td> </tr> <tr> <td>0.12</td> <td>4.991</td> <td>4.991</td> <td>4.991</td> </tr> <tr> <td>0.18</td> <td>4.990</td> <td>4.991</td> <td>4.991</td> </tr> <tr> <td>0.24</td> <td>4.990</td> <td>4.990</td> <td>4.990</td> </tr> <tr> <td>0.30</td> <td>4.989</td> <td>4.990</td> <td>4.990</td> </tr> <tr> <td>0.33</td> <td>4.988</td> <td>4.989</td> <td>4.989</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> </tbody> </table>				Load Current [A]	Output Voltage [V]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	4.991	4.992	4.992	0.06	4.991	4.991	4.992	0.12	4.991	4.991	4.991	0.18	4.990	4.991	4.991	0.24	4.990	4.990	4.990	0.30	4.989	4.990	4.990	0.33	4.988	4.989	4.989	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
0.00	4.991	4.992	4.992																																																			
0.06	4.991	4.991	4.992																																																			
0.12	4.991	4.991	4.991																																																			
0.18	4.990	4.991	4.991																																																			
0.24	4.990	4.990	4.990																																																			
0.30	4.989	4.990	4.990																																																			
0.33	4.988	4.989	4.989																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			

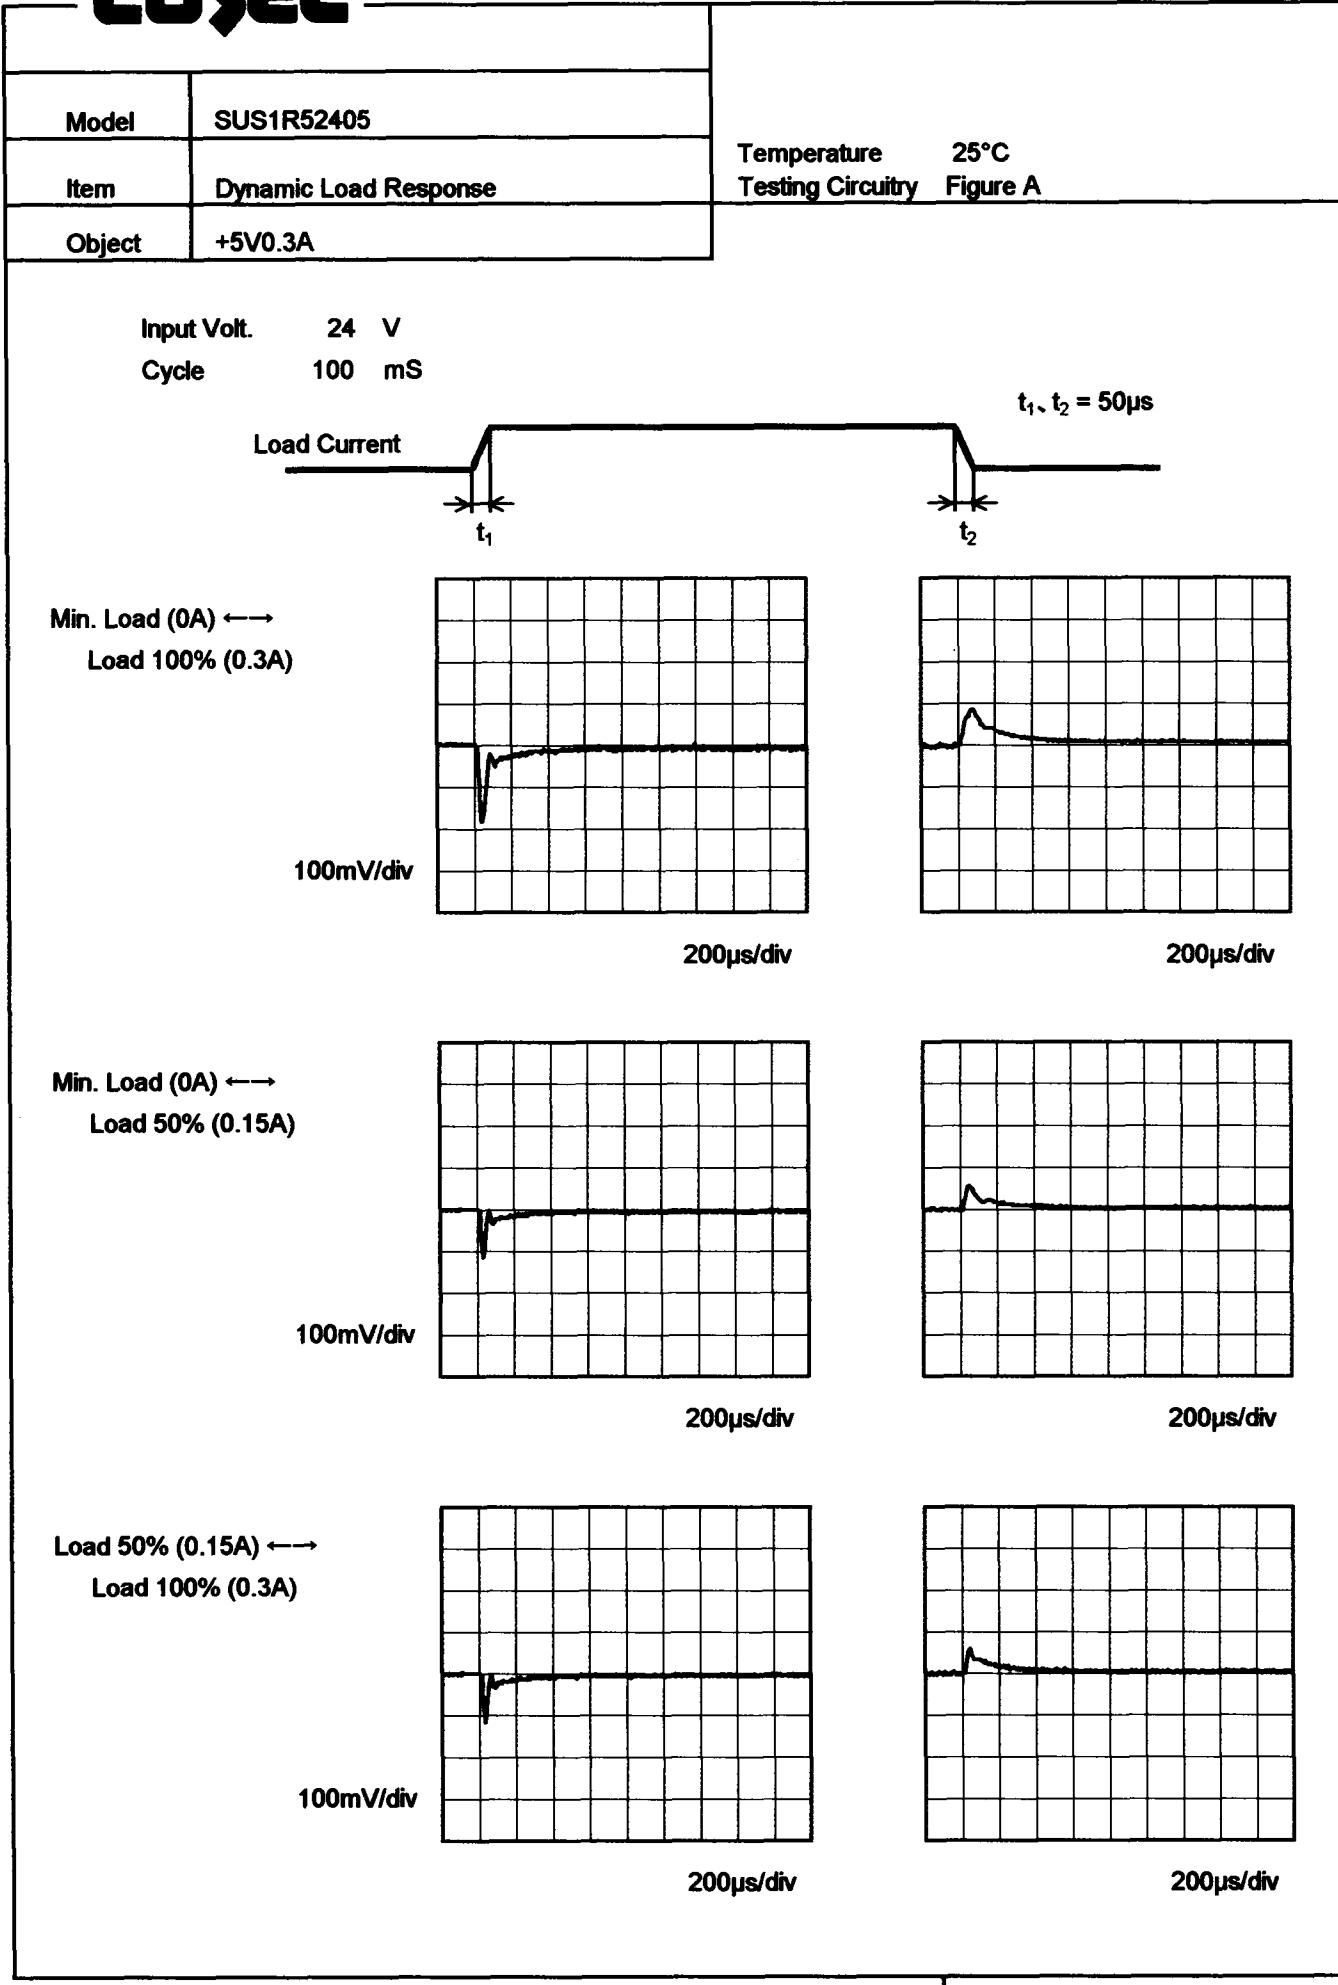
COSEL

COSEL

Model	SUS1R52405
Item	Ripple Voltage (by Load Current)
Object	+5V0.3A

Temperature 25°C
Testing Circuitry Figure B

1. Graph

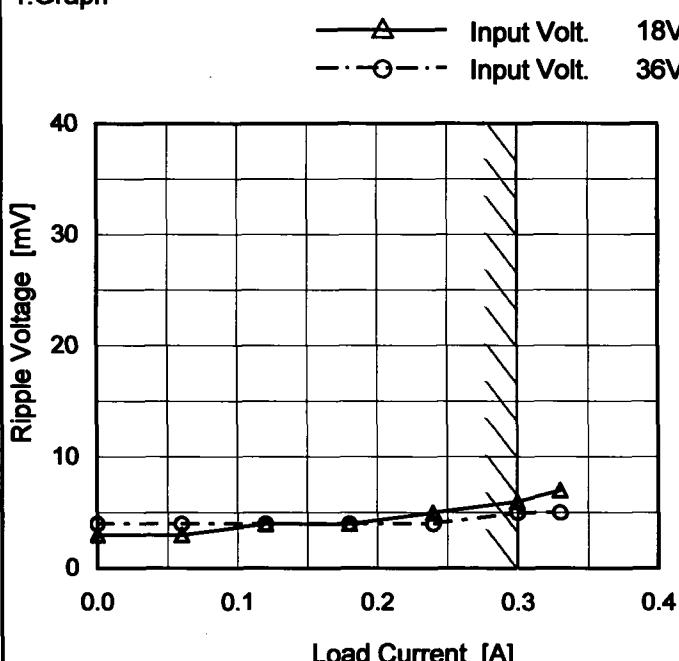

2. Values

Load Current [A]	Ripple Voltage [mV]	
	Input Volt. 18 [V]	Input Volt. 36 [V]
0.00	3	4
0.06	3	4
0.12	4	4
0.18	4	4
0.24	5	4
0.30	6	5
0.33	7	5
-	-	-
-	-	-
-	-	-
-	-	-

Measured by 100 MHz Oscilloscope.

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

Ripple [mVp-p]

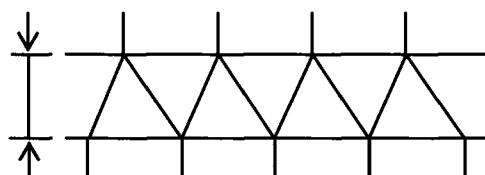



Fig.Complex Ripple Wave Form

COSEL

Model	SUS1R52405
Item	Ripple-Noise
Object	+5V0.3A

Temperature 25°C
Testing Circuitry Figure B

1. Graph

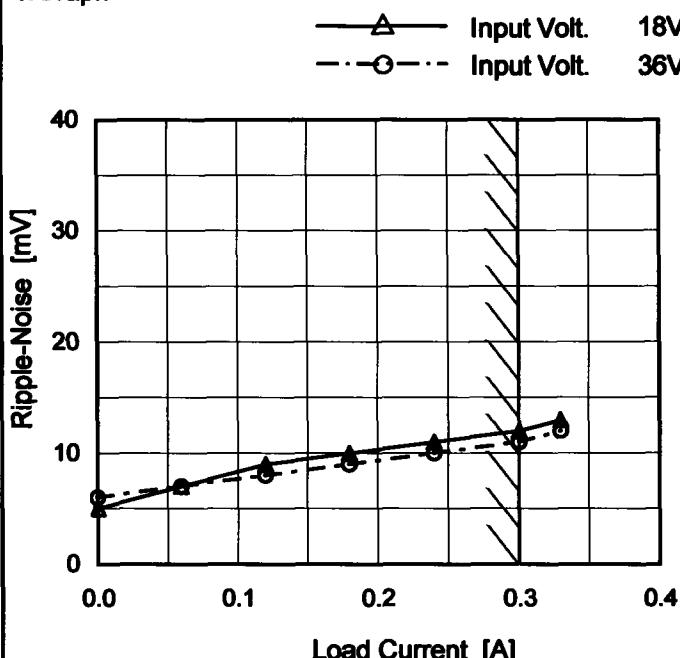

2. Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 18 [V]	Input Volt. 36 [V]
0.00	5	6
0.06	7	7
0.12	9	8
0.18	10	9
0.24	11	10
0.30	12	11
0.33	13	12
-	-	-
-	-	-
-	-	-
-	-	-

Measured by 100 MHz Oscilloscope.

Ripple-Noise is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.


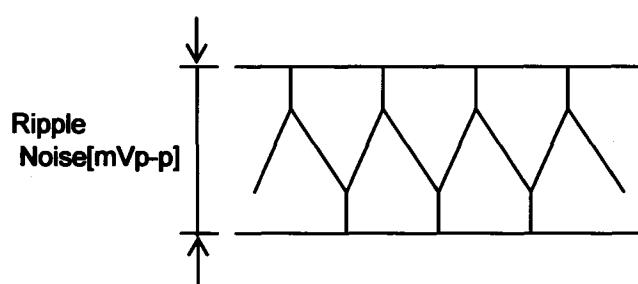


Fig.Complex Ripple Noise Wave Form

COSEL

Model	SUS1R52405
Item	Ripple Voltage (by Ambient Temp.)
Object	+5V0.3A

1. Graph

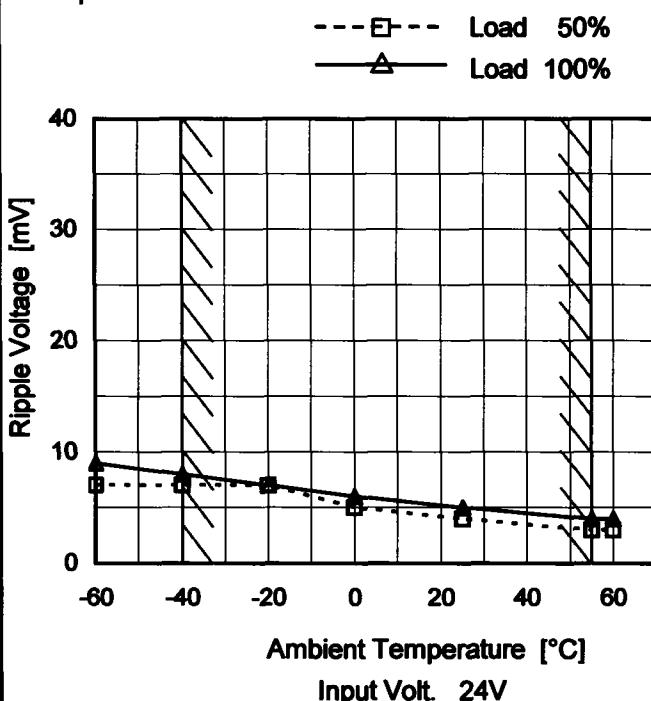

Measured by 100 MHz Oscilloscope.


Note: Slanted line shows the range of the rated ambient temperature.

Testing Circuitry Figure B

2. Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-60	7	9
-40	7	8
-20	7	7
0	5	6
25	4	5
55	3	4
60	3	4
-	-	-
-	-	-
-	-	-
-	-	-

COSEL

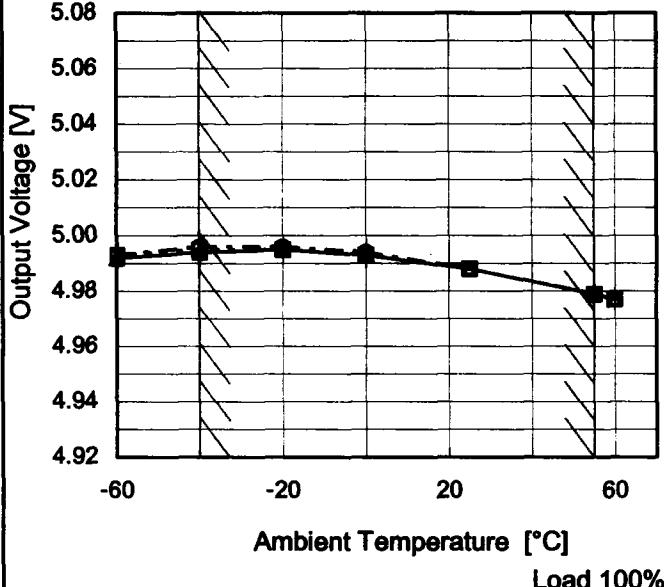Model	SUS1R52405																																																					
Item	Ambient Temperature Drift																																																					
Object	+5V0.3A																																																					
1.Graph	—▲— Input Volt. 18V - - □ - - Input Volt. 24V - - ○ - - Input Volt. 36V																																																					
																																																						
	Note: Slanted line shows the range of the rated ambient temperature.																																																					
Testing Circuitry Figure A																																																						
2.Values																																																						
<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>-60</td><td>4.992</td><td>4.993</td><td>4.993</td></tr> <tr><td>-40</td><td>4.994</td><td>4.995</td><td>4.996</td></tr> <tr><td>-20</td><td>4.995</td><td>4.995</td><td>4.996</td></tr> <tr><td>0</td><td>4.993</td><td>4.993</td><td>4.994</td></tr> <tr><td>25</td><td>4.988</td><td>4.988</td><td>4.988</td></tr> <tr><td>55</td><td>4.979</td><td>4.979</td><td>4.979</td></tr> <tr><td>60</td><td>4.977</td><td>4.977</td><td>4.977</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	-60	4.992	4.993	4.993	-40	4.994	4.995	4.996	-20	4.995	4.995	4.996	0	4.993	4.993	4.994	25	4.988	4.988	4.988	55	4.979	4.979	4.979	60	4.977	4.977	4.977	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
Ambient Temperature [°C]	Output Voltage [V]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
-60	4.992	4.993	4.993																																																			
-40	4.994	4.995	4.996																																																			
-20	4.995	4.995	4.996																																																			
0	4.993	4.993	4.994																																																			
25	4.988	4.988	4.988																																																			
55	4.979	4.979	4.979																																																			
60	4.977	4.977	4.977																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			



Model	SUS1R52405	
Item	Output Voltage Accuracy	Testing Circuitry Figure A
Object	+5V0.3A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 55°C

Input Voltage : 18 - 36V

Load Current : 0 - 0.3A


* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

$$\text{* Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	-20	36	0	4.998		
Minimum Voltage	55	24	0.3	4.979	±10	±0.2

COSEL

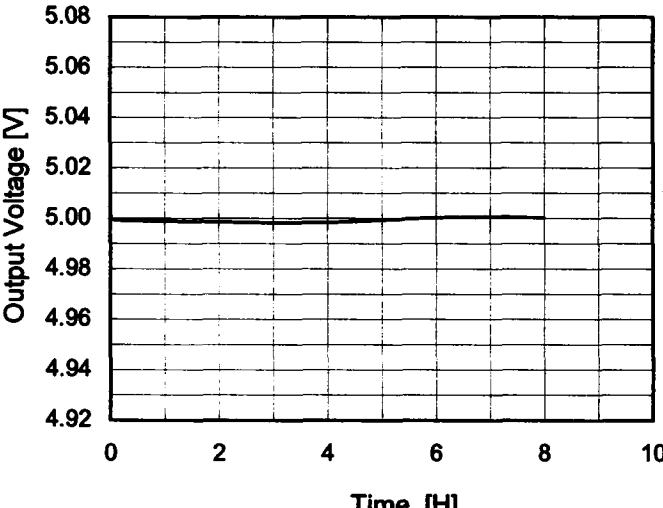Model	SUS1R52405	Temperature	25°C																						
Item	Time Lapse Drift	Testing Circuitry	Figure A																						
Object	+5V0.3A																								
1.Graph			2.Values																						
 <p>Output Voltage [V]</p> <p>Time [H]</p> <p>Input Volt. 24V Load 100%</p>			<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5.002</td></tr> <tr><td>0.5</td><td>4.999</td></tr> <tr><td>1.0</td><td>4.999</td></tr> <tr><td>2.0</td><td>4.999</td></tr> <tr><td>3.0</td><td>4.998</td></tr> <tr><td>4.0</td><td>4.998</td></tr> <tr><td>5.0</td><td>4.999</td></tr> <tr><td>6.0</td><td>5.000</td></tr> <tr><td>7.0</td><td>5.001</td></tr> <tr><td>8.0</td><td>5.000</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	5.002	0.5	4.999	1.0	4.999	2.0	4.999	3.0	4.998	4.0	4.998	5.0	4.999	6.0	5.000	7.0	5.001	8.0	5.000
Time since start [H]	Output Voltage [V]																								
0.0	5.002																								
0.5	4.999																								
1.0	4.999																								
2.0	4.999																								
3.0	4.998																								
4.0	4.998																								
5.0	4.999																								
6.0	5.000																								
7.0	5.001																								
8.0	5.000																								

COSEL


Model SUS1R52405

Item Rise and Fall Time

Object +5V0.3A

Temperature 25°C
Testing Circuitry Figure A


1. Graph

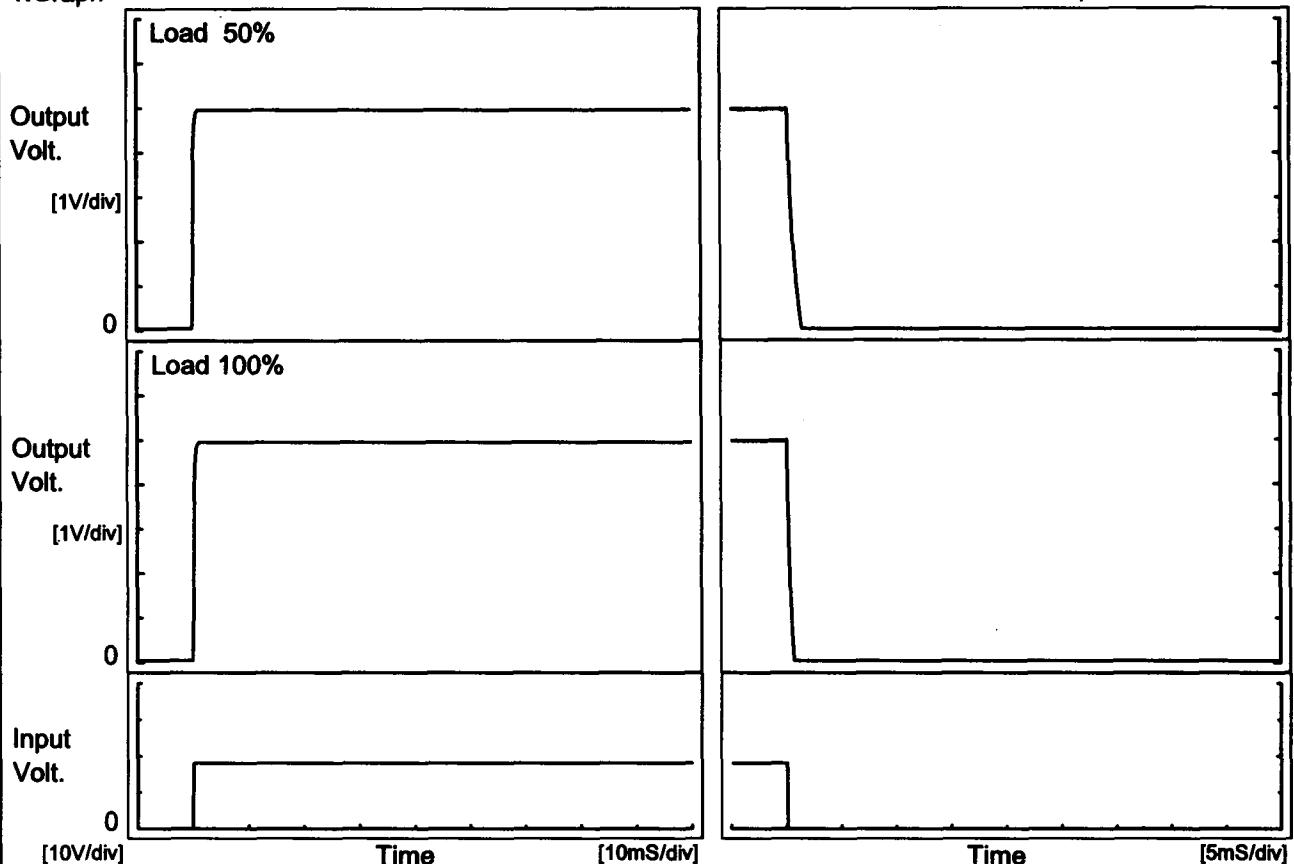

2. Values

[mS]


Load	Time	Td	Tr	Ts	Th	Tf
50 %		0.1	0.4	0.5	0.2	1.2
100 %		0.1	0.5	0.6	0.1	0.6

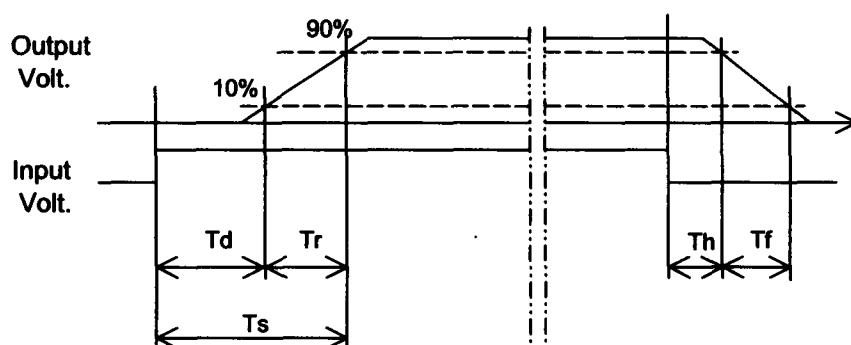

COSEL

Model	SUS1R52405
Item	Minimum Input Voltage for Regulated Output Voltage
Object	+5V0.3A

1.Graph

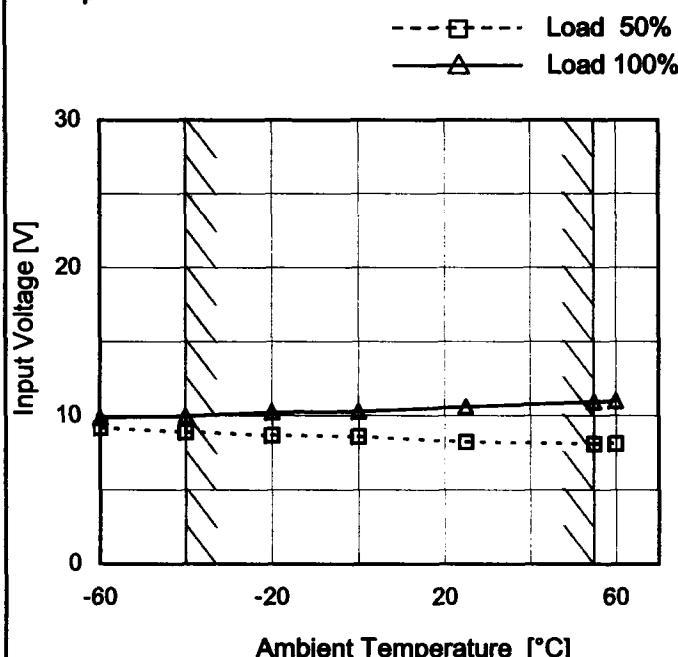

Note: Slanted line shows the range of the rated ambient temperature.

Testing Circuitry Figure A

2.Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-60	9.2	9.9
-40	8.9	10.0
-20	8.7	10.3
0	8.6	10.3
25	8.3	10.6
55	8.1	11.0
60	8.2	11.0
-	-	-
-	-	-
-	-	-
-	-	-

COSEL

Model	SUS1R52405	Temperature 25°C																																																							
Item	Overcurrent Protection	Testing Circuitry Figure A																																																							
Object	+5V0.3A																																																								
1.Graph	<p>Input Volt. 18V Input Volt. 24V Input Volt. 36V</p> <p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>	2.Values																																																							
		<table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>5.00</td><td>0.30</td><td>0.30</td><td>0.30</td></tr> <tr><td>4.75</td><td>0.47</td><td>0.44</td><td>0.40</td></tr> <tr><td>4.50</td><td>0.48</td><td>0.45</td><td>0.42</td></tr> <tr><td>4.00</td><td>0.51</td><td>0.48</td><td>0.44</td></tr> <tr><td>3.50</td><td>0.55</td><td>0.51</td><td>0.47</td></tr> <tr><td>3.00</td><td>0.58</td><td>0.54</td><td>0.49</td></tr> <tr><td>2.50</td><td>0.62</td><td>0.57</td><td>0.52</td></tr> <tr><td>2.00</td><td>0.65</td><td>0.59</td><td>0.54</td></tr> <tr><td>1.50</td><td>0.68</td><td>0.61</td><td>0.56</td></tr> <tr><td>1.00</td><td>0.70</td><td>0.61</td><td>0.57</td></tr> <tr><td>0.50</td><td>0.69</td><td>0.61</td><td>0.58</td></tr> <tr><td>0.00</td><td>0.75</td><td>0.64</td><td>0.65</td></tr> </tbody> </table>	Output Voltage [V]	Load Current [A]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	5.00	0.30	0.30	0.30	4.75	0.47	0.44	0.40	4.50	0.48	0.45	0.42	4.00	0.51	0.48	0.44	3.50	0.55	0.51	0.47	3.00	0.58	0.54	0.49	2.50	0.62	0.57	0.52	2.00	0.65	0.59	0.54	1.50	0.68	0.61	0.56	1.00	0.70	0.61	0.57	0.50	0.69	0.61	0.58	0.00	0.75	0.64	0.65
Output Voltage [V]	Load Current [A]																																																								
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																						
5.00	0.30	0.30	0.30																																																						
4.75	0.47	0.44	0.40																																																						
4.50	0.48	0.45	0.42																																																						
4.00	0.51	0.48	0.44																																																						
3.50	0.55	0.51	0.47																																																						
3.00	0.58	0.54	0.49																																																						
2.50	0.62	0.57	0.52																																																						
2.00	0.65	0.59	0.54																																																						
1.50	0.68	0.61	0.56																																																						
1.00	0.70	0.61	0.57																																																						
0.50	0.69	0.61	0.58																																																						
0.00	0.75	0.64	0.65																																																						

COSEL

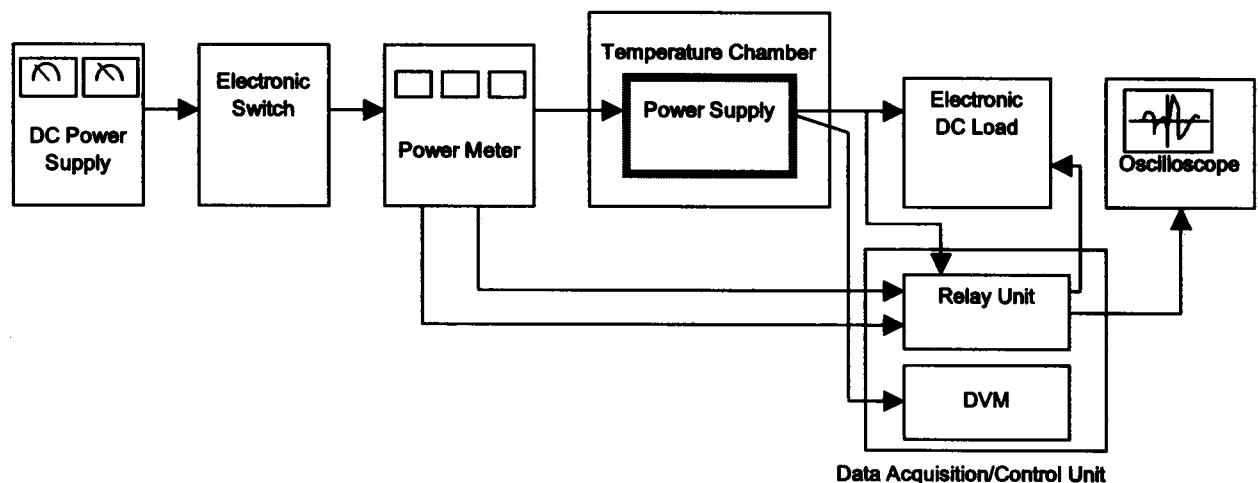


Figure A

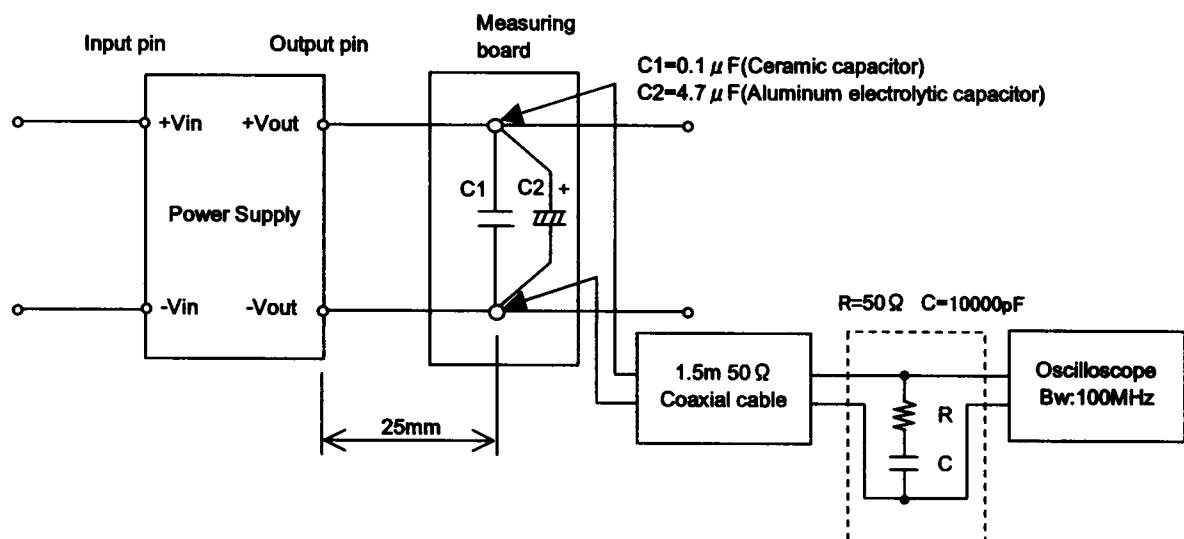


Figure B (Ripple and Ripple noise Characteristic)