

TEST DATA OF SUW1R50512

Regulated DC Power Supply
Sep 14, 2004

Approved by : Tetsuo Sugimori
Tetsuo Sugimori Design Manager

Prepared by : Masahiro Shima
Masahiro Shima Design Engineer

COSEL CO.,LTD.



CONTENTS

1. Input Current (by Input Voltage)	1
2. Input Current (by Load Current)	2
3. Input Power (by Load Current)	3
4. Efficiency (by Input Voltage)	4
5. Efficiency (by Load Current)	5
6. Line Regulation	6
7. Load Regulation	7
8. Dynamic Load Response	8
9. Ripple Voltage (by Load Current)	10
10. Ripple-Noise	12
11. Ripple Voltage (by Ambient Temperature)	14
12. Ambient Temperature Drift	15
13. Output Voltage Accuracy	16
14. Time Lapse Drift	17
15. Rise and Fall Time	18
16. Minimum Input Voltage for Regulated Output Voltage	20
17. Overcurrent Protection	21
18. Figure of Testing Circuitry	22

(Final Page 22)

COSEL


Model	SUW1R50512	Temperature 25°C Testing Circuitry Figure A																																																																									
Item	Input Current (by Input Voltage)																																																																										
Object																																																																											
1.Graph	<p>The graph plots Input Current [A] on the y-axis (0.0 to 1.0) against Input Voltage [V] on the x-axis (0 to 10). Three data series are shown: Load 100% (triangles), Load 50% (squares), and Load 0% (circles). A slanted line at approximately 2.5V marks the rated input voltage range.</p> <table border="1"> <thead> <tr> <th>Input Voltage [V]</th> <th>Load 0% [A]</th> <th>Load 50% [A]</th> <th>Load 100% [A]</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>2</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>3</td><td>0.000</td><td>0.45</td><td>0.75</td></tr> <tr><td>4</td><td>0.000</td><td>0.30</td><td>0.60</td></tr> <tr><td>5</td><td>0.000</td><td>0.20</td><td>0.45</td></tr> <tr><td>6</td><td>0.000</td><td>0.15</td><td>0.35</td></tr> <tr><td>7</td><td>0.000</td><td>0.12</td><td>0.28</td></tr> <tr><td>8</td><td>0.000</td><td>0.10</td><td>0.22</td></tr> <tr><td>9</td><td>0.000</td><td>0.08</td><td>0.18</td></tr> <tr><td>10</td><td>0.000</td><td>0.06</td><td>0.15</td></tr> </tbody> </table>				Input Voltage [V]	Load 0% [A]	Load 50% [A]	Load 100% [A]	0	0.000	0.000	0.000	2	0.000	0.000	0.000	3	0.000	0.45	0.75	4	0.000	0.30	0.60	5	0.000	0.20	0.45	6	0.000	0.15	0.35	7	0.000	0.12	0.28	8	0.000	0.10	0.22	9	0.000	0.08	0.18	10	0.000	0.06	0.15																											
Input Voltage [V]	Load 0% [A]	Load 50% [A]	Load 100% [A]																																																																								
0	0.000	0.000	0.000																																																																								
2	0.000	0.000	0.000																																																																								
3	0.000	0.45	0.75																																																																								
4	0.000	0.30	0.60																																																																								
5	0.000	0.20	0.45																																																																								
6	0.000	0.15	0.35																																																																								
7	0.000	0.12	0.28																																																																								
8	0.000	0.10	0.22																																																																								
9	0.000	0.08	0.18																																																																								
10	0.000	0.06	0.15																																																																								
2.Values	<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>1.7</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>2.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>2.5</td><td>0.084</td><td>0.698</td><td>0.768</td></tr> <tr><td>3.0</td><td>0.072</td><td>0.449</td><td>0.795</td></tr> <tr><td>4.0</td><td>0.060</td><td>0.297</td><td>0.627</td></tr> <tr><td>4.5</td><td>0.056</td><td>0.261</td><td>0.524</td></tr> <tr><td>5.0</td><td>0.052</td><td>0.235</td><td>0.453</td></tr> <tr><td>6.0</td><td>0.048</td><td>0.197</td><td>0.364</td></tr> <tr><td>7.0</td><td>0.044</td><td>0.169</td><td>0.311</td></tr> <tr><td>8.0</td><td>0.041</td><td>0.150</td><td>0.271</td></tr> <tr><td>9.0</td><td>0.038</td><td>0.137</td><td>0.241</td></tr> <tr><td>10.0</td><td>0.037</td><td>0.127</td><td>0.219</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0	0.000	0.000	0.000	1.7	0.000	0.000	0.000	2.0	0.000	0.000	0.000	2.5	0.084	0.698	0.768	3.0	0.072	0.449	0.795	4.0	0.060	0.297	0.627	4.5	0.056	0.261	0.524	5.0	0.052	0.235	0.453	6.0	0.048	0.197	0.364	7.0	0.044	0.169	0.311	8.0	0.041	0.150	0.271	9.0	0.038	0.137	0.241	10.0	0.037	0.127	0.219	--	-	-	-	--	-	-	-	--	-	-	-
Input Voltage [V]	Input Current [A]																																																																										
	Load 0%	Load 50%	Load 100%																																																																								
0	0.000	0.000	0.000																																																																								
1.7	0.000	0.000	0.000																																																																								
2.0	0.000	0.000	0.000																																																																								
2.5	0.084	0.698	0.768																																																																								
3.0	0.072	0.449	0.795																																																																								
4.0	0.060	0.297	0.627																																																																								
4.5	0.056	0.261	0.524																																																																								
5.0	0.052	0.235	0.453																																																																								
6.0	0.048	0.197	0.364																																																																								
7.0	0.044	0.169	0.311																																																																								
8.0	0.041	0.150	0.271																																																																								
9.0	0.038	0.137	0.241																																																																								
10.0	0.037	0.127	0.219																																																																								
--	-	-	-																																																																								
--	-	-	-																																																																								
--	-	-	-																																																																								

Note: Slanted line shows the range of the rated input voltage.

COSEL


Model	SUW1R50512																																																
Item	Input Current (by Load Current)	Temperature 25°C Testing Circuitry Figure A																																															
Object	—	—																																															
1.Graph	—△— Input Volt. 4.5V ---□--- Input Volt. 5V ---○--- Input Volt. 9V	2.Values																																															
<p>Graph showing Input Current [A] vs Load Ration [%] for SUW1R50512 at 25°C. The graph shows three curves for input voltages 4.5V, 5V, and 9V. The 4.5V curve is the highest, followed by 5V, and then 9V. All curves show a linear increase in input current as load ratio increases from 0% to 120%.</p> <table border="1"> <thead> <tr> <th>Load Ration [%]</th> <th>Input Volt. 4.5[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 9[V]</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.055</td><td>0.052</td><td>0.038</td></tr> <tr><td>20</td><td>0.135</td><td>0.124</td><td>0.079</td></tr> <tr><td>40</td><td>0.221</td><td>0.195</td><td>0.118</td></tr> <tr><td>60</td><td>0.306</td><td>0.273</td><td>0.158</td></tr> <tr><td>80</td><td>0.402</td><td>0.356</td><td>0.198</td></tr> <tr><td>100</td><td>0.497</td><td>0.435</td><td>0.239</td></tr> <tr><td>110</td><td>0.556</td><td>0.481</td><td>0.260</td></tr> <tr><td>—</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>—</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>—</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>—</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Ration [%]	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	0	0.055	0.052	0.038	20	0.135	0.124	0.079	40	0.221	0.195	0.118	60	0.306	0.273	0.158	80	0.402	0.356	0.198	100	0.497	0.435	0.239	110	0.556	0.481	0.260	—	-	-	-	—	-	-	-	—	-	-	-	—	-	-	-
Load Ration [%]	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																														
0	0.055	0.052	0.038																																														
20	0.135	0.124	0.079																																														
40	0.221	0.195	0.118																																														
60	0.306	0.273	0.158																																														
80	0.402	0.356	0.198																																														
100	0.497	0.435	0.239																																														
110	0.556	0.481	0.260																																														
—	-	-	-																																														
—	-	-	-																																														
—	-	-	-																																														
—	-	-	-																																														

COSEL

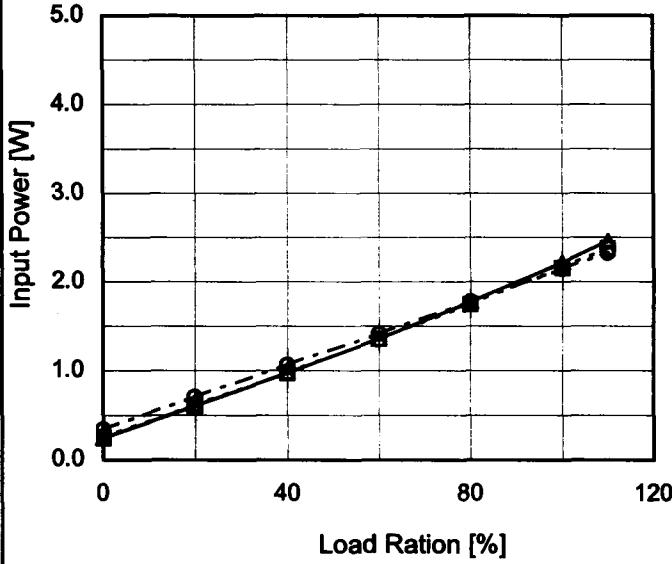Model	SUW1R50512	Temperature	25°C																																																			
Item	Input Power (by Load Current)	Testing Circuitry	Figure A																																																			
Object	_____	2.Values																																																				
1.Graph	<p>—△— Input Volt. 4.5V - - -□- - Input Volt. 5V - - ○- - Input Volt. 9V</p> 																																																					
	<table border="1"> <thead> <tr> <th rowspan="2">Load Ration [%]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 4.5[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 9[V]</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.24</td><td>0.26</td><td>0.34</td></tr> <tr><td>20</td><td>0.60</td><td>0.61</td><td>0.71</td></tr> <tr><td>40</td><td>0.98</td><td>0.98</td><td>1.07</td></tr> <tr><td>60</td><td>1.36</td><td>1.36</td><td>1.42</td></tr> <tr><td>80</td><td>1.77</td><td>1.75</td><td>1.78</td></tr> <tr><td>100</td><td>2.22</td><td>2.16</td><td>2.14</td></tr> <tr><td>110</td><td>2.46</td><td>2.38</td><td>2.32</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Ration [%]	Input Power [W]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	0	0.24	0.26	0.34	20	0.60	0.61	0.71	40	0.98	0.98	1.07	60	1.36	1.36	1.42	80	1.77	1.75	1.78	100	2.22	2.16	2.14	110	2.46	2.38	2.32	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Load Ration [%]	Input Power [W]																																																					
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																			
0	0.24	0.26	0.34																																																			
20	0.60	0.61	0.71																																																			
40	0.98	0.98	1.07																																																			
60	1.36	1.36	1.42																																																			
80	1.77	1.75	1.78																																																			
100	2.22	2.16	2.14																																																			
110	2.46	2.38	2.32																																																			
-	-	-	-																																																			
-	-	-	-																																																			
-	-	-	-																																																			
-	-	-	-																																																			

COSEL

Model	SUW1R50512																																	
Item	Efficiency (by Input Voltage)	Temperature 25°C Testing Circuitry Figure A																																
Object	—	—																																
1.Graph																																		
<p>Efficiency [%]</p> <p>Input Voltage [V]</p> <p>Legend: Load 50% (dashed line with squares), Load 100% (solid line with triangles)</p>																																		
2.Values																																		
<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr> <td>4.0</td> <td>68.0</td> <td>65.7</td> </tr> <tr> <td>4.5</td> <td>68.5</td> <td>70.1</td> </tr> <tr> <td>5.0</td> <td>68.4</td> <td>72.4</td> </tr> <tr> <td>6.0</td> <td>67.9</td> <td>74.0</td> </tr> <tr> <td>7.0</td> <td>67.1</td> <td>74.5</td> </tr> <tr> <td>8.0</td> <td>65.7</td> <td>74.4</td> </tr> <tr> <td>9.0</td> <td>64.4</td> <td>73.7</td> </tr> <tr> <td>9.5</td> <td>63.4</td> <td>73.2</td> </tr> <tr> <td>—</td> <td>-</td> <td>-</td> </tr> </tbody> </table>			Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	4.0	68.0	65.7	4.5	68.5	70.1	5.0	68.4	72.4	6.0	67.9	74.0	7.0	67.1	74.5	8.0	65.7	74.4	9.0	64.4	73.7	9.5	63.4	73.2	—	-	-
Input Voltage [V]	Efficiency [%]																																	
	Load 50%	Load 100%																																
4.0	68.0	65.7																																
4.5	68.5	70.1																																
5.0	68.4	72.4																																
6.0	67.9	74.0																																
7.0	67.1	74.5																																
8.0	65.7	74.4																																
9.0	64.4	73.7																																
9.5	63.4	73.2																																
—	-	-																																
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																		

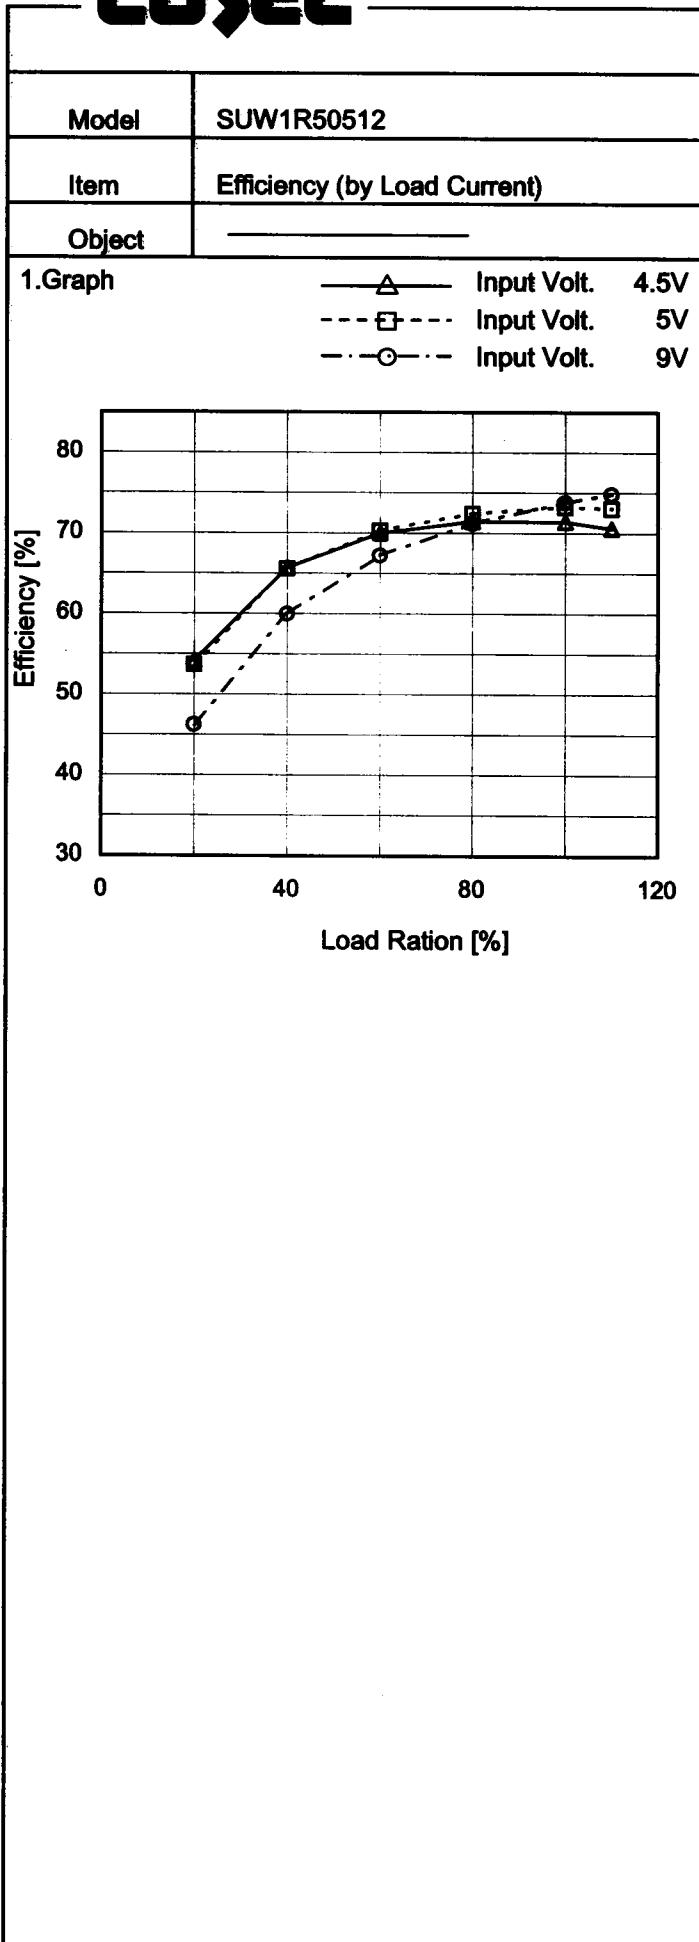COSEL

Temperature 25°C
Testing Circuitry Figure A


2. Values

Load Ration [%]	Efficiency [%]		
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]
0	-	-	-
20	54.2	53.7	46.2
40	65.7	65.6	60.0
60	70.0	70.3	67.2
80	71.4	72.4	71.2
100	71.4	73.2	73.8
110	70.6	73.0	74.8
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

COSEL

Model	SUW1R50512
Item	Line Regulation
Object	+12V0.065A

1.Graph

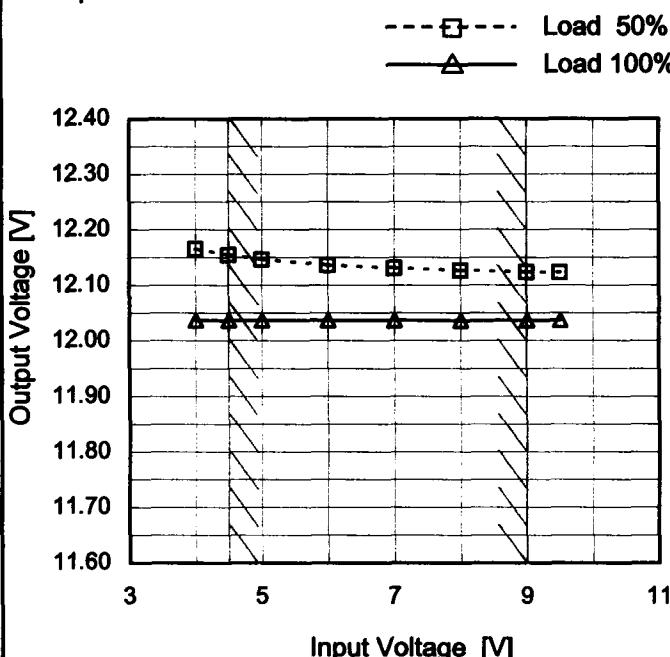


Temperature 25°C
Testing Circuitry Figure A

2.Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
4.0	12.165	12.037
4.5	12.154	12.037
5.0	12.147	12.037
6.0	12.136	12.037
7.0	12.131	12.037
8.0	12.127	12.036
9.0	12.124	12.037
9.5	12.123	12.037
-	-	-

Object	-12V0.065A
--------	------------

1.Graph

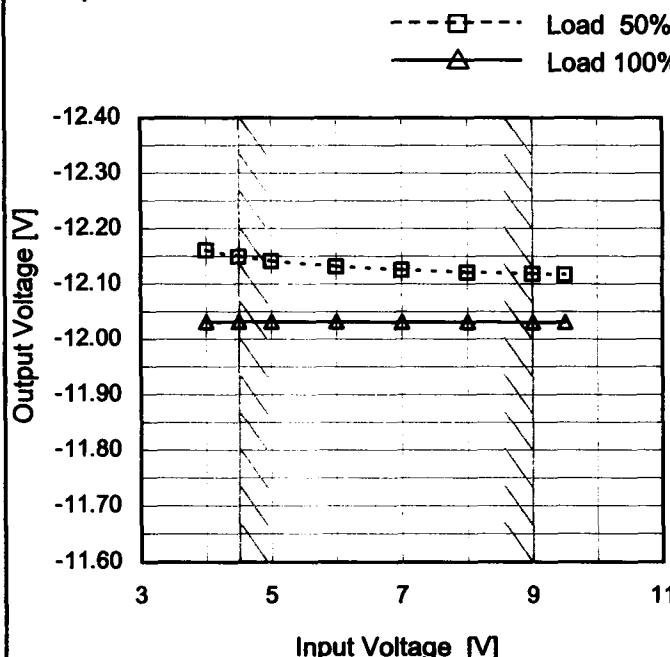


2.Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
4.0	-12.161	-12.032
4.5	-12.150	-12.032
5.0	-12.141	-12.032
6.0	-12.132	-12.032
7.0	-12.125	-12.032
8.0	-12.121	-12.032
9.0	-12.118	-12.031
9.5	-12.117	-12.031
-	-	-


Note: Slanted line shows the range of the rated input voltage.

COSEL

Model	SUW1R50512																																																						
Item	Load Regulation	Temperature 25°C Testing Circuitry Figure A																																																					
Object	+12V0.065A																																																						
1.Graph		<p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Input Volt. 4.5V</p> <p>Input Volt. 5V</p> <p>Input Volt. 9V</p>																																																					
		2.Values																																																					
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 4.5[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 9[V]</th> </tr> </thead> <tbody> <tr><td>0.000</td><td>12.411</td><td>12.412</td><td>12.417</td></tr> <tr><td>0.010</td><td>12.246</td><td>12.237</td><td>12.215</td></tr> <tr><td>0.020</td><td>12.201</td><td>12.192</td><td>12.166</td></tr> <tr><td>0.030</td><td>12.164</td><td>12.156</td><td>12.131</td></tr> <tr><td>0.040</td><td>12.130</td><td>12.122</td><td>12.102</td></tr> <tr><td>0.050</td><td>12.094</td><td>12.089</td><td>12.075</td></tr> <tr><td>0.060</td><td>12.057</td><td>12.055</td><td>12.050</td></tr> <tr><td>0.065</td><td>12.038</td><td>12.038</td><td>12.038</td></tr> <tr><td>0.072</td><td>12.011</td><td>12.015</td><td>12.022</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Output Voltage [V]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	0.000	12.411	12.412	12.417	0.010	12.246	12.237	12.215	0.020	12.201	12.192	12.166	0.030	12.164	12.156	12.131	0.040	12.130	12.122	12.102	0.050	12.094	12.089	12.075	0.060	12.057	12.055	12.050	0.065	12.038	12.038	12.038	0.072	12.011	12.015	12.022	-	-	-	-	-	-	-	-
Load Current [A]	Output Voltage [V]																																																						
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																				
0.000	12.411	12.412	12.417																																																				
0.010	12.246	12.237	12.215																																																				
0.020	12.201	12.192	12.166																																																				
0.030	12.164	12.156	12.131																																																				
0.040	12.130	12.122	12.102																																																				
0.050	12.094	12.089	12.075																																																				
0.060	12.057	12.055	12.050																																																				
0.065	12.038	12.038	12.038																																																				
0.072	12.011	12.015	12.022																																																				
-	-	-	-																																																				
-	-	-	-																																																				
Object																																																							
1.Graph		<p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Input Volt. 4.5V</p> <p>Input Volt. 5V</p> <p>Input Volt. 9V</p>																																																					
			2.Values																																																				
			<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 4.5[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 9[V]</th> </tr> </thead> <tbody> <tr><td>0.000</td><td>-12.394</td><td>-12.394</td><td>-12.399</td></tr> <tr><td>0.010</td><td>-12.241</td><td>-12.232</td><td>-12.208</td></tr> <tr><td>0.020</td><td>-12.197</td><td>-12.187</td><td>-12.161</td></tr> <tr><td>0.030</td><td>-12.160</td><td>-12.151</td><td>-12.126</td></tr> <tr><td>0.040</td><td>-12.125</td><td>-12.118</td><td>-12.097</td></tr> <tr><td>0.050</td><td>-12.089</td><td>-12.084</td><td>-12.070</td></tr> <tr><td>0.060</td><td>-12.052</td><td>-12.050</td><td>-12.044</td></tr> <tr><td>0.065</td><td>-12.033</td><td>-12.033</td><td>-12.032</td></tr> <tr><td>0.072</td><td>-12.007</td><td>-12.009</td><td>-12.016</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Output Voltage [V]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	0.000	-12.394	-12.394	-12.399	0.010	-12.241	-12.232	-12.208	0.020	-12.197	-12.187	-12.161	0.030	-12.160	-12.151	-12.126	0.040	-12.125	-12.118	-12.097	0.050	-12.089	-12.084	-12.070	0.060	-12.052	-12.050	-12.044	0.065	-12.033	-12.033	-12.032	0.072	-12.007	-12.009	-12.016	-	-	-	-	-	-	-	-
Load Current [A]	Output Voltage [V]																																																						
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																				
0.000	-12.394	-12.394	-12.399																																																				
0.010	-12.241	-12.232	-12.208																																																				
0.020	-12.197	-12.187	-12.161																																																				
0.030	-12.160	-12.151	-12.126																																																				
0.040	-12.125	-12.118	-12.097																																																				
0.050	-12.089	-12.084	-12.070																																																				
0.060	-12.052	-12.050	-12.044																																																				
0.065	-12.033	-12.033	-12.032																																																				
0.072	-12.007	-12.009	-12.016																																																				
-	-	-	-																																																				
-	-	-	-																																																				
Note: Slanted line shows the range of the rated load current.																																																							

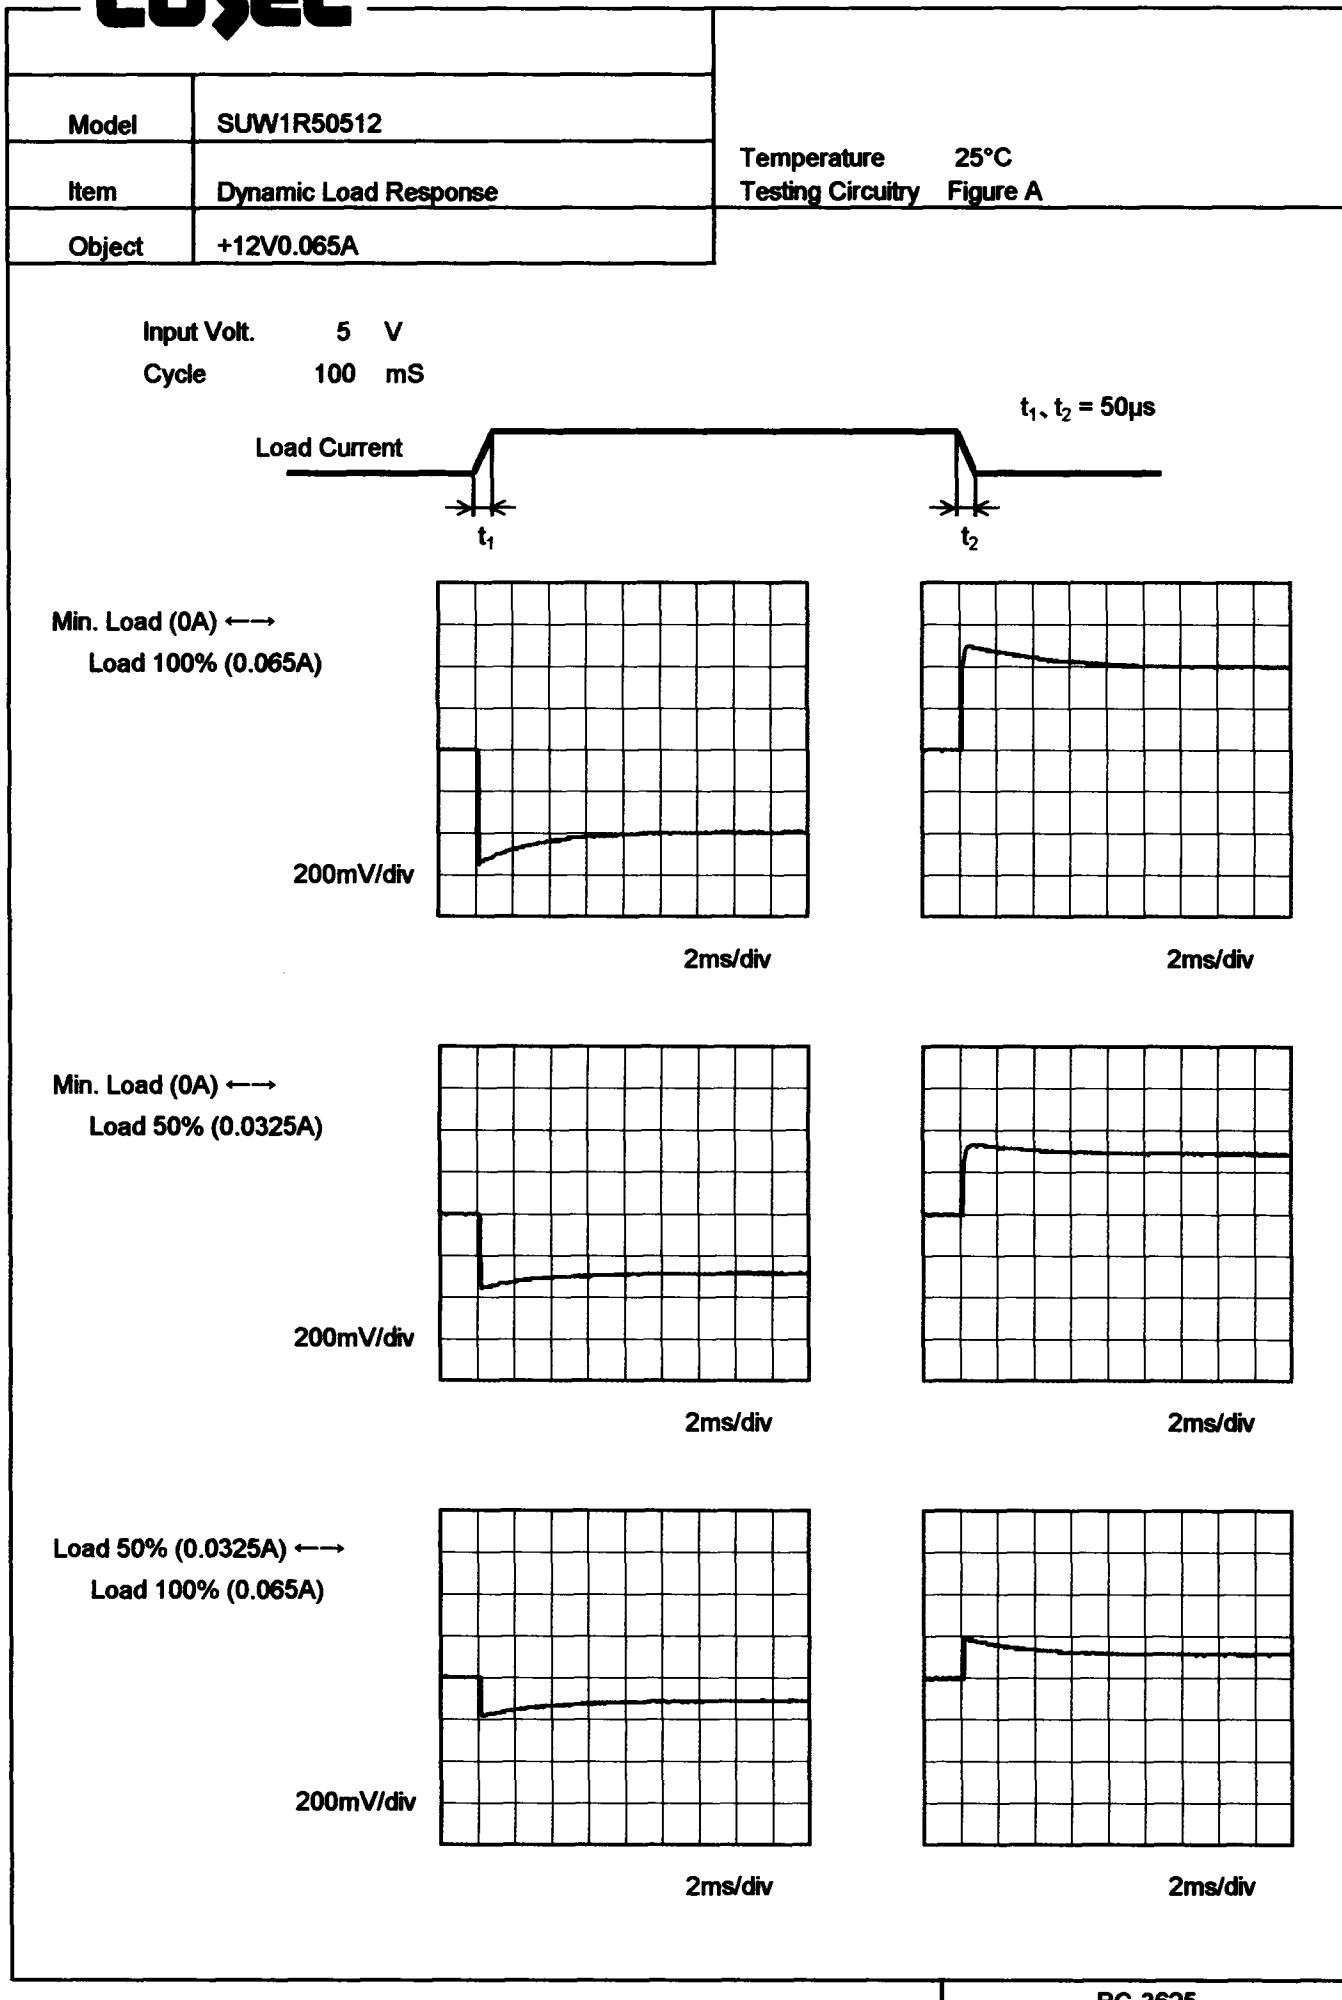COSEL

COSEL

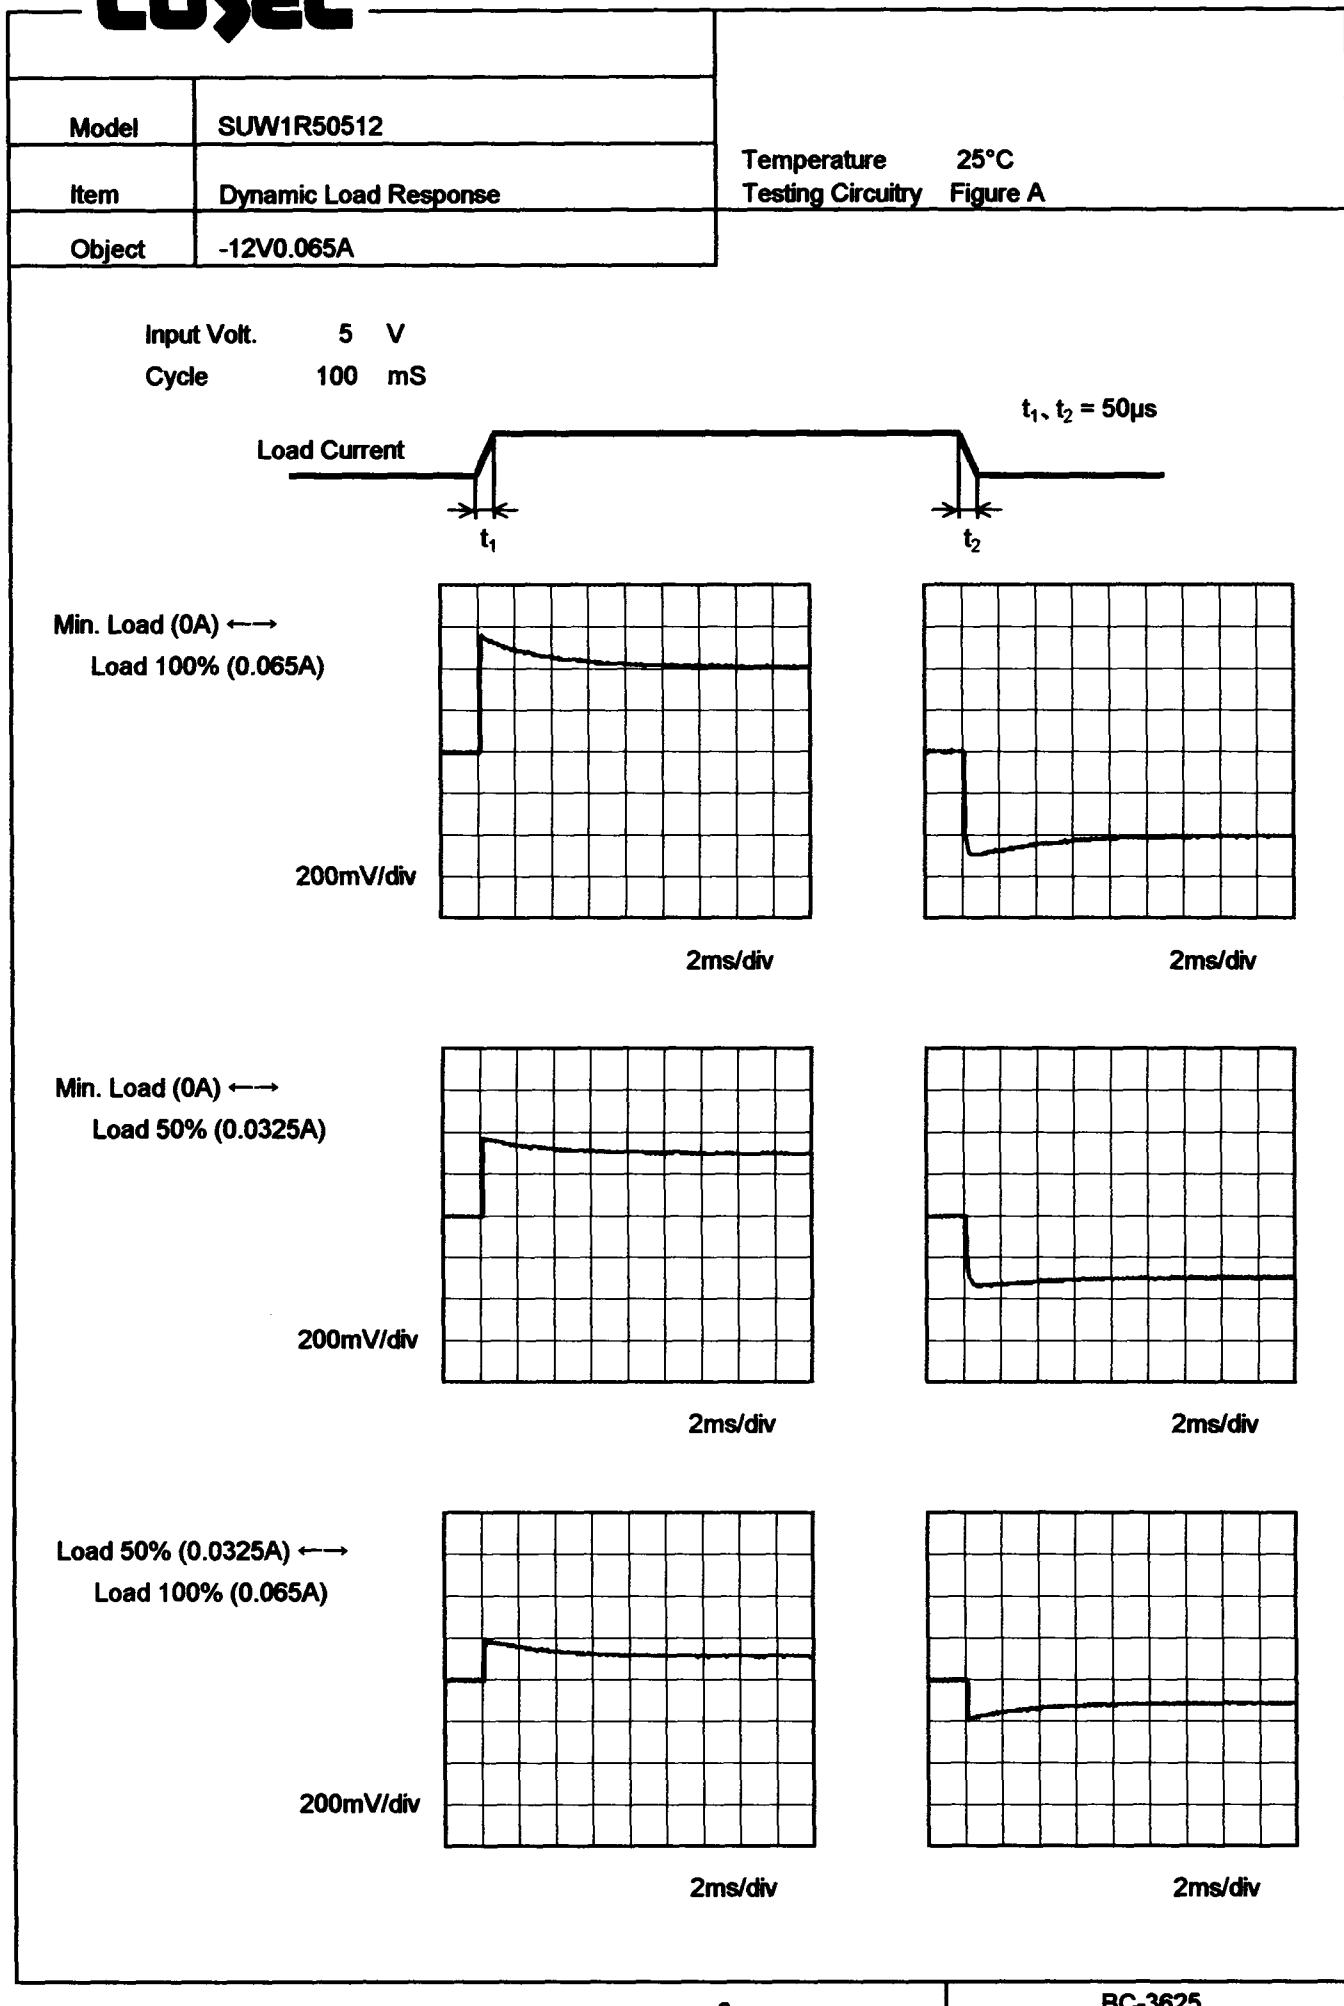

COSEL


Model SUW1R50512

Item Ripple Voltage (by Load Current)

Object +12V0.065A

1. Graph

—▲— Input Volt. 4.5V
 -·○-· Input Volt. 9V

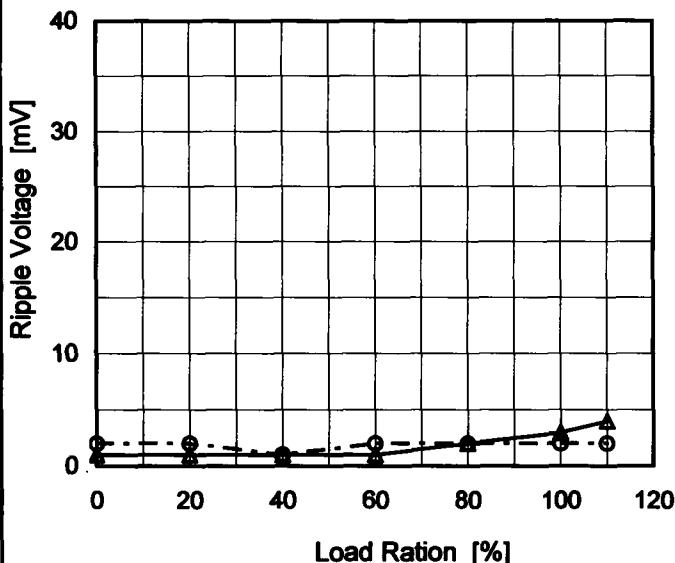

Measured by 100 MHz Oscilloscope.
 Ripple Voltage is shown as p-p in the figure below.

Ripple [mVp-p]

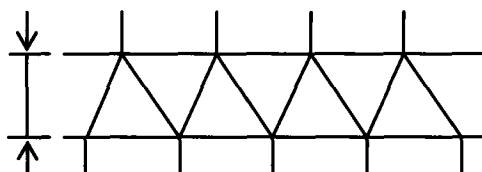


Fig.Complex Ripple Wave Form

Temperature 25°C
Testing Circuitry Figure B

2. Values

Load Ration [%]	Ripple Voltage [mV]	
	Input Volt. 4.5 [V]	Input Volt. 9 [V]
0	1	2
20	1	2
40	1	1
60	1	2
80	2	2
100	3	2
110	4	2
-	-	-
-	-	-
-	-	-
-	-	-

COSEL


Model SUW1R50512

Item Ripple Voltage (by Load Current)

Object -12V0.065A

1. Graph

—△— Input Volt. 4.5V
 -·○-· Input Volt. 9V

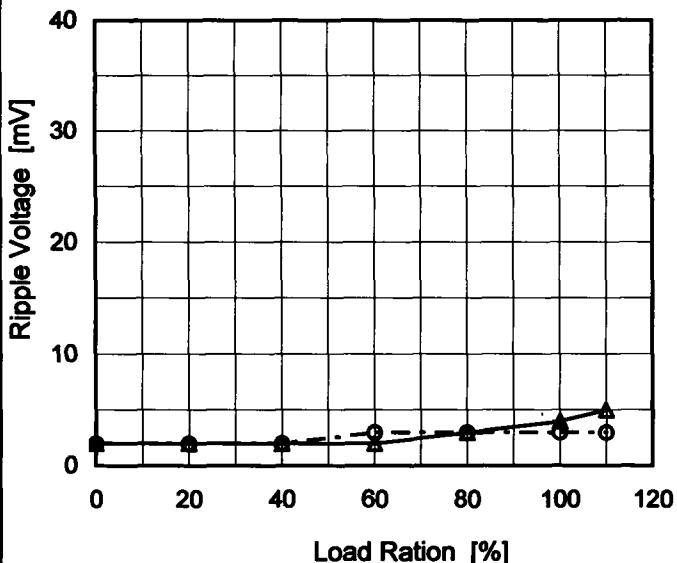

Measured by 100 MHz Oscilloscope.
 Ripple Voltage is shown as p-p in the figure below.

Ripple [mVp-p]

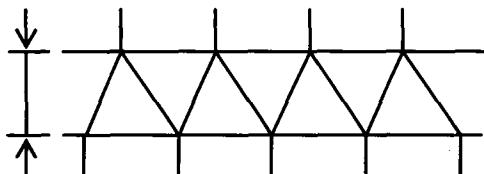


Fig. Complex Ripple Wave Form

Temperature 25°C
 Testing Circuitry Figure B

2. Values

Load Ration [%]	Ripple Voltage [mV]	
	Input Volt. 4.5 [V]	Input Volt. 9 [V]
0	2	2
20	2	2
40	2	2
60	2	3
80	3	3
100	4	3
110	5	3
-	-	-
-	-	-
-	-	-
-	-	-

COSEL


Model SUW1R50512

Item Ripple-Noise

Object +12V0.065A

Temperature 25°C
Testing Circuitry Figure B

1. Graph

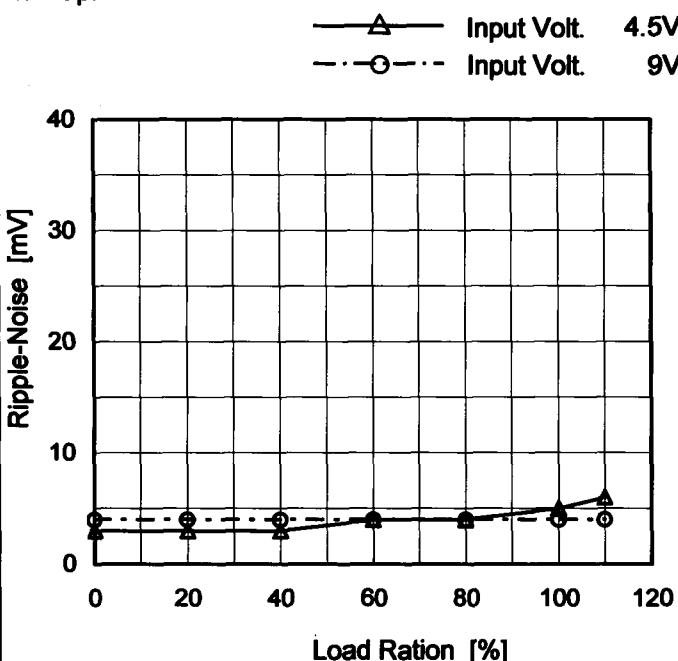

2. Values

Load Ration [%]	Ripple-Noise [mV]	
	Input Volt. 4.5 [V]	Input Volt. 9 [V]
0	3	4
20	3	4
40	3	4
60	4	4
80	4	4
100	5	4
110	6	4
-	-	-
-	-	-
-	-	-
-	-	-

Measured by 100 MHz Oscilloscope.

Ripple-Noise is shown as p-p in the figure below.


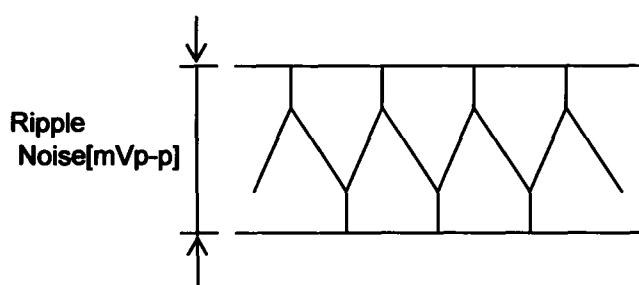


Fig.Complex Ripple Noise Wave Form

COSEL

Model	SUW1R50512
Item	Ripple-Noise
Object	-12V0.065A

1. Graph

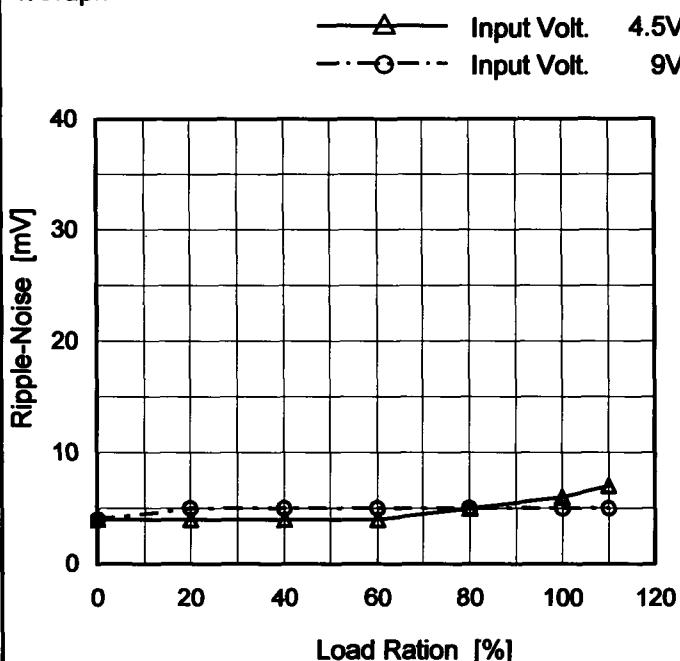

Measured by 100 MHz Oscilloscope.

Ripple-Noise is shown as p-p in the figure below.

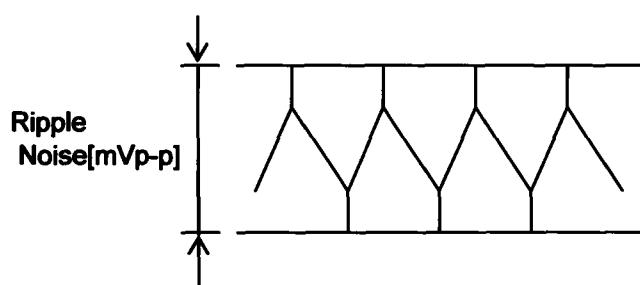


Fig.Complex Ripple Noise Wave Form

Temperature 25°C
Testing Circuitry Figure B

2. Values

Load Ration [%]	Ripple-Noise [mV]	
	Input Volt. 4.5 [V]	Input Volt. 9 [V]
0	4	4
20	4	5
40	4	5
60	4	5
80	5	5
100	6	5
110	7	5
--	-	-
--	-	-
--	-	-
--	-	-

COSEL


Model SUW1R50512

Item Ripple Voltage (by Ambient Temp.)

Object +12V0.065A

1. Graph

---□--- Load 50%
—△— Load 100%

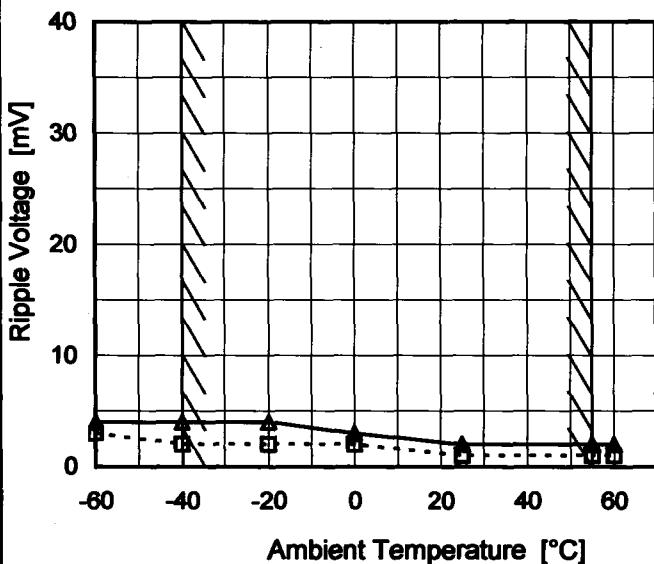

Testing Circuitry Figure B


2. Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-60	3	4
-40	2	4
-20	2	4
0	2	3
25	1	2
55	1	2
60	1	2
-	-	-
-	-	-
-	-	-
-	-	-

Object -12V0.065A

1. Graph

---□--- Load 50%
—△— Load 100%

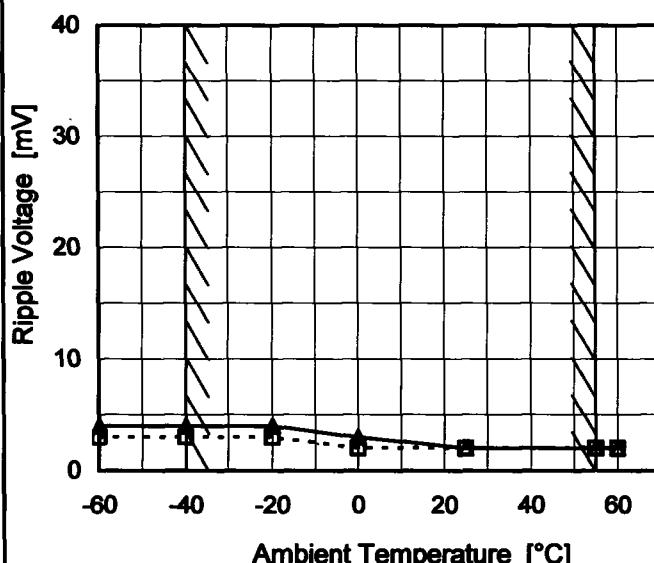


2. Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-60	3	4
-40	3	4
-20	3	4
0	2	3
25	2	2
55	2	2
60	2	2
-	-	-
-	-	-
-	-	-
-	-	-

Measured by 100 MHz Oscilloscope.


Note: Slanted line shows the range of the rated ambient temperature.

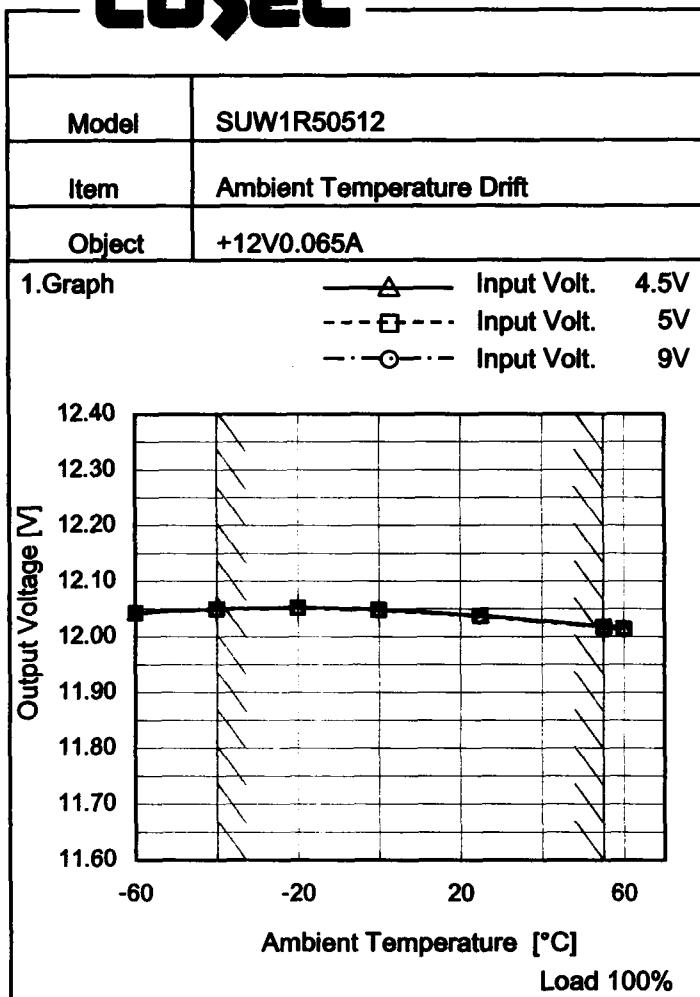COSEL

Testing Circuitry Figure A

2.Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]
-60	12.043	12.043	12.042
-40	12.050	12.050	12.048
-20	12.053	12.052	12.051
0	12.049	12.048	12.047
25	12.038	12.037	12.036
55	12.019	12.017	12.016
60	12.016	12.014	12.012
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

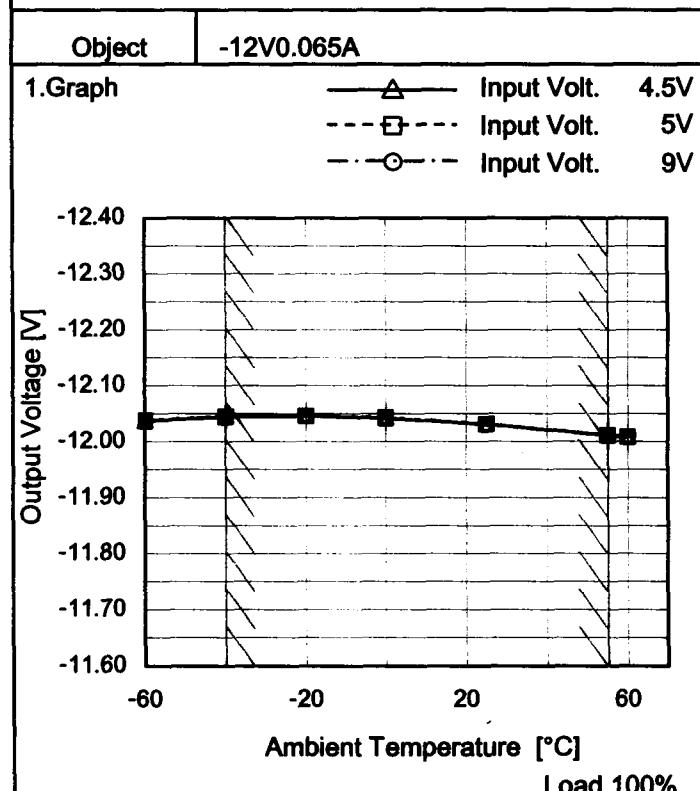

2.Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]
-60	-12.037	-12.038	-12.037
-40	-12.044	-12.045	-12.045
-20	-12.046	-12.046	-12.046
0	-12.042	-12.043	-12.042
25	-12.031	-12.031	-12.030
55	-12.011	-12.011	-12.010
60	-12.008	-12.008	-12.006
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

Note: Slanted line shows the range of the rated ambient temperature.



Model	SUW1R50512	Testing Circuitry Figure A
Item	Output Voltage Accuracy	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 55°C

Input Voltage : 4.5 - 9V

Load Current (AVR 1) : 0 - 0.065A (AVR 2):0 - 0.065A

* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$



$$\text{* Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

2. Values

Object	+12V0.065A		Output		Output Voltage Accuracy	
Item	Temperature [°C]	Input Voltage[V]	Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	0	9	0	12.433	±209	±1.7
Minimum Voltage	55	9	0.065	12.016		

Object	-12V0.065A		Output		Output Voltage Accuracy	
Item	Temperature [°C]	Input Voltage[V]	Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	0	9	0	-12.413	±202	±1.7
Minimum Voltage	55	9	0.065	-12.010		

COSEL

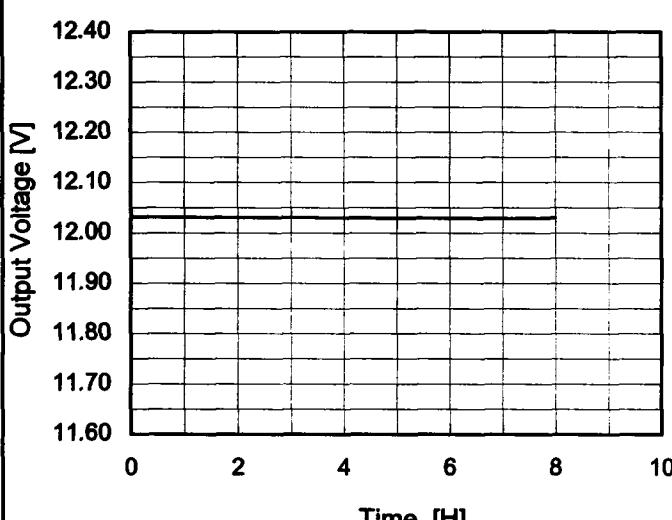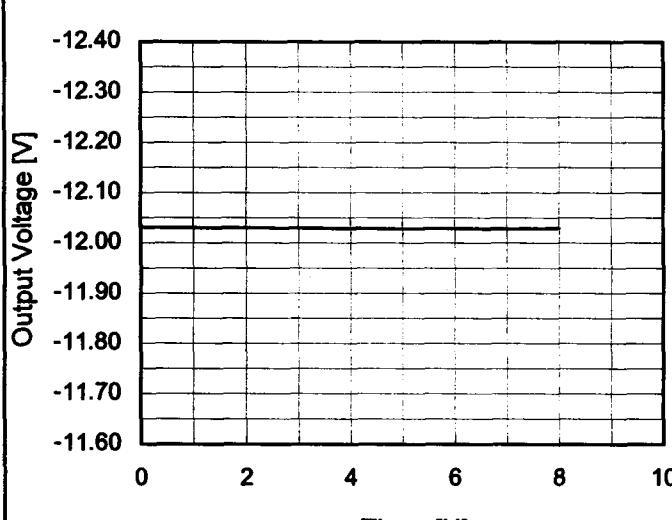Model	SUW1R50512	Temperature	25°C																						
Item	Time Lapse Drift	Testing Circuitry	Figure A																						
Object	+12V0.065A																								
1.Graph			2.Values																						
 <p>Output Voltage [V]</p> <p>Time [H]</p> <p>Input Volt. 5V Load 100%</p>			<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>12.040</td></tr> <tr><td>0.5</td><td>12.032</td></tr> <tr><td>1.0</td><td>12.032</td></tr> <tr><td>2.0</td><td>12.031</td></tr> <tr><td>3.0</td><td>12.031</td></tr> <tr><td>4.0</td><td>12.030</td></tr> <tr><td>5.0</td><td>12.030</td></tr> <tr><td>6.0</td><td>12.030</td></tr> <tr><td>7.0</td><td>12.029</td></tr> <tr><td>8.0</td><td>12.031</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	12.040	0.5	12.032	1.0	12.032	2.0	12.031	3.0	12.031	4.0	12.030	5.0	12.030	6.0	12.030	7.0	12.029	8.0	12.031
Time since start [H]	Output Voltage [V]																								
0.0	12.040																								
0.5	12.032																								
1.0	12.032																								
2.0	12.031																								
3.0	12.031																								
4.0	12.030																								
5.0	12.030																								
6.0	12.030																								
7.0	12.029																								
8.0	12.031																								
Object -12V0.065A			2.Values																						
 <p>Output Voltage [V]</p> <p>Time [H]</p> <p>Input Volt. 5V Load 100%</p>			<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>-12.038</td></tr> <tr><td>0.5</td><td>-12.030</td></tr> <tr><td>1.0</td><td>-12.031</td></tr> <tr><td>2.0</td><td>-12.030</td></tr> <tr><td>3.0</td><td>-12.030</td></tr> <tr><td>4.0</td><td>-12.029</td></tr> <tr><td>5.0</td><td>-12.029</td></tr> <tr><td>6.0</td><td>-12.029</td></tr> <tr><td>7.0</td><td>-12.029</td></tr> <tr><td>8.0</td><td>-12.030</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	-12.038	0.5	-12.030	1.0	-12.031	2.0	-12.030	3.0	-12.030	4.0	-12.029	5.0	-12.029	6.0	-12.029	7.0	-12.029	8.0	-12.030
Time since start [H]	Output Voltage [V]																								
0.0	-12.038																								
0.5	-12.030																								
1.0	-12.031																								
2.0	-12.030																								
3.0	-12.030																								
4.0	-12.029																								
5.0	-12.029																								
6.0	-12.029																								
7.0	-12.029																								
8.0	-12.030																								

COSEL


Model SUW1R50512

Item Rise and Fall Time

Object +12V0.065A


Temperature 25°C
Testing Circuitry Figure A

1. Graph

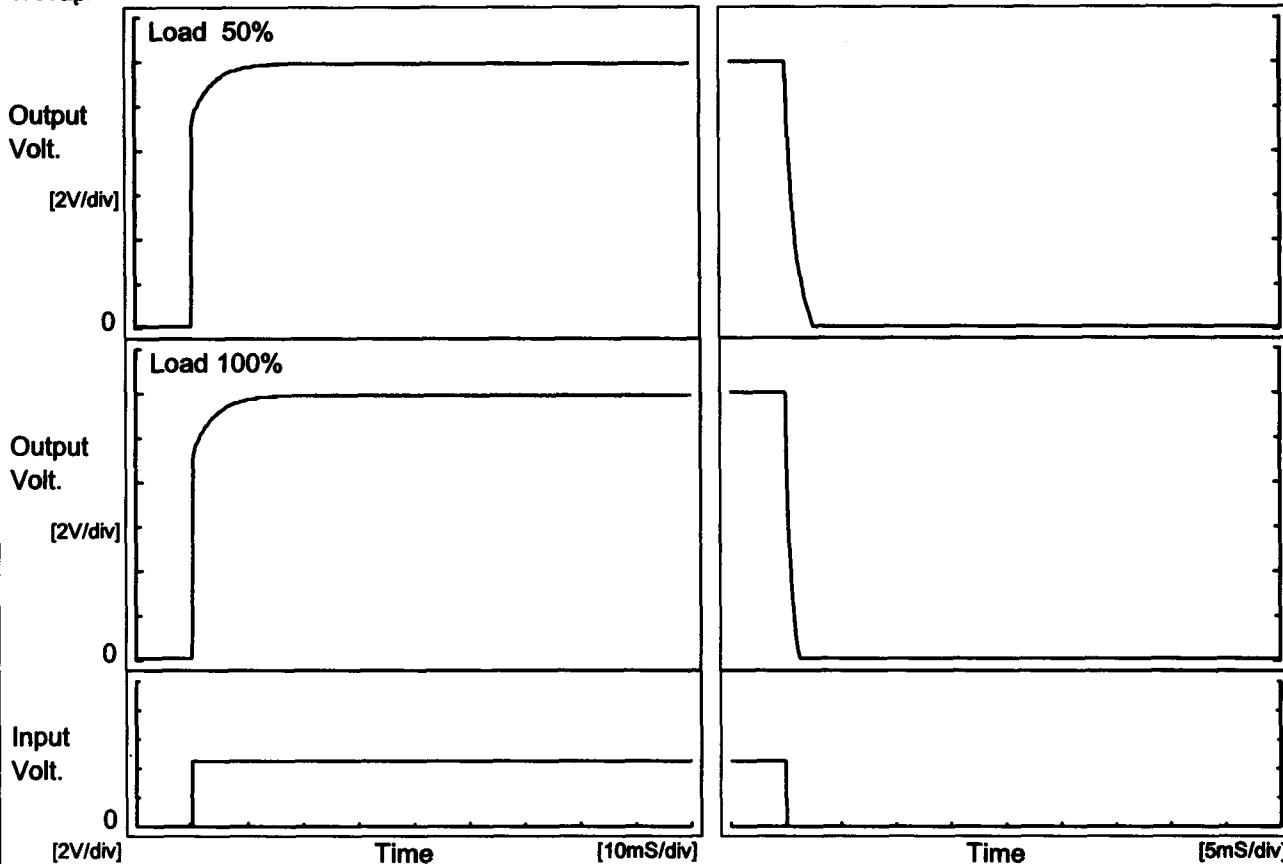

2. Values

Load	Time	Td	Tr	Ts	Th	Tf	[mS]
50 %		0.1	3.3	3.4	0.1	3.6	
100 %		0.1	3.6	3.7	0.1	1.8	

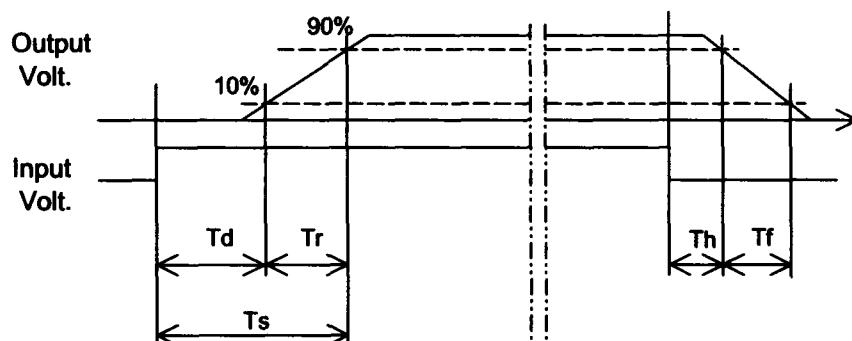


COSEL

Model	SUW1R50512
Item	Rise and Fall Time
Object	-12V0.065A

Temperature 25°C
Testing Circuitry Figure A


1. Graph

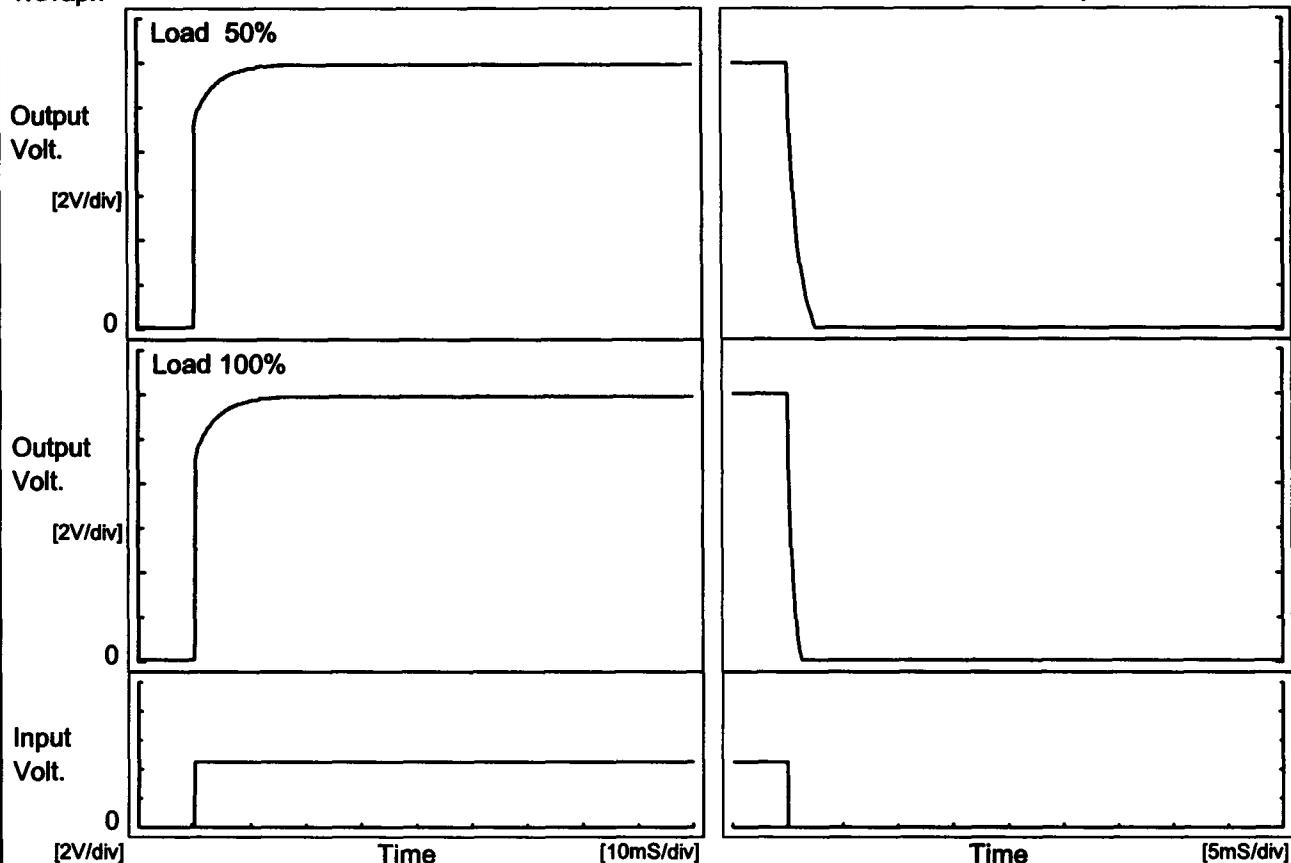

2. Values

[mS]


Load	Time	Td	Tr	Ts	Th	Tf
50 %		0.1	3.3	3.4	0.1	3.6
100 %		0.1	3.6	3.7	0.1	1.8

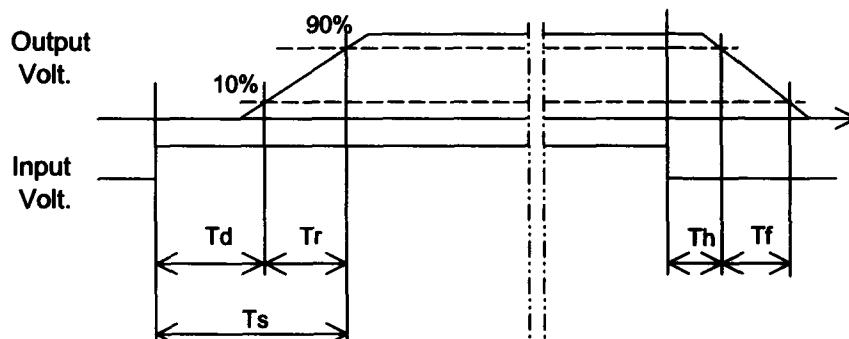

COSEL

Model	SUW1R50512
Item	Minimum Input Voltage for Regulated Output Voltage
Object	+12V0.065A

1.Graph

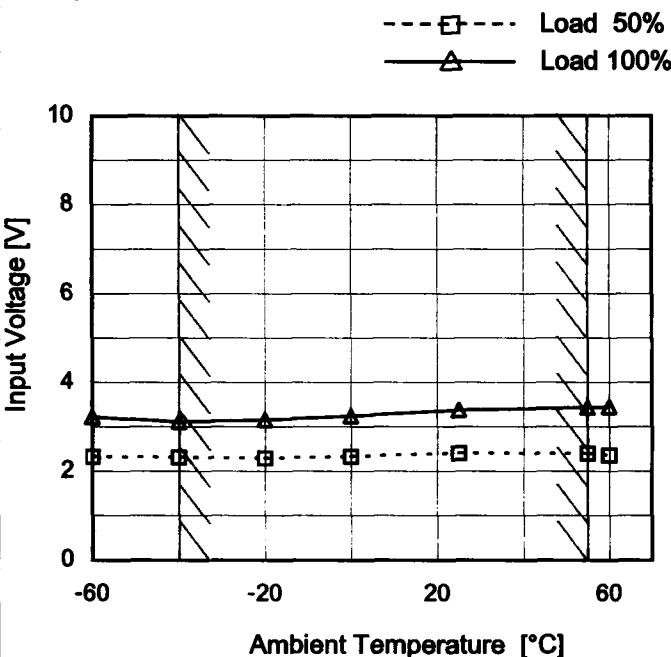


Testing Circuitry Figure A

2.Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-60	2.4	3.3
-40	2.4	3.2
-20	2.3	3.2
0	2.4	3.3
25	2.4	3.4
55	2.4	3.5
60	2.4	3.5
-	-	-
-	-	-
-	-	-
-	-	-

Object	-12V0.065A
--------	------------

1.Graph

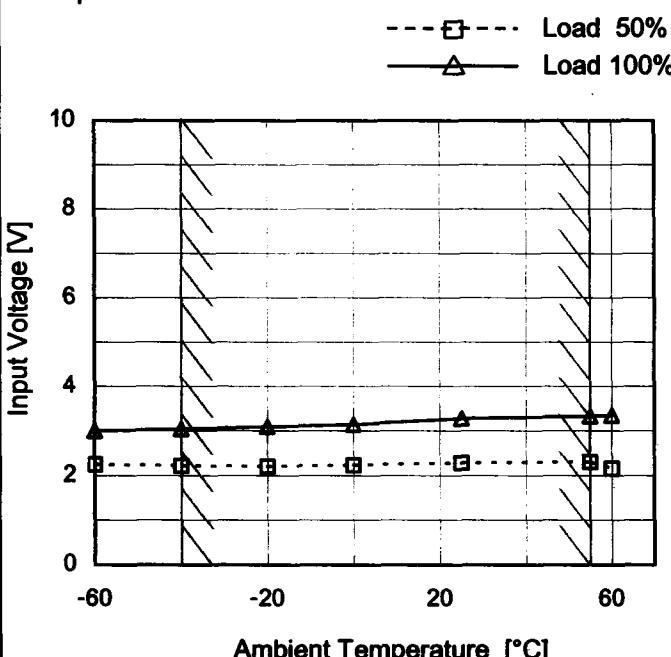


2.Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-60	2.3	3.0
-40	2.3	3.1
-20	2.2	3.1
0	2.3	3.2
25	2.3	3.3
55	2.3	3.4
60	2.2	3.4
-	-	-
-	-	-
-	-	-
-	-	-

Note: Slanted line shows the range of the rated ambient temperature.


COSEL

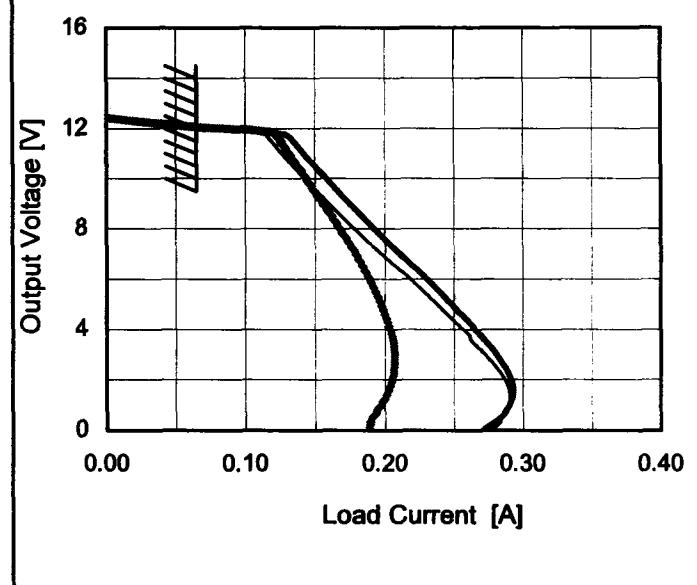Model	SUW1R50512
Item	Overcurrent Protection
Object	+12V0.065A
1.Graph	<p style="text-align: center;"> Input Volt. 4.5V Input Volt. 5V Input Volt. 9V </p>  <p style="text-align: center;">Output Voltage [V]</p> <p style="text-align: center;">Load Current [A]</p>

Temperature 25°C
Testing Circuitry Figure A

2.Values

Output Voltage [V]	Load Current [A]		
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]
12.0	0.07	0.07	0.07
11.4	0.12	0.14	0.13
10.8	0.13	0.15	0.13
9.6	0.15	0.16	0.15
8.4	0.17	0.19	0.16
7.2	0.19	0.21	0.18
6.0	0.22	0.23	0.19
4.8	0.24	0.25	0.20
3.6	0.26	0.27	0.21
2.4	0.28	0.29	0.21
1.2	0.29	0.29	0.20
0.0	0.27	0.28	0.19

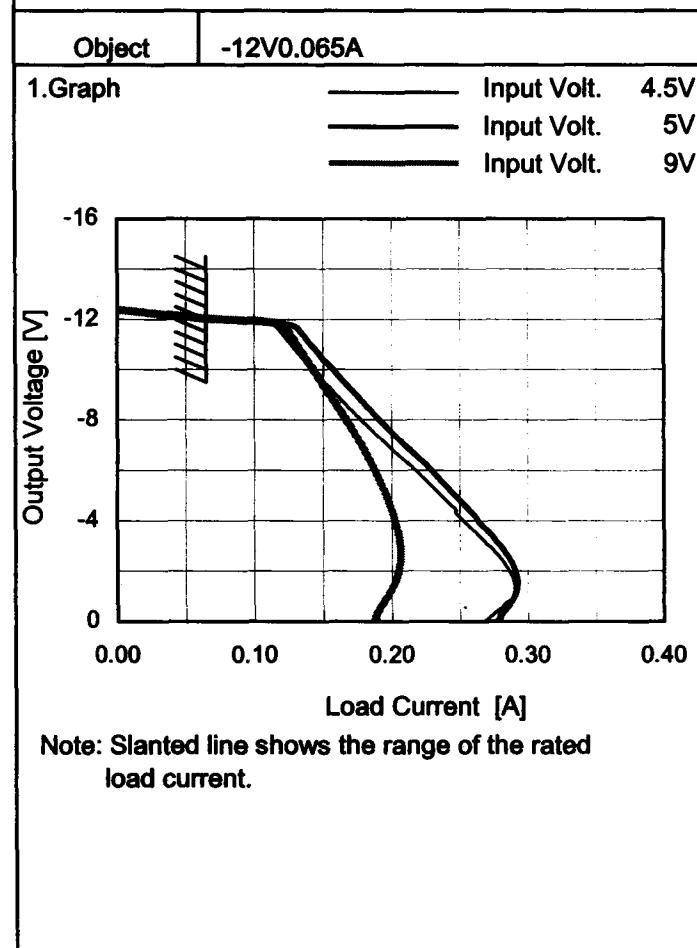Object	-12V0.065A
1.Graph	<p style="text-align: center;"> Input Volt. 4.5V Input Volt. 5V Input Volt. 9V </p>  <p style="text-align: center;">Output Voltage [V]</p> <p style="text-align: center;">Load Current [A]</p>
Note:	Slanted line shows the range of the rated load current.

2.Values

Output Voltage [V]	Load Current [A]		
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]
-12.0	0.07	0.07	0.07
-11.4	0.12	0.14	0.13
-10.8	0.13	0.15	0.13
-9.6	0.15	0.16	0.15
-8.4	0.17	0.18	0.16
-7.2	0.19	0.21	0.18
-6.0	0.22	0.23	0.19
-4.8	0.24	0.25	0.20
-3.6	0.26	0.27	0.20
-2.4	0.28	0.29	0.21
-1.2	0.29	0.29	0.20
0.0	0.27	0.28	0.19

COSEL

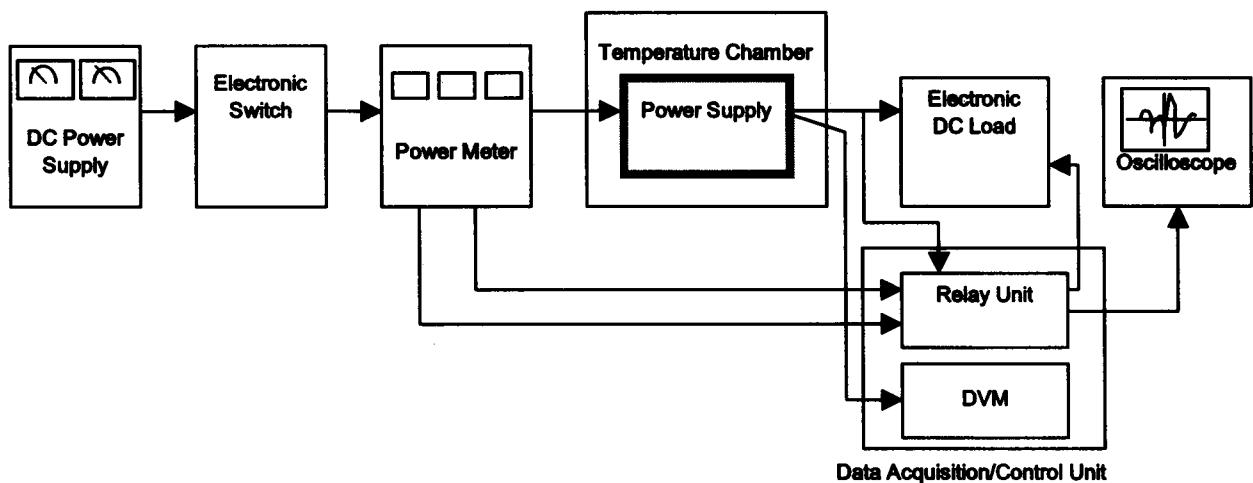


Figure A

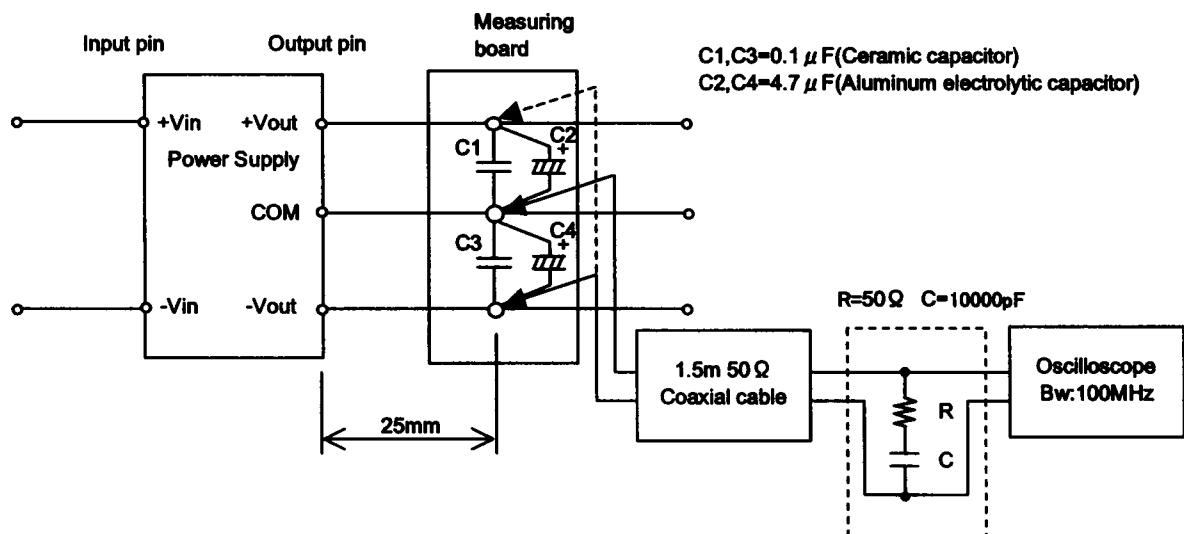


Figure B (Ripple and Ripple noise Characteristic)