

Date : Apr.1,2005

Temperature increase of main components

Model: SFS3048 series

1. Conditions

- (1) Input : DC36-76V
- (2) Output : Rated output
- (3) Mounting method : Shown as Fig.1.1

2. Result

No.	Parts name	Symbol No.	Increase (ΔT)							Rated temp. [°C]	Reference
			[deg]								
			1.2V	1.5V	1.8V	2V	2.5V	3.3V	5V		
1	Input choke coil	L101	30	30	31	31	31	38	37	125	
2	Switching MOS-FET	TR101	38	39	38	40	43	51	50	150	Junction Temp.
3	Power control IC	IC101	32	33	30	33	31	41	40	150	Junction Temp.
4	Transformer (PWB)	T101	42	42	42	41	46	54	48	130	
5	Rectifying MOS-FET	TR501	43	46	43	43	48	54	47	150	Junction Temp.
6	Rectifying MOS-FET	TR502	44	45	43	44	46	56	49	150	Junction Temp.
7											
8											
9											
10											
11											
12											
13											
14											
15											
16											
17											
18											
19											
20											

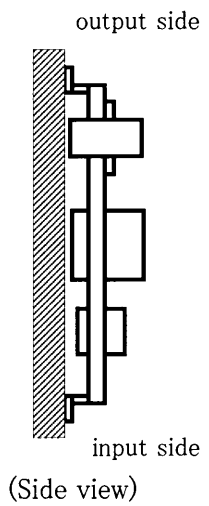


Fig.1.1 Mounting method

Date : Apr.1,2005

Temperature increase of main components

Model: SFS3048 series

1. Conditions

- (1) Input : DC36-76V
- (2) Output : Rated output
- (3) Mounting method : Shown as Fig.1.1

2. Result

No.	Parts name	Symbol No.	Increase (ΔT)						Rated temp. [°C]	Reference
			[deg]							
			10V	12V	15V					
1	Input choke coil	L101	38	37	38				125	
2	Switching MOS-FET	TR101	54	49	53				150	Junction Temp.
3	Power control IC	IC101	41	38	40				150	Junction Temp.
4	Transformer (PWB)	T101	52	48	53				130	
5	Rectifying MOS-FET	TR501	52	48	51				150	Junction Temp.
6	Rectifying MOS-FET	TR502	53	48	51				150	Junction Temp.
7										
8										
9										
10										
11										
12										
13										
14										
15										
16										
17										
18										
19										
20										

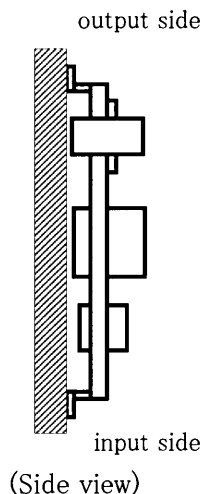


Fig.1.1 Mounting method