

# TEST DATA OF TAH-150-□□□

Noise Filter

May. 20. 2016

Approved by : Tadayuki Noda  
Tadayuki Noda Design Manager

Prepared by : Shiro Gotani  
Shiro Gotani Design Engineer



**COSEL CO.,LTD.**

## CONTENTS

1.Attenuation Characteristics .....	1
2.Leakage Current .....	3
3.Figure of Testing Circuitry .....	4
(Final Page 4)	


**COSEL**

Model	TAH-150-□□□	Temperature 25°C Testing Circuitry Figure A
Item	Attenuation Characteristics	
Object	_____	

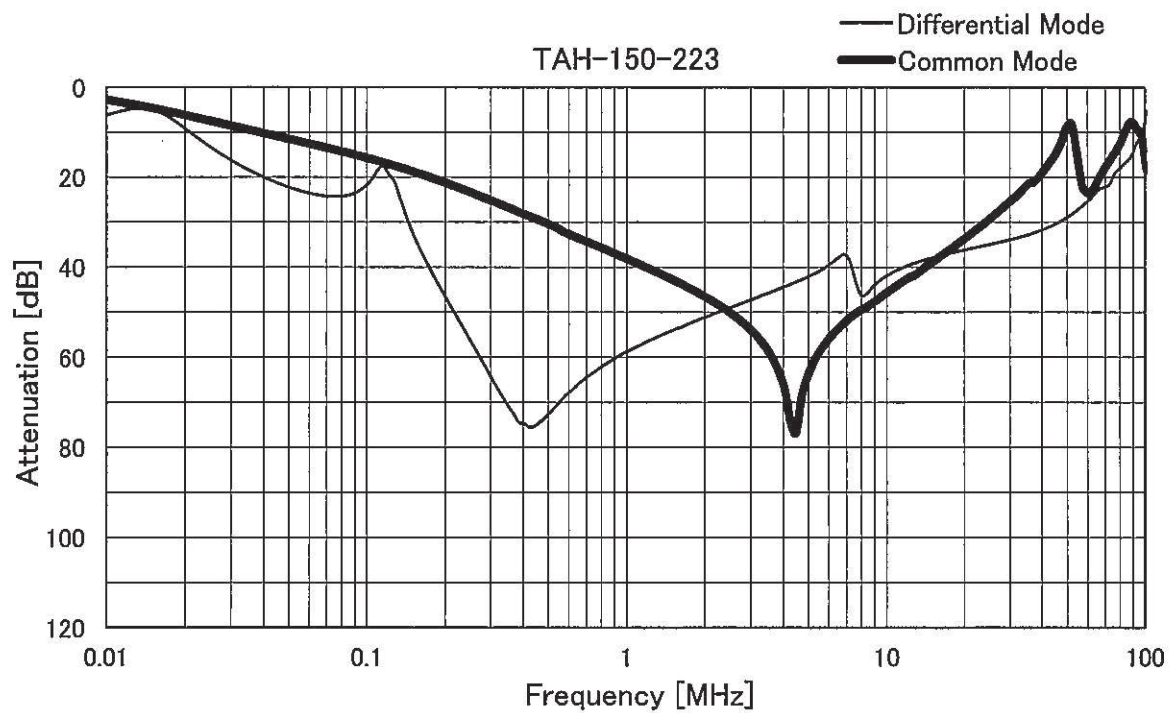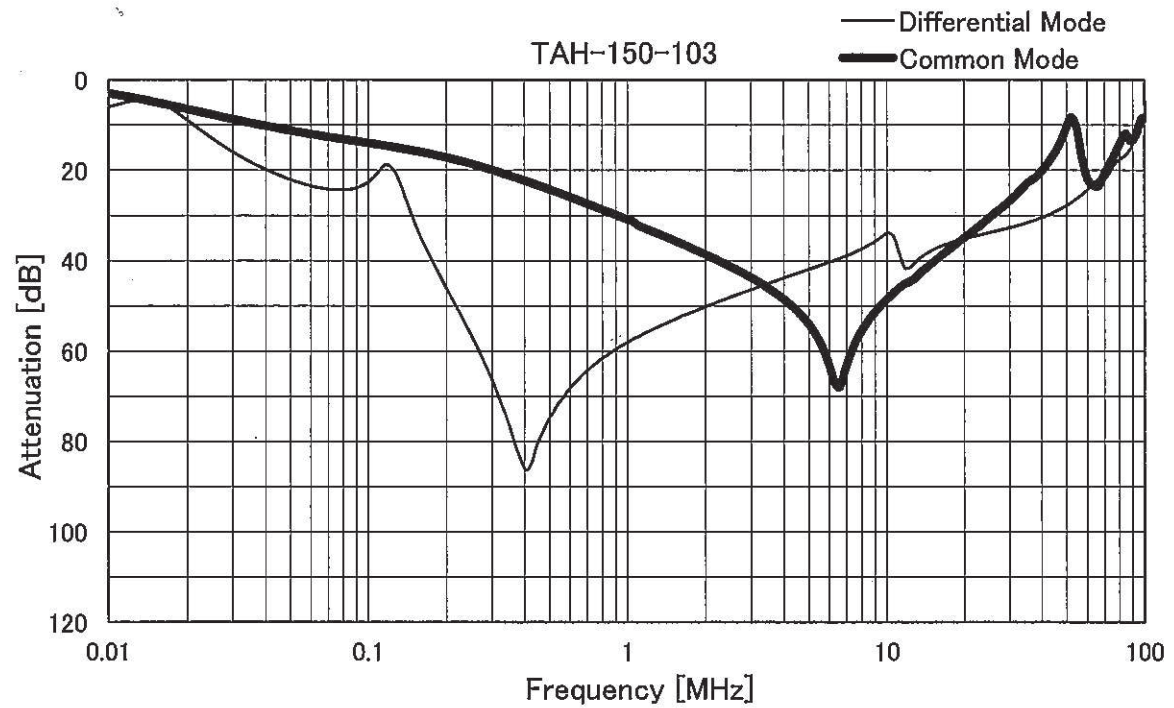



		Temperature 25°C Testing Circuitry Figure A
Model	TAH-150-□□□	
Item	Attenuation Characteristics	
Object	_____	

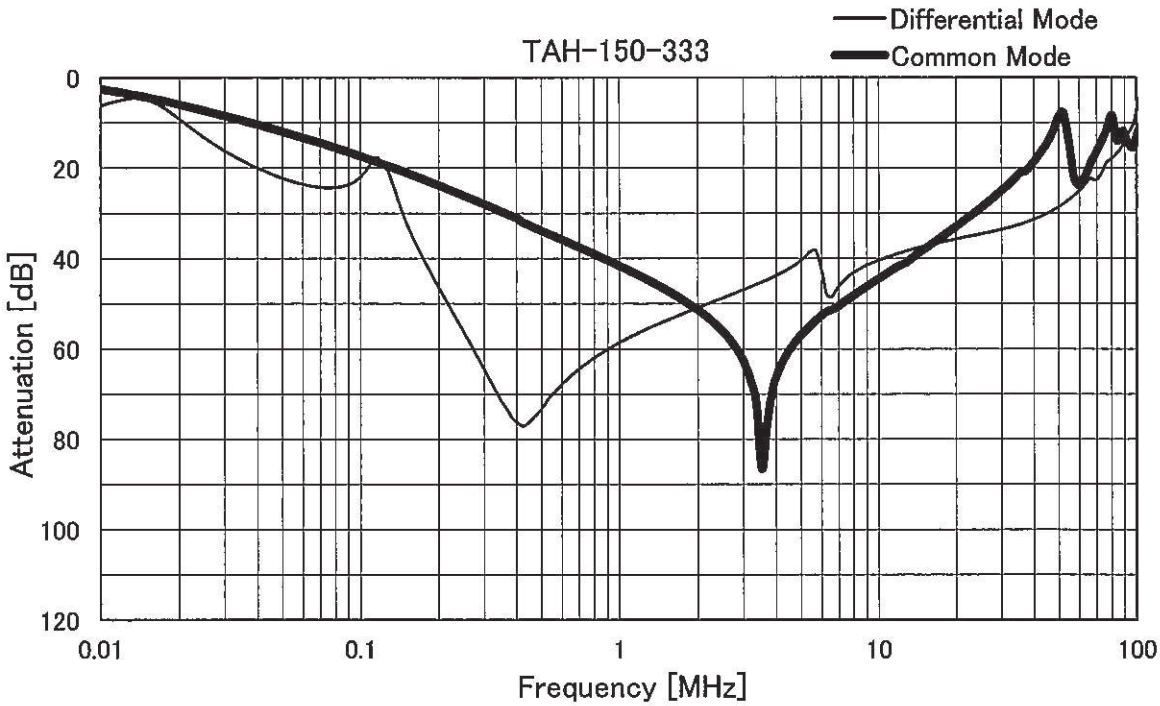



		Temperature 25°C Testing Circuitry Figure B
Model	TAH-150-□□□	
Item	Leakage Current	
Object	_____	

1.Results

[mA]

Model	Standards	Input Volt.					Note
		200 [V]	250 [V]	400 [V]	480 [V]	500 [V]	
TAH-150-103	UL1283	0.65	0.78	1.30	1.50	1.55	
TAH-150-223	UL1283	1.49	1.80	2.80	3.45	3.50	
TAH-150-333	UL1283	1.95	2.45	3.85	4.60	4.90	

2.Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

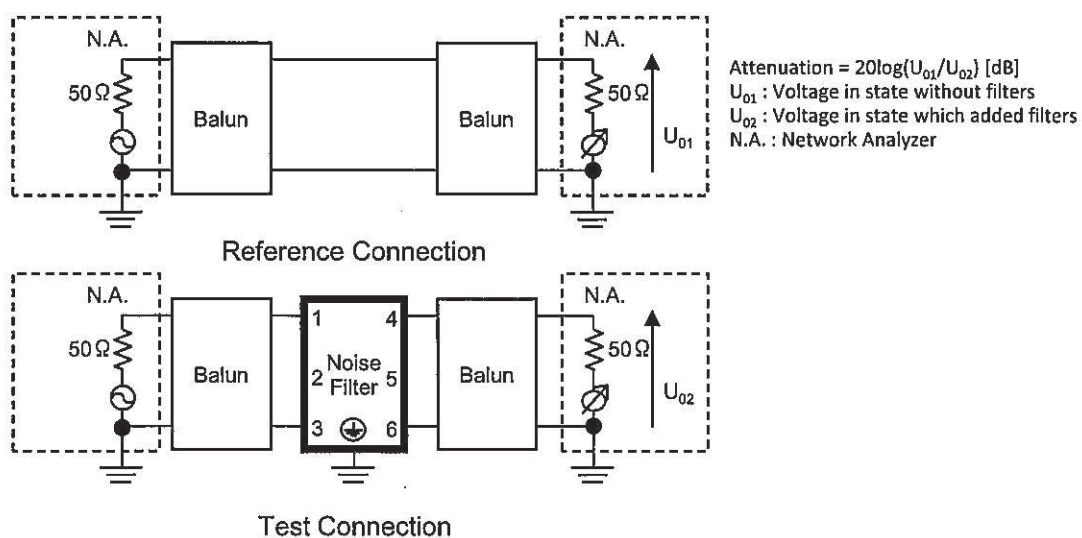


Figure A - 1 Differential mode attenuation measurement

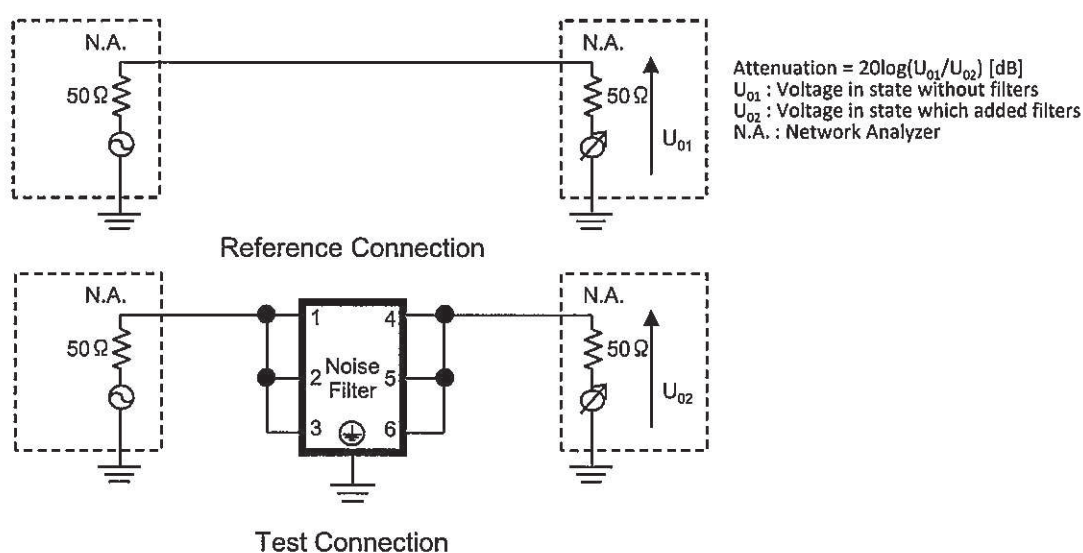


Figure A - 2 Common mode attenuation measurement

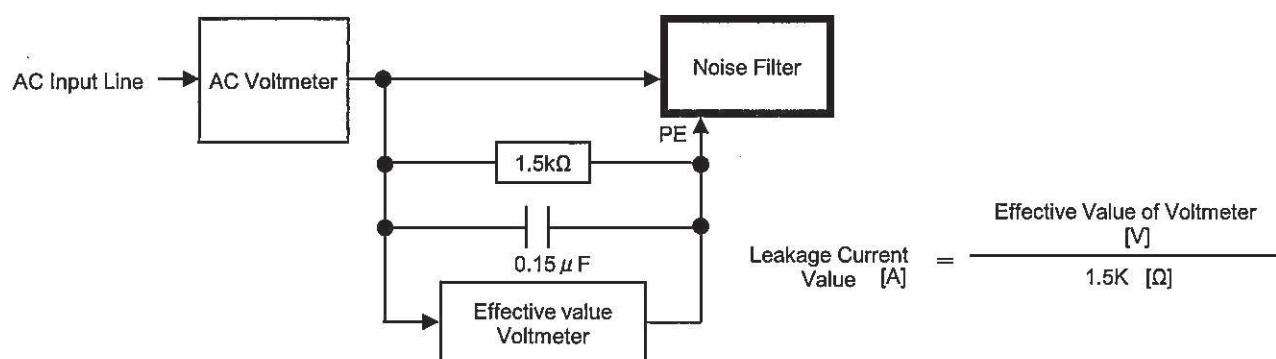


Figure B Leakage current measurement ( UL1283 )