



# TEST DATA OF ZTW1R50515

(5.0V INPUT)

Regulated DC Power Supply

Date : Mar. 5. 1998

Approved by : N. Shiraishi  
Design Manager


Prepared by : J. Teuri  
Design Engineer

**コーセル株式会社**  
**COSEL CO., LTD.**

## CONTENTS

1. Line Regulation . . . . .	1
静的入力変動	
2. Efficiency . . . . .	2
効率	
3. Load Regulation . . . . .	3
静的負荷変動	
4. Ripple Voltage (by Load Current) . . . . .	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise . . . . .	6
リップルノイズ	
6. Overcurrent Protection . . . . .	8
過電流保護	
7. Dynamic Load Responce . . . . .	9
動的負荷変動	
8. Rise and Fall Time . . . . .	11
立上り、立下がり時間	
9. Ambient Temperature Drift . . . . .	13
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage . . .	14
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature) . . . . .	15
リップル電圧(周囲温度特性)	
12. Time Lapse Drift . . . . .	16
経時ドリフト	
13. Output Voltage Accuracy . . . . .	17
定電圧精度	
14. Condensation . . . . .	18
結露特性	
15. Figure of Testing Circuitry . . . . .	20
測定回路図	

(Final Page 20 )

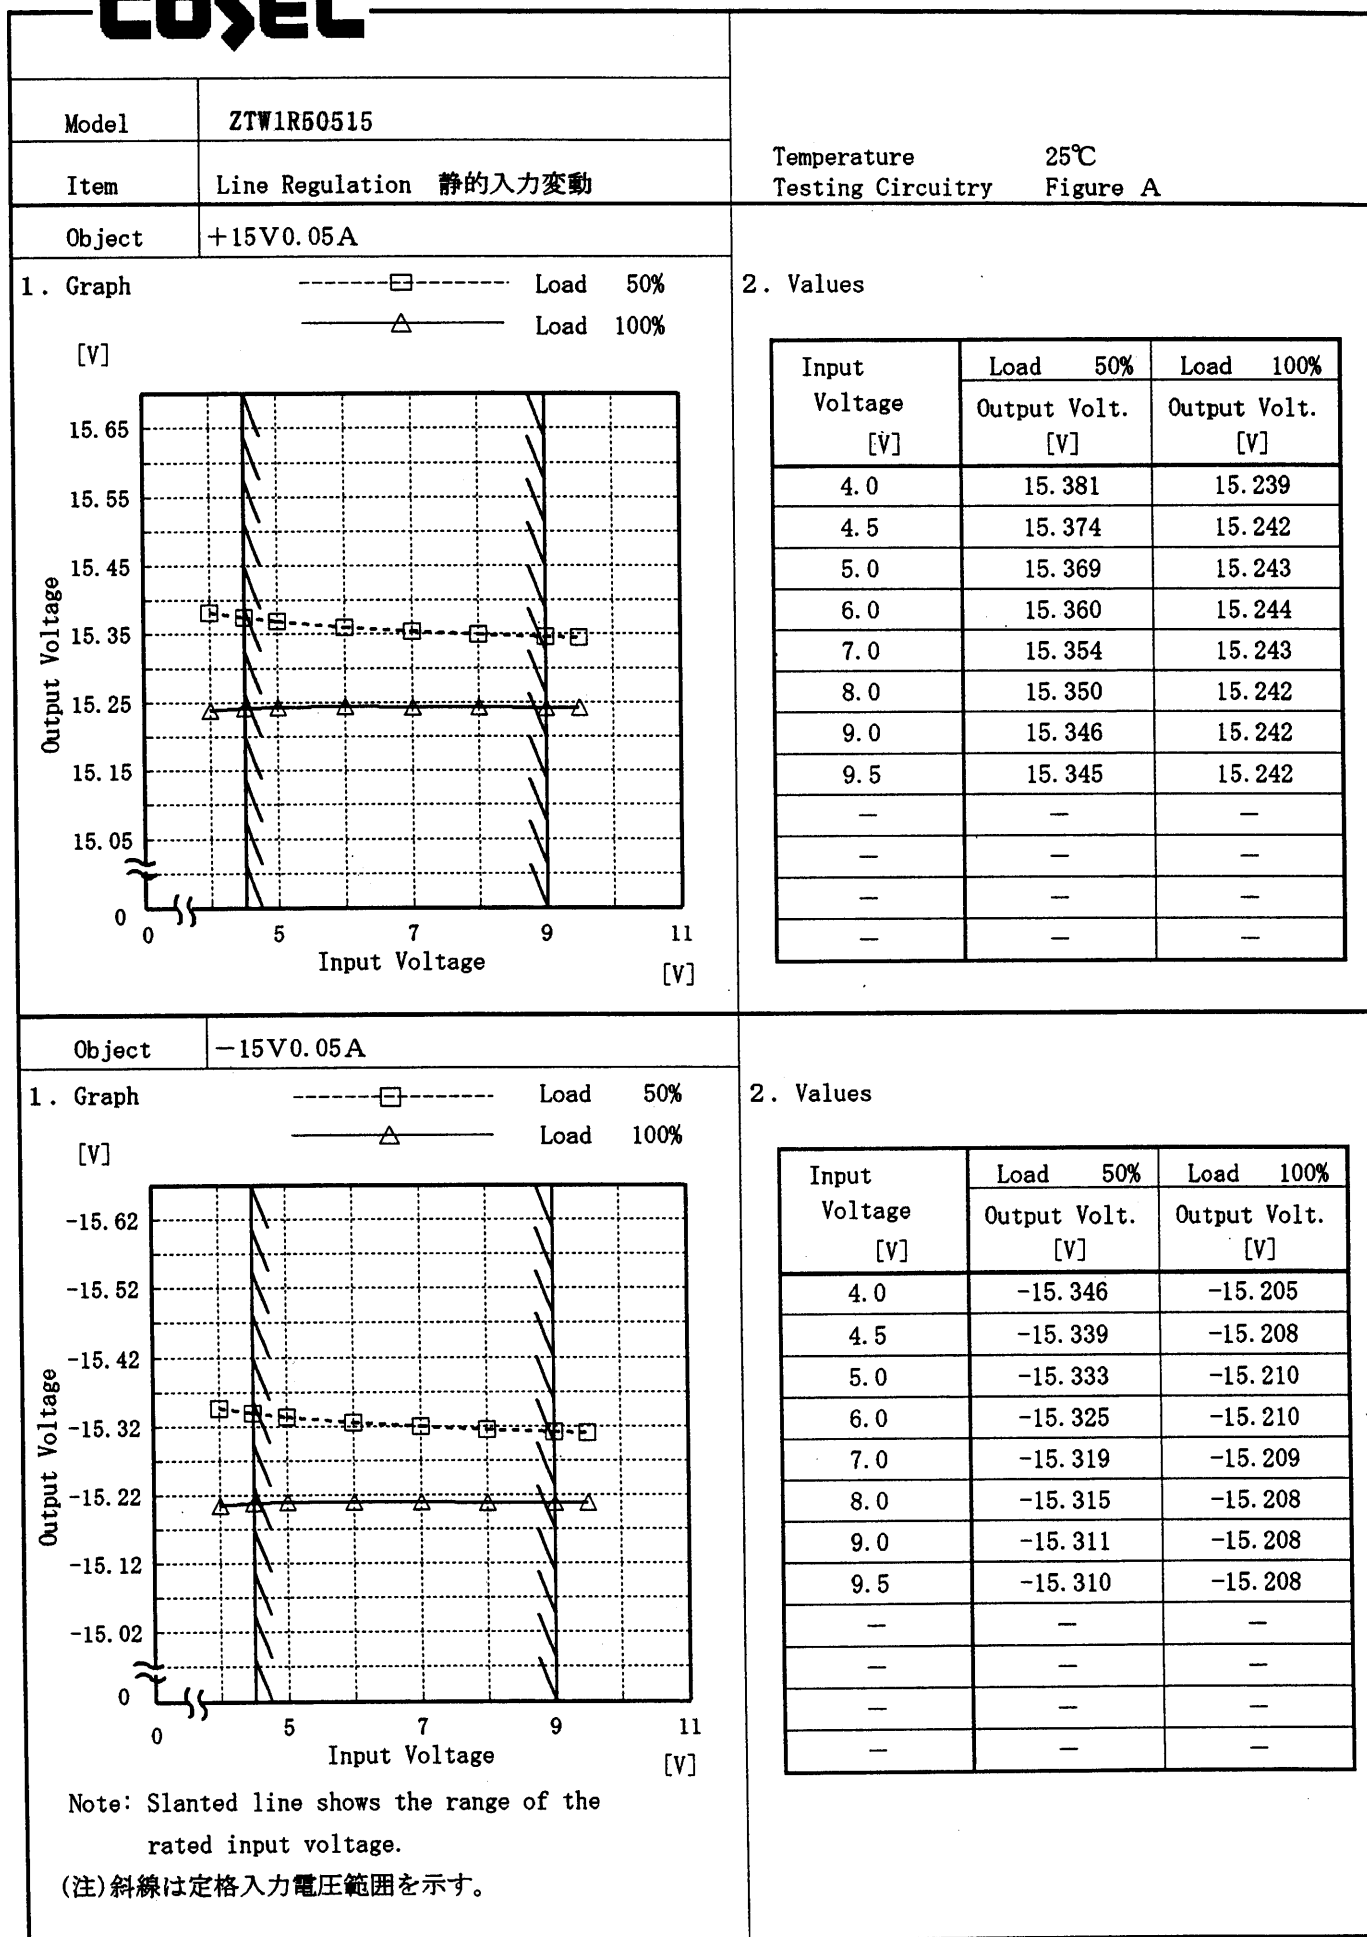**COSEL**

**COSEL**

Model

ZTW1R50515

Item

Efficiency 効率

Object


Temperature

25°C

Testing Circuitry

Figure A

## 1. Graph

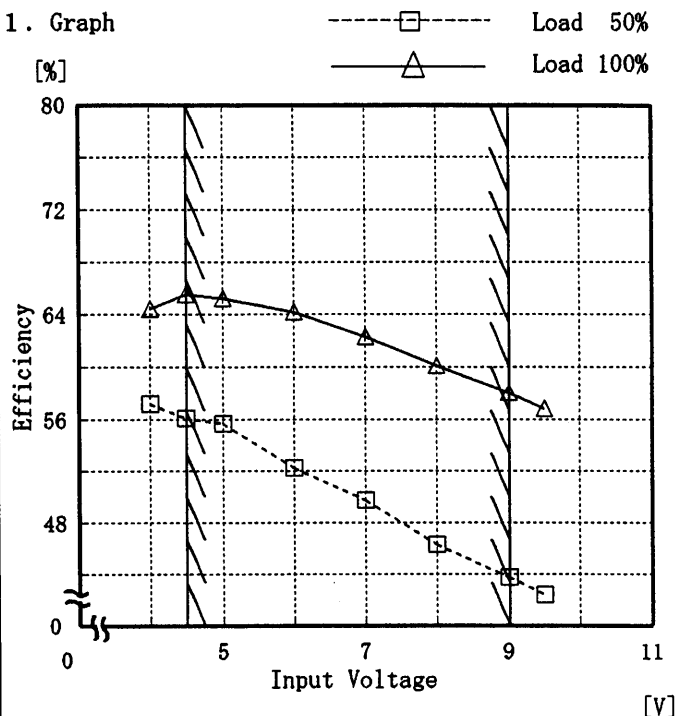

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

## 2. Values

Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
4.0	57.2	64.4
4.5	56.1	65.6
5.0	55.7	65.3
6.0	52.2	64.2
7.0	49.8	62.3
8.0	46.3	60.1
9.0	43.7	58.1
9.5	42.4	56.9
—	—	—
—	—	—
—	—	—
—	—	—


# COSEL

Model ZTW1R50515		Temperature 25°C																																																
Item	Load Regulation 静的負荷変動	Testing Circuitry Figure A																																																
Object	+15V0.05A																																																	
1. Graph		2. Values																																																
<div> <div>△</div> Input Volt. 4.5V <div>□</div> Input Volt. 5.0V <div>○</div> Input Volt. 9.0V </div>		<table> <tr> <th rowspan="2">Load Current [A]</th><th>Input Volt. 4.5[V]</th><th>Input Volt. 5.0[V]</th><th>Input Volt. 9.0[V]</th></tr> <tr> <th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr> <tr><td>0.000</td><td>15.558</td><td>15.552</td><td>15.530</td></tr> <tr><td>0.008</td><td>15.471</td><td>15.464</td><td>15.437</td></tr> <tr><td>0.016</td><td>15.417</td><td>15.411</td><td>15.386</td></tr> <tr><td>0.024</td><td>15.372</td><td>15.367</td><td>15.345</td></tr> <tr><td>0.032</td><td>15.330</td><td>15.326</td><td>15.310</td></tr> <tr><td>0.040</td><td>15.287</td><td>15.286</td><td>15.275</td></tr> <tr><td>0.048</td><td>15.247</td><td>15.248</td><td>15.244</td></tr> <tr><td>0.050</td><td>15.237</td><td>15.239</td><td>15.237</td></tr> <tr><td>0.055</td><td>15.212</td><td>15.215</td><td>15.218</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </table>		Load Current [A]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.000	15.558	15.552	15.530	0.008	15.471	15.464	15.437	0.016	15.417	15.411	15.386	0.024	15.372	15.367	15.345	0.032	15.330	15.326	15.310	0.040	15.287	15.286	15.275	0.048	15.247	15.248	15.244	0.050	15.237	15.239	15.237	0.055	15.212	15.215	15.218	—	—	—	—
Load Current [A]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]																																															
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																															
0.000	15.558	15.552	15.530																																															
0.008	15.471	15.464	15.437																																															
0.016	15.417	15.411	15.386																																															
0.024	15.372	15.367	15.345																																															
0.032	15.330	15.326	15.310																																															
0.040	15.287	15.286	15.275																																															
0.048	15.247	15.248	15.244																																															
0.050	15.237	15.239	15.237																																															
0.055	15.212	15.215	15.218																																															
—	—	—	—																																															
Object -15V0.05A																																																		
1. Graph		2. Values																																																
<div> <div>△</div> Input Volt. 4.5V <div>□</div> Input Volt. 5.0V <div>○</div> Input Volt. 9.0V </div>		<table> <tr> <th rowspan="2">Load Current [A]</th><th>Input Volt. 4.5[V]</th><th>Input Volt. 5.0[V]</th><th>Input Volt. 9.0[V]</th></tr> <tr> <th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr> <tr><td>0.000</td><td>-15.499</td><td>-15.493</td><td>-15.468</td></tr> <tr><td>0.008</td><td>-15.426</td><td>-15.419</td><td>-15.393</td></tr> <tr><td>0.016</td><td>-15.374</td><td>-15.368</td><td>-15.344</td></tr> <tr><td>0.024</td><td>-15.329</td><td>-15.323</td><td>-15.304</td></tr> <tr><td>0.032</td><td>-15.286</td><td>-15.282</td><td>-15.268</td></tr> <tr><td>0.040</td><td>-15.245</td><td>-15.244</td><td>-15.235</td></tr> <tr><td>0.048</td><td>-15.204</td><td>-15.206</td><td>-15.204</td></tr> <tr><td>0.050</td><td>-15.194</td><td>-15.196</td><td>-15.196</td></tr> <tr><td>0.055</td><td>-15.169</td><td>-15.173</td><td>-15.177</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </table>		Load Current [A]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.000	-15.499	-15.493	-15.468	0.008	-15.426	-15.419	-15.393	0.016	-15.374	-15.368	-15.344	0.024	-15.329	-15.323	-15.304	0.032	-15.286	-15.282	-15.268	0.040	-15.245	-15.244	-15.235	0.048	-15.204	-15.206	-15.204	0.050	-15.194	-15.196	-15.196	0.055	-15.169	-15.173	-15.177	—	—	—	—
Load Current [A]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]																																															
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																															
0.000	-15.499	-15.493	-15.468																																															
0.008	-15.426	-15.419	-15.393																																															
0.016	-15.374	-15.368	-15.344																																															
0.024	-15.329	-15.323	-15.304																																															
0.032	-15.286	-15.282	-15.268																																															
0.040	-15.245	-15.244	-15.235																																															
0.048	-15.204	-15.206	-15.204																																															
0.050	-15.194	-15.196	-15.196																																															
0.055	-15.169	-15.173	-15.177																																															
—	—	—	—																																															
Note: Slanted line shows the range of the rated load current. (注) 斜線は定格負荷電流範囲を示す。																																																		

# COSEL

Model		ZTW1R50515	Temperature		25°C																																						
Item		Ripple Voltage (by Load Current) リップル電圧 (負荷電流特性)	Testing Circuitry		Figure A																																						
Object		+15V 0.05A																																									
1. Graph			2. Values																																								
<div><div>[mV]</div><div><div>-----□-----</div>Input Volt. 4.5V</div><div><div>-----△-----</div>Input Volt. 9.0V</div><div><div><div>80</div><div>60</div><div>40</div><div>20</div><div>0</div></div><div><div>Ripple Voltage</div></div><div><div>0</div><div>0.02</div><div>0.04</div><div>0.06</div></div><div><div>Load Current</div></div><div><div>[A]</div></div></div></div>			<table><tr><th rowspan="2">Load Current [A]</th><th>Input Volt. 4.5 [V]</th><th>Input Volt. 9.0 [V]</th></tr><tr><th>Ripple Output Volt. [mV]</th><th>Ripple Output Volt. [mV]</th></tr><tr><td>0.000</td><td>15</td><td>15</td></tr><tr><td>0.008</td><td>15</td><td>15</td></tr><tr><td>0.016</td><td>15</td><td>15</td></tr><tr><td>0.024</td><td>20</td><td>20</td></tr><tr><td>0.032</td><td>20</td><td>20</td></tr><tr><td>0.040</td><td>25</td><td>25</td></tr><tr><td>0.048</td><td>30</td><td>25</td></tr><tr><td>0.050</td><td>30</td><td>25</td></tr><tr><td>0.055</td><td>35</td><td>25</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>			Load Current [A]	Input Volt. 4.5 [V]	Input Volt. 9.0 [V]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	0.000	15	15	0.008	15	15	0.016	15	15	0.024	20	20	0.032	20	20	0.040	25	25	0.048	30	25	0.050	30	25	0.055	35	25	—	—	—	—	—	—
Load Current [A]	Input Volt. 4.5 [V]	Input Volt. 9.0 [V]																																									
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																									
0.000	15	15																																									
0.008	15	15																																									
0.016	15	15																																									
0.024	20	20																																									
0.032	20	20																																									
0.040	25	25																																									
0.048	30	25																																									
0.050	30	25																																									
0.055	35	25																																									
—	—	—																																									
—	—	—																																									
<p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップル電圧は、下図 p-p 値で示される。</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p> <div><div>T1: Due to AC Input Line 入力商用周期</div><div>T2: Due to Switching スイッチング周期</div><div><div><div>Ripple [mVp-p]</div><div><div><div>T2</div></div><div><div>T1</div></div></div></div></div></div>																																											
Fig. Complex Ripple Wave Form																																											
図 リップル波形詳細図																																											

# COSEL

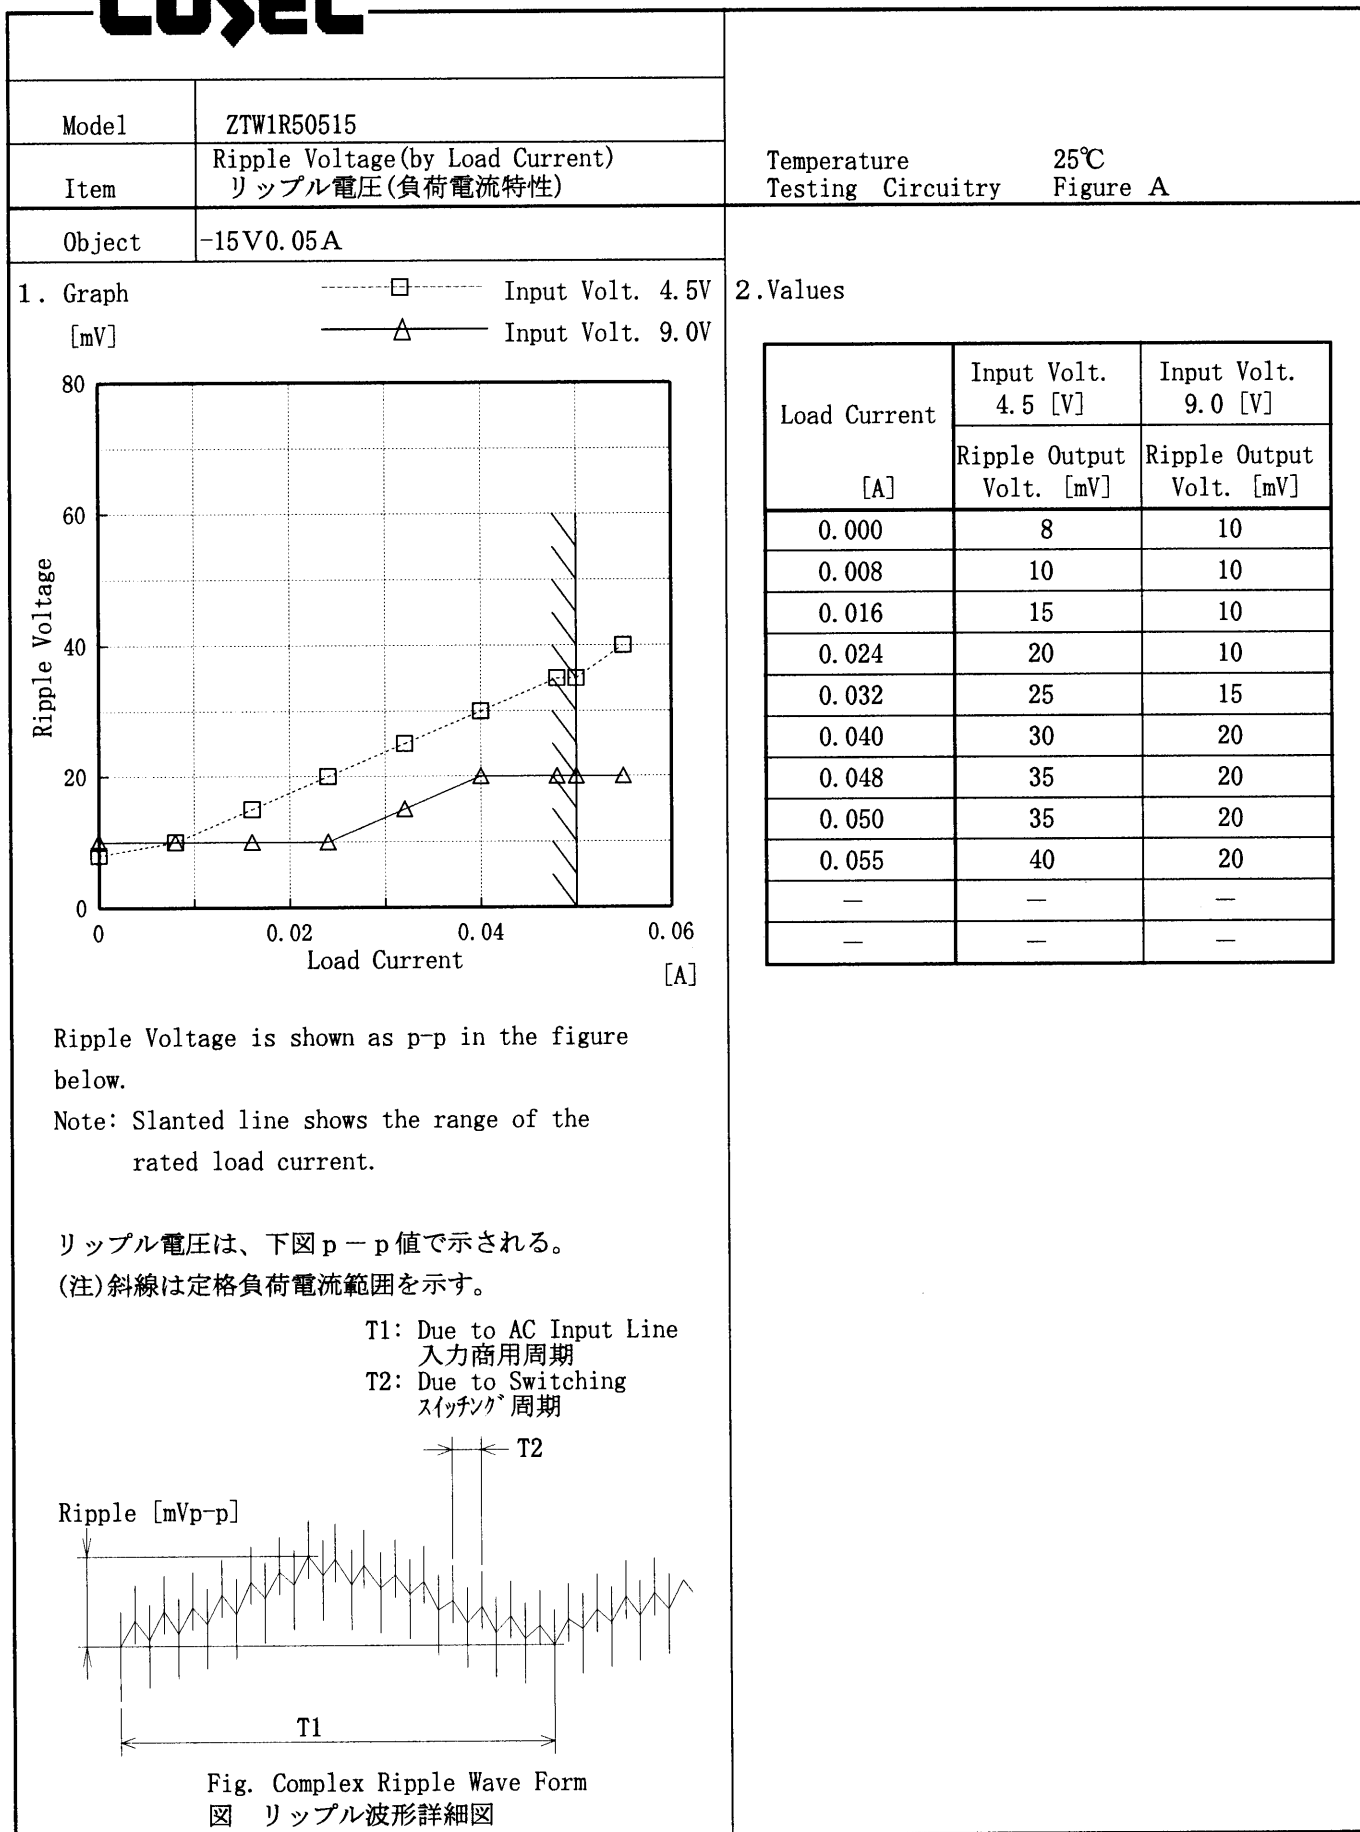



# COSEL

Model		ZTW1R50515	
Item		Ripple-Noise   リップルノイズ	
Object		+15V0.05A	
1. Graph		2. Values	

<



# COSEL

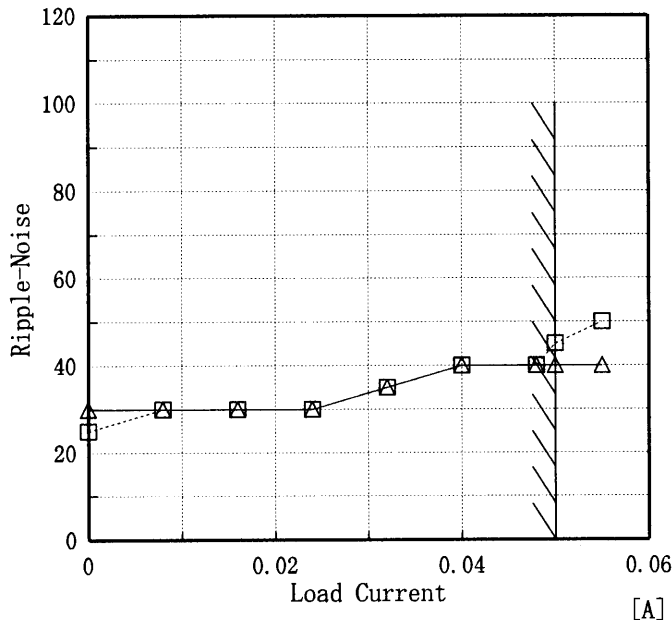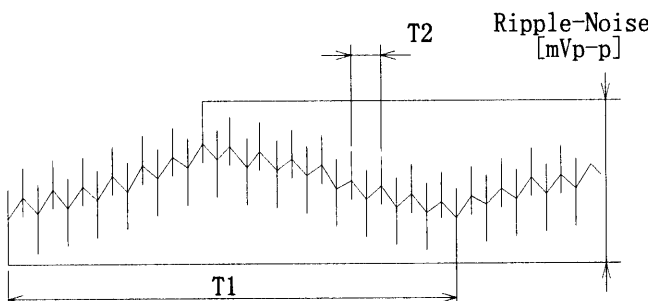Model		ZTW1R50515	Temperature		25℃																																						
Item		Ripple-Noise   リップルノイズ	Testing Circuitry		Figure A																																						
Object		-15V0.05A																																									
1. Graph			2. Values																																								
<div><div>-----□-----    Input Volt. 4.5V</div><div>—————△————    Input Volt. 9.0V</div></div>			<table><tr><th rowspan="2">Load current [A]</th><th>Input Volt. 4.5 [V]</th><th>Input Volt. 9.0 [V]</th></tr><tr><th>Ripple-Noise [mV]</th><th>Ripple-Noise [mV]</th></tr><tr><td>0.000</td><td>25</td><td>30</td></tr><tr><td>0.008</td><td>30</td><td>30</td></tr><tr><td>0.016</td><td>30</td><td>30</td></tr><tr><td>0.024</td><td>30</td><td>30</td></tr><tr><td>0.032</td><td>35</td><td>35</td></tr><tr><td>0.040</td><td>40</td><td>40</td></tr><tr><td>0.048</td><td>40</td><td>40</td></tr><tr><td>0.050</td><td>45</td><td>40</td></tr><tr><td>0.055</td><td>50</td><td>40</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>			Load current [A]	Input Volt. 4.5 [V]	Input Volt. 9.0 [V]	Ripple-Noise [mV]	Ripple-Noise [mV]	0.000	25	30	0.008	30	30	0.016	30	30	0.024	30	30	0.032	35	35	0.040	40	40	0.048	40	40	0.050	45	40	0.055	50	40	—	—	—	—	—	—
Load current [A]	Input Volt. 4.5 [V]	Input Volt. 9.0 [V]																																									
	Ripple-Noise [mV]	Ripple-Noise [mV]																																									
0.000	25	30																																									
0.008	30	30																																									
0.016	30	30																																									
0.024	30	30																																									
0.032	35	35																																									
0.040	40	40																																									
0.048	40	40																																									
0.050	45	40																																									
0.055	50	40																																									
—	—	—																																									
—	—	—																																									
<p>Ripple-Noise is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップルノイズは、下図 p - p 値で示される。</p> <p>(注)斜線は定格負荷電流範囲を示す。</p> <div><div>T1: Due to AC Input Line 入力商用周期</div><div>T2: Due to Switching スイッチング周期</div></div>																																											
Fig. Complex Ripple Wave Form																																											
図   リップル波形詳細図																																											

# COSEL

Model	ZTW1R50515	Temperature	25°C																																																				
Item	Overcurrent Protection 過電流保護	Testing Circuitry	Figure A																																																				
Object	+15V0.05A																																																						
1. Graph		2. Values																																																					
<p> <span style="border-bottom: 1px dashed black; display: inline-block; width: 50px;"></span> Input Volt. 4.5 V  <span style="border-bottom: 1px solid black; display: inline-block; width: 50px;"></span> Input Volt. 5.0 V  <span style="border-bottom: 3px solid black; display: inline-block; width: 50px;"></span> Input Volt. 9.0 V         </p>		<table> <tr> <th>Output Voltage [V]</th><th>Input Volt. 4.5[V] Load Current [A]</th><th>Input Volt. 5.0[V] Load Current [A]</th><th>Input Volt. 9.0[V] Load Current [A]</th></tr> <tr><td>15.00</td><td>0.086</td><td>0.089</td><td>0.109</td></tr> <tr><td>14.25</td><td>0.114</td><td>0.118</td><td>0.113</td></tr> <tr><td>13.50</td><td>0.120</td><td>0.123</td><td>0.117</td></tr> <tr><td>12.00</td><td>0.131</td><td>0.134</td><td>0.124</td></tr> <tr><td>10.50</td><td>0.142</td><td>0.144</td><td>0.129</td></tr> <tr><td>9.00</td><td>0.154</td><td>0.155</td><td>0.135</td></tr> <tr><td>7.50</td><td>0.166</td><td>0.165</td><td>0.140</td></tr> <tr><td>6.00</td><td>0.176</td><td>0.173</td><td>0.143</td></tr> <tr><td>4.50</td><td>0.186</td><td>0.178</td><td>0.145</td></tr> <tr><td>3.00</td><td>0.193</td><td>0.183</td><td>0.147</td></tr> <tr><td>1.50</td><td>0.203</td><td>0.190</td><td>0.155</td></tr> <tr><td>0.00</td><td>0.145</td><td>0.134</td><td>0.161</td></tr> </table>		Output Voltage [V]	Input Volt. 4.5[V] Load Current [A]	Input Volt. 5.0[V] Load Current [A]	Input Volt. 9.0[V] Load Current [A]	15.00	0.086	0.089	0.109	14.25	0.114	0.118	0.113	13.50	0.120	0.123	0.117	12.00	0.131	0.134	0.124	10.50	0.142	0.144	0.129	9.00	0.154	0.155	0.135	7.50	0.166	0.165	0.140	6.00	0.176	0.173	0.143	4.50	0.186	0.178	0.145	3.00	0.193	0.183	0.147	1.50	0.203	0.190	0.155	0.00	0.145	0.134	0.161
Output Voltage [V]	Input Volt. 4.5[V] Load Current [A]	Input Volt. 5.0[V] Load Current [A]	Input Volt. 9.0[V] Load Current [A]																																																				
15.00	0.086	0.089	0.109																																																				
14.25	0.114	0.118	0.113																																																				
13.50	0.120	0.123	0.117																																																				
12.00	0.131	0.134	0.124																																																				
10.50	0.142	0.144	0.129																																																				
9.00	0.154	0.155	0.135																																																				
7.50	0.166	0.165	0.140																																																				
6.00	0.176	0.173	0.143																																																				
4.50	0.186	0.178	0.145																																																				
3.00	0.193	0.183	0.147																																																				
1.50	0.203	0.190	0.155																																																				
0.00	0.145	0.134	0.161																																																				
Object	-15V0.05A																																																						
1. Graph		2. Values																																																					
<p> <span style="border-bottom: 1px dashed black; display: inline-block; width: 50px;"></span> Input Volt. 4.5 V  <span style="border-bottom: 1px solid black; display: inline-block; width: 50px;"></span> Input Volt. 5.0 V  <span style="border-bottom: 3px solid black; display: inline-block; width: 50px;"></span> Input Volt. 9.0 V         </p>		<table> <tr> <th>Output Voltage [V]</th><th>Input Volt. 4.5[V] Load Current [A]</th><th>Input Volt. 5.0[V] Load Current [A]</th><th>Input Volt. 9.0[V] Load Current [A]</th></tr> <tr><td>-15.00</td><td>0.094</td><td>0.101</td><td>0.089</td></tr> <tr><td>-14.25</td><td>0.119</td><td>0.121</td><td>0.116</td></tr> <tr><td>-13.50</td><td>0.124</td><td>0.126</td><td>0.120</td></tr> <tr><td>-12.00</td><td>0.136</td><td>0.136</td><td>0.126</td></tr> <tr><td>-10.50</td><td>0.147</td><td>0.147</td><td>0.133</td></tr> <tr><td>-9.00</td><td>0.159</td><td>0.158</td><td>0.139</td></tr> <tr><td>-7.50</td><td>0.171</td><td>0.168</td><td>0.144</td></tr> <tr><td>-6.00</td><td>0.182</td><td>0.177</td><td>0.148</td></tr> <tr><td>-4.50</td><td>0.191</td><td>0.183</td><td>0.150</td></tr> <tr><td>-3.00</td><td>0.199</td><td>0.189</td><td>0.152</td></tr> <tr><td>-1.50</td><td>0.209</td><td>0.196</td><td>0.160</td></tr> <tr><td>0.00</td><td>0.171</td><td>0.139</td><td>0.200</td></tr> </table>		Output Voltage [V]	Input Volt. 4.5[V] Load Current [A]	Input Volt. 5.0[V] Load Current [A]	Input Volt. 9.0[V] Load Current [A]	-15.00	0.094	0.101	0.089	-14.25	0.119	0.121	0.116	-13.50	0.124	0.126	0.120	-12.00	0.136	0.136	0.126	-10.50	0.147	0.147	0.133	-9.00	0.159	0.158	0.139	-7.50	0.171	0.168	0.144	-6.00	0.182	0.177	0.148	-4.50	0.191	0.183	0.150	-3.00	0.199	0.189	0.152	-1.50	0.209	0.196	0.160	0.00	0.171	0.139	0.200
Output Voltage [V]	Input Volt. 4.5[V] Load Current [A]	Input Volt. 5.0[V] Load Current [A]	Input Volt. 9.0[V] Load Current [A]																																																				
-15.00	0.094	0.101	0.089																																																				
-14.25	0.119	0.121	0.116																																																				
-13.50	0.124	0.126	0.120																																																				
-12.00	0.136	0.136	0.126																																																				
-10.50	0.147	0.147	0.133																																																				
-9.00	0.159	0.158	0.139																																																				
-7.50	0.171	0.168	0.144																																																				
-6.00	0.182	0.177	0.148																																																				
-4.50	0.191	0.183	0.150																																																				
-3.00	0.199	0.189	0.152																																																				
-1.50	0.209	0.196	0.160																																																				
0.00	0.171	0.139	0.200																																																				
<p>Note: Slanted line shows the range of the rated load current.</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>																																																							

# COSEL

Model	ZTW1R50515		
Item	Dynamic Load Response 動的負荷変動	Temperature	25°C
Object	+15V0.05A	Testing Circuitry	Figure A

Input Volt. 5.0 V



Cycle 100 mS

Load Current

Min. Load ↔

Load 100 %



200 mV/div

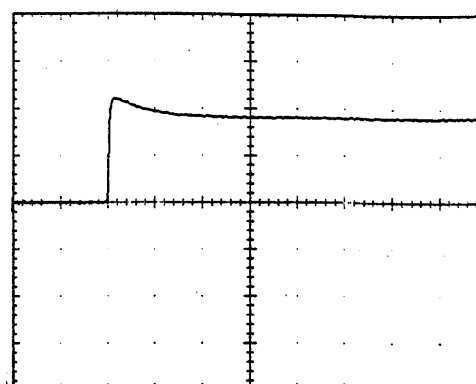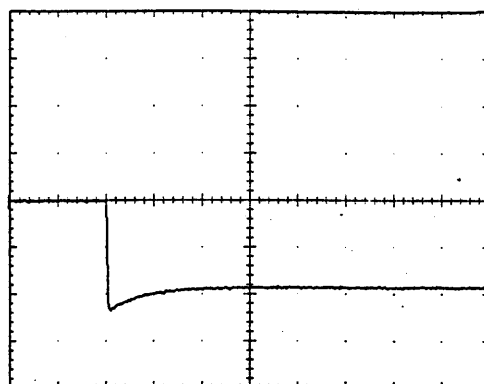

Min. Load ↔

Load 50 %



200 mV/div

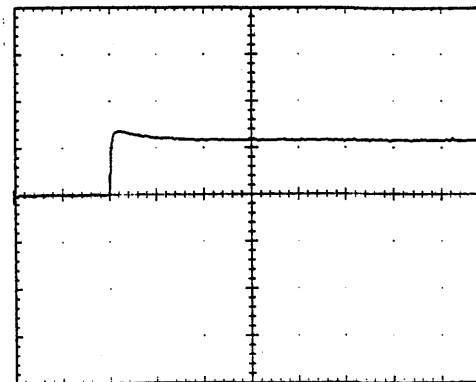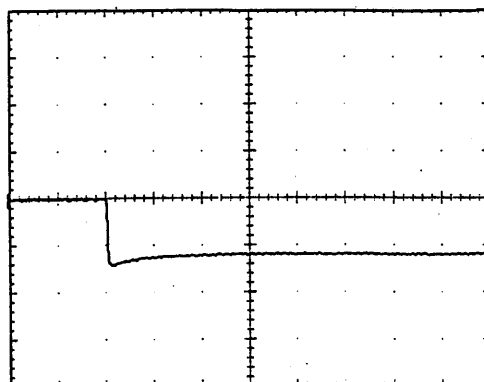

Load 50% ↔

Load 100 %

200 mV/div

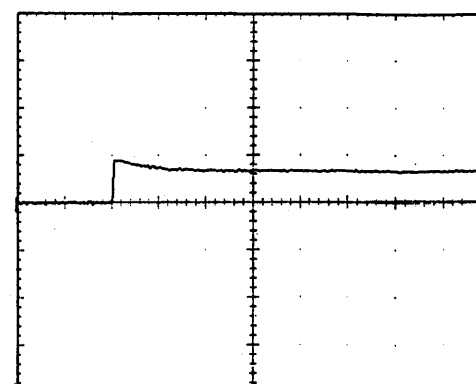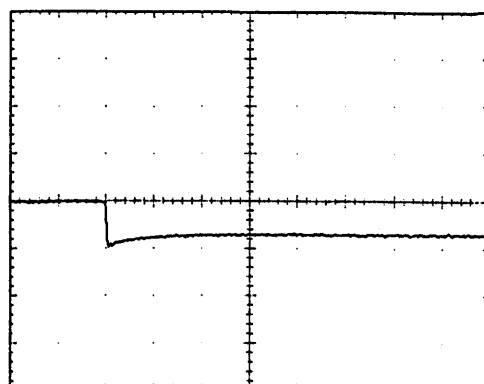

1 mS/div

# COSEL

Model	ZTW1R50515	Temperature 25°C Testing Circuitry Figure A
Item	Dynamic Load Responce 動的負荷変動	
Object	-15V0.05A	


Input Volt. 5.0 V

Cycle 100 mS

Load Current


Min. Load ↔  
Load 100 %

200 mV/div

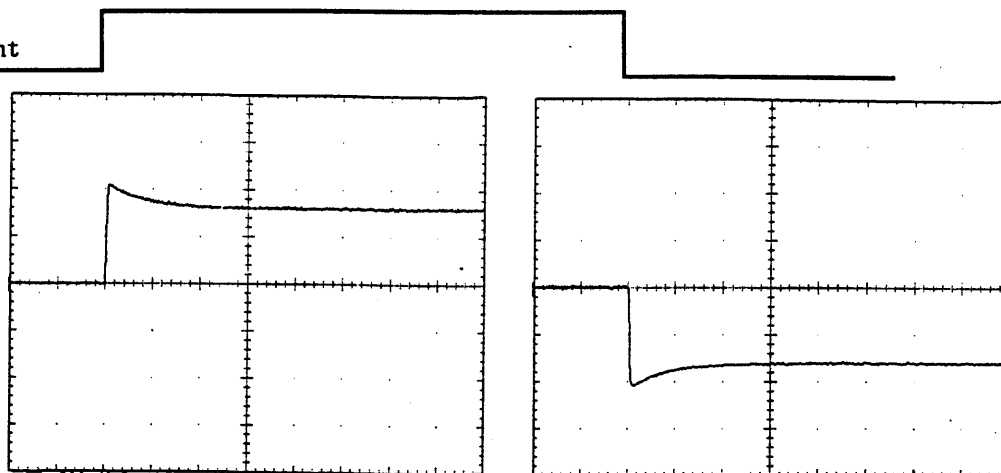


Min. Load ↔  
Load 50 %

200 mV/div

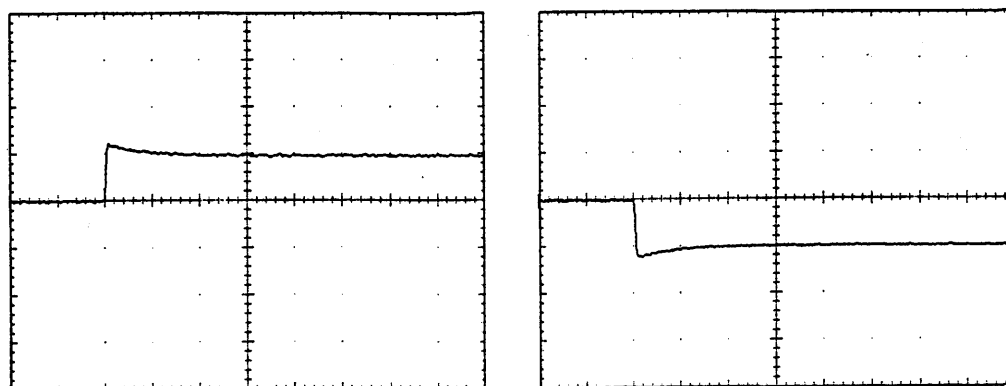

Load 50% ↔  
Load 100 %

200 mV/div

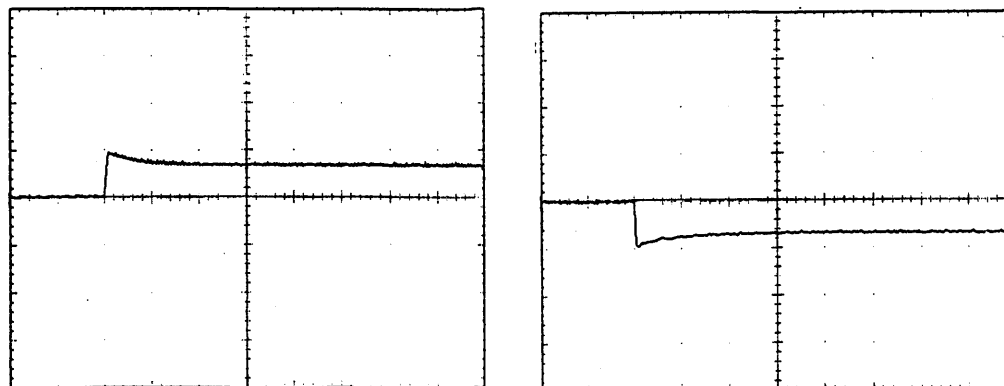


1 mS/div

**COSEL**

Model	ZTW1R50515	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+15V0.05A		

## 1. Graph


Input Volt. 4.5 V

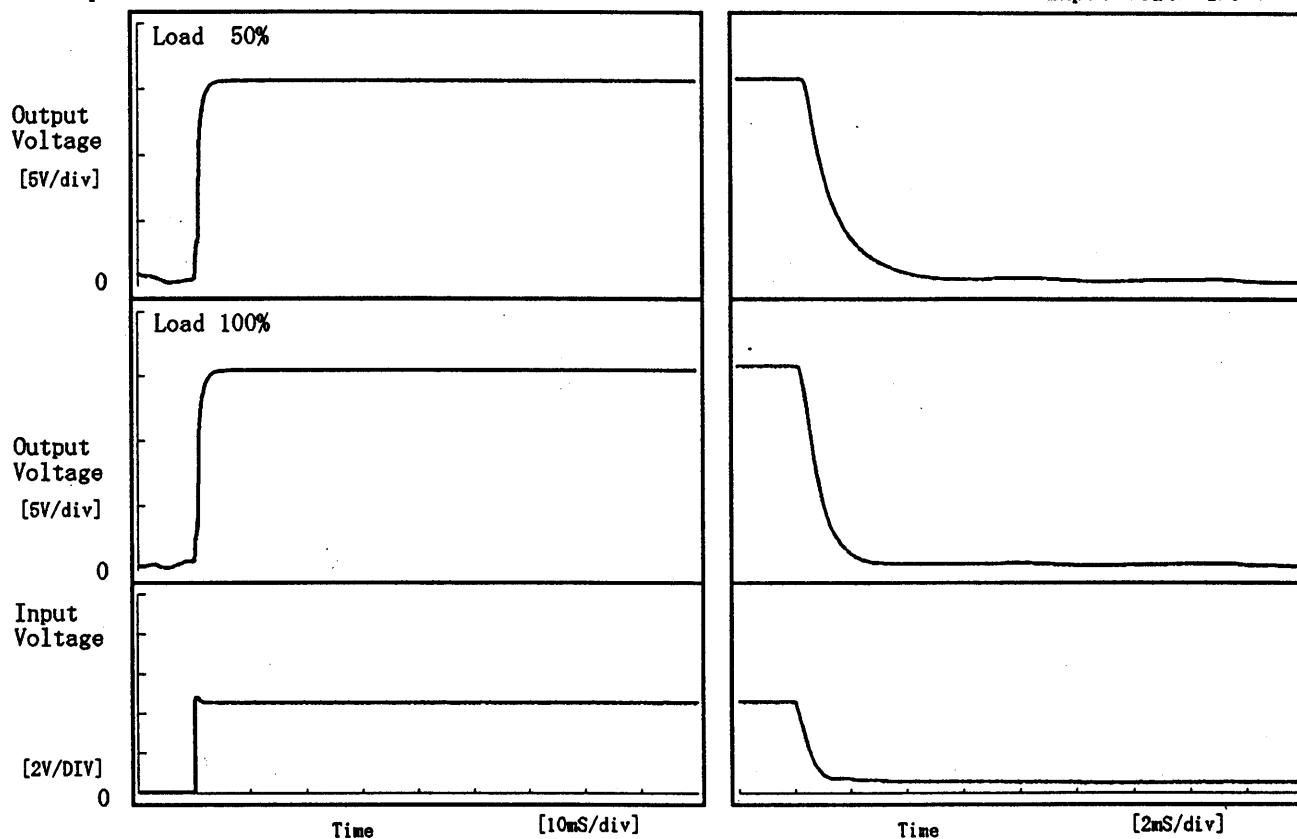

## 2. Values

[ms]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.10	1.55	1.65	0.59	2.56
100 %	0.10	1.60	1.70	0.39	1.43

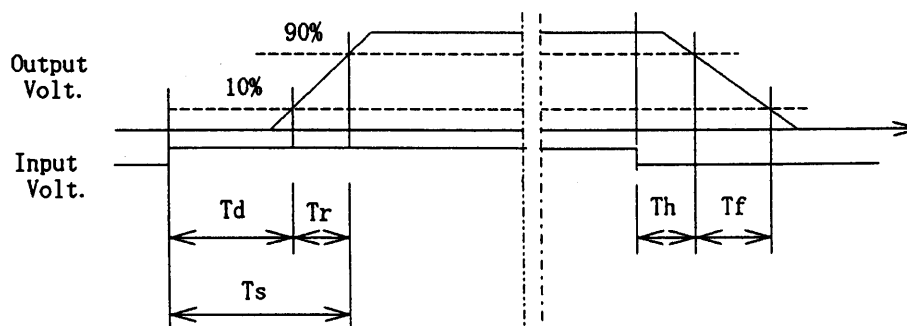

**COSEL**

Model ZTW1R50515


Item Rise and Fall Time 立上り、立下り時間

Temperature 25°C  
Testing Circuitry Figure A

Object -15V0.05A

## 1. Graph


Input Volt. 4.5 V

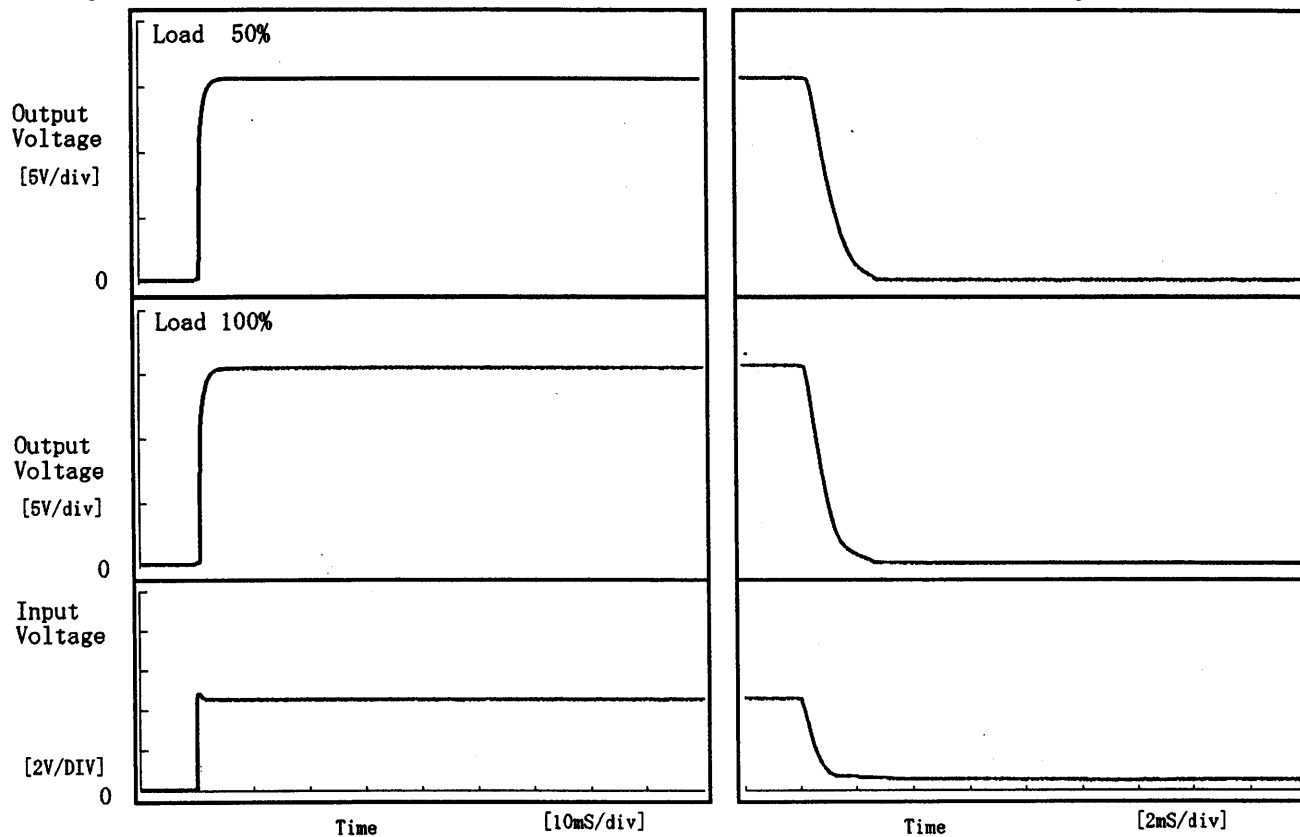

## 2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.65	1.00	1.65	0.57	1.44
100 %	0.65	1.05	1.70	0.37	1.25

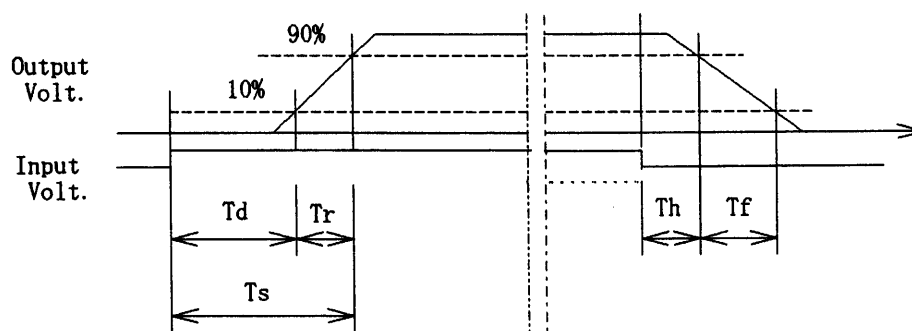

**COSEL**


Model ZTW1R50515

Item Ambient Temperature Drift  
周囲温度変動

Object +15V0.05A

Testing Circuitry Figure A

## 1. Graph

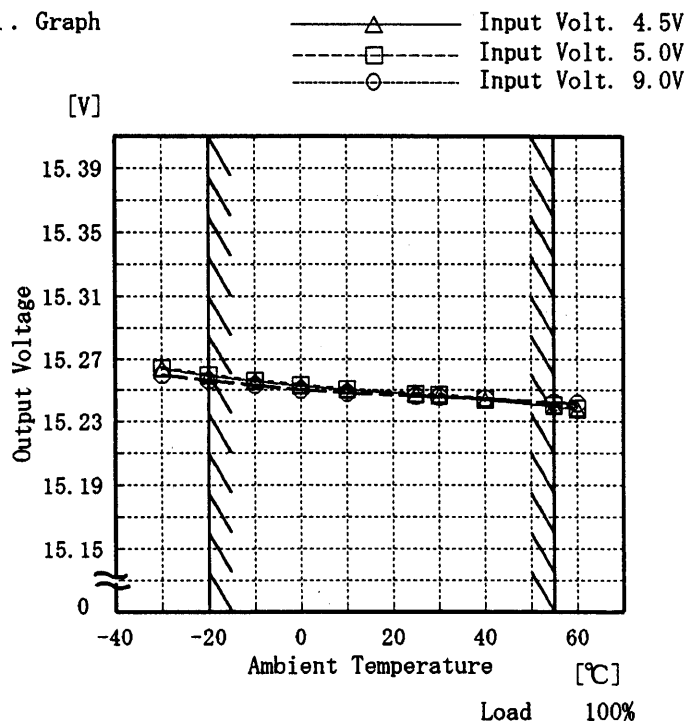


## 2. Values

Temperature	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]
[°C]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
-30	15.264	15.264	15.260
-20	15.259	15.260	15.256
-10	15.256	15.256	15.253
0	15.252	15.253	15.250
10	15.250	15.251	15.248
25	15.247	15.248	15.246
30	15.246	15.247	15.246
40	15.244	15.245	15.244
55	15.239	15.241	15.242
60	15.237	15.239	15.241
-	-	-	-

Object -15V0.05A

## 1. Graph

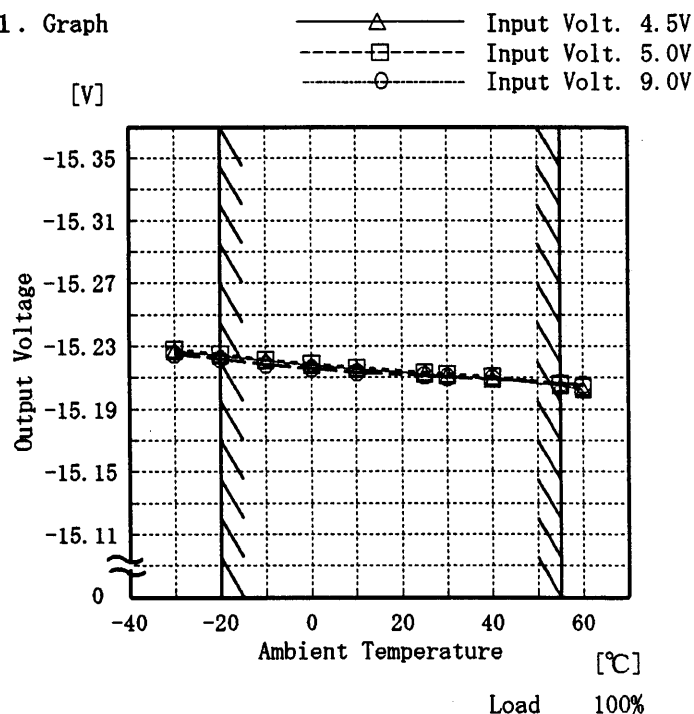

## 2. Values

Temperature	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]
[°C]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
-30	-15.227	-15.228	-15.225
-20	-15.224	-15.225	-15.222
-10	-15.221	-15.221	-15.218
0	-15.218	-15.219	-15.216
10	-15.215	-15.216	-15.213
25	-15.212	-15.213	-15.211
30	-15.211	-15.212	-15.210
40	-15.209	-15.210	-15.209
55	-15.205	-15.206	-15.207
60	-15.203	-15.204	-15.206
-	-	-	-

Note: Slanted line shows the range of the rated  
ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

**COSEL**

Model ZTW1R50515


Item Minimum Input Voltage for Regulated Output Voltage  
最低レギュレーション電圧

Object +15V0.05A

## 1. Graph

[V]

-----□----- Load 50%  
 -----△----- Load 100%

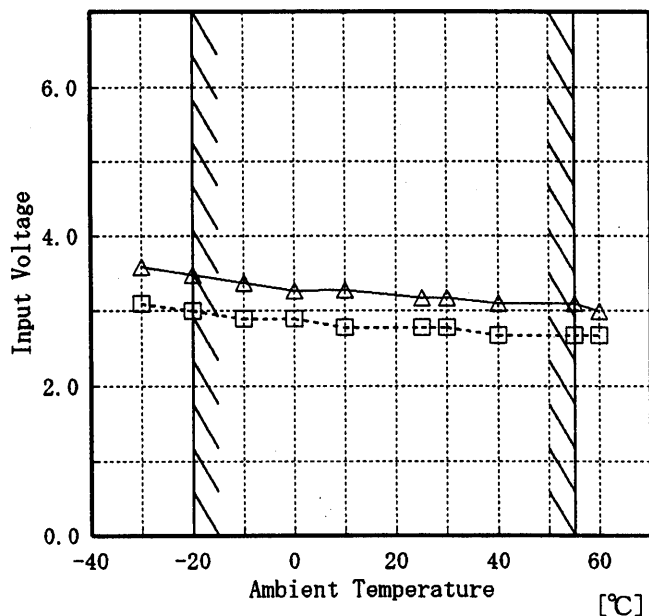

Testing Circuitry Figure A


## 2. Values

Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]
-30	3.1	3.6
-20	3.0	3.5
-10	2.9	3.4
0	2.9	3.3
10	2.8	3.3
25	2.8	3.2
30	2.8	3.2
40	2.7	3.1
55	2.7	3.1
60	2.7	3.0
—	—	—

Object -15V0.05A

[V]

-----□----- Load 50%  
 -----△----- Load 100%

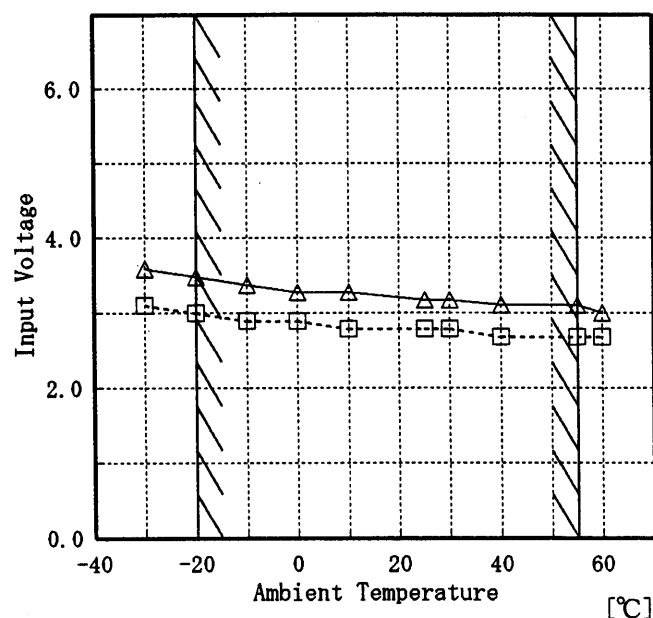

## 2. Values

Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]
-30	3.1	3.6
-20	3.0	3.5
-10	2.9	3.4
0	2.9	3.3
10	2.8	3.3
25	2.8	3.2
30	2.8	3.2
40	2.7	3.1
55	2.7	3.1
60	2.7	3.0
—	—	—

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。



# COSEL

Model		ZTW1R50515		Testing Circuitry      Figure A	
Item		Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)			
Object		+15V 0.05A			
1. Graph		-----□----- Load 50% -----△----- Load 100%			
[mV]					
100					
80					
60					
40					
20					
0					
Ripple Voltage					
-40		-20			
		0			
		20			
		40			
		60			
		Ambient Temperature [°C]			
Input Volt. 4.5 V					
Object		-15V 0.05A			
1. Graph		-----□----- Load 50% -----△----- Load 100%			
100					
80					
60					
40					
20					
0					
Ripple Voltage					
-40		-20			
		0			
		20			
		40			
		60			
		Ambient Temperature [°C]			
Input Volt. 4.5 V					
Note: Slanted line shows the range of the rated ambient temperature.					
(注) 斜線は定格周囲温度範囲を示す。					
2. Values					

**COSEL**

Model

ZTW1R50515

Item

Time Lapse Drift 経時ドリフト

Temperature

25 °C


Testing Circuitry

Figure A

Object

+15V0.05A

## 1. Graph

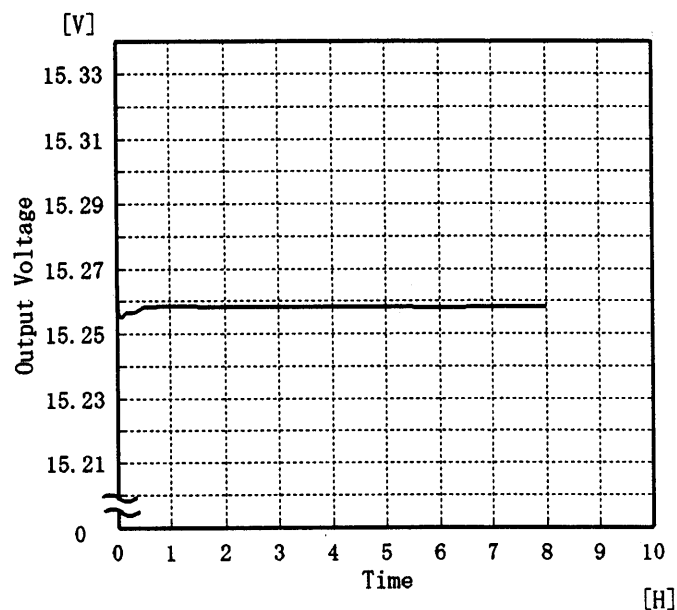


## 2. Values

Time since start [H]	Output Voltage [V]
0.0	15.262
0.5	15.259
1.0	15.259
2.0	15.258
3.0	15.258
4.0	15.258
5.0	15.258
6.0	15.258
7.0	15.258
8.0	15.258

Object

-15V0.05A

## 1. Graph

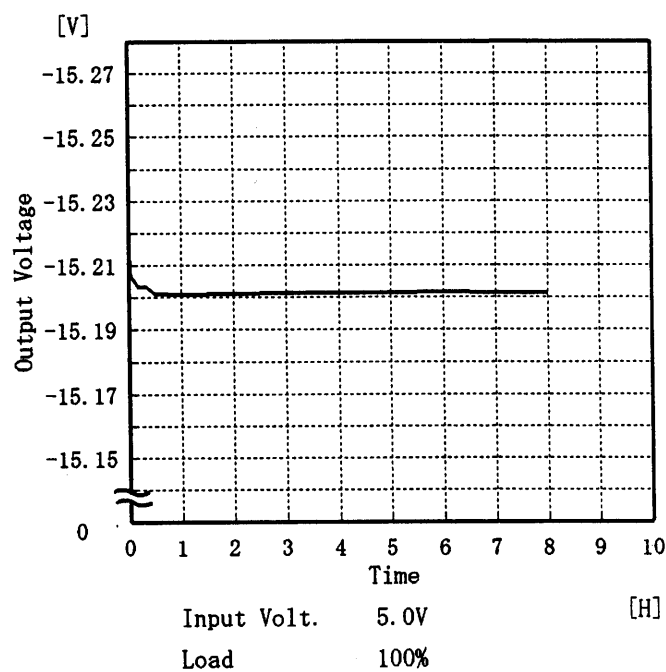

## 2. Values

Time since start [H]	Output Voltage [V]
0.0	-15.215
0.5	-15.201
1.0	-15.201
2.0	-15.201
3.0	-15.201
4.0	-15.202
5.0	-15.202
6.0	-15.202
7.0	-15.201
8.0	-15.202

**COSEL**

LOTEL

		Testing Circuitry    Figure A
Model	ZTW1R50515	
Item	Output Voltage Accuracy    定電圧精度	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

- Temperature    : -20~55 ℃
- Input Voltage : 4.5~9.0 V
- Load Current ( AVR 1 ) : 0.00~0.05 A
- ( AVR 2 ) : 0.00~0.05 A

\* Output Voltage Accuracy = ± (Maximum of Output Voltage    - Minimum of Output Voltage) / 2

\* Output Voltage Accuracy (Ration)    =     $\frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

- 周囲温度                -20~55 ℃
- 入力電圧                4.5~9.0 V
- 負荷電流 (AVR 1) 0.00~0.05 A
- (AVR 2) 0.00~0.05 A

\* 定電圧精度 (変動値)    =    ± (出力電圧の最高値 - 出力電圧の最低値) / 2

\* 定電圧精度 (変動率)    =     $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Object	+15V0.05A
--------	-----------

Item	Temperature [℃]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy (Ration) [%]
Maximum Voltage	-20	5.0	0.05	15.257	±155	±1.1
Minimum Voltage	25	4.5	0.00	14.948		

Object	-15V0.05A
--------	-----------

Item	Temperature [℃]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy (Ration) [%]
Maximum Voltage	-20	5.0	0.05	-15.223	±161	±1.1
Minimum Voltage	55	4.5	0.00	-14.902		

- 17 -

BC-3119

# COSEL

		Testing Circuitry      Figure A
Model	ZTW1R50515	
Item	Condensation 結露特性	
Object	+15V0.05A	

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で－10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。

2. Values

Item	Data	Testing Conditions
Output Voltage [V]	15.304	Input Volt. : 5V, Load Current:0.05A
Line Regulation [mV]	5	Input Volt. : 4.5～9V, Load Current:0.05A
Load Regulation [mV]	324	Input Volt. : 5V, Load Current:0～0.05A


# COSEL

Model	ZTW1R50515																		
Item	Condensation 結露特性	Testing Circuitry	Figure A																
Object	−15V0.05A																		
<p>1. Condensation test</p> <p>Testing procedure is as follows.</p> <p>① Keeping and cooling the unit in a tank at −10℃ for an hour with the input off.</p> <p>② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.</p> <p>③ Testing electrical characteristics of the unit to confirm there be no fault.</p>																			
<p>1. 結露特性試験</p> <p>入力を切った状態で、恒温槽で−10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。</p>																			
<p>2. Values</p> <table> <tr> <th>Item</th> <th>Data</th> <th colspan="2">Testing Conditions</th> </tr> <tr> <td>Output Voltage [V]</td> <td>−15.256</td> <td colspan="2">Input Volt.: 5V, Load Current:0.05A</td> </tr> <tr> <td>Line Regulation [mV]</td> <td>8</td> <td colspan="2">Input Volt.: 4.5~9V, Load Current:0.05A</td> </tr> <tr> <td>Load Regulation [mV]</td> <td>267</td> <td colspan="2">Input Volt.: 5V, Load Current:0~0.05A</td> </tr> </table>				Item	Data	Testing Conditions		Output Voltage [V]	−15.256	Input Volt.: 5V, Load Current:0.05A		Line Regulation [mV]	8	Input Volt.: 4.5~9V, Load Current:0.05A		Load Regulation [mV]	267	Input Volt.: 5V, Load Current:0~0.05A	
Item	Data	Testing Conditions																	
Output Voltage [V]	−15.256	Input Volt.: 5V, Load Current:0.05A																	
Line Regulation [mV]	8	Input Volt.: 4.5~9V, Load Current:0.05A																	
Load Regulation [mV]	267	Input Volt.: 5V, Load Current:0~0.05A																	

−19−

BC−3119

COSEL

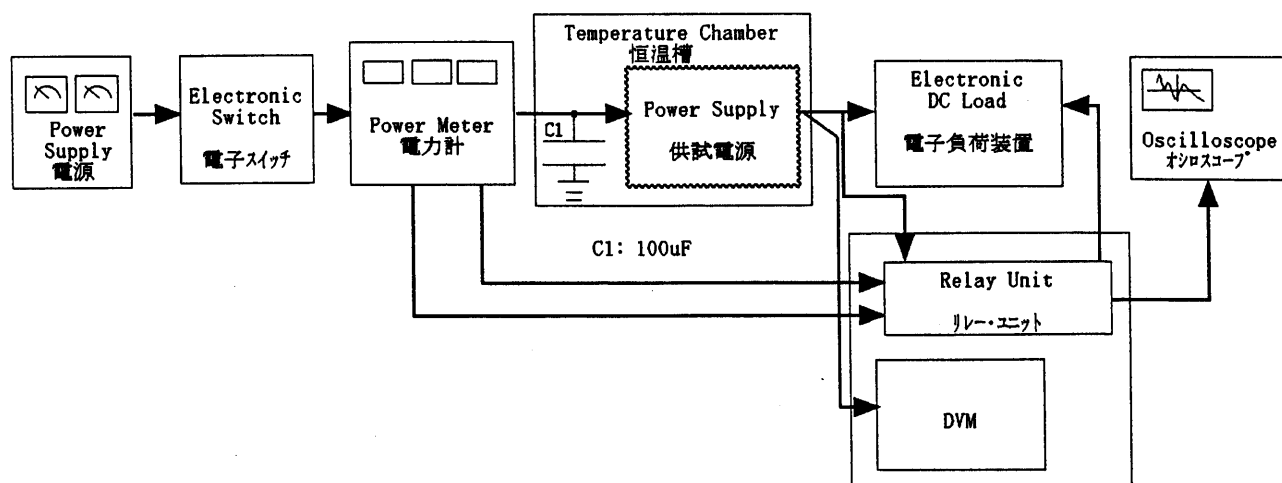

Data Acquisition/Control Unit  
データ集録システム

Figure A