



# TEST DATA OF ZTW1R52415

(24.0V INPUT)

Regulated DC Power Supply

Date : Mar. 5. 1998

Approved by : N. Shiraishi  
Design Manager

Prepared by : T. Tsuri  
Design Engineer

コーセル株式会社  
COSEL CO., LTD.

CONTENTS

1. Line Regulation . . . . .	1
静的入力変動	
2. Efficiency . . . . .	2
効率	
3. Load Regulation . . . . .	3
静的負荷変動	
4. Ripple Voltage (by Load Current) . . . . .	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise . . . . .	6
リップルノイズ	
6. Overcurrent Protection . . . . .	8
過電流保護	
7. Dynamic Load Responce . . . . .	9
動的負荷変動	
8. Rise and Fall Time . . . . .	11
立上り、立下がり時間	
9. Ambient Temperature Drift . . . . .	13
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage . . .	14
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature) . . . . .	15
リップル電圧(周囲温度特性)	
12. Time Lapse Drift . . . . .	16
経時ドリフト	
13. Output Voltage Accuracy . . . . .	17
定電圧精度	
14. Condensation . . . . .	18
結露特性	
15. Figure of Testing Circuitry . . . . .	20
測定回路図	

(Final Page 20 )

# COSEL

Model		ZTW1R52415																																								
Item		Line Regulation  静的入力変動																																								
Object		+15V0.05A																																								
1. Graph		<div>-----□----- Load 50%</div> <div>-----△----- Load 100%</div> <div><p>[V]</p><p>Output Voltage</p><p>Input Voltage [V]</p></div>																																								
		2. Values																																								
		<table><tr><th>Input Voltage [V]</th><th>Load 50% Output Volt. [V]</th><th>Load 100% Output Volt. [V]</th></tr><tr><td>16.0</td><td>15.113</td><td>14.971</td></tr><tr><td>18.0</td><td>15.108</td><td>14.976</td></tr><tr><td>20.0</td><td>15.105</td><td>14.979</td></tr><tr><td>24.0</td><td>15.100</td><td>14.982</td></tr><tr><td>30.0</td><td>15.093</td><td>14.982</td></tr><tr><td>36.0</td><td>15.088</td><td>14.980</td></tr><tr><td>40.0</td><td>15.085</td><td>14.979</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>		Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]	16.0	15.113	14.971	18.0	15.108	14.976	20.0	15.105	14.979	24.0	15.100	14.982	30.0	15.093	14.982	36.0	15.088	14.980	40.0	15.085	14.979	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]																																								
16.0	15.113	14.971																																								
18.0	15.108	14.976																																								
20.0	15.105	14.979																																								
24.0	15.100	14.982																																								
30.0	15.093	14.982																																								
36.0	15.088	14.980																																								
40.0	15.085	14.979																																								
—	—	—																																								
—	—	—																																								
—	—	—																																								
—	—	—																																								
—	—	—																																								
Object		-15V0.05A																																								
1. Graph		<div>-----□----- Load 50%</div> <div>-----△----- Load 100%</div> <div><p>[V]</p><p>Output Voltage</p><p>Input Voltage [V]</p></div>																																								
		2. Values																																								
		<table><tr><th>Input Voltage [V]</th><th>Load 50% Output Volt. [V]</th><th>Load 100% Output Volt. [V]</th></tr><tr><td>16.0</td><td>-15.106</td><td>-14.966</td></tr><tr><td>18.0</td><td>-15.101</td><td>-14.970</td></tr><tr><td>20.0</td><td>-15.097</td><td>-14.973</td></tr><tr><td>24.0</td><td>-15.091</td><td>-14.975</td></tr><tr><td>30.0</td><td>-15.085</td><td>-14.974</td></tr><tr><td>36.0</td><td>-15.079</td><td>-14.972</td></tr><tr><td>40.0</td><td>-15.077</td><td>-14.971</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>		Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]	16.0	-15.106	-14.966	18.0	-15.101	-14.970	20.0	-15.097	-14.973	24.0	-15.091	-14.975	30.0	-15.085	-14.974	36.0	-15.079	-14.972	40.0	-15.077	-14.971	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]																																								
16.0	-15.106	-14.966																																								
18.0	-15.101	-14.970																																								
20.0	-15.097	-14.973																																								
24.0	-15.091	-14.975																																								
30.0	-15.085	-14.974																																								
36.0	-15.079	-14.972																																								
40.0	-15.077	-14.971																																								
—	—	—																																								
—	—	—																																								
—	—	—																																								
—	—	—																																								
—	—	—																																								
Note: Slanted line shows the range of the rated input voltage.																																										
(注) 斜線は定格入力電圧範囲を示す。																																										

**COSEL**

Model

ZTW1R52415

Item

Efficiency 効率

Object


Temperature

25°C

Testing Circuitry

Figure A

## 1. Graph

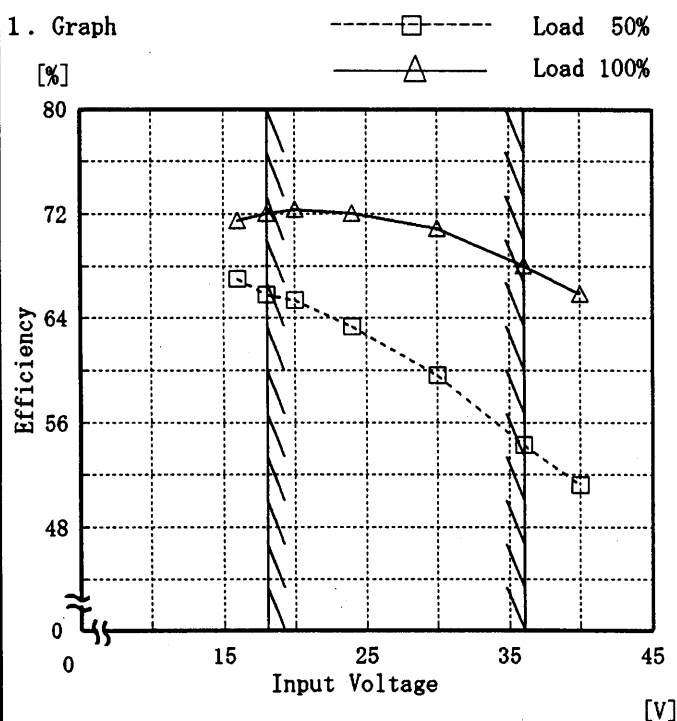

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

## 2. Values

Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
16.0	67.0	71.5
18.0	65.8	72.0
20.0	65.4	72.4
24.0	63.3	72.0
30.0	59.6	70.9
36.0	54.3	68.0
40.0	51.2	65.8
—	—	—
—	—	—
—	—	—
—	—	—
—	—	—

# COSEL

Model ZTW1R52415		Temperature 25°C																																																
Item	Load Regulation 静的負荷変動	Testing Circuitry Figure A																																																
Object	+15V0.05A																																																	
1. Graph		2. Values																																																
<div> <div> <div>△</div> <div>—</div> <div>Input Volt. 18.0V</div> </div> <div> <div>□</div> <div>- - -</div> <div>Input Volt. 24.0V</div> </div> <div> <div>○</div> <div>—</div> <div>Input Volt. 36.0V</div> </div> </div>		<table> <tr> <th rowspan="2">Load Current [A]</th><th>Input Volt. 18.0[V]</th><th>Input Volt. 24.0[V]</th><th>Input Volt. 36.0[V]</th></tr> <tr> <th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr> <tr><td>0.000</td><td>15.296</td><td>15.283</td><td>15.271</td></tr> <tr><td>0.008</td><td>15.207</td><td>15.194</td><td>15.179</td></tr> <tr><td>0.016</td><td>15.151</td><td>15.141</td><td>15.127</td></tr> <tr><td>0.024</td><td>15.105</td><td>15.097</td><td>15.086</td></tr> <tr><td>0.032</td><td>15.063</td><td>15.059</td><td>15.050</td></tr> <tr><td>0.040</td><td>15.020</td><td>15.020</td><td>15.014</td></tr> <tr><td>0.048</td><td>14.980</td><td>14.985</td><td>14.982</td></tr> <tr><td>0.050</td><td>14.970</td><td>14.976</td><td>14.974</td></tr> <tr><td>0.055</td><td>14.945</td><td>14.955</td><td>14.955</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </table>		Load Current [A]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.000	15.296	15.283	15.271	0.008	15.207	15.194	15.179	0.016	15.151	15.141	15.127	0.024	15.105	15.097	15.086	0.032	15.063	15.059	15.050	0.040	15.020	15.020	15.014	0.048	14.980	14.985	14.982	0.050	14.970	14.976	14.974	0.055	14.945	14.955	14.955	—	—	—	—
Load Current [A]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]																																															
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																															
0.000	15.296	15.283	15.271																																															
0.008	15.207	15.194	15.179																																															
0.016	15.151	15.141	15.127																																															
0.024	15.105	15.097	15.086																																															
0.032	15.063	15.059	15.050																																															
0.040	15.020	15.020	15.014																																															
0.048	14.980	14.985	14.982																																															
0.050	14.970	14.976	14.974																																															
0.055	14.945	14.955	14.955																																															
—	—	—	—																																															
Object	-15V0.05A																																																	
1. Graph		2. Values																																																
<div> <div> <div>△</div> <div>—</div> <div>Input Volt. 18.0V</div> </div> <div> <div>□</div> <div>- - -</div> <div>Input Volt. 24.0V</div> </div> <div> <div>○</div> <div>—</div> <div>Input Volt. 36.0V</div> </div> </div>		<table> <tr> <th rowspan="2">Load Current [A]</th><th>Input Volt. 18.0[V]</th><th>Input Volt. 24.0[V]</th><th>Input Volt. 36.0[V]</th></tr> <tr> <th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr> <tr><td>0.000</td><td>-15.243</td><td>-15.230</td><td>-15.219</td></tr> <tr><td>0.008</td><td>-15.168</td><td>-15.157</td><td>-15.145</td></tr> <tr><td>0.016</td><td>-15.114</td><td>-15.107</td><td>-15.096</td></tr> <tr><td>0.024</td><td>-15.068</td><td>-15.063</td><td>-15.054</td></tr> <tr><td>0.032</td><td>-15.025</td><td>-15.024</td><td>-15.018</td></tr> <tr><td>0.040</td><td>-14.984</td><td>-14.987</td><td>-14.984</td></tr> <tr><td>0.048</td><td>-14.944</td><td>-14.951</td><td>-14.952</td></tr> <tr><td>0.050</td><td>-14.934</td><td>-14.943</td><td>-14.944</td></tr> <tr><td>0.055</td><td>-14.909</td><td>-14.921</td><td>-14.924</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </table>		Load Current [A]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.000	-15.243	-15.230	-15.219	0.008	-15.168	-15.157	-15.145	0.016	-15.114	-15.107	-15.096	0.024	-15.068	-15.063	-15.054	0.032	-15.025	-15.024	-15.018	0.040	-14.984	-14.987	-14.984	0.048	-14.944	-14.951	-14.952	0.050	-14.934	-14.943	-14.944	0.055	-14.909	-14.921	-14.924	—	—	—	—
Load Current [A]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]																																															
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																															
0.000	-15.243	-15.230	-15.219																																															
0.008	-15.168	-15.157	-15.145																																															
0.016	-15.114	-15.107	-15.096																																															
0.024	-15.068	-15.063	-15.054																																															
0.032	-15.025	-15.024	-15.018																																															
0.040	-14.984	-14.987	-14.984																																															
0.048	-14.944	-14.951	-14.952																																															
0.050	-14.934	-14.943	-14.944																																															
0.055	-14.909	-14.921	-14.924																																															
—	—	—	—																																															
Note: Slanted line shows the range of the rated load current. (注)斜線は定格負荷電流範囲を示す。																																																		

# COSEL

Model		ZTW1R52415	Temperature		25℃
Item		Ripple Voltage(by Load Current) リップル電圧(負荷電流特性)	Testing Circuitry		Figure A
Object		+15V0.05A			
1. Graph			2.Values		

-----□----- Input Volt. 18.0V

—————△———— Input Volt. 36.0V

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p-p 値で示される。

(注)斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line  
入力商用周期

T2: Due to Switching  
スイッチング周期

Fig. Complex Ripple Wave Form

図 リップル波形詳細図

Load Current [A]	Input Volt. 18.0 [V]	Input Volt. 36.0 [V]
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.000	10	10
0.008	10	10
0.016	10	10
0.024	15	10
0.032	20	10
0.040	20	15
0.048	25	15
0.050	25	15
0.055	30	15
—	—	—
—	—	—

# COSEL

Model		ZTW1R52415	Temperature		25℃
Item		Ripple Voltage(by Load Current) リップル電圧(負荷電流特性)	Testing Circuitry		Figure A
Object		-15V0.05A			

1. Graph

-----□-----

Input Volt. 18.0V

———△———

Input Volt. 36.0V

[mV]

80

60

40

20

0

Ripple Voltage

0

0.02

0.04

0.06

Load Current

[A]

2. Values

Load Current [A]	Input Volt. 18.0 [V]	Input Volt. 36.0 [V]
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.000	5	8
0.008	5	10
0.016	10	10
0.024	10	10
0.032	15	10
0.040	15	10
0.048	20	10
0.050	20	10
0.055	25	10
—	—	—
—	—	—

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p - p 値で示される。

(注)斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line  
入力商用周期

T2: Due to Switching  
スイッチング周期

Ripple [mVp-p]

T1

T2

Fig. Complex Ripple Wave Form

図 リップル波形詳細図

# COSEL



Model		ZTW1R52415		Temperature		25℃																																							
Item		Ripple-Noise   リップルノイズ		Testing Circuitry		Figure A																																							
Object		+15V0.05A																																											
1. Graph				2. Values																																									
<div><div>-----□-----    Input Volt. 18.0V</div><div>-----△-----    Input Volt. 36.0V</div><p>Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p><p>リップルノイズは、下図 p - p 値で示される。 (注)斜線は定格負荷電流範囲を示す。</p></div>				<table><tr><th rowspan="2">Load current [A]</th><th>Input Volt. 18.0 [V]</th><th>Input Volt. 36.0 [V]</th></tr><tr><th>Ripple-Noise [mV]</th><th>Ripple-Noise [mV]</th></tr><tr><td>0.000</td><td>20</td><td>20</td></tr><tr><td>0.008</td><td>25</td><td>25</td></tr><tr><td>0.016</td><td>25</td><td>25</td></tr><tr><td>0.024</td><td>30</td><td>25</td></tr><tr><td>0.032</td><td>30</td><td>25</td></tr><tr><td>0.040</td><td>35</td><td>25</td></tr><tr><td>0.048</td><td>40</td><td>25</td></tr><tr><td>0.050</td><td>40</td><td>25</td></tr><tr><td>0.055</td><td>40</td><td>30</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>				Load current [A]	Input Volt. 18.0 [V]	Input Volt. 36.0 [V]	Ripple-Noise [mV]	Ripple-Noise [mV]	0.000	20	20	0.008	25	25	0.016	25	25	0.024	30	25	0.032	30	25	0.040	35	25	0.048	40	25	0.050	40	25	0.055	40	30	—	—	—	—	—	—
Load current [A]	Input Volt. 18.0 [V]	Input Volt. 36.0 [V]																																											
	Ripple-Noise [mV]	Ripple-Noise [mV]																																											
0.000	20	20																																											
0.008	25	25																																											
0.016	25	25																																											
0.024	30	25																																											
0.032	30	25																																											
0.040	35	25																																											
0.048	40	25																																											
0.050	40	25																																											
0.055	40	30																																											
—	—	—																																											
—	—	—																																											
<div><div>T1: Due to AC Input Line           入力商用周期</div><div>T2: Due to Switching           スイッチング周期</div><p>Fig. Complex Ripple Wave Form 図   リップル波形詳細図</p></div>																																													



# COSEL

Model		ZTW1R52415	Temperature		25℃																																										
Item		Ripple-Noise   リップルノイズ	Testing Circuitry		Figure A																																										
Object		-15V0.05A																																													
1. Graph			2. Values																																												
<div><div>-----□-----   Input Volt. 18.0V</div><div>-----△-----   Input Volt. 36.0V</div><div>[mV]</div><div><div>Ripple-Noise</div><div>Load Current</div><div>[A]</div></div></div> <div><div>Ripple-Noise is shown as p-p in the figure below.</div><div>Note: Slanted line shows the range of the rated load current.</div></div> <div><div>リップルノイズは、下図 p - p 値で示される。</div><div>(注) 斜線は定格負荷電流範囲を示す。</div></div> <div><div><div>T1: Due to AC Input Line</div><div>入力商用周期</div><div>T2: Due to Switching</div><div>スイッチング周期</div></div><div><div><div>T2</div><div>Ripple-Noise</div><div>[mVp-p]</div></div><div><div>T1</div></div><div></div></div></div> <div><div>Fig. Complex Ripple Wave Form</div><div>図   リップル波形詳細図</div></div>			<table><tr><th rowspan="2">Load current</th><th>Input Volt.</th><th>Input Volt.</th></tr><tr><th>18.0 [V]</th><th>36.0 [V]</th></tr><tr><th>[A]</th><th>Ripple-Noise</th><th>Ripple-Noise</th></tr><tr><th></th><th>[mV]</th><th>[mV]</th></tr><tr><td>0.000</td><td>15</td><td>15</td></tr><tr><td>0.008</td><td>15</td><td>15</td></tr><tr><td>0.016</td><td>20</td><td>15</td></tr><tr><td>0.024</td><td>20</td><td>15</td></tr><tr><td>0.032</td><td>25</td><td>20</td></tr><tr><td>0.040</td><td>25</td><td>20</td></tr><tr><td>0.048</td><td>30</td><td>20</td></tr><tr><td>0.050</td><td>30</td><td>20</td></tr><tr><td>0.055</td><td>35</td><td>25</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>	Load current	Input Volt.	Input Volt.	18.0 [V]	36.0 [V]	[A]	Ripple-Noise	Ripple-Noise		[mV]	[mV]	0.000	15	15	0.008	15	15	0.016	20	15	0.024	20	15	0.032	25	20	0.040	25	20	0.048	30	20	0.050	30	20	0.055	35	25	—	—	—	—	—	—
Load current	Input Volt.	Input Volt.																																													
	18.0 [V]	36.0 [V]																																													
[A]	Ripple-Noise	Ripple-Noise																																													
	[mV]	[mV]																																													
0.000	15	15																																													
0.008	15	15																																													
0.016	20	15																																													
0.024	20	15																																													
0.032	25	20																																													
0.040	25	20																																													
0.048	30	20																																													
0.050	30	20																																													
0.055	35	25																																													
—	—	—																																													
—	—	—																																													

# COSEL

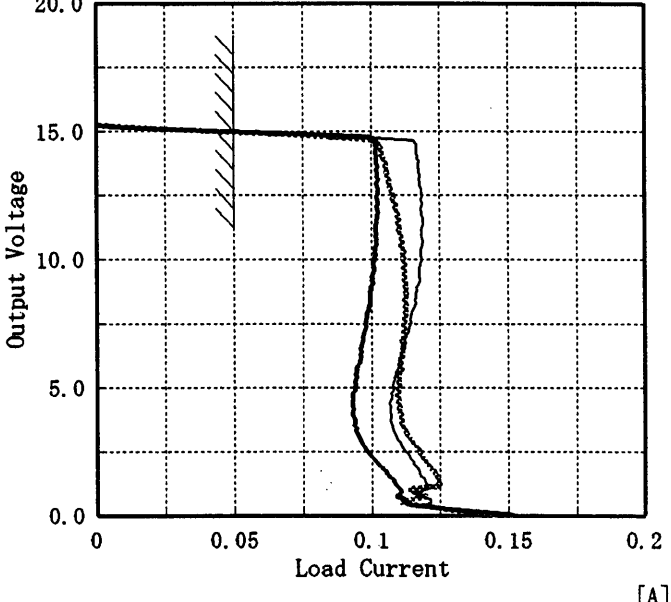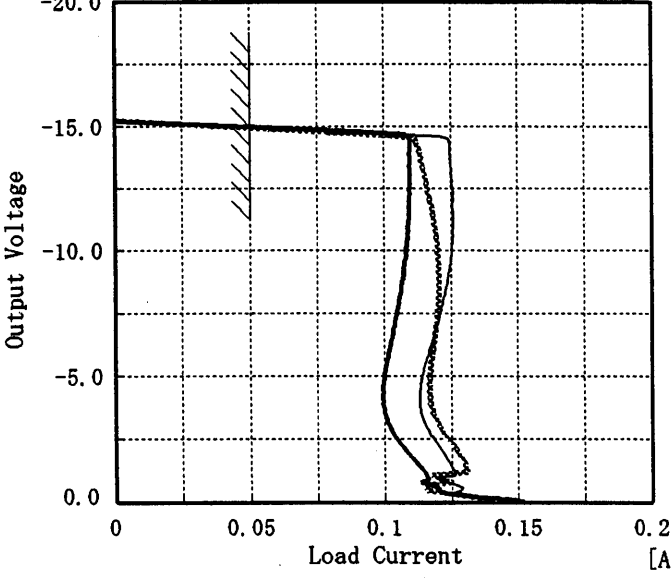Model ZTW1R52415		Temperature 25°C																																																								
Item Overcurrent Protection 過電流保護		Testing Circuitry Figure A																																																								
Object +15V0.05A																																																										
1. Graph [V] 		2. Values <table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th><th>Input Volt. 18.0[V]</th><th>Input Volt. 24.0[V]</th><th>Input Volt. 36.0[V]</th></tr> <tr> <th>Load Current [A]</th><th>Load Current [A]</th><th>Load Current [A]</th></tr> </thead> <tbody> <tr><td>15.00</td><td>0.047</td><td>0.048</td><td>0.032</td></tr> <tr><td>14.25</td><td>0.104</td><td>0.116</td><td>0.102</td></tr> <tr><td>13.50</td><td>0.105</td><td>0.117</td><td>0.102</td></tr> <tr><td>12.00</td><td>0.109</td><td>0.118</td><td>0.102</td></tr> <tr><td>10.50</td><td>0.111</td><td>0.118</td><td>0.102</td></tr> <tr><td>9.00</td><td>0.112</td><td>0.117</td><td>0.101</td></tr> <tr><td>7.50</td><td>0.112</td><td>0.114</td><td>0.098</td></tr> <tr><td>6.00</td><td>0.110</td><td>0.110</td><td>0.096</td></tr> <tr><td>4.50</td><td>0.110</td><td>0.107</td><td>0.093</td></tr> <tr><td>3.00</td><td>0.114</td><td>0.109</td><td>0.096</td></tr> <tr><td>1.50</td><td>0.123</td><td>0.118</td><td>0.106</td></tr> <tr><td>0.00</td><td>0.145</td><td>0.154</td><td>0.151</td></tr> </tbody> </table>		Output Voltage [V]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]	Load Current [A]	Load Current [A]	Load Current [A]	15.00	0.047	0.048	0.032	14.25	0.104	0.116	0.102	13.50	0.105	0.117	0.102	12.00	0.109	0.118	0.102	10.50	0.111	0.118	0.102	9.00	0.112	0.117	0.101	7.50	0.112	0.114	0.098	6.00	0.110	0.110	0.096	4.50	0.110	0.107	0.093	3.00	0.114	0.109	0.096	1.50	0.123	0.118	0.106	0.00	0.145	0.154	0.151
Output Voltage [V]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]																																																							
	Load Current [A]	Load Current [A]	Load Current [A]																																																							
15.00	0.047	0.048	0.032																																																							
14.25	0.104	0.116	0.102																																																							
13.50	0.105	0.117	0.102																																																							
12.00	0.109	0.118	0.102																																																							
10.50	0.111	0.118	0.102																																																							
9.00	0.112	0.117	0.101																																																							
7.50	0.112	0.114	0.098																																																							
6.00	0.110	0.110	0.096																																																							
4.50	0.110	0.107	0.093																																																							
3.00	0.114	0.109	0.096																																																							
1.50	0.123	0.118	0.106																																																							
0.00	0.145	0.154	0.151																																																							
Object -15V0.05A																																																										
1. Graph [V] 		2. Values <table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th><th>Input Volt. 18.0[V]</th><th>Input Volt. 24.0[V]</th><th>Input Volt. 36.0[V]</th></tr> <tr> <th>Load Current [A]</th><th>Load Current [A]</th><th>Load Current [A]</th></tr> </thead> <tbody> <tr><td>-15.00</td><td>0.075</td><td>0.084</td><td>0.089</td></tr> <tr><td>-14.25</td><td>0.112</td><td>0.124</td><td>0.110</td></tr> <tr><td>-13.50</td><td>0.114</td><td>0.125</td><td>0.110</td></tr> <tr><td>-12.00</td><td>0.117</td><td>0.126</td><td>0.110</td></tr> <tr><td>-10.50</td><td>0.119</td><td>0.126</td><td>0.109</td></tr> <tr><td>-9.00</td><td>0.120</td><td>0.124</td><td>0.107</td></tr> <tr><td>-7.50</td><td>0.120</td><td>0.121</td><td>0.105</td></tr> <tr><td>-6.00</td><td>0.118</td><td>0.117</td><td>0.102</td></tr> <tr><td>-4.50</td><td>0.117</td><td>0.113</td><td>0.100</td></tr> <tr><td>-3.00</td><td>0.120</td><td>0.115</td><td>0.101</td></tr> <tr><td>-1.50</td><td>0.130</td><td>0.124</td><td>0.112</td></tr> <tr><td>0.00</td><td>0.144</td><td>0.152</td><td>0.149</td></tr> </tbody> </table>		Output Voltage [V]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]	Load Current [A]	Load Current [A]	Load Current [A]	-15.00	0.075	0.084	0.089	-14.25	0.112	0.124	0.110	-13.50	0.114	0.125	0.110	-12.00	0.117	0.126	0.110	-10.50	0.119	0.126	0.109	-9.00	0.120	0.124	0.107	-7.50	0.120	0.121	0.105	-6.00	0.118	0.117	0.102	-4.50	0.117	0.113	0.100	-3.00	0.120	0.115	0.101	-1.50	0.130	0.124	0.112	0.00	0.144	0.152	0.149
Output Voltage [V]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]																																																							
	Load Current [A]	Load Current [A]	Load Current [A]																																																							
-15.00	0.075	0.084	0.089																																																							
-14.25	0.112	0.124	0.110																																																							
-13.50	0.114	0.125	0.110																																																							
-12.00	0.117	0.126	0.110																																																							
-10.50	0.119	0.126	0.109																																																							
-9.00	0.120	0.124	0.107																																																							
-7.50	0.120	0.121	0.105																																																							
-6.00	0.118	0.117	0.102																																																							
-4.50	0.117	0.113	0.100																																																							
-3.00	0.120	0.115	0.101																																																							
-1.50	0.130	0.124	0.112																																																							
0.00	0.144	0.152	0.149																																																							
Note: Slanted line shows the range of the rated load current. (注)斜線は定格負荷電流範囲を示す。																																																										

# COSEL

Model	ZTW1R52415	Temperature	25°C
Item	Dynamic Load Responce 動的負荷変動	Testing Circuitry	Figure A
Object	+15V0.05A		

Input Volt. 24.0 V


Cycle 100 mS

Load Current

Min. Load ↔

Load 100 %


200 mV/div

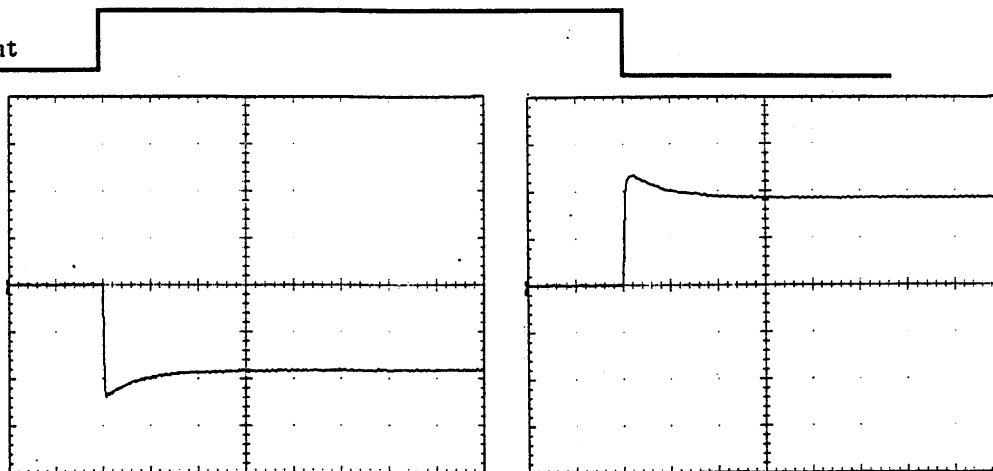

Min. Load ↔

Load 50 %


200 mV/div

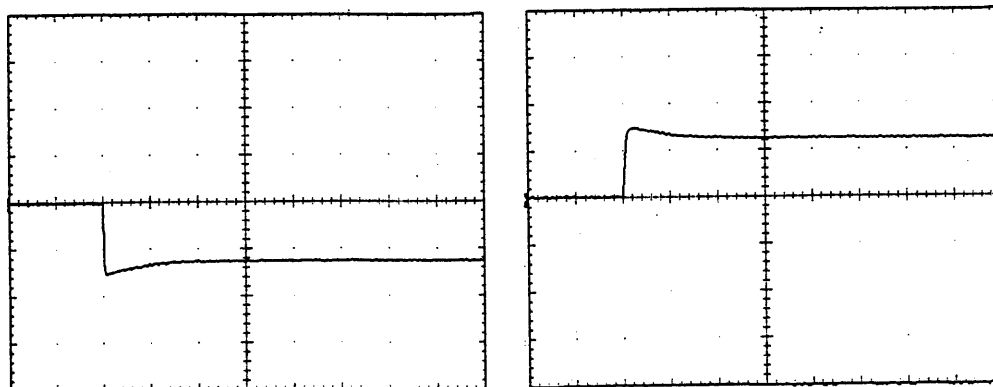

Load 50% ↔

Load 100 %

200 mV/div

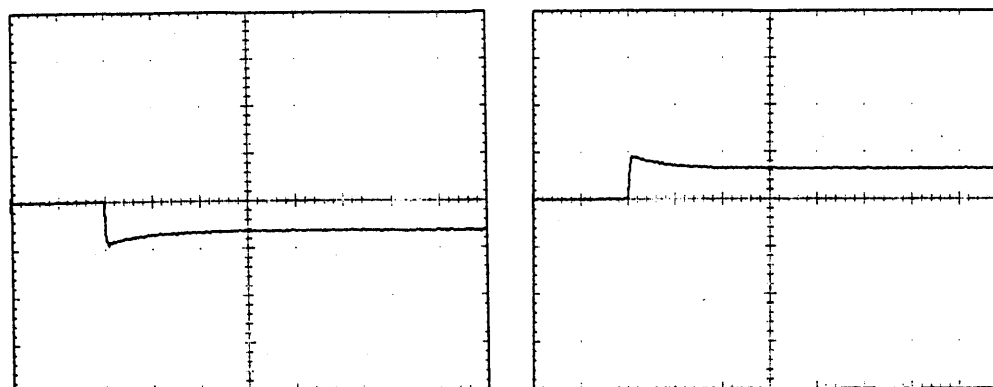

1 mS/div

# COSEL

Model	ZTW1R52415	Temperature 25°C Testing Circuitry Figure A
Item	Dynamic Load Responce 動的負荷変動	
Object	-15V0.05A	



Input Volt. 24.0 V

Cycle 100 mS

Load Current



Min. Load ↔  
Load 100 %

200 mV/div

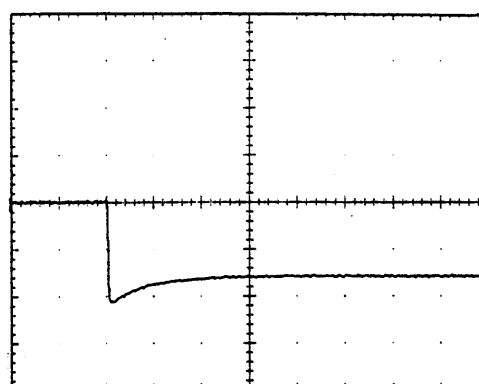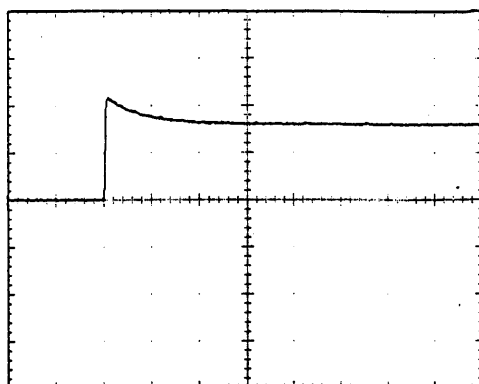



Min. Load ↔  
Load 50 %

200 mV/div

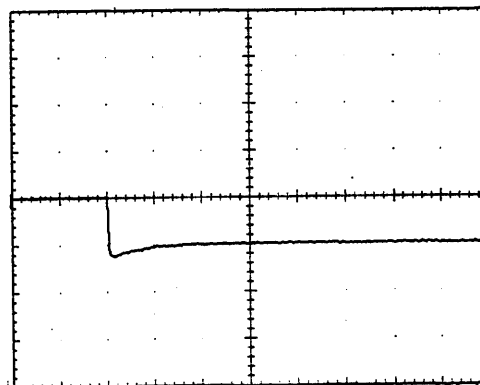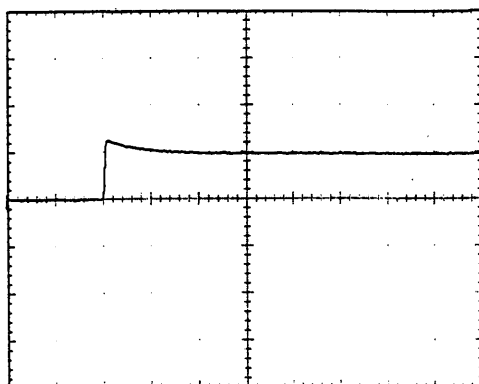

Load 50% ↔  
Load 100 %

200 mV/div

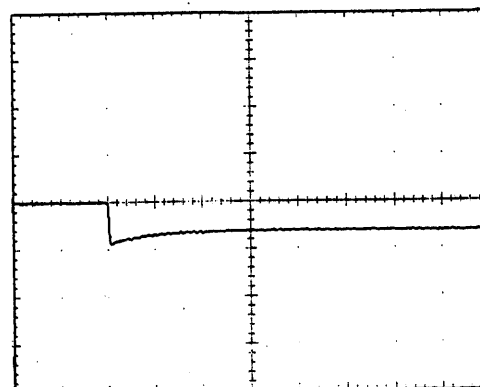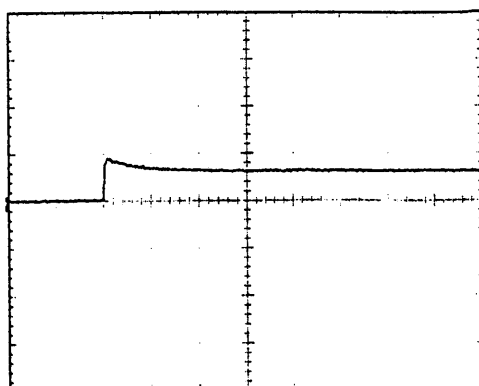

1 mS/div

**COSEL**

Model ZTW1R52415


Item Rise and Fall Time 立上り、立下り時間

Temperature 25°C  
Testing Circuitry Figure A

Object +15V0.05A

## 1. Graph


Input Volt. 18.0 V

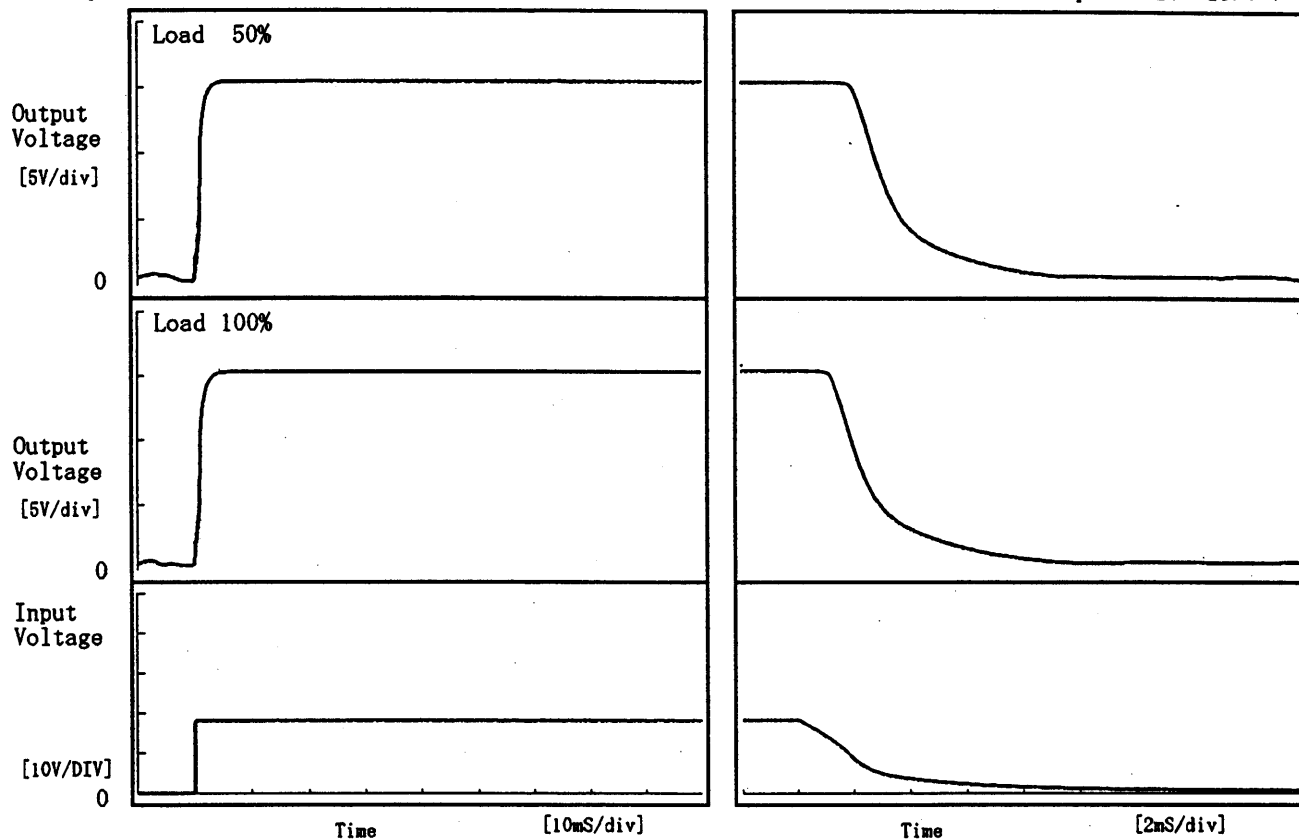

## 2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.10	1.70	1.80	2.19	4.30
100 %	0.10	1.80	1.90	1.40	4.42

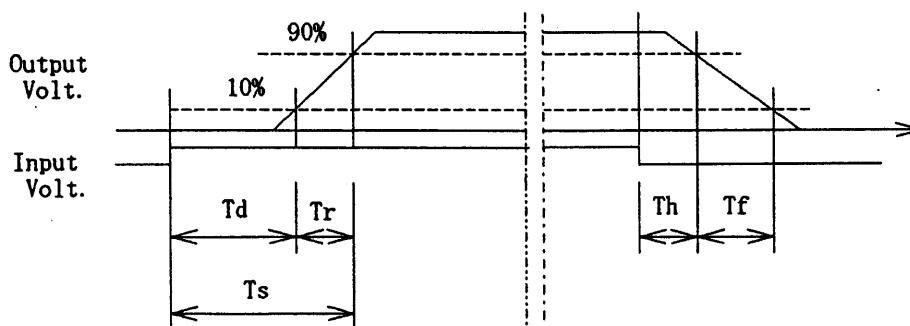


**COSEL**

Model	ZTW1R52415	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	-15V0.05A		

## 1. Graph


Input Volt. 18.0 V

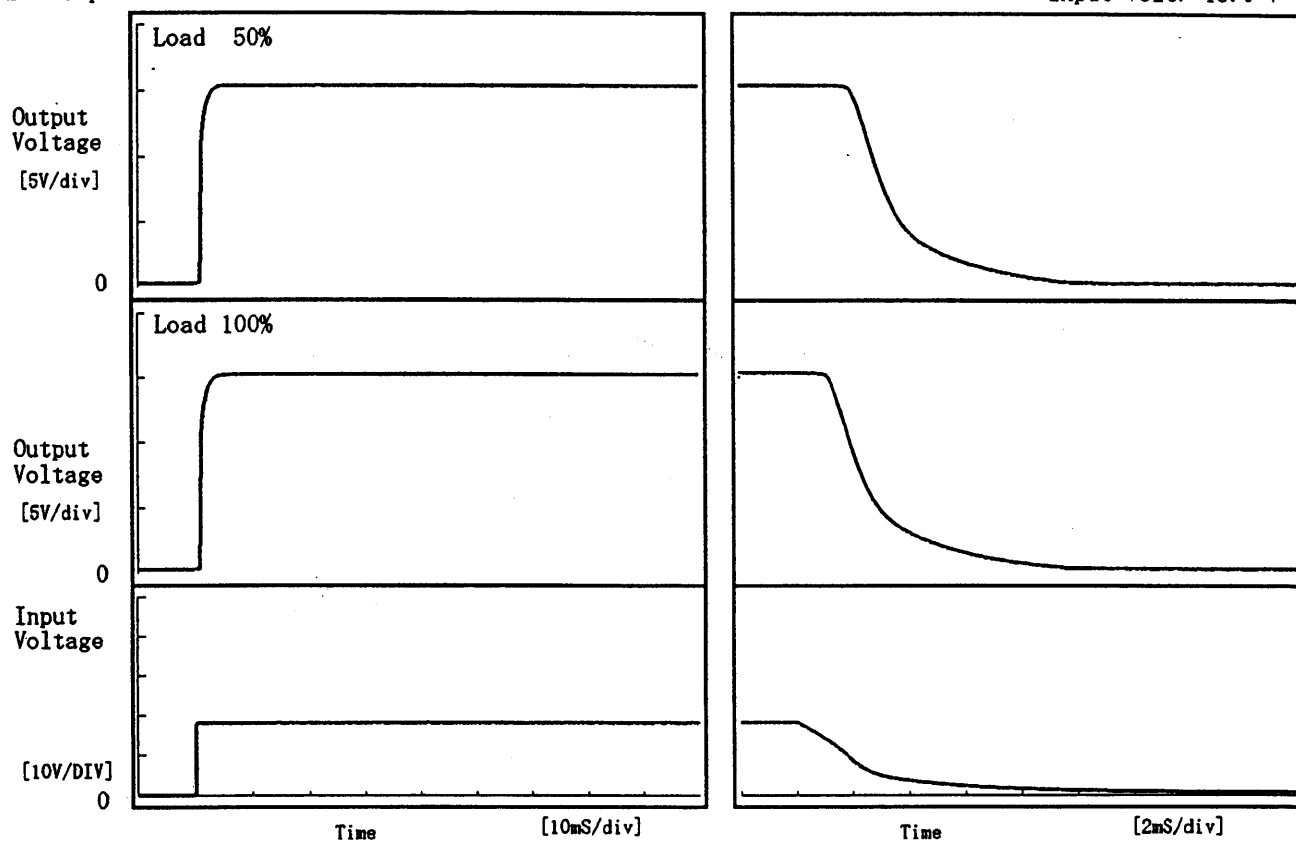

## 2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.75	1.10	1.85	2.20	4.18
100 %	0.75	1.15	1.90	1.39	4.38

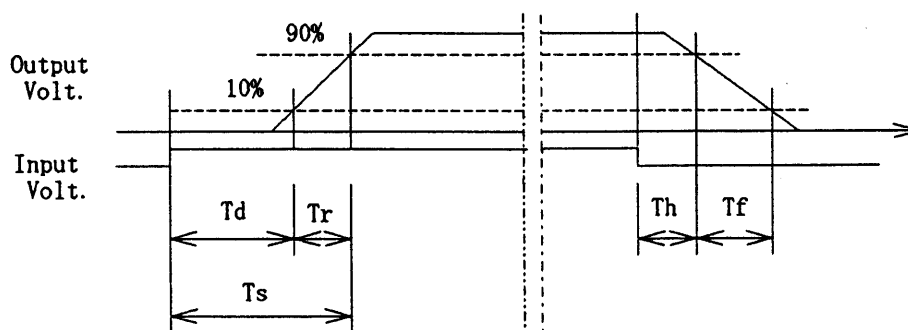

**COSEL**

Model

ZTW1R52415

Item


Ambient Temperature Drift  
周囲温度変動

Object

+15V0.05A

Testing Circuitry Figure A

1. Graph

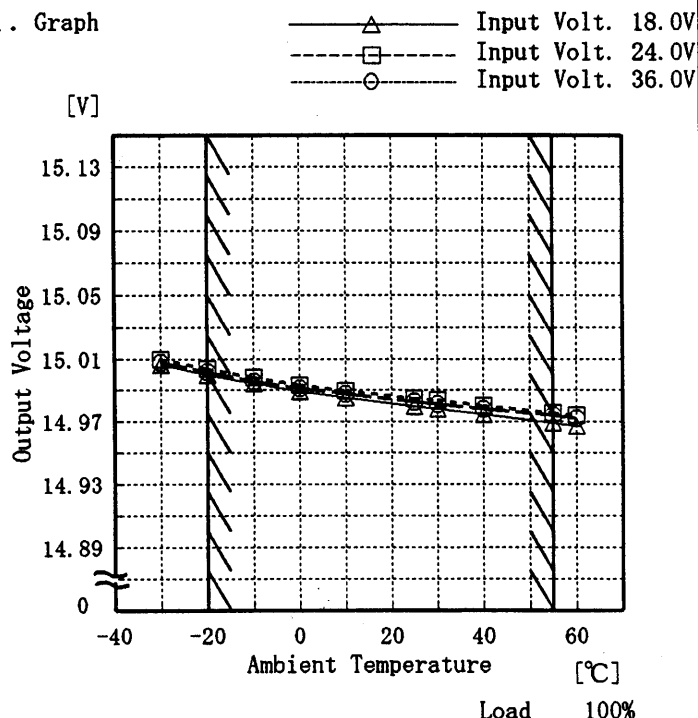


2. Values

Temperature	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]
[°C]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
-30	15.006	15.010	15.008
-20	15.000	15.004	15.002
-10	14.994	14.998	14.996
0	14.989	14.993	14.991
10	14.985	14.990	14.987
25	14.980	14.985	14.982
30	14.978	14.983	14.981
40	14.974	14.980	14.978
55	14.969	14.976	14.974
60	14.967	14.974	14.972
—	—	—	—

Object

-15V0.05A

1. Graph

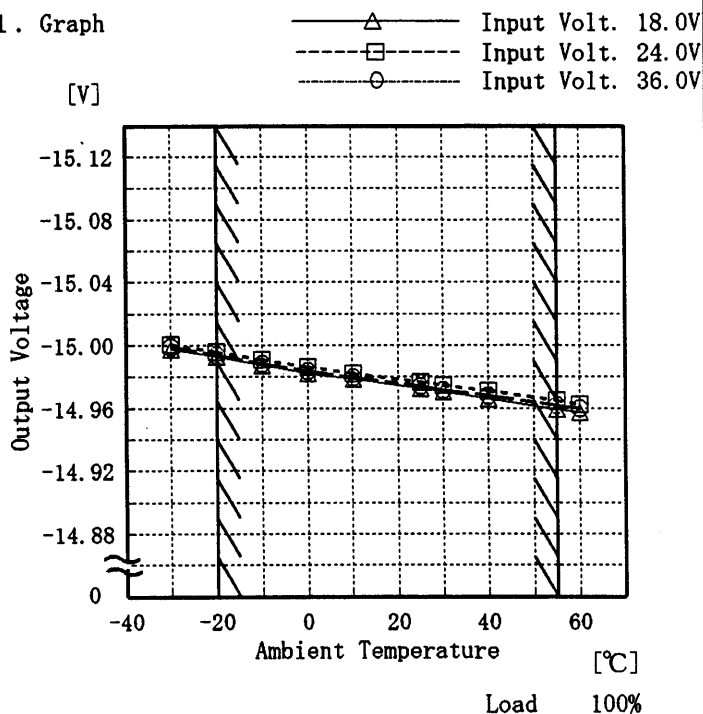

2. Values

Temperature	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]
[°C]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
-30	-14.998	-15.001	-14.999
-20	-14.993	-14.996	-14.994
-10	-14.987	-14.991	-14.988
0	-14.982	-14.986	-14.984
10	-14.979	-14.982	-14.980
25	-14.973	-14.977	-14.974
30	-14.970	-14.975	-14.972
40	-14.966	-14.971	-14.968
55	-14.960	-14.965	-14.962
60	-14.957	-14.963	-14.960
—	—	—	—

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

# COSEL

Model

ZTW1R52415

Item


Minimum Input Voltage for Regulated Output Voltage  
最低レギュレーション電圧

Object

+15V0.05A

1. Graph

[V]

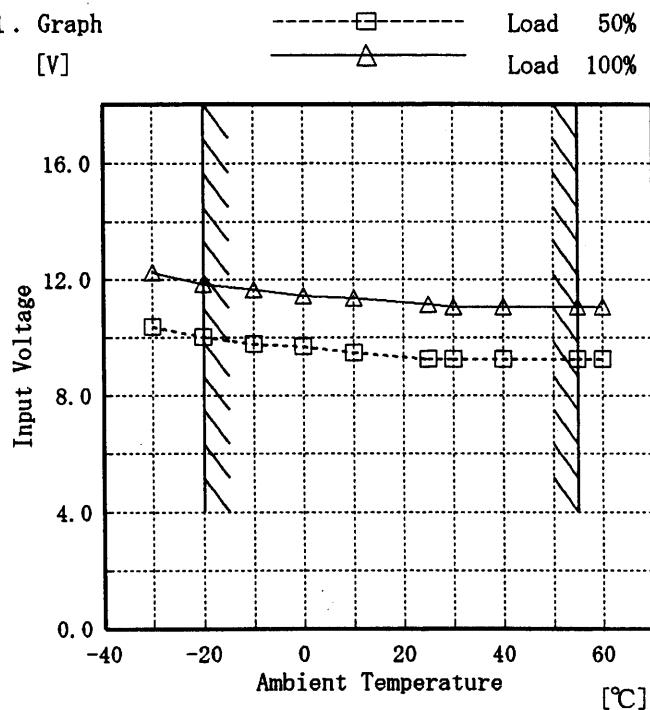

Testing Circuitry Figure A


2. Values

Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]
-30	10.4	12.3
-20	10.0	11.9
-10	9.8	11.6
0	9.7	11.4
10	9.5	11.4
25	9.3	11.1
30	9.3	11.1
40	9.3	11.1
55	9.3	11.1
60	9.3	11.1
—	—	—

Object

-15V0.05A

[V]

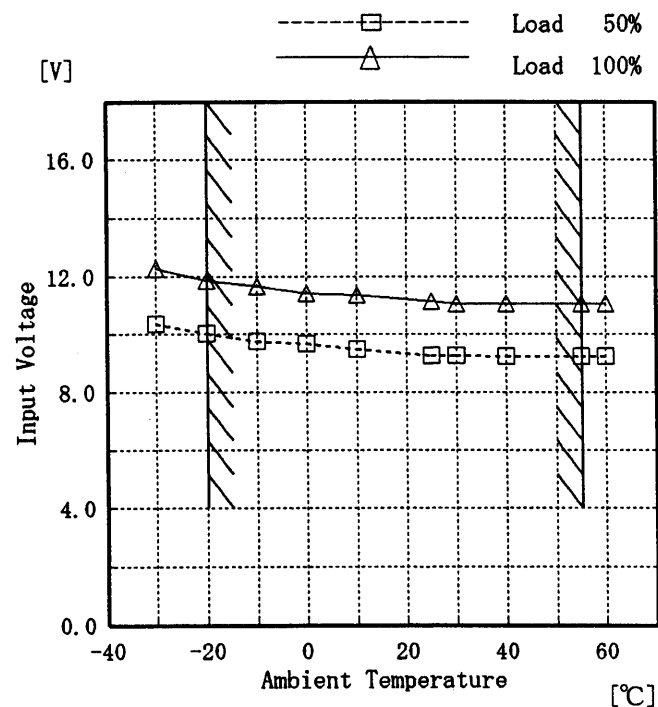

2. Values

Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]
-30	10.4	12.3
-20	10.0	11.9
-10	9.8	11.6
0	9.7	11.4
10	9.5	11.4
25	9.3	11.1
30	9.3	11.1
40	9.3	11.1
55	9.3	11.1
60	9.3	11.1
—	—	—

Note: Slanted line shows the range of the rated ambient temperature.



(注) 斜線は定格周囲温度範囲を示す。



# COSEL

Model		ZTW1R52415	Testing Circuitry      Figure A																																					
Item		Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)																																						
Object		+15V0.05A																																						
1. Graph		<div><div>-----□----- Load 50%</div><div>-----△----- Load 100%</div></div> <div><p>[mV]</p><p>Ripple Voltage</p><p>Ambient Temperature [°C]</p><p>Input Volt. 18.0 V</p></div>	2.Values																																					
		<table><tr><th>Ambient Temp. [°C]</th><th>Load 50% Ripple Output Volt. [mV]</th><th>Load 100% Ripple Output Volt. [mV]</th></tr><tr><td>-30</td><td>20</td><td>45</td></tr><tr><td>-20</td><td>20</td><td>40</td></tr><tr><td>-10</td><td>15</td><td>35</td></tr><tr><td>0</td><td>15</td><td>35</td></tr><tr><td>10</td><td>15</td><td>30</td></tr><tr><td>25</td><td>15</td><td>25</td></tr><tr><td>30</td><td>15</td><td>25</td></tr><tr><td>40</td><td>15</td><td>25</td></tr><tr><td>55</td><td>10</td><td>20</td></tr><tr><td>60</td><td>10</td><td>20</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>	Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]	-30	20	45	-20	20	40	-10	15	35	0	15	35	10	15	30	25	15	25	30	15	25	40	15	25	55	10	20	60	10	20	—	—	—		
Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]																																						
-30	20	45																																						
-20	20	40																																						
-10	15	35																																						
0	15	35																																						
10	15	30																																						
25	15	25																																						
30	15	25																																						
40	15	25																																						
55	10	20																																						
60	10	20																																						
—	—	—																																						
Object		-15V0.05A																																						
1. Graph		<div><div>-----□----- Load 50%</div><div>-----△----- Load 100%</div></div> <div><p>Ripple Voltage</p><p>Ambient Temperature [°C]</p><p>Input Volt. 18.0 V</p></div>			2.Values																																			
		<table><tr><th>Ambient Temp. [°C]</th><th>Load 50% Ripple Output Volt. [mV]</th><th>Load 100% Ripple Output Volt. [mV]</th></tr><tr><td>-30</td><td>15</td><td>35</td></tr><tr><td>-20</td><td>15</td><td>35</td></tr><tr><td>-10</td><td>15</td><td>30</td></tr><tr><td>0</td><td>10</td><td>30</td></tr><tr><td>10</td><td>10</td><td>25</td></tr><tr><td>25</td><td>10</td><td>20</td></tr><tr><td>30</td><td>10</td><td>20</td></tr><tr><td>40</td><td>10</td><td>20</td></tr><tr><td>55</td><td>10</td><td>20</td></tr><tr><td>60</td><td>10</td><td>15</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>			Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]	-30	15	35	-20	15	35	-10	15	30	0	10	30	10	10	25	25	10	20	30	10	20	40	10	20	55	10	20	60	10	15	—	—	—
Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]																																						
-30	15	35																																						
-20	15	35																																						
-10	15	30																																						
0	10	30																																						
10	10	25																																						
25	10	20																																						
30	10	20																																						
40	10	20																																						
55	10	20																																						
60	10	15																																						
—	—	—																																						
Note: Slanted line shows the range of the rated ambient temperature. (注) 斜線は定格周囲温度範囲を示す。																																								

**COSEL**

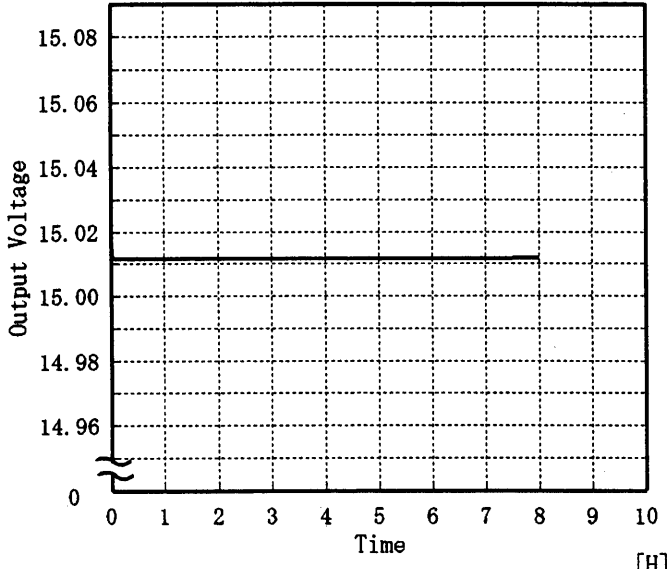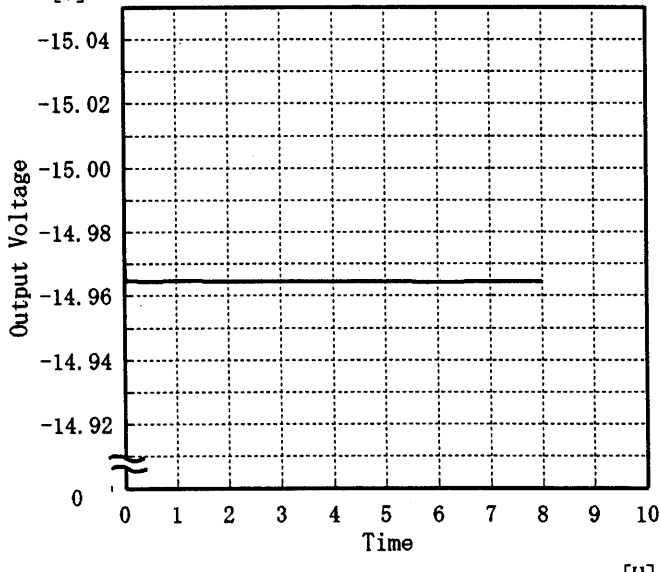COSEL																									
Model	ZTW1R52415	Temperature 25 ℃ Testing Circuitry Figure A																							
Item	Time Lapse Drift 経時ドリフト																								
Object	+15V0.05A																								
1. Graph		2. Values																							
<div><p>[V]</p><p>Time [H]</p><p>Input Volt. 24.0V Load 100%</p></div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>15.017</td></tr><tr><td>0.5</td><td>15.012</td></tr><tr><td>1.0</td><td>15.012</td></tr><tr><td>2.0</td><td>15.012</td></tr><tr><td>3.0</td><td>15.012</td></tr><tr><td>4.0</td><td>15.012</td></tr><tr><td>5.0</td><td>15.012</td></tr><tr><td>6.0</td><td>15.012</td></tr><tr><td>7.0</td><td>15.012</td></tr><tr><td>8.0</td><td>15.012</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	15.017	0.5	15.012	1.0	15.012	2.0	15.012	3.0	15.012	4.0	15.012	5.0	15.012	6.0	15.012	7.0	15.012	8.0	15.012
Time since start [H]	Output Voltage [V]																								
0.0	15.017																								
0.5	15.012																								
1.0	15.012																								
2.0	15.012																								
3.0	15.012																								
4.0	15.012																								
5.0	15.012																								
6.0	15.012																								
7.0	15.012																								
8.0	15.012																								
Object -15V0.05A																									
1. Graph		2. Values																							
<div><p>[V]</p><p>Time [H]</p><p>Input Volt. 24.0V Load 100%</p></div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>-14.971</td></tr><tr><td>0.5</td><td>-14.965</td></tr><tr><td>1.0</td><td>-14.965</td></tr><tr><td>2.0</td><td>-14.964</td></tr><tr><td>3.0</td><td>-14.965</td></tr><tr><td>4.0</td><td>-14.965</td></tr><tr><td>5.0</td><td>-14.964</td></tr><tr><td>6.0</td><td>-14.964</td></tr><tr><td>7.0</td><td>-14.965</td></tr><tr><td>8.0</td><td>-14.964</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	-14.971	0.5	-14.965	1.0	-14.965	2.0	-14.964	3.0	-14.965	4.0	-14.965	5.0	-14.964	6.0	-14.964	7.0	-14.965	8.0	-14.964
Time since start [H]	Output Voltage [V]																								
0.0	-14.971																								
0.5	-14.965																								
1.0	-14.965																								
2.0	-14.964																								
3.0	-14.965																								
4.0	-14.965																								
5.0	-14.964																								
6.0	-14.964																								
7.0	-14.965																								
8.0	-14.964																								





# COSEL

COSEL

		Testing Circuitry      Figure A
Model	ZTW1R52415	
Item	Condensation    結露特性	
Object	−15V0.05A	

1. Condensation test

Testing procedure is as follows.

① Keeping and cooling the unit in a tank at −10℃ for an hour with the input off.

② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.

③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で−10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。

2. Values

Item	Data	Testing Conditions
Output Voltage [V]	−15.339	Input Volt. : 24V, Load Current:0.05A
Line Regulation [mV]	2	Input Volt. : 18~36V, Load Current:0.05A
Load Regulation [mV]	250	Input Volt. : 24V, Load Current:0~0.05A

COSEL

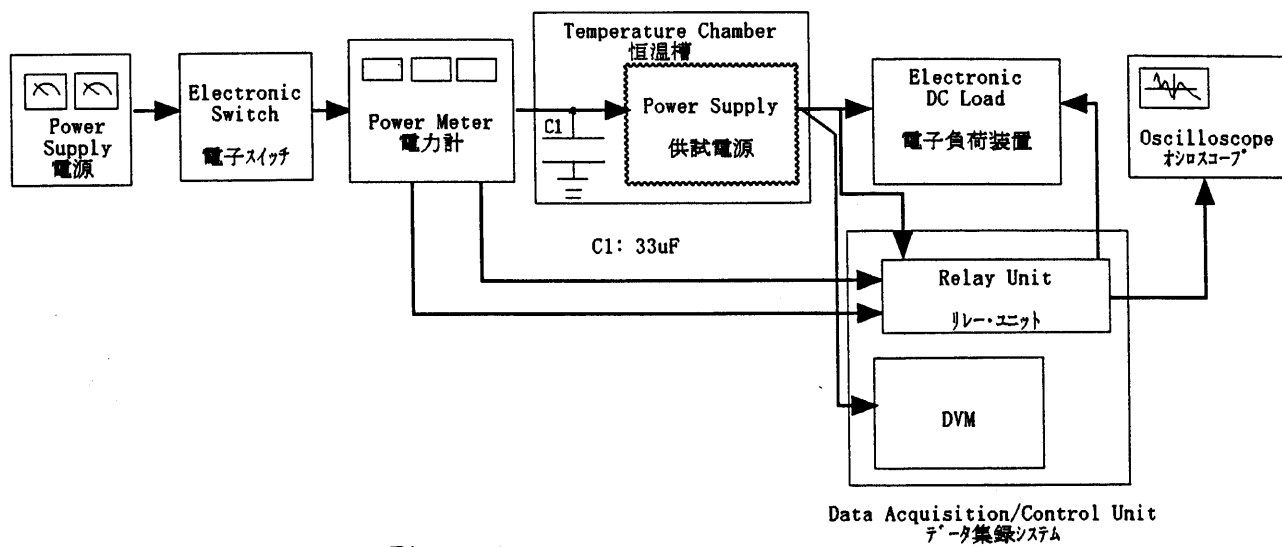


Figure A