



TEST DATA OF ZTW1R54815

(48.0V INPUT)

Regulated DC Power Supply

Date : Mar. 5. 1998

Approved by : N. Shiraishi
Design Manager

Prepared by : T. Tsuru
Design Engineer

コーセル株式会社
COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Efficiency	2
効率	
3. Load Regulation	3
静的負荷変動	
4. Ripple Voltage (by Load Current)	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise	6
リップルノイズ	
6. Overcurrent Protection	8
過電流保護	
7. Dynamic Load Responce	9
動的負荷変動	
8. Rise and Fall Time	11
立上り、立下がり時間	
9. Ambient Temperature Drift	13
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage . . .	14
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature)	15
リップル電圧(周囲温度特性)	
12. Time Lapse Drift	16
経時ドリフト	
13. Output Voltage Accuracy	17
定電圧精度	
14. Condensation	18
結露特性	
15. Figure of Testing Circuitry	20
測定回路図	

(Final Page 20)

COSEL


Model ZTW1R54815

Item Line Regulation 静的入力変動

Object +15V0.05A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

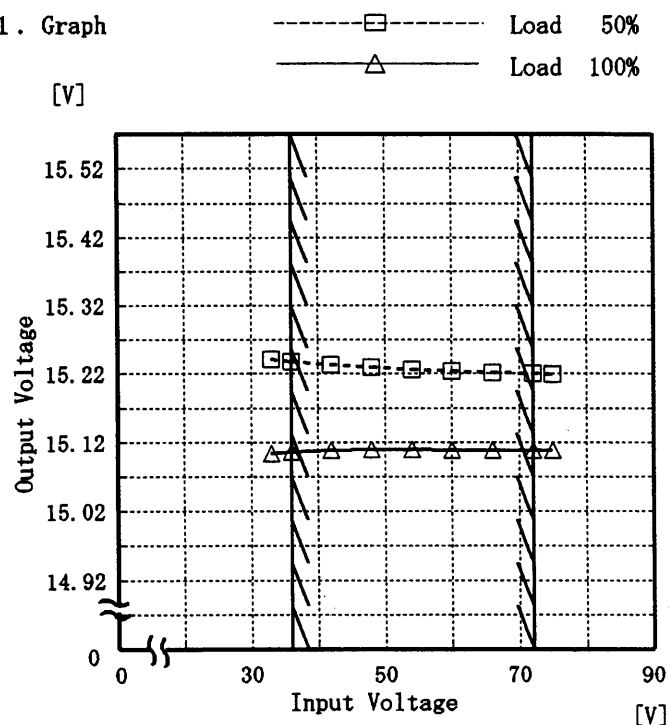


2. Values

Input Voltage [V]	Load 50%	Load 100%
	Output Volt. [V]	Output Volt. [V]
33.0	15.241	15.104
36.0	15.238	15.106
42.0	15.233	15.109
48.0	15.230	15.109
54.0	15.227	15.109
60.0	15.224	15.109
66.0	15.222	15.108
72.0	15.220	15.108
75.0	15.219	15.108
—	—	—
—	—	—
—	—	—

Object -15V0.05A

1. Graph

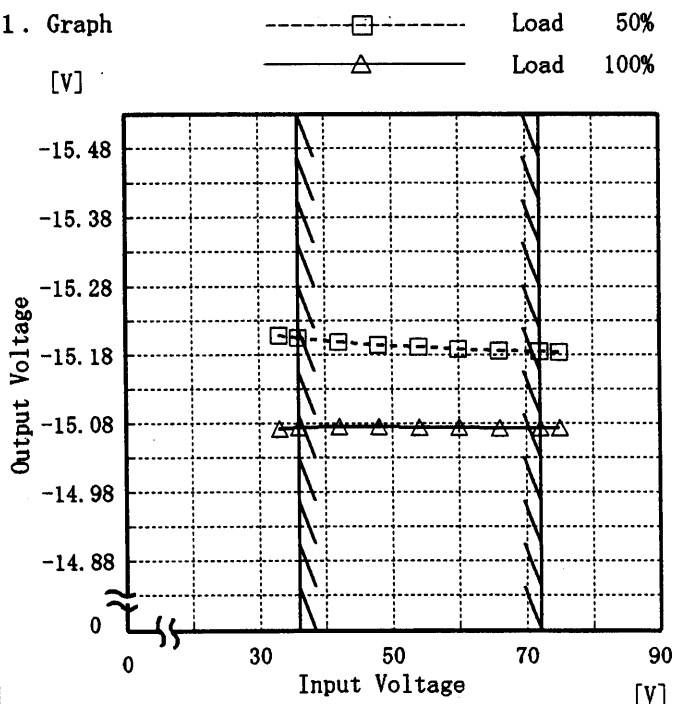

2. Values

Input Voltage [V]	Load 50%	Load 100%
	Output Volt. [V]	Output Volt. [V]
33.0	-15.207	-15.072
36.0	-15.204	-15.074
42.0	-15.198	-15.075
48.0	-15.194	-15.075
54.0	-15.191	-15.075
60.0	-15.188	-15.074
66.0	-15.185	-15.073
72.0	-15.184	-15.073
75.0	-15.183	-15.073
—	—	—
—	—	—
—	—	—

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

COSEL

Model

ZTW1R54815

Item

Efficiency 効率

Object


Temperature

25°C

Testing Circuitry

Figure A

1. Graph

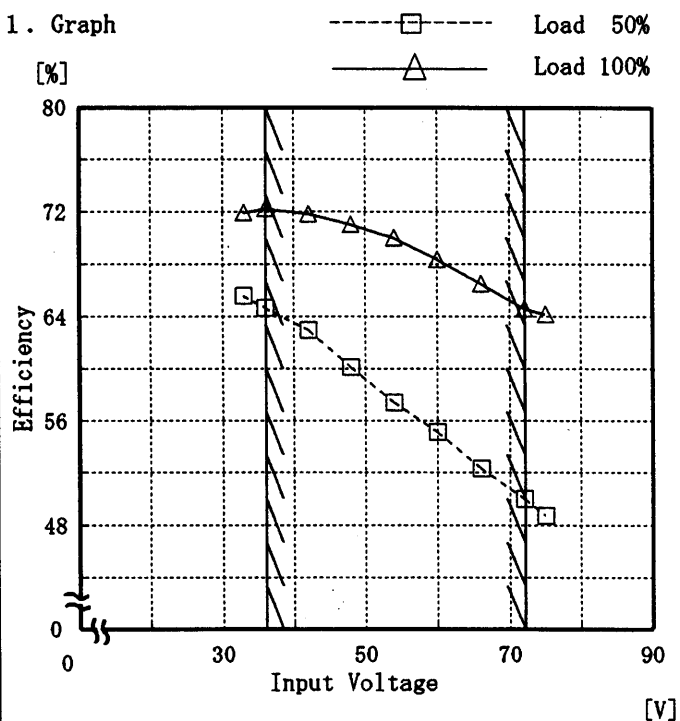

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。


2. Values

Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
33.0	65.6	71.9
36.0	64.7	72.2
42.0	63.0	71.8
48.0	60.1	71.0
54.0	57.4	70.0
60.0	55.1	68.4
66.0	52.3	66.5
72.0	50.0	64.6
75.0	48.7	64.2
—	—	—
—	—	—
—	—	—


COSEL

Model		ZTW1R54815																																																																																																																	
Item	Load Regulation 静的負荷変動																																																																																																																		
Object	+15V0.05A																																																																																																																		
1. Graph		2. Values																																																																																																																	
<div><div><div>△</div><div>—</div></div><div>Input Volt. 36.0V</div><div><div>□</div><div>---</div></div><div>Input Volt. 48.0V</div><div><div>○</div><div>---</div></div><div>Input Volt. 72.0V</div></div> <div><table><thead><tr><th>Load Current</th><th>Input Volt. 36.0[V]</th><th>Input Volt. 48.0[V]</th><th>Input Volt. 72.0[V]</th></tr><tr><th>[A]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr></thead><tbody><tr><td>0.000</td><td>15.445</td><td>15.437</td><td>15.428</td></tr><tr><td>0.008</td><td>15.344</td><td>15.332</td><td>15.319</td></tr><tr><td>0.016</td><td>15.287</td><td>15.277</td><td>15.265</td></tr><tr><td>0.024</td><td>15.240</td><td>15.232</td><td>15.222</td></tr><tr><td>0.032</td><td>15.197</td><td>15.192</td><td>15.184</td></tr><tr><td>0.040</td><td>15.155</td><td>15.153</td><td>15.147</td></tr><tr><td>0.048</td><td>15.115</td><td>15.117</td><td>15.114</td></tr><tr><td>0.050</td><td>15.105</td><td>15.108</td><td>15.106</td></tr><tr><td>0.055</td><td>15.080</td><td>15.086</td><td>15.086</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></tbody></table></div> <tr><td colspan="2">Object</td><td colspan="2">-15V0.05A</td></tr> <tr><td colspan="2">1. Graph</td><td colspan="2">2. Values</td></tr> <tr><td colspan="2"><div><div><div>△</div><div>—</div></div><div>Input Volt. 36.0V</div><div><div>□</div><div>---</div></div><div>Input Volt. 48.0V</div><div><div>○</div><div>---</div></div><div>Input Volt. 72.0V</div></div><div><table><thead><tr><th>Load Current</th><th>Input Volt. 36.0[V]</th><th>Input Volt. 48.0[V]</th><th>Input Volt. 72.0[V]</th></tr><tr><th>[A]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr></thead><tbody><tr><td>0.000</td><td>-15.375</td><td>-15.364</td><td>-15.352</td></tr><tr><td>0.008</td><td>-15.294</td><td>-15.282</td><td>-15.270</td></tr><tr><td>0.016</td><td>-15.240</td><td>-15.230</td><td>-15.219</td></tr><tr><td>0.024</td><td>-15.194</td><td>-15.185</td><td>-15.176</td></tr><tr><td>0.032</td><td>-15.151</td><td>-15.146</td><td>-15.138</td></tr><tr><td>0.040</td><td>-15.110</td><td>-15.108</td><td>-15.103</td></tr><tr><td>0.048</td><td>-15.071</td><td>-15.072</td><td>-15.070</td></tr><tr><td>0.050</td><td>-15.061</td><td>-15.063</td><td>-15.061</td></tr><tr><td>0.055</td><td>-15.036</td><td>-15.041</td><td>-15.041</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></tbody></table></div><tr><td colspan="2">Note: Slanted line shows the range of the rated load current.</td><td colspan="2"></td></tr><tr><td colspan="2">(注) 斜線は定格負荷電流範囲を示す。</td><td colspan="2"></td></tr></td></tr>		Load Current	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]	[A]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.000	15.445	15.437	15.428	0.008	15.344	15.332	15.319	0.016	15.287	15.277	15.265	0.024	15.240	15.232	15.222	0.032	15.197	15.192	15.184	0.040	15.155	15.153	15.147	0.048	15.115	15.117	15.114	0.050	15.105	15.108	15.106	0.055	15.080	15.086	15.086	—	—	—	—	Object		-15V0.05A		1. Graph		2. Values		<div><div><div>△</div><div>—</div></div><div>Input Volt. 36.0V</div><div><div>□</div><div>---</div></div><div>Input Volt. 48.0V</div><div><div>○</div><div>---</div></div><div>Input Volt. 72.0V</div></div> <div><table><thead><tr><th>Load Current</th><th>Input Volt. 36.0[V]</th><th>Input Volt. 48.0[V]</th><th>Input Volt. 72.0[V]</th></tr><tr><th>[A]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr></thead><tbody><tr><td>0.000</td><td>-15.375</td><td>-15.364</td><td>-15.352</td></tr><tr><td>0.008</td><td>-15.294</td><td>-15.282</td><td>-15.270</td></tr><tr><td>0.016</td><td>-15.240</td><td>-15.230</td><td>-15.219</td></tr><tr><td>0.024</td><td>-15.194</td><td>-15.185</td><td>-15.176</td></tr><tr><td>0.032</td><td>-15.151</td><td>-15.146</td><td>-15.138</td></tr><tr><td>0.040</td><td>-15.110</td><td>-15.108</td><td>-15.103</td></tr><tr><td>0.048</td><td>-15.071</td><td>-15.072</td><td>-15.070</td></tr><tr><td>0.050</td><td>-15.061</td><td>-15.063</td><td>-15.061</td></tr><tr><td>0.055</td><td>-15.036</td><td>-15.041</td><td>-15.041</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></tbody></table></div> <tr><td colspan="2">Note: Slanted line shows the range of the rated load current.</td><td colspan="2"></td></tr> <tr><td colspan="2">(注) 斜線は定格負荷電流範囲を示す。</td><td colspan="2"></td></tr>		Load Current	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]	[A]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.000	-15.375	-15.364	-15.352	0.008	-15.294	-15.282	-15.270	0.016	-15.240	-15.230	-15.219	0.024	-15.194	-15.185	-15.176	0.032	-15.151	-15.146	-15.138	0.040	-15.110	-15.108	-15.103	0.048	-15.071	-15.072	-15.070	0.050	-15.061	-15.063	-15.061	0.055	-15.036	-15.041	-15.041	—	—	—	—	Note: Slanted line shows the range of the rated load current.				(注) 斜線は定格負荷電流範囲を示す。			
Load Current	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]																																																																																																																
[A]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																																																																																
0.000	15.445	15.437	15.428																																																																																																																
0.008	15.344	15.332	15.319																																																																																																																
0.016	15.287	15.277	15.265																																																																																																																
0.024	15.240	15.232	15.222																																																																																																																
0.032	15.197	15.192	15.184																																																																																																																
0.040	15.155	15.153	15.147																																																																																																																
0.048	15.115	15.117	15.114																																																																																																																
0.050	15.105	15.108	15.106																																																																																																																
0.055	15.080	15.086	15.086																																																																																																																
—	—	—	—																																																																																																																
Object		-15V0.05A																																																																																																																	
1. Graph		2. Values																																																																																																																	
<div><div><div>△</div><div>—</div></div><div>Input Volt. 36.0V</div><div><div>□</div><div>---</div></div><div>Input Volt. 48.0V</div><div><div>○</div><div>---</div></div><div>Input Volt. 72.0V</div></div> <div><table><thead><tr><th>Load Current</th><th>Input Volt. 36.0[V]</th><th>Input Volt. 48.0[V]</th><th>Input Volt. 72.0[V]</th></tr><tr><th>[A]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr></thead><tbody><tr><td>0.000</td><td>-15.375</td><td>-15.364</td><td>-15.352</td></tr><tr><td>0.008</td><td>-15.294</td><td>-15.282</td><td>-15.270</td></tr><tr><td>0.016</td><td>-15.240</td><td>-15.230</td><td>-15.219</td></tr><tr><td>0.024</td><td>-15.194</td><td>-15.185</td><td>-15.176</td></tr><tr><td>0.032</td><td>-15.151</td><td>-15.146</td><td>-15.138</td></tr><tr><td>0.040</td><td>-15.110</td><td>-15.108</td><td>-15.103</td></tr><tr><td>0.048</td><td>-15.071</td><td>-15.072</td><td>-15.070</td></tr><tr><td>0.050</td><td>-15.061</td><td>-15.063</td><td>-15.061</td></tr><tr><td>0.055</td><td>-15.036</td><td>-15.041</td><td>-15.041</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></tbody></table></div> <tr><td colspan="2">Note: Slanted line shows the range of the rated load current.</td><td colspan="2"></td></tr> <tr><td colspan="2">(注) 斜線は定格負荷電流範囲を示す。</td><td colspan="2"></td></tr>		Load Current	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]	[A]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.000	-15.375	-15.364	-15.352	0.008	-15.294	-15.282	-15.270	0.016	-15.240	-15.230	-15.219	0.024	-15.194	-15.185	-15.176	0.032	-15.151	-15.146	-15.138	0.040	-15.110	-15.108	-15.103	0.048	-15.071	-15.072	-15.070	0.050	-15.061	-15.063	-15.061	0.055	-15.036	-15.041	-15.041	—	—	—	—	Note: Slanted line shows the range of the rated load current.				(注) 斜線は定格負荷電流範囲を示す。																																																													
Load Current	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]																																																																																																																
[A]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																																																																																
0.000	-15.375	-15.364	-15.352																																																																																																																
0.008	-15.294	-15.282	-15.270																																																																																																																
0.016	-15.240	-15.230	-15.219																																																																																																																
0.024	-15.194	-15.185	-15.176																																																																																																																
0.032	-15.151	-15.146	-15.138																																																																																																																
0.040	-15.110	-15.108	-15.103																																																																																																																
0.048	-15.071	-15.072	-15.070																																																																																																																
0.050	-15.061	-15.063	-15.061																																																																																																																
0.055	-15.036	-15.041	-15.041																																																																																																																
—	—	—	—																																																																																																																
Note: Slanted line shows the range of the rated load current.																																																																																																																			
(注) 斜線は定格負荷電流範囲を示す。																																																																																																																			


COSEL

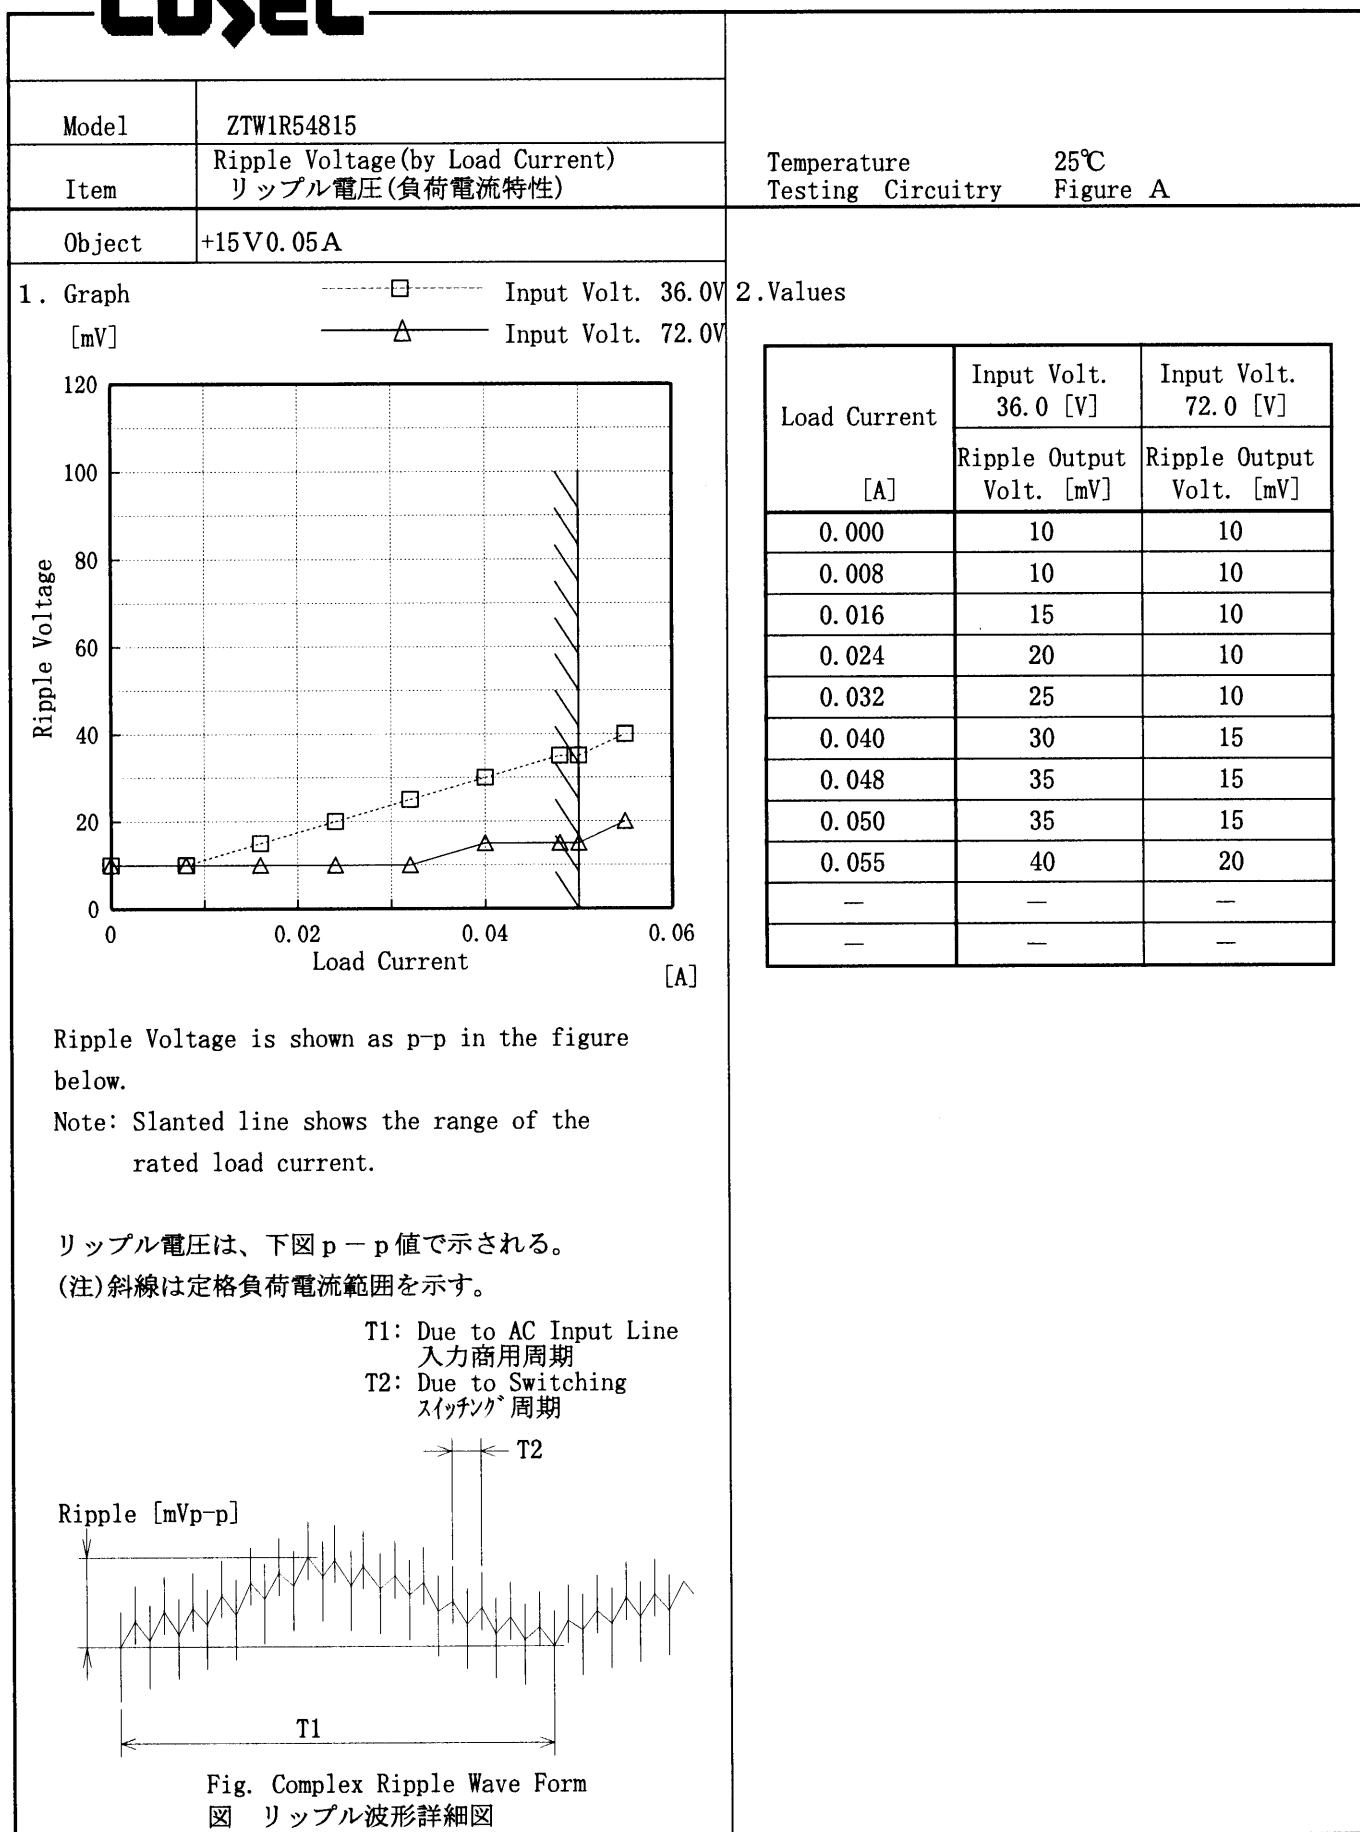


COSEL

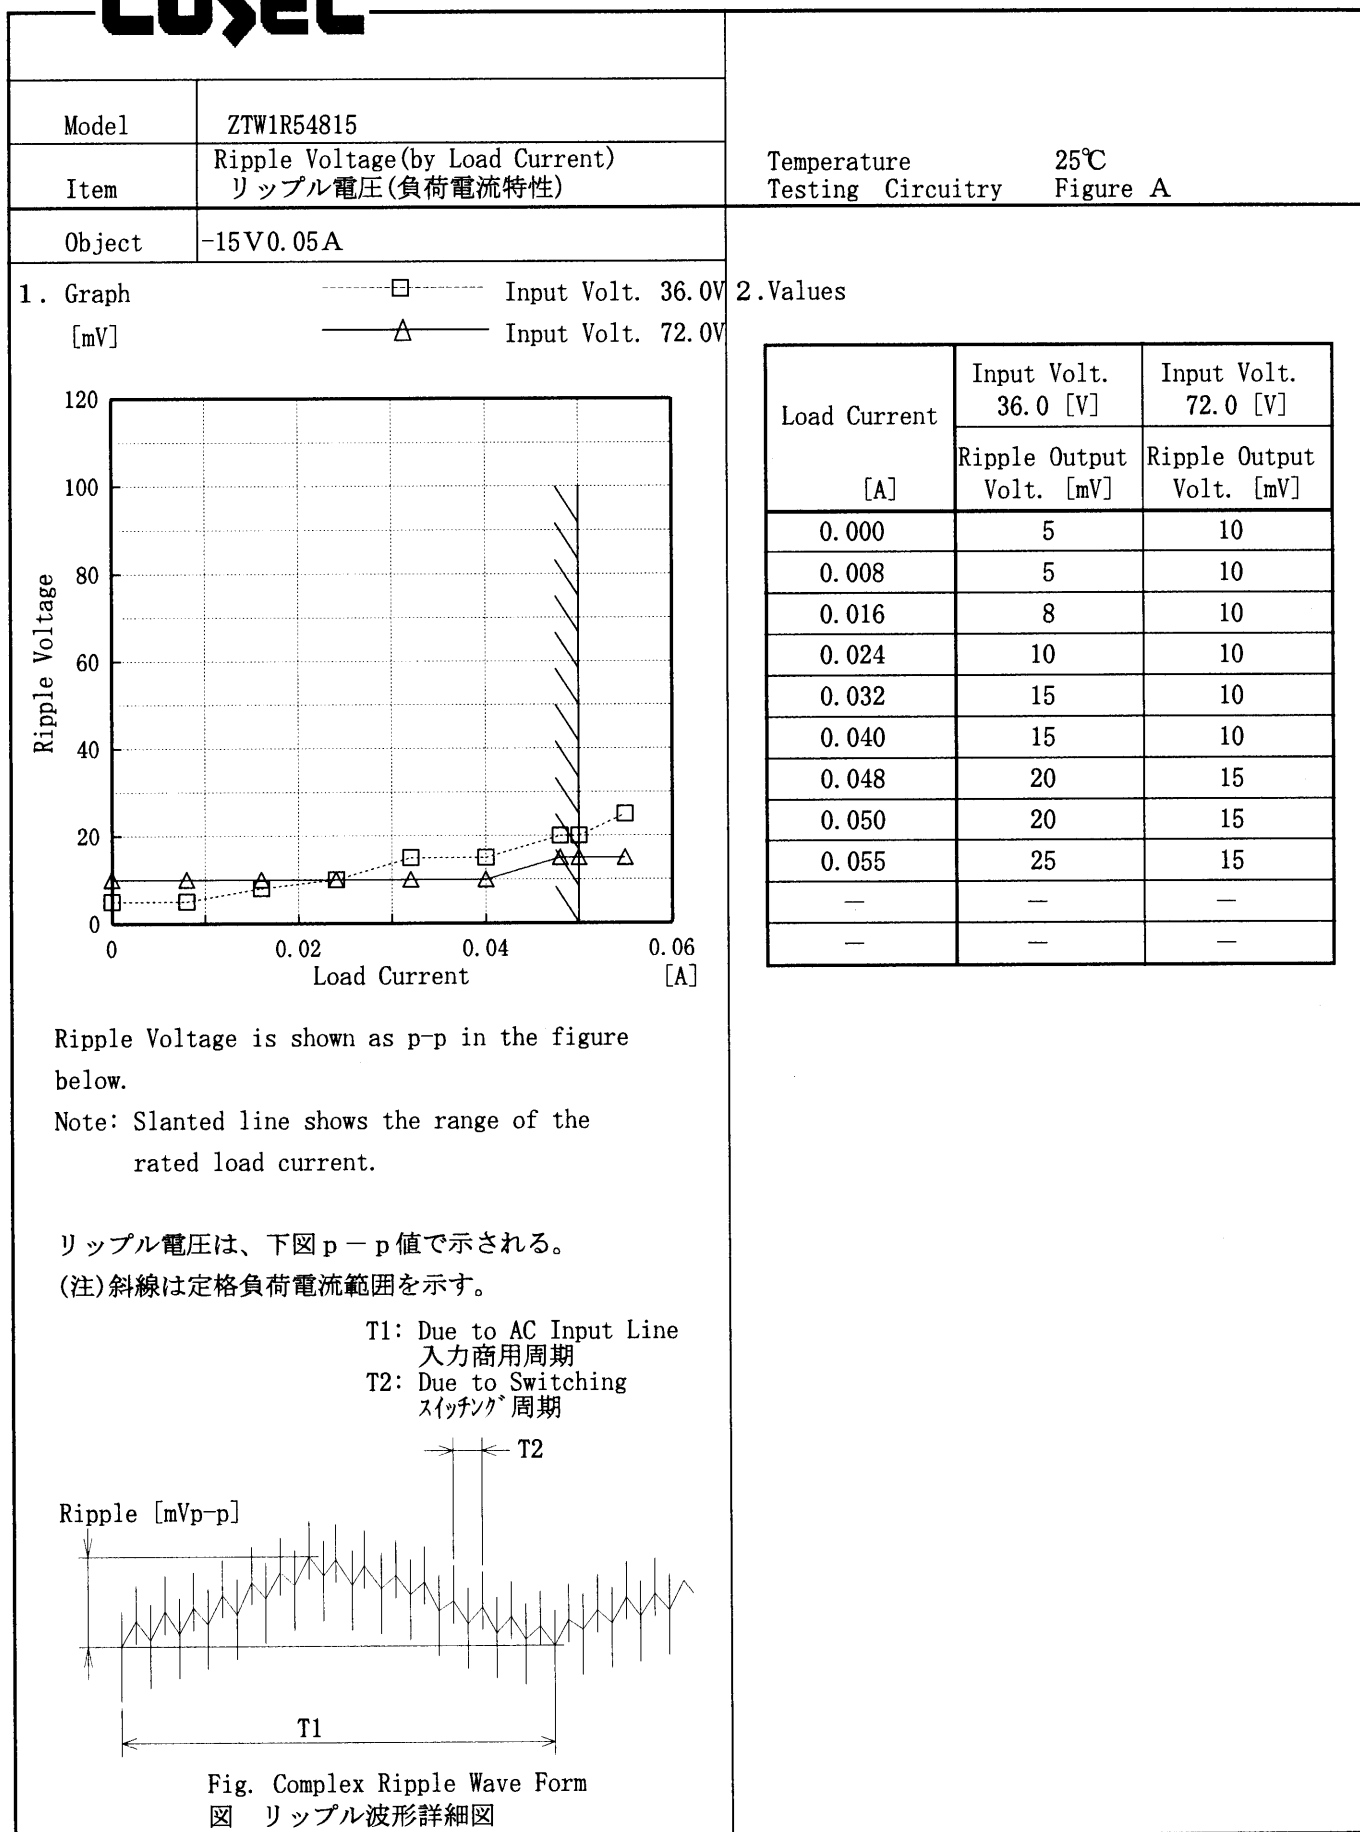

COSEL

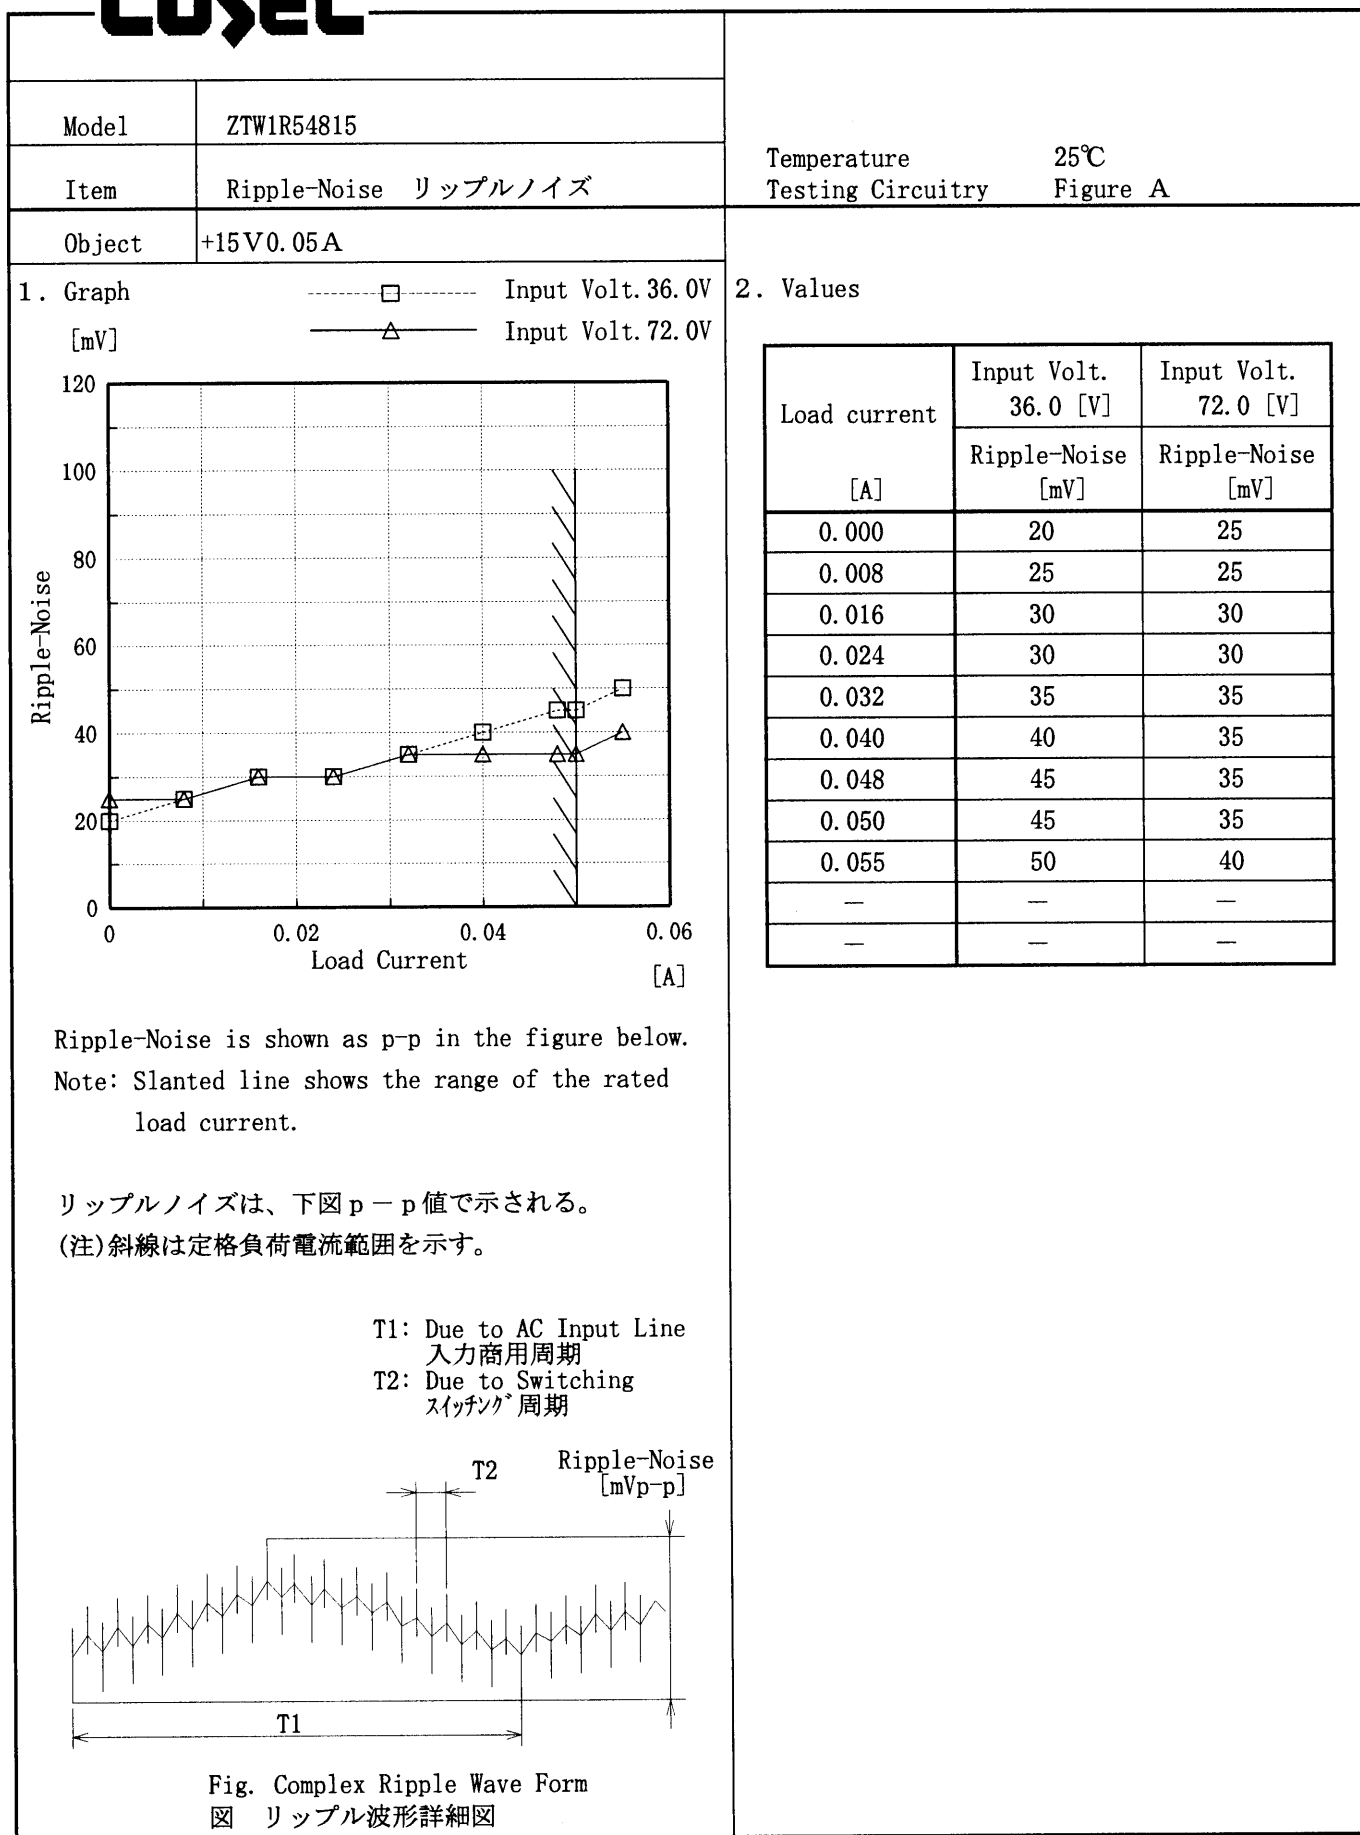

COSEL

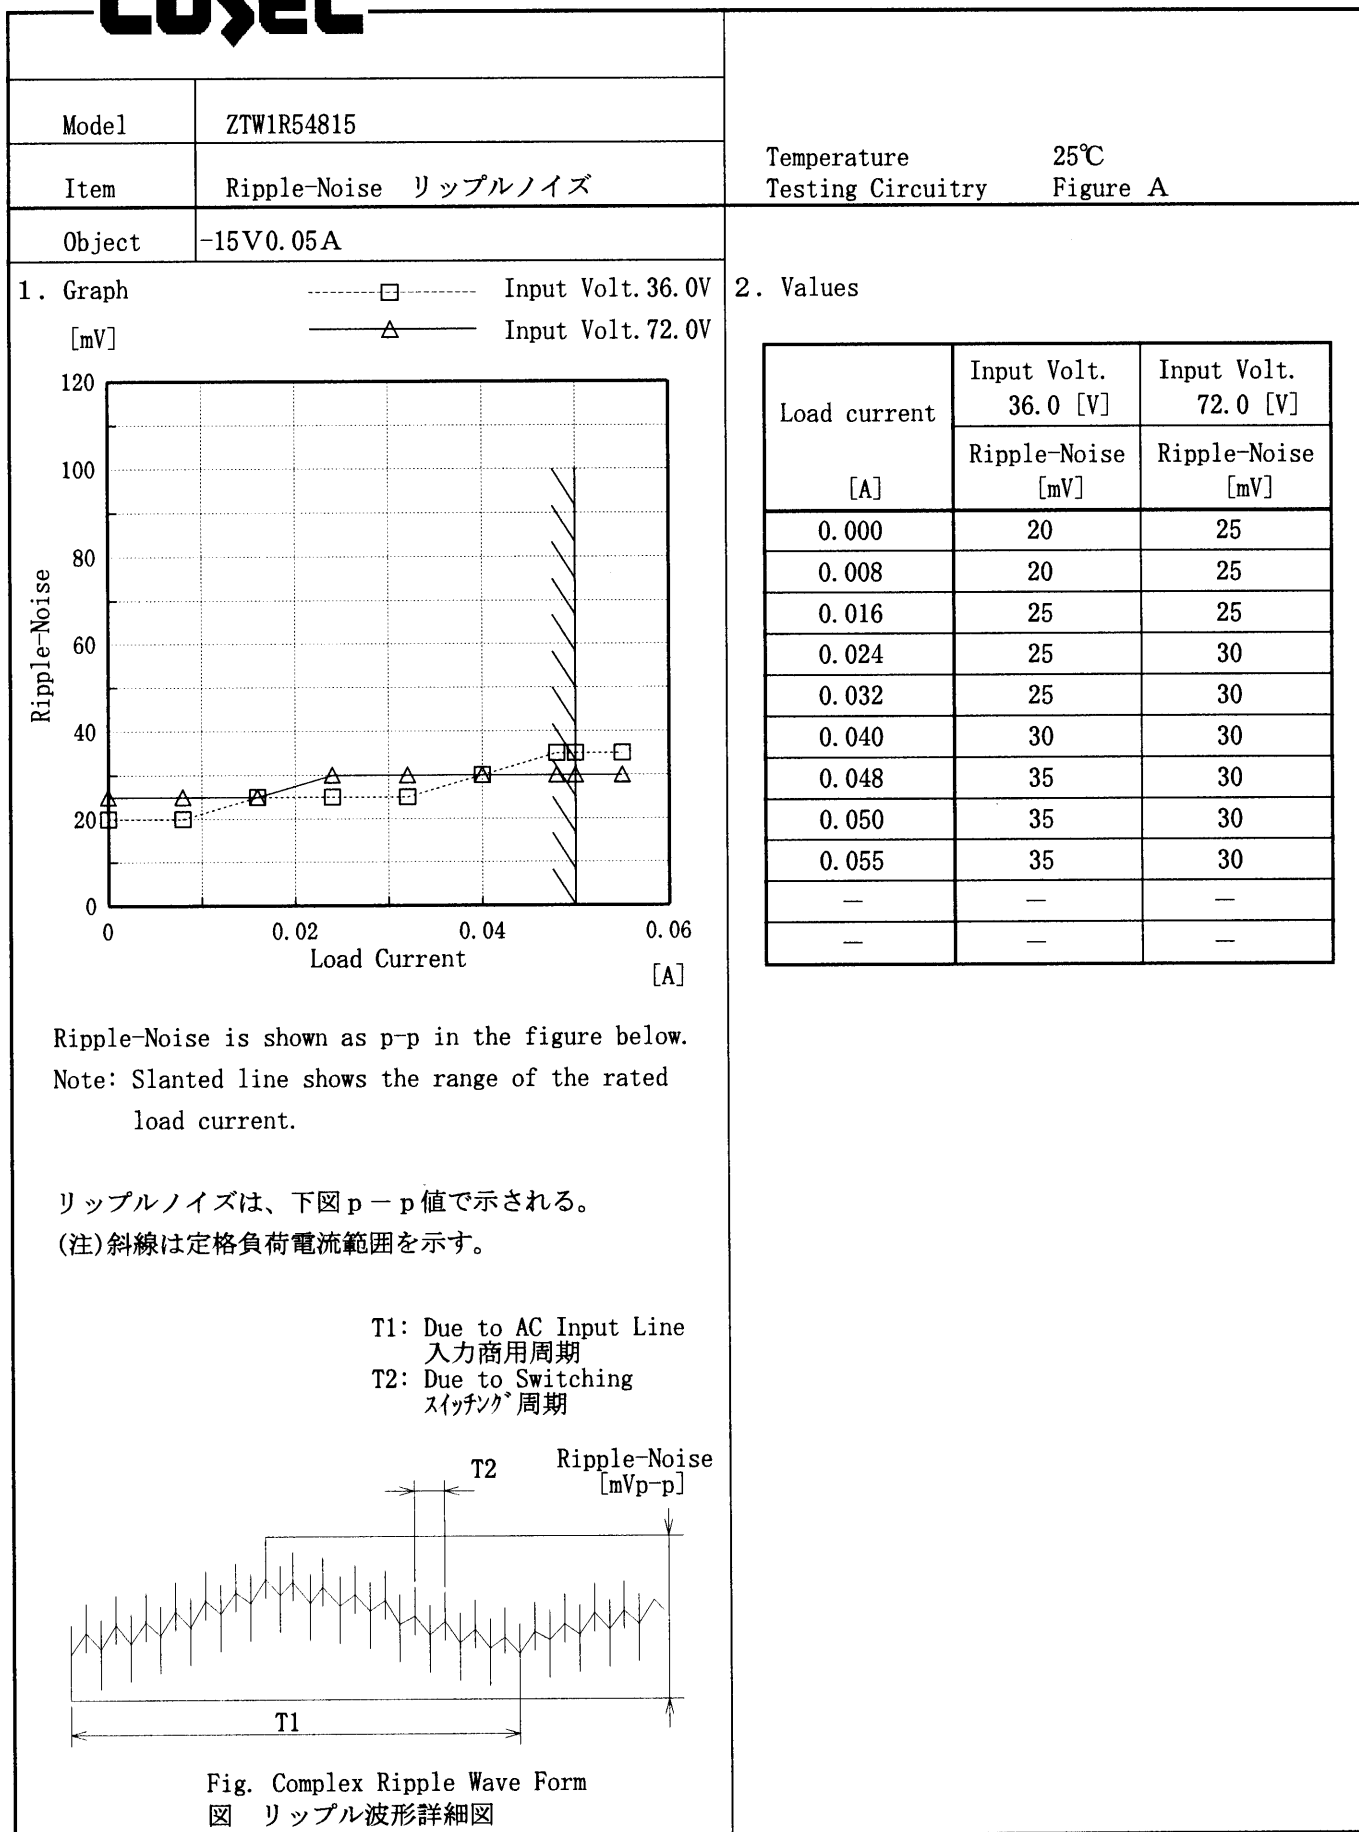

COSEL


Model ZTW1R54815

Item Overcurrent Protection
過電流保護

Object +15V0.05A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

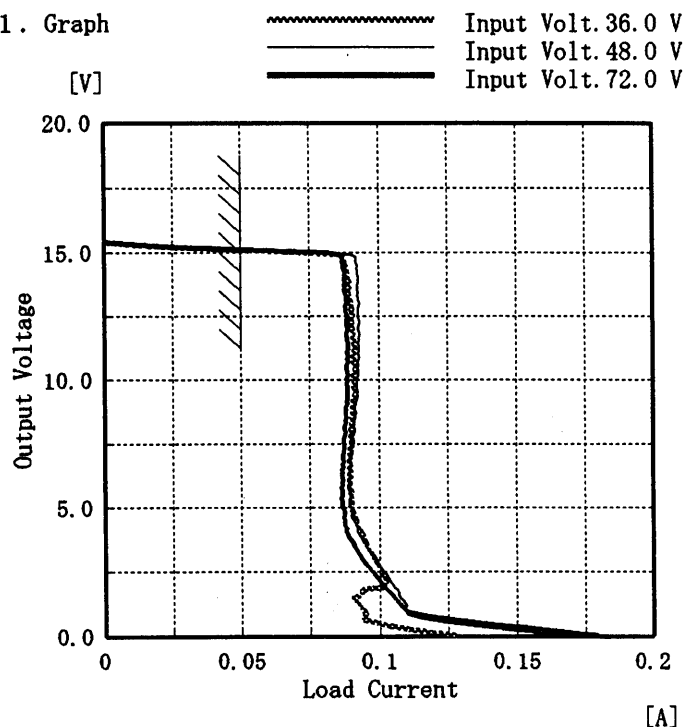


2. Values

Output Voltage [V]	Input Volt. 36.0 [V]	Input Volt. 48.0 [V]	Input Volt. 72.0 [V]
	Load Current [A]	Load Current [A]	Load Current [A]
15.00	0.063	0.079	0.081
14.25	0.088	0.092	0.088
13.50	0.089	0.092	0.088
12.00	0.090	0.092	0.089
10.50	0.091	0.092	0.088
9.00	0.091	0.091	0.088
7.50	0.090	0.090	0.087
6.00	0.089	0.089	0.087
4.50	0.091	0.090	0.087
3.00	0.098	0.097	0.093
1.50	0.093	0.107	0.104
0.00	0.128	0.168	0.180

Object -15V0.05A

1. Graph

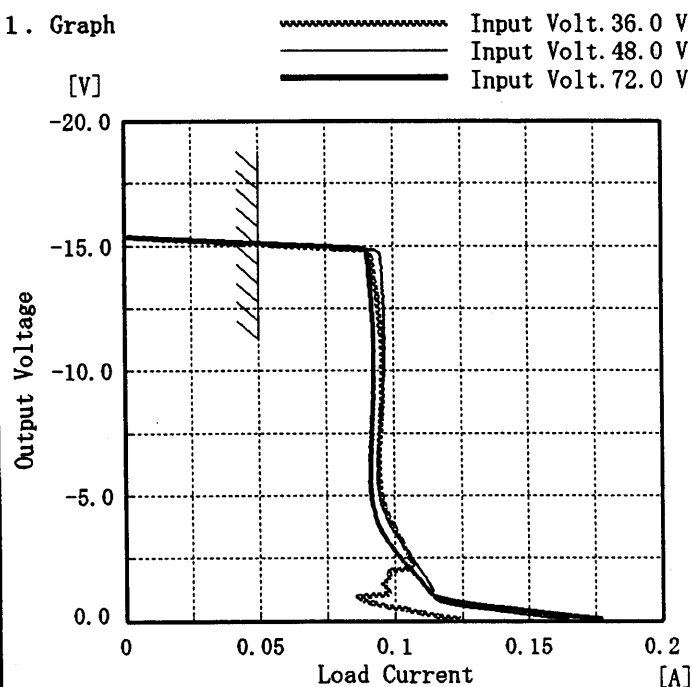

2. Values

Output Voltage [V]	Input Volt. 36.0 [V]	Input Volt. 48.0 [V]	Input Volt. 72.0 [V]
	Load Current [A]	Load Current [A]	Load Current [A]
-15.00	0.073	0.078	0.087
-14.25	0.092	0.095	0.091
-13.50	0.093	0.096	0.091
-12.00	0.095	0.096	0.092
-10.50	0.096	0.097	0.093
-9.00	0.096	0.096	0.092
-7.50	0.095	0.095	0.092
-6.00	0.094	0.094	0.091
-4.50	0.096	0.095	0.092
-3.00	0.103	0.103	0.099
-1.50	0.097	0.112	0.110
0.00	0.125	0.165	0.178

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

COSEL

Model	ZTW1R54815	Temperature	25°C
Item	Dynamic Load Responce 動的負荷変動	Testing Circuitry	Figure A
Object	+15V0.05A		

Input Volt. 48.0 V


Cycle 100 mS

Load Current

Min. Load ↔

Load 100 %


200 mV/div

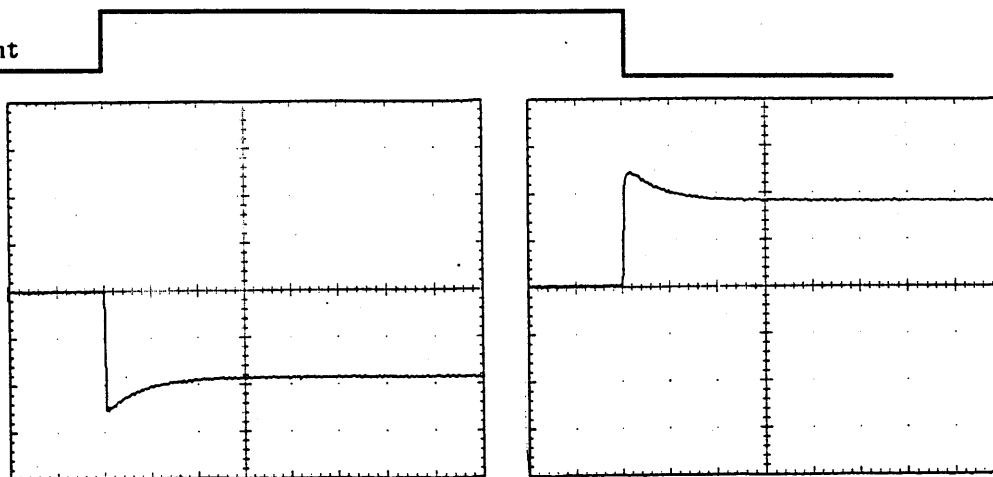

Min. Load ↔

Load 50 %


200 mV/div

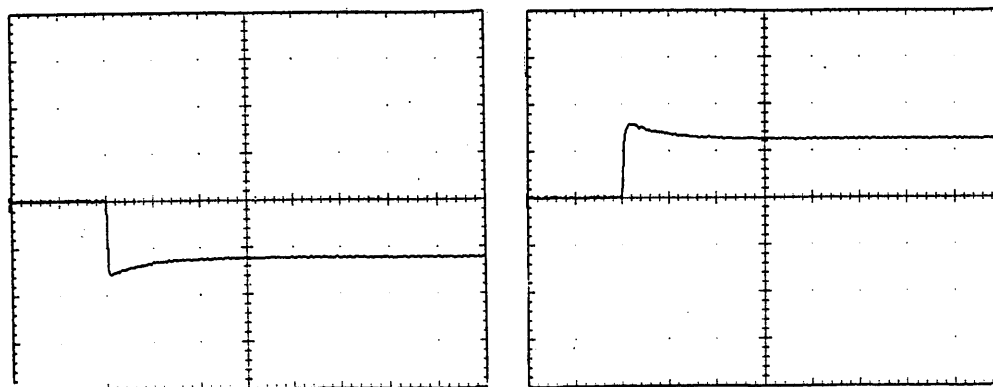

Load 50% ↔


Load 100 %

200 mV/div

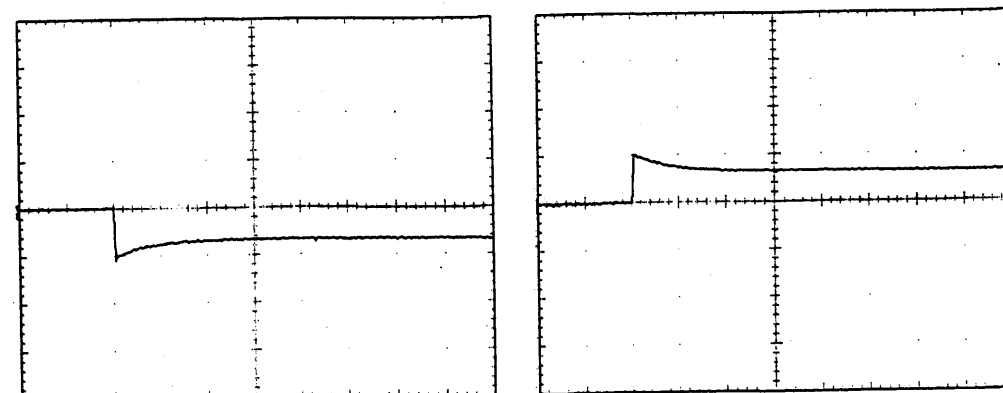

1 mS/div

COSEL

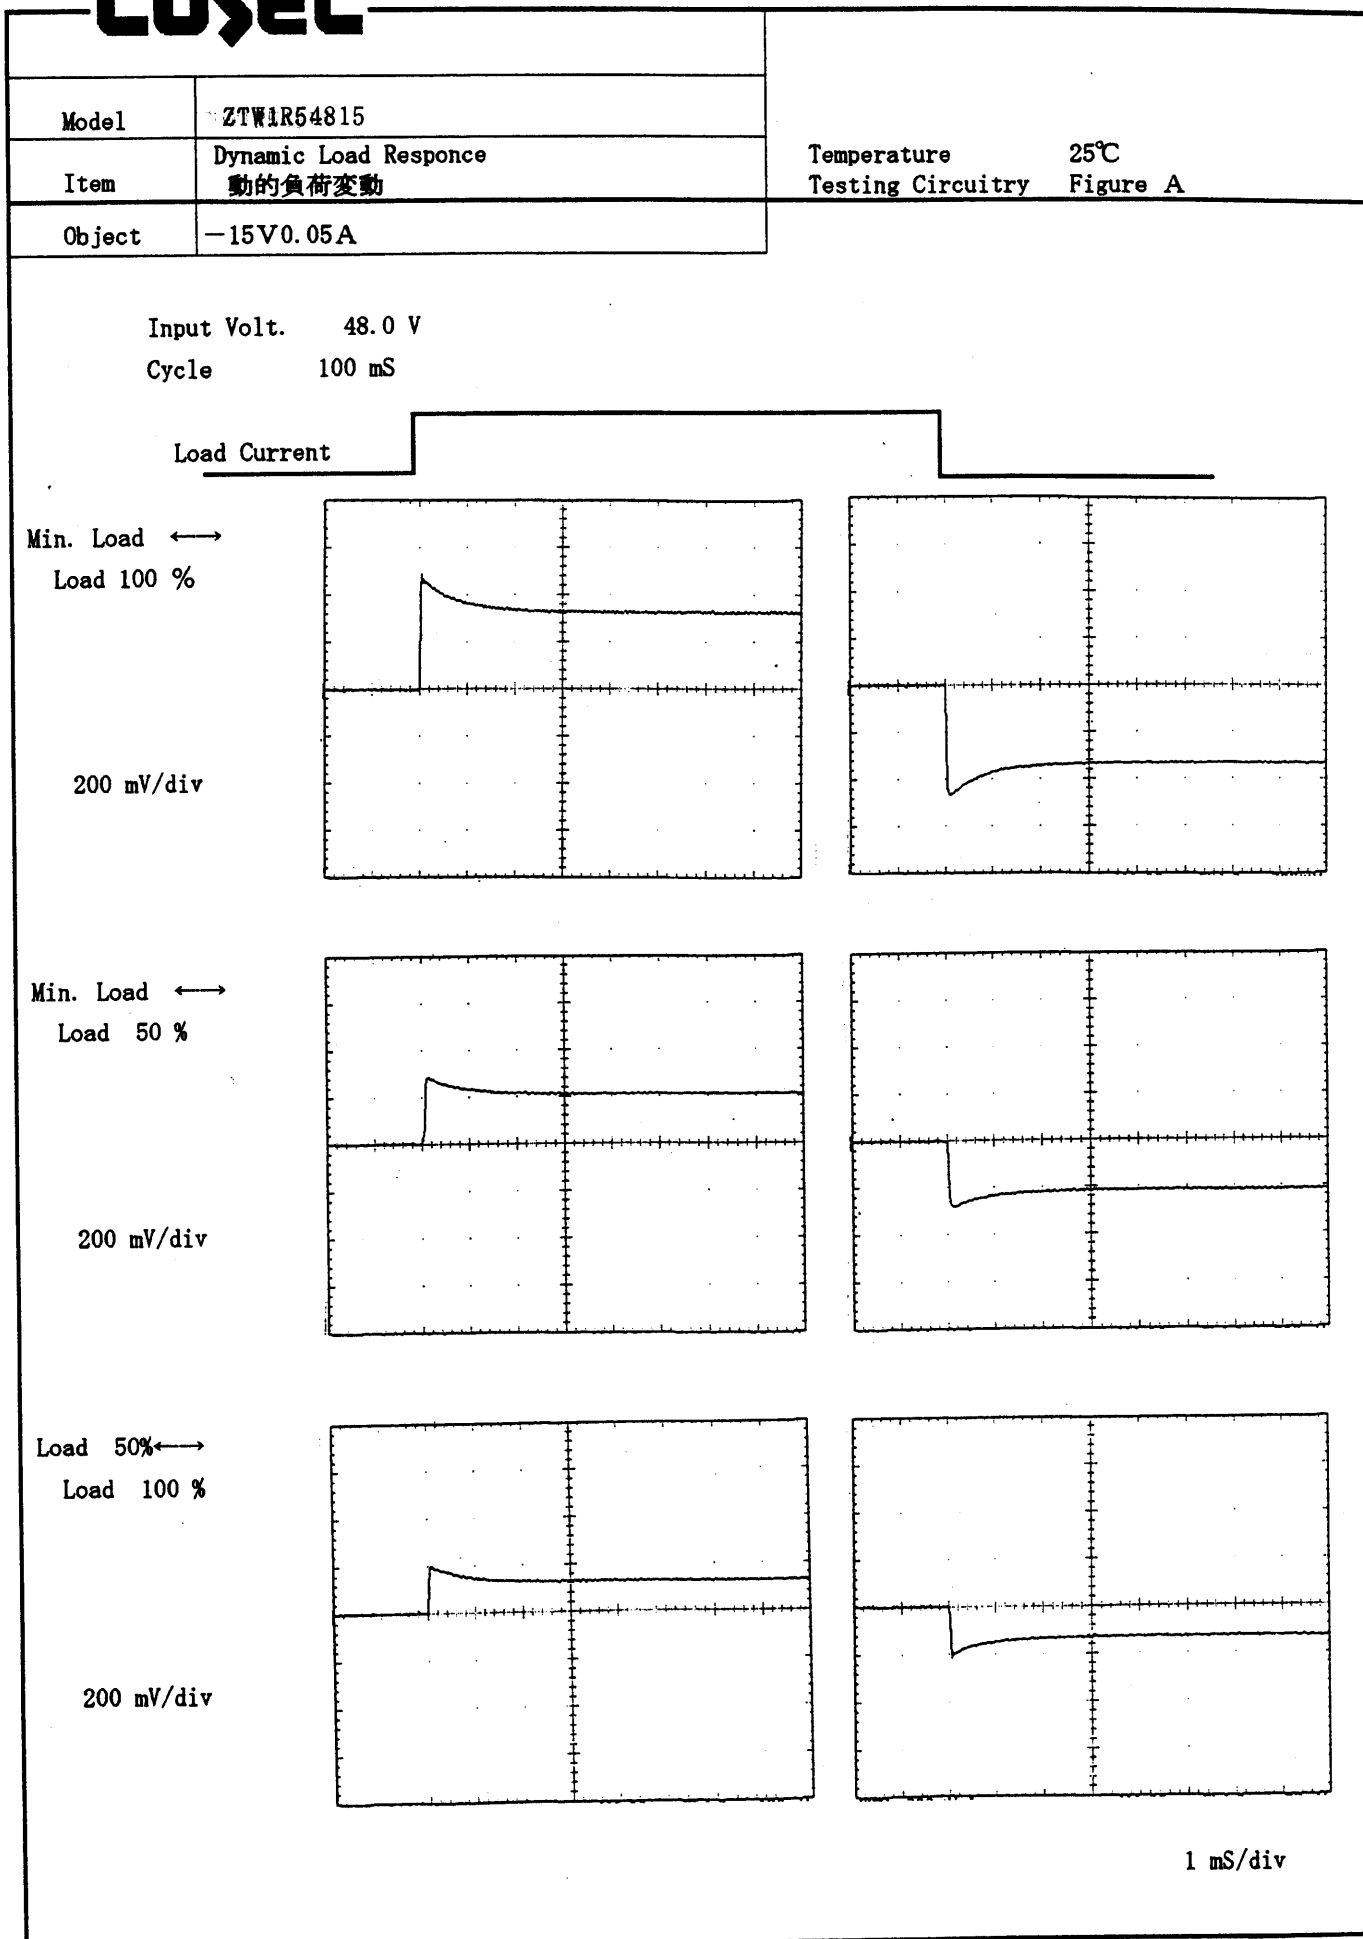

COSEL

Model ZTW1R54815


Item Rise and Fall Time 立上り、立下り時間

Temperature 25°C
Testing Circuitry Figure A

Object +15V0.05A

1. Graph


Input Volt. 36.0 V

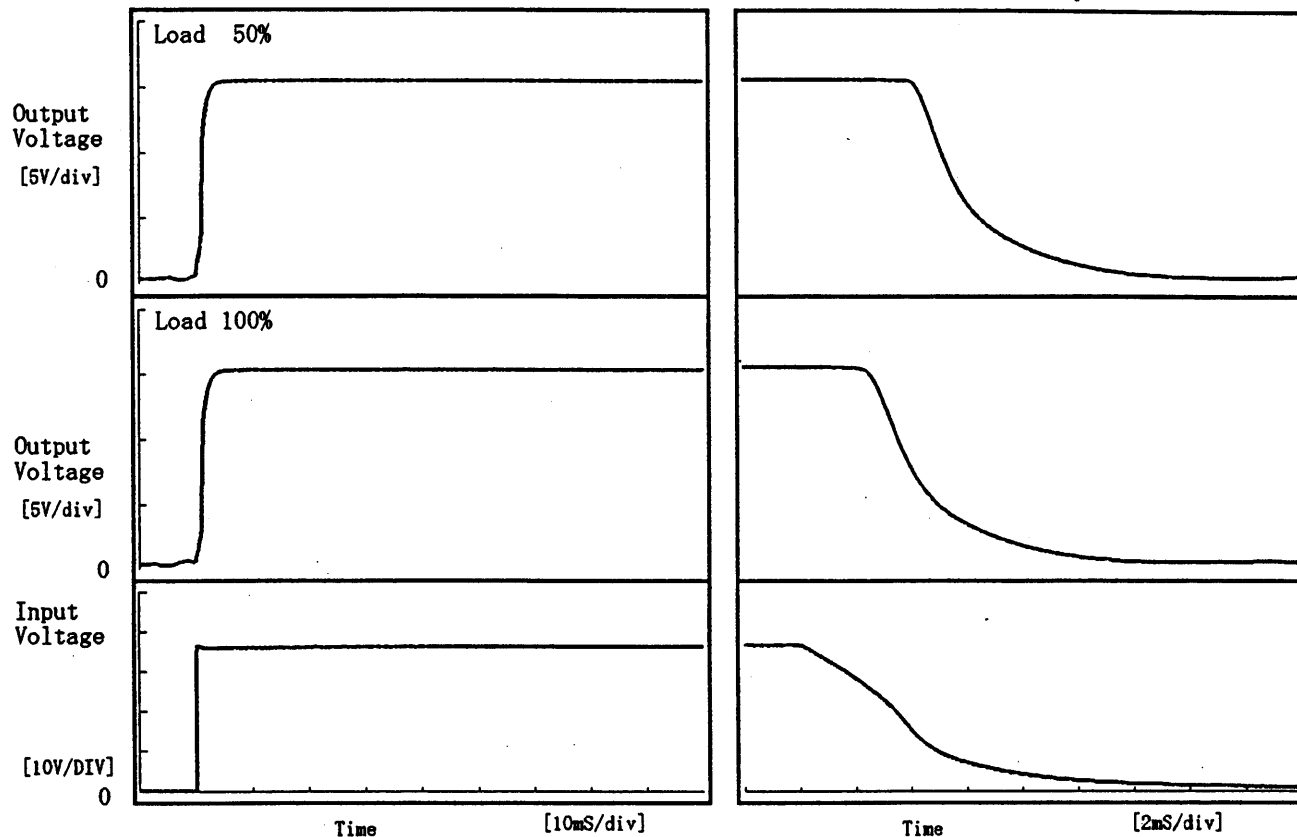

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.10	1.85	1.95	4.49	5.05
100 %	0.15	2.00	2.15	2.84	5.27

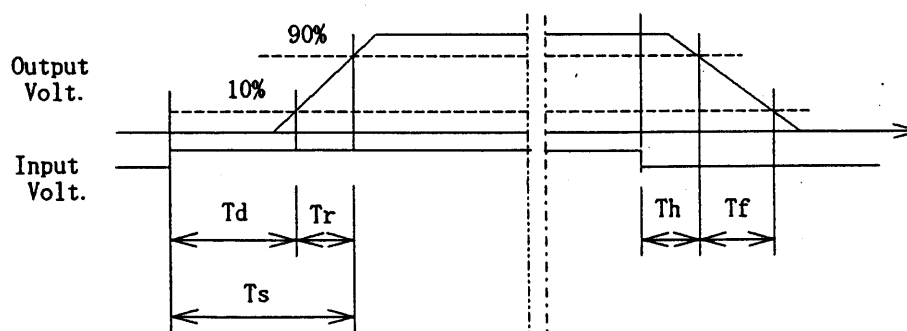


COSEL

Model	ZTW1R54815	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	-15V0.05A		

1. Graph


Input Volt. 36.0 V

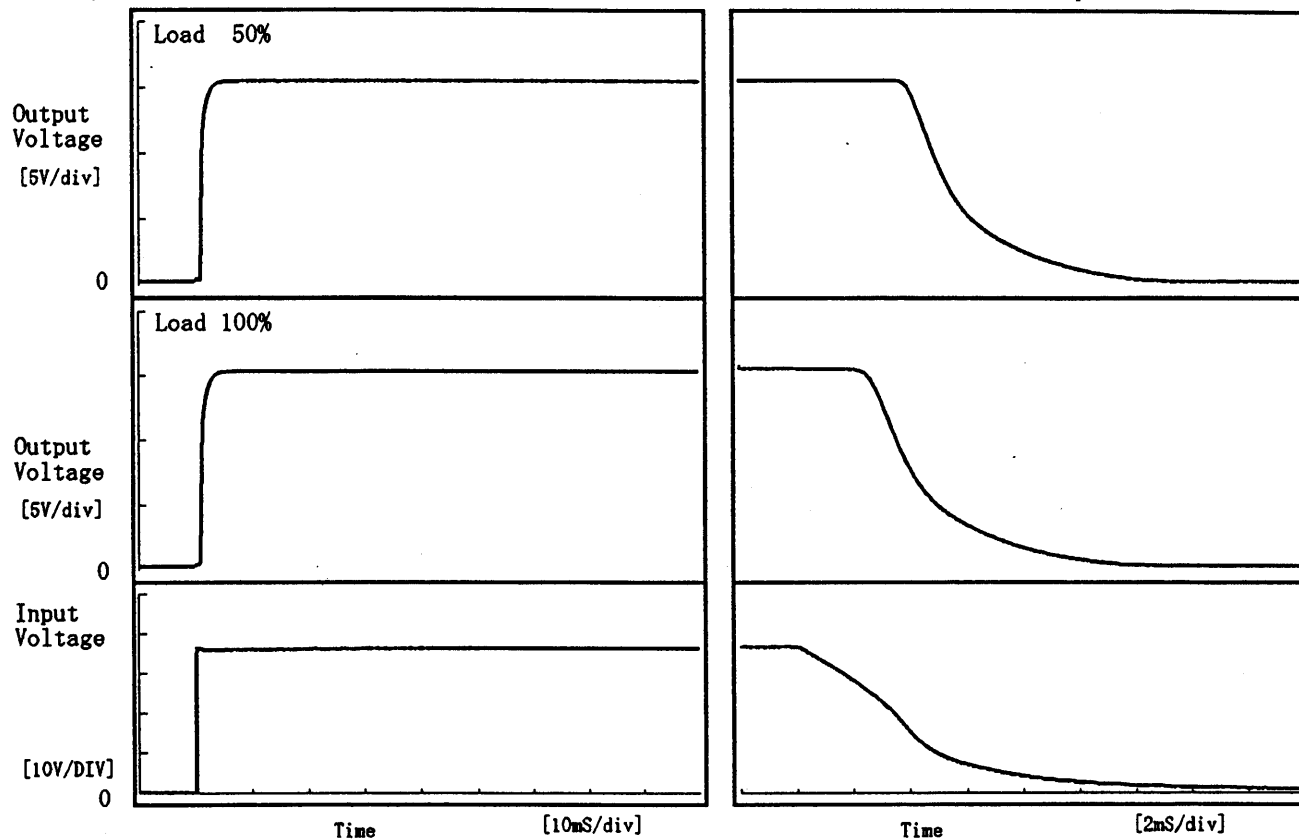

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.90	1.10	2.00	4.22	4.94
100 %	0.85	1.25	2.10	2.84	5.15

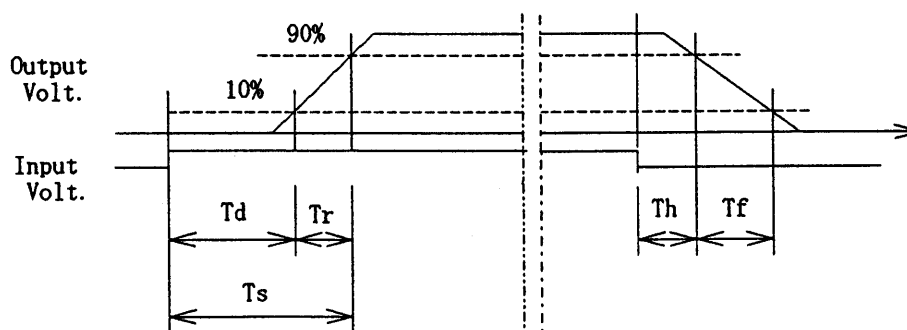

COSEL

Model ZTW1R54815		Testing Circuitry Figure A																																																	
Item	Ambient Temperature Drift 周囲温度変動																																																		
Object	+15V0.05A																																																		
1. Graph		2. Values																																																	
<p> \triangle Input Volt. 36.0V \square Input Volt. 48.0V \circ Input Volt. 72.0V </p> <p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p>		<table border="1"> <thead> <tr> <th>Temperature [°C]</th><th>Input Volt. 36.0[V] Output Volt. [V]</th><th>Input Volt. 48.0[V] Output Volt. [V]</th><th>Input Volt. 72.0[V] Output Volt. [V]</th></tr> </thead> <tbody> <tr><td>-30</td><td>15.141</td><td>15.143</td><td>15.141</td></tr> <tr><td>-20</td><td>15.134</td><td>15.136</td><td>15.134</td></tr> <tr><td>-10</td><td>15.127</td><td>15.129</td><td>15.128</td></tr> <tr><td>0</td><td>15.122</td><td>15.124</td><td>15.123</td></tr> <tr><td>10</td><td>15.117</td><td>15.120</td><td>15.118</td></tr> <tr><td>25</td><td>15.110</td><td>15.113</td><td>15.112</td></tr> <tr><td>30</td><td>15.108</td><td>15.110</td><td>15.109</td></tr> <tr><td>40</td><td>15.103</td><td>15.105</td><td>15.105</td></tr> <tr><td>55</td><td>15.094</td><td>15.098</td><td>15.098</td></tr> <tr><td>60</td><td>15.091</td><td>15.094</td><td>15.095</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Temperature [°C]	Input Volt. 36.0[V] Output Volt. [V]	Input Volt. 48.0[V] Output Volt. [V]	Input Volt. 72.0[V] Output Volt. [V]	-30	15.141	15.143	15.141	-20	15.134	15.136	15.134	-10	15.127	15.129	15.128	0	15.122	15.124	15.123	10	15.117	15.120	15.118	25	15.110	15.113	15.112	30	15.108	15.110	15.109	40	15.103	15.105	15.105	55	15.094	15.098	15.098	60	15.091	15.094	15.095	—	—	—	—
Temperature [°C]	Input Volt. 36.0[V] Output Volt. [V]	Input Volt. 48.0[V] Output Volt. [V]	Input Volt. 72.0[V] Output Volt. [V]																																																
-30	15.141	15.143	15.141																																																
-20	15.134	15.136	15.134																																																
-10	15.127	15.129	15.128																																																
0	15.122	15.124	15.123																																																
10	15.117	15.120	15.118																																																
25	15.110	15.113	15.112																																																
30	15.108	15.110	15.109																																																
40	15.103	15.105	15.105																																																
55	15.094	15.098	15.098																																																
60	15.091	15.094	15.095																																																
—	—	—	—																																																
Object -15V0.05A		2. Values																																																	
1. Graph		<table border="1"> <thead> <tr> <th>Temperature [°C]</th><th>Input Volt. 36.0[V] Output Volt. [V]</th><th>Input Volt. 48.0[V] Output Volt. [V]</th><th>Input Volt. 72.0[V] Output Volt. [V]</th></tr> </thead> <tbody> <tr><td>-30</td><td>-15.105</td><td>-15.106</td><td>-15.103</td></tr> <tr><td>-20</td><td>-15.099</td><td>-15.100</td><td>-15.097</td></tr> <tr><td>-10</td><td>-15.093</td><td>-15.093</td><td>-15.090</td></tr> <tr><td>0</td><td>-15.088</td><td>-15.088</td><td>-15.085</td></tr> <tr><td>10</td><td>-15.083</td><td>-15.084</td><td>-15.081</td></tr> <tr><td>25</td><td>-15.077</td><td>-15.078</td><td>-15.075</td></tr> <tr><td>30</td><td>-15.075</td><td>-15.076</td><td>-15.073</td></tr> <tr><td>40</td><td>-15.071</td><td>-15.072</td><td>-15.070</td></tr> <tr><td>55</td><td>-15.064</td><td>-15.065</td><td>-15.064</td></tr> <tr><td>60</td><td>-15.061</td><td>-15.063</td><td>-15.062</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Temperature [°C]	Input Volt. 36.0[V] Output Volt. [V]	Input Volt. 48.0[V] Output Volt. [V]	Input Volt. 72.0[V] Output Volt. [V]	-30	-15.105	-15.106	-15.103	-20	-15.099	-15.100	-15.097	-10	-15.093	-15.093	-15.090	0	-15.088	-15.088	-15.085	10	-15.083	-15.084	-15.081	25	-15.077	-15.078	-15.075	30	-15.075	-15.076	-15.073	40	-15.071	-15.072	-15.070	55	-15.064	-15.065	-15.064	60	-15.061	-15.063	-15.062	—	—	—	—
Temperature [°C]	Input Volt. 36.0[V] Output Volt. [V]	Input Volt. 48.0[V] Output Volt. [V]	Input Volt. 72.0[V] Output Volt. [V]																																																
-30	-15.105	-15.106	-15.103																																																
-20	-15.099	-15.100	-15.097																																																
-10	-15.093	-15.093	-15.090																																																
0	-15.088	-15.088	-15.085																																																
10	-15.083	-15.084	-15.081																																																
25	-15.077	-15.078	-15.075																																																
30	-15.075	-15.076	-15.073																																																
40	-15.071	-15.072	-15.070																																																
55	-15.064	-15.065	-15.064																																																
60	-15.061	-15.063	-15.062																																																
—	—	—	—																																																
<p> \triangle Input Volt. 36.0V \square Input Volt. 48.0V \circ Input Volt. 72.0V </p> <p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p>																																																			
<p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注) 斜線は定格周囲温度範囲を示す。</p>																																																			

COSEL

Model

ZTW1R54815


Item

Minimum Input Voltage for Regulated Output Voltage
最低レギュレーション電圧

Object

+15V0.05A

1. Graph

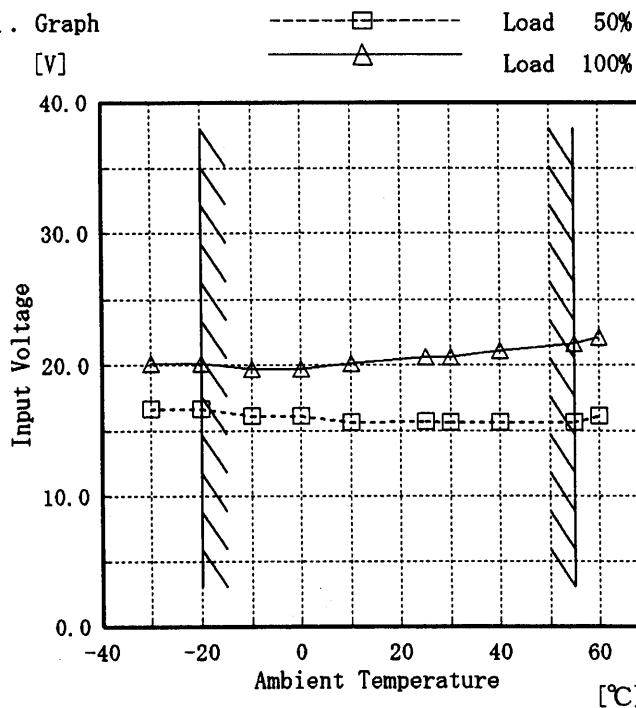


Testing Circuitry Figure A

2. Values

Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]
-30	16.7	20.1
-20	16.7	20.2
-10	16.2	19.7
0	16.2	19.7
10	15.7	20.2
25	15.7	20.6
30	15.7	20.6
40	15.7	21.1
55	15.7	21.6
60	16.2	22.1
—	—	—

Object

-15V0.05A

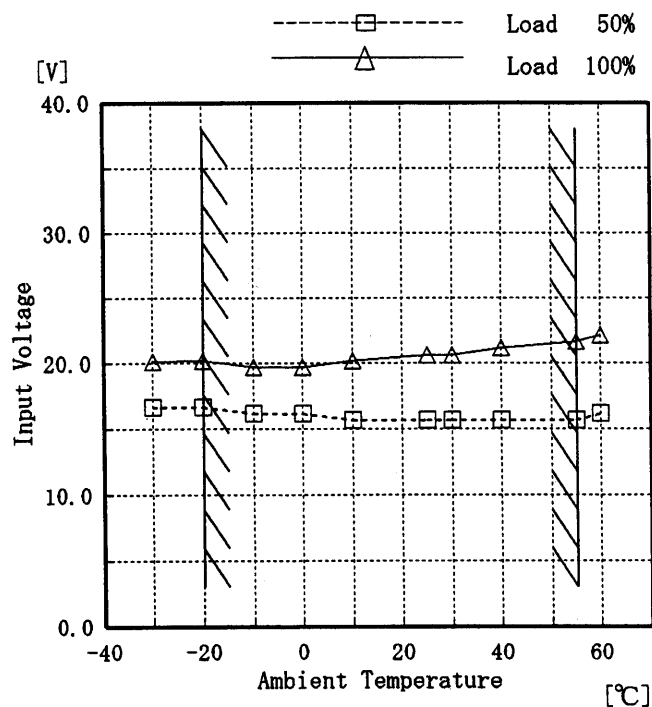

2. Values

Ambient Temp. [°C]	Load 50% Input Volt. [V]	Load 100% Input Volt. [V]
-30	16.7	20.1
-20	16.7	20.2
-10	16.2	19.7
0	16.2	19.7
10	15.7	20.2
25	15.7	20.6
30	15.7	20.6
40	15.7	21.1
55	15.7	21.6
60	16.2	22.1
—	—	—

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

COSEL

Model		ZTW1R54815																																					
Item		Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)																																					
Object		+15V0.05A																																					
1. Graph		2. Values																																					
<div><div>-----□----- Load 50%</div><div>-----△----- Load 100%</div><div><p>[mV]</p><p>Ambient Temperature [°C]</p><p>Input Volt. 36.0 V</p></div></div>		<table><tr><th>Ambient Temp. [°C]</th><th>Load 50% Ripple Output Volt. [mV]</th><th>Load 100% Ripple Output Volt. [mV]</th></tr><tr><td>-30</td><td>30</td><td>65</td></tr><tr><td>-20</td><td>30</td><td>60</td></tr><tr><td>-10</td><td>25</td><td>55</td></tr><tr><td>0</td><td>20</td><td>50</td></tr><tr><td>10</td><td>20</td><td>45</td></tr><tr><td>25</td><td>20</td><td>35</td></tr><tr><td>30</td><td>20</td><td>35</td></tr><tr><td>40</td><td>15</td><td>35</td></tr><tr><td>55</td><td>15</td><td>30</td></tr><tr><td>60</td><td>15</td><td>25</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>		Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]	-30	30	65	-20	30	60	-10	25	55	0	20	50	10	20	45	25	20	35	30	20	35	40	15	35	55	15	30	60	15	25	—	—	—
Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]																																					
-30	30	65																																					
-20	30	60																																					
-10	25	55																																					
0	20	50																																					
10	20	45																																					
25	20	35																																					
30	20	35																																					
40	15	35																																					
55	15	30																																					
60	15	25																																					
—	—	—																																					
Object		-15V0.05A																																					
1. Graph		2. Values																																					
<div><div>-----□----- Load 50%</div><div>-----△----- Load 100%</div><div><p>[mV]</p><p>Ambient Temperature [°C]</p><p>Input Volt. 36.0 V</p></div></div>		<table><tr><th>Ambient Temp. [°C]</th><th>Load 50% Ripple Output Volt. [mV]</th><th>Load 100% Ripple Output Volt. [mV]</th></tr><tr><td>-30</td><td>20</td><td>45</td></tr><tr><td>-20</td><td>20</td><td>40</td></tr><tr><td>-10</td><td>20</td><td>35</td></tr><tr><td>0</td><td>15</td><td>35</td></tr><tr><td>10</td><td>15</td><td>25</td></tr><tr><td>25</td><td>15</td><td>25</td></tr><tr><td>30</td><td>15</td><td>20</td></tr><tr><td>40</td><td>15</td><td>20</td></tr><tr><td>55</td><td>10</td><td>20</td></tr><tr><td>60</td><td>10</td><td>20</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>		Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]	-30	20	45	-20	20	40	-10	20	35	0	15	35	10	15	25	25	15	25	30	15	20	40	15	20	55	10	20	60	10	20	—	—	—
Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]																																					
-30	20	45																																					
-20	20	40																																					
-10	20	35																																					
0	15	35																																					
10	15	25																																					
25	15	25																																					
30	15	20																																					
40	15	20																																					
55	10	20																																					
60	10	20																																					
—	—	—																																					
<div>Note: Slanted line shows the range of the rated ambient temperature.</div> <div>(注)斜線は定格周囲温度範囲を示す。</div>																																							

COSEL

Model

ZTW1R54815

Item

Time Lapse Drift 経時ドリフト

Temperature

25 °C


Testing Circuitry

Figure A

Object

+15V0.05A

1. Graph

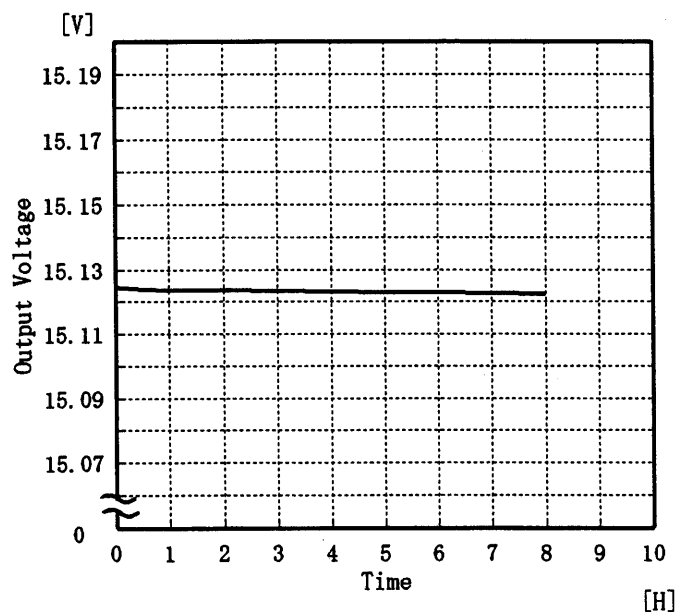


2. Values

Time since start [H]	Output Voltage [V]
0.0	15.124
0.5	15.124
1.0	15.124
2.0	15.124
3.0	15.124
4.0	15.123
5.0	15.123
6.0	15.123
7.0	15.123
8.0	15.123

Object

-15V0.05A

1. Graph

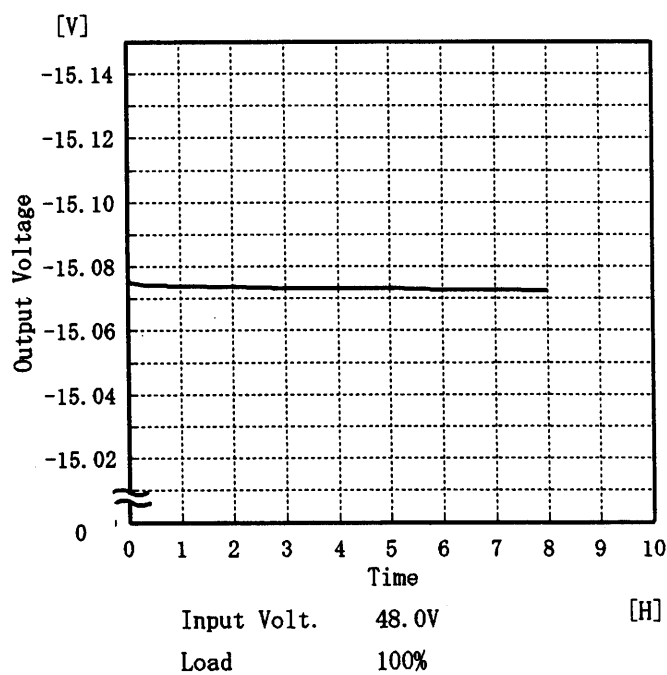

2. Values

Time since start [H]	Output Voltage [V]
0.0	-15.076
0.5	-15.074
1.0	-15.074
2.0	-15.074
3.0	-15.073
4.0	-15.073
5.0	-15.073
6.0	-15.073
7.0	-15.073
8.0	-15.073

COSEL

<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%; text-align: center;">Model</td> <td>ZTW1R54815</td> </tr> <tr> <td style="text-align: center;">Item</td> <td>Output Voltage Accuracy 定電圧精度</td> </tr> </table>		Model	ZTW1R54815	Item	Output Voltage Accuracy 定電圧精度		
Model	ZTW1R54815						
Item	Output Voltage Accuracy 定電圧精度						
		Testing Circuitry	Figure A				

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20~55 °C

Input Voltage : 36.0~72.0 V

Load Current (AVR 1) : 0.00~0.05 A

(AVR 2) : 0.00~0.05 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -20~55 °C

入力電圧 36.0~72.0 V

負荷電流 (AVR 1) 0.00~0.05 A

(AVR 2) 0.00~0.05 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Object	+15V0.05A
--------	-----------

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	-20	48.0	0.05	15.133	±167	±1.2
Minimum Voltage	55	36.0	0.00	14.800		

Object	-15V0.05A
--------	-----------

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	-20	48.0	0.05	-15.098	±175	±1.2
Minimum Voltage	55	36.0	0.00	-14.748		

COSEL

Model		ZTW1R54815	Testing Circuitry	Figure A
Item		Condensation 結露特性		
Object		−15V0.05A		
1. Condensation test				
Testing procedure is as follows.				
① Keeping and cooling the unit in a tank at −10℃ for an hour with the input off.				
② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.				
③ Testing electrical characteristics of the unit to confirm there be no fault.				
1. 結露特性試験				
入力を切った状態で、恒温槽で−10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。				
2. Values				
Item		Data	Testing Conditions	
Output Voltage [V]		−14.963	Input Volt.: 48V, Load Current:0.05A	
Line Regulation [mV]		4	Input Volt.: 36~72V, Load Current:0.05A	
Load Regulation [mV]		271	Input Volt.: 48V, Load Current:0~0.05A	

COSEL

