



TEST DATA OF ZTW34815

(48.0V INPUT)

Regulated DC Power Supply

Date : Mar. 5. 1998

Approved by : N. Shinaishi
Design Manager

Prepared by : T. Tsuri
Design Engineer

コーセル株式会社

COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Efficiency	2
効率	
3. Load Regulation	3
静的負荷変動	
4. Ripple Voltage (by Load Current)	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise	6
リップルノイズ	
6. Overcurrent Protection	8
過電流保護	
7. Dynamic Load Responce	9
動的負荷変動	
8. Rise and Fall Time	11
立ち上り、立下がり時間	
9. Ambient Temperature Drift	13
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage	14
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature)	15
リップル電圧(周囲温度特性)	
12. Time Lapse Drift	16
経時ドリフト	
13. Output Voltage Accuracy	17
定電圧精度	
14. Condensation	18
結露特性	
15. Figure of Testing Circuitry	20
測定回路図	

(Final Page 20)

COSEL


Model ZTW34815

Item Line Regulation 靜的入力変動

Object +15V0.1A

1. Graph

Load 50%
Load 100%

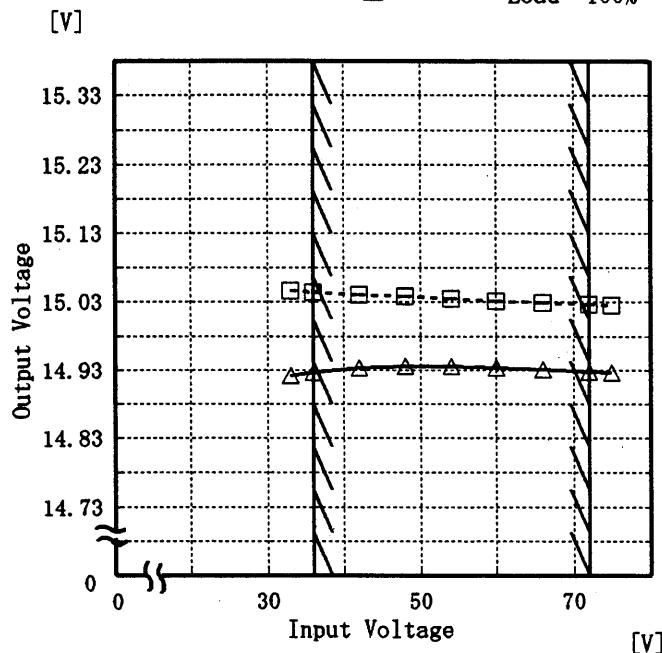

Temperature 25°C
Testing Circuitry Figure A


2. Values

Input Voltage [V]	Load 50%	Load 100%
	Output Volt. [V]	Output Volt. [V]
33.0	15.047	14.922
36.0	15.045	14.926
42.0	15.041	14.933
48.0	15.038	14.935
54.0	15.035	14.935
60.0	15.032	14.934
66.0	15.029	14.931
72.0	15.027	14.928
75.0	15.026	14.927
—	—	—
—	—	—
—	—	—

Object -15V0.1A

1. Graph

Load 50%
Load 100%

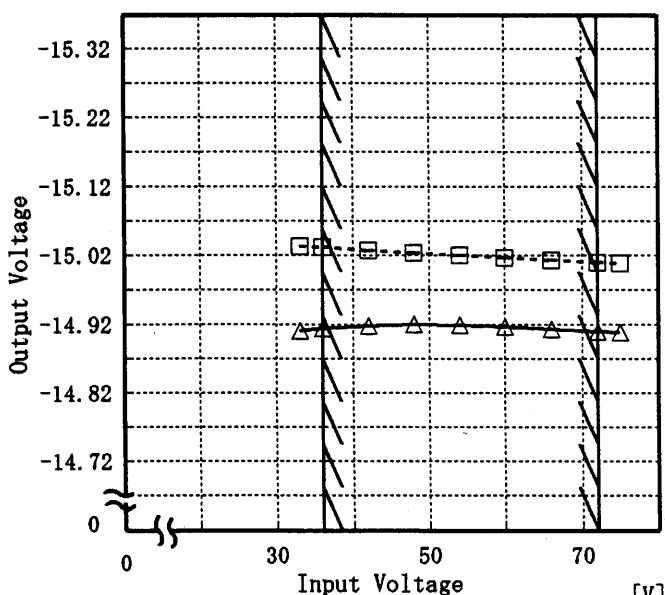

2. Values


Input Voltage [V]	Load 50%	Load 100%
	Output Volt. [V]	Output Volt. [V]
33.0	-15.033	-14.911
36.0	-15.031	-14.914
42.0	-15.027	-14.918
48.0	-15.023	-14.920
54.0	-15.019	-14.919
60.0	-15.016	-14.917
66.0	-15.012	-14.913
72.0	-15.010	-14.910
75.0	-15.009	-14.909
—	—	—
—	—	—
—	—	—

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

COSEL

Model	ZTW34815
Item	Efficiency 効率
Object	_____

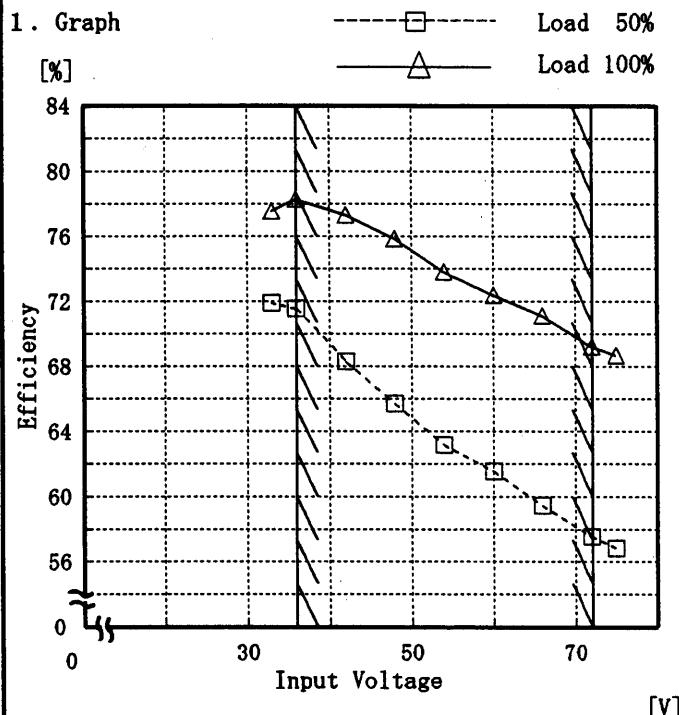

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

Temperature 25°C
Testing Circuitry Figure A

2. Values

Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
33.0	71.9	77.6
36.0	71.5	78.3
42.0	68.3	77.3
48.0	65.7	75.9
54.0	63.2	73.8
60.0	61.6	72.4
66.0	59.5	71.1
72.0	57.6	69.2
75.0	56.8	68.7
-	-	-
-	-	-
-	-	-

COSEL

Model	ZTW34815
Item	Load Regulation 靜的負荷変動
Object	+15V0.1A
1. Graph	

Legend:

- △ Input Volt. 36.0V
- Input Volt. 48.0V
- Input Volt. 72.0V

Temperature 25°C
Testing Circuitry Figure A

2. Values

Load Current [A]	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
0.000	15.235	15.233	15.236
0.020	15.118	15.111	15.102
0.040	15.062	15.056	15.046
0.060	15.015	15.012	15.002
0.080	14.969	14.971	14.962
0.100	14.922	14.931	14.924
0.110	14.898	14.912	14.906
—	—	—	—
—	—	—	—
—	—	—	—

Object	-15V0.1A
1. Graph	

Legend:

- △ Input Volt. 36.0V
- Input Volt. 48.0V
- Input Volt. 72.0V

2. Values

Load Current [A]	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
0.000	-15.251	-15.250	-15.258
0.020	-15.103	-15.095	-15.086
0.040	-15.046	-15.038	-15.027
0.060	-14.998	-14.994	-14.982
0.080	-14.951	-14.952	-14.942
0.100	-14.905	-14.912	-14.904
0.110	-14.881	-14.892	-14.885
—	—	—	—
—	—	—	—
—	—	—	—

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

COSEL

Model	ZTW34815																																							
Item	Ripple Voltage(by Load Current) リップル電圧(負荷電流特性)	Temperature Testing Circuitry 25°C Figure A																																						
Object	+15V 0.1A																																							
1. Graph																																								
<p style="text-align: center;">-----□----- Input Volt. 36.0V [mV]</p> <p style="text-align: center;">——△—— Input Volt. 72.0V</p>		2. Values																																						
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 36.0 [V]</th> <th>Input Volt. 72.0 [V]</th> </tr> <tr> <th>Ripple Output Volt. [mV]</th> <th>Ripple Output Volt. [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>5</td><td>5</td></tr> <tr><td>0.02</td><td>8</td><td>5</td></tr> <tr><td>0.04</td><td>10</td><td>5</td></tr> <tr><td>0.06</td><td>15</td><td>8</td></tr> <tr><td>0.08</td><td>20</td><td>8</td></tr> <tr><td>0.10</td><td>25</td><td>10</td></tr> <tr><td>0.11</td><td>35</td><td>15</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Input Volt. 36.0 [V]	Input Volt. 72.0 [V]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	0.00	5	5	0.02	8	5	0.04	10	5	0.06	15	8	0.08	20	8	0.10	25	10	0.11	35	15	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Volt. 36.0 [V]	Input Volt. 72.0 [V]																																						
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																						
0.00	5	5																																						
0.02	8	5																																						
0.04	10	5																																						
0.06	15	8																																						
0.08	20	8																																						
0.10	25	10																																						
0.11	35	15																																						
—	—	—																																						
—	—	—																																						
—	—	—																																						
—	—	—																																						
<p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップル電圧は、下図 p - p 値で示される。 (注)斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line T2: Due to Switching</p>																																								
<p>Ripple [mVp-p]</p> <p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																								

COSEL

Model	ZTW34815																																								
Item	Ripple Voltage(by Load Current) リップル電圧(負荷電流特性)	Temperature Testing Circuitry 25°C Figure A																																							
Object	-15V0.1A																																								
1. Graph																																									
<p>[mV]</p>		2. Values																																							
<p>Ripple Voltage [mV]</p> <p>Load Current [A]</p>		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 36.0 [V]</th> <th>Input Volt. 72.0 [V]</th> </tr> <tr> <th>Ripple Output Volt. [mV]</th> <th>Ripple Output Volt. [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>5</td><td>5</td></tr> <tr><td>0.02</td><td>5</td><td>5</td></tr> <tr><td>0.04</td><td>10</td><td>8</td></tr> <tr><td>0.06</td><td>15</td><td>8</td></tr> <tr><td>0.08</td><td>20</td><td>10</td></tr> <tr><td>0.10</td><td>30</td><td>10</td></tr> <tr><td>0.11</td><td>35</td><td>15</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Load Current [A]	Input Volt. 36.0 [V]	Input Volt. 72.0 [V]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	0.00	5	5	0.02	5	5	0.04	10	8	0.06	15	8	0.08	20	10	0.10	30	10	0.11	35	15	—	—	—	—	—	—	—	—	—	—	—	—	
Load Current [A]	Input Volt. 36.0 [V]	Input Volt. 72.0 [V]																																							
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																							
0.00	5	5																																							
0.02	5	5																																							
0.04	10	8																																							
0.06	15	8																																							
0.08	20	10																																							
0.10	30	10																																							
0.11	35	15																																							
—	—	—																																							
—	—	—																																							
—	—	—																																							
—	—	—																																							
<p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p>																																									
<p>リップル電圧は、下図 p - p 値で示される。</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line T2: Due to Switching</p>																																									
<p>Ripple [mVp-p]</p> <p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																									

COSEL


Model	ZTW34815	Temperature Testing Circuitry	25°C Figure A																																						
Item	Ripple-Noise リップルノイズ																																								
Object	+15V 0.1A																																								
1. Graph		2. Values																																							
<p style="text-align: center;">----- □ ----- Input Volt. 36.0V [mV] ----- △ ----- Input Volt. 72.0V</p>		<table border="1"> <thead> <tr> <th rowspan="2">Load current [A]</th> <th>Input Volt. 36.0 [V]</th> <th>Input Volt. 72.0 [V]</th> </tr> <tr> <th>Ripple-Noise [mV]</th> <th>Ripple-Noise [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>30</td><td>30</td></tr> <tr><td>0.02</td><td>35</td><td>35</td></tr> <tr><td>0.04</td><td>40</td><td>35</td></tr> <tr><td>0.06</td><td>40</td><td>35</td></tr> <tr><td>0.08</td><td>40</td><td>35</td></tr> <tr><td>0.10</td><td>45</td><td>40</td></tr> <tr><td>0.11</td><td>50</td><td>45</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Load current [A]	Input Volt. 36.0 [V]	Input Volt. 72.0 [V]	Ripple-Noise [mV]	Ripple-Noise [mV]	0.00	30	30	0.02	35	35	0.04	40	35	0.06	40	35	0.08	40	35	0.10	45	40	0.11	50	45	—	—	—	—	—	—	—	—	—	—	—	—
Load current [A]	Input Volt. 36.0 [V]	Input Volt. 72.0 [V]																																							
	Ripple-Noise [mV]	Ripple-Noise [mV]																																							
0.00	30	30																																							
0.02	35	35																																							
0.04	40	35																																							
0.06	40	35																																							
0.08	40	35																																							
0.10	45	40																																							
0.11	50	45																																							
—	—	—																																							
—	—	—																																							
—	—	—																																							
—	—	—																																							
Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.																																									
リップルノイズは、下図 p - p 値で示される。 (注)斜線は定格負荷電流範囲を示す。																																									
<p style="text-align: center;"> T1: Due to AC Input Line 入力商用周期 T2: Due to Switching スイッチング周期 </p>																																									
Fig. Complex Ripple Wave Form 図 リップル波形詳細図																																									

COSEL

Model	ZTW34815	Temperature Testing Circuitry	25°C Figure A																																																																
Item	Ripple-Noise リップルノイズ																																																																		
Object	-15V 0.1A																																																																		
1. Graph																																																																			
<p>[mV] Input Volt. 36.0V — □ — Input Volt. 72.0V</p>																																																																			
2. Values																																																																			
<table border="1"> <thead> <tr> <th rowspan="2">Load current [A]</th> <th colspan="2">Input Volt. 36.0 [V]</th> <th colspan="2">Input Volt. 72.0 [V]</th> </tr> <tr> <th>Ripple-Noise [mV]</th> <th>Ripple-Noise [mV]</th> <th>Ripple-Noise [mV]</th> <th>Ripple-Noise [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>25</td><td>25</td><td>25</td><td>25</td></tr> <tr><td>0.02</td><td>30</td><td>25</td><td>25</td><td>25</td></tr> <tr><td>0.04</td><td>30</td><td>25</td><td>25</td><td>25</td></tr> <tr><td>0.06</td><td>30</td><td>30</td><td>30</td><td>30</td></tr> <tr><td>0.08</td><td>30</td><td>30</td><td>30</td><td>30</td></tr> <tr><td>0.10</td><td>35</td><td>35</td><td>35</td><td>35</td></tr> <tr><td>0.11</td><td>35</td><td>35</td><td>35</td><td>35</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Load current [A]	Input Volt. 36.0 [V]		Input Volt. 72.0 [V]		Ripple-Noise [mV]	Ripple-Noise [mV]	Ripple-Noise [mV]	Ripple-Noise [mV]	0.00	25	25	25	25	0.02	30	25	25	25	0.04	30	25	25	25	0.06	30	30	30	30	0.08	30	30	30	30	0.10	35	35	35	35	0.11	35	35	35	35	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load current [A]	Input Volt. 36.0 [V]		Input Volt. 72.0 [V]																																																																
	Ripple-Noise [mV]	Ripple-Noise [mV]	Ripple-Noise [mV]	Ripple-Noise [mV]																																																															
0.00	25	25	25	25																																																															
0.02	30	25	25	25																																																															
0.04	30	25	25	25																																																															
0.06	30	30	30	30																																																															
0.08	30	30	30	30																																																															
0.10	35	35	35	35																																																															
0.11	35	35	35	35																																																															
—	—	—	—	—																																																															
—	—	—	—	—																																																															
—	—	—	—	—																																																															
—	—	—	—	—																																																															
<p>Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p> <p>リップルノイズは、下図p-p値で示される。 (注)斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line T2: Due to Switching</p> <p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																																																			

COSSEL


Model	ZTW34815
Item	Overcurrent Protection 過電流保護
Object	+15V0.1A

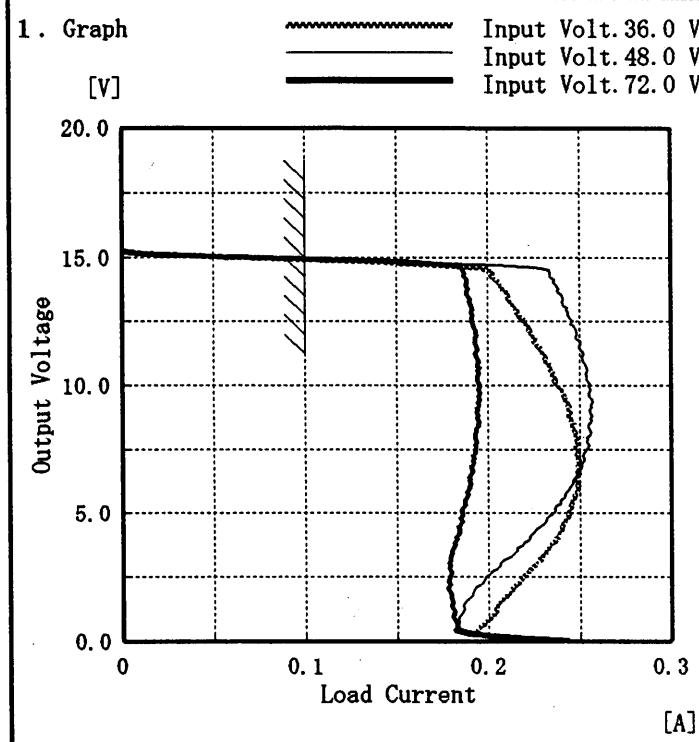

Temperature 25°C
Testing Circuitry Figure A

2. Values

Output Voltage [V]	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]
	Load Current [A]	Load Current [A]	Load Current [A]
15.00	0.049	0.046	0.043
14.25	0.202	0.234	0.186
13.50	0.210	0.240	0.188
12.00	0.223	0.248	0.193
10.50	0.233	0.254	0.194
9.00	0.242	0.255	0.194
7.50	0.247	0.254	0.193
6.00	0.248	0.244	0.190
4.50	0.240	0.230	0.185
3.00	0.226	0.206	0.178
1.50	0.206	0.187	0.180
0.00	0.243	0.234	0.244

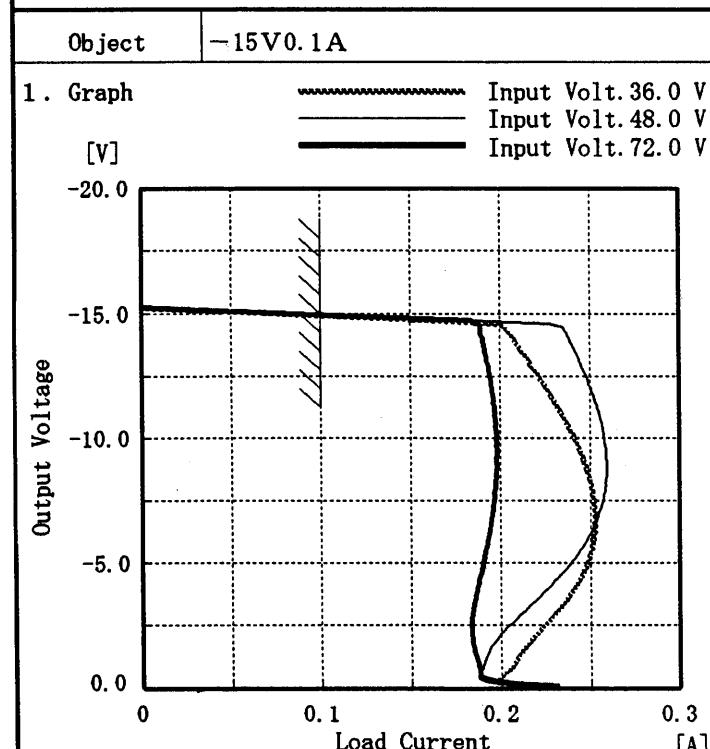

2. Values

Output Voltage [V]	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]
	Load Current [A]	Load Current [A]	Load Current [A]
-15.00	0.122	0.131	0.129
-14.25	0.205	0.237	0.189
-13.50	0.212	0.242	0.192
-12.00	0.226	0.250	0.195
-10.50	0.237	0.256	0.197
-9.00	0.246	0.259	0.198
-7.50	0.251	0.257	0.197
-6.00	0.252	0.248	0.193
-4.50	0.246	0.234	0.189
-3.00	0.232	0.213	0.184
-1.50	0.213	0.194	0.185
0.00	0.230	0.221	0.232

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

COSEL

Model ZTW34815

Item Dynamic Load Response
動的負荷變動

Object +15V 0.1A

Temperature 25°C
Testing Circuitry Figure A


Input Volt. 48.0 V

Cycle 100 mS


Load Current

Min. Load ←
Load 100 %


200 mV/div

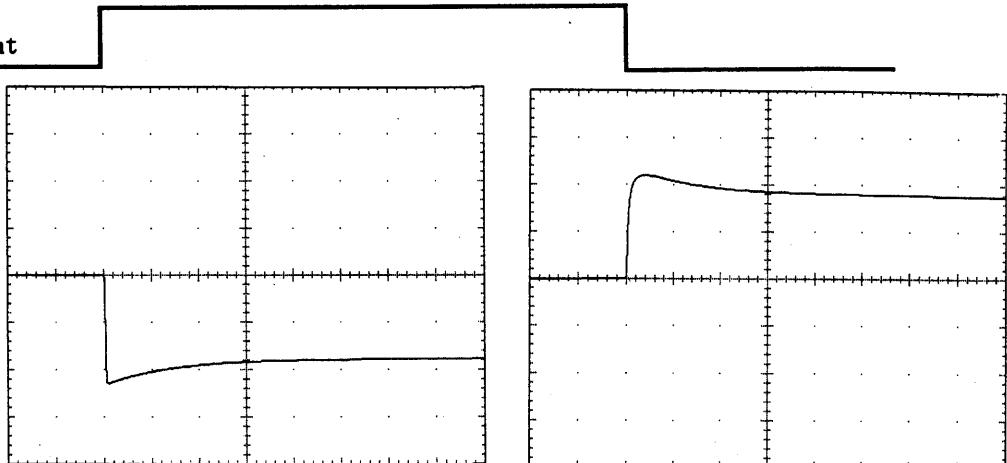Min. Load ←
Load 50 %

200 mV/div

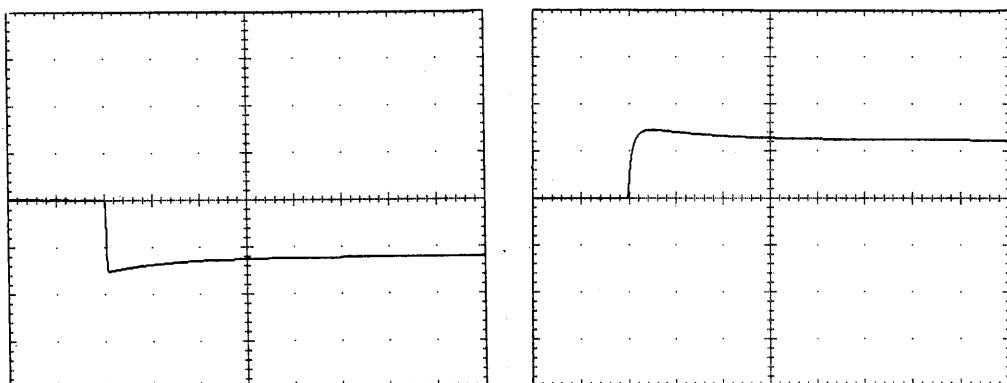Load 50% ←
Load 100 %

200 mV/div

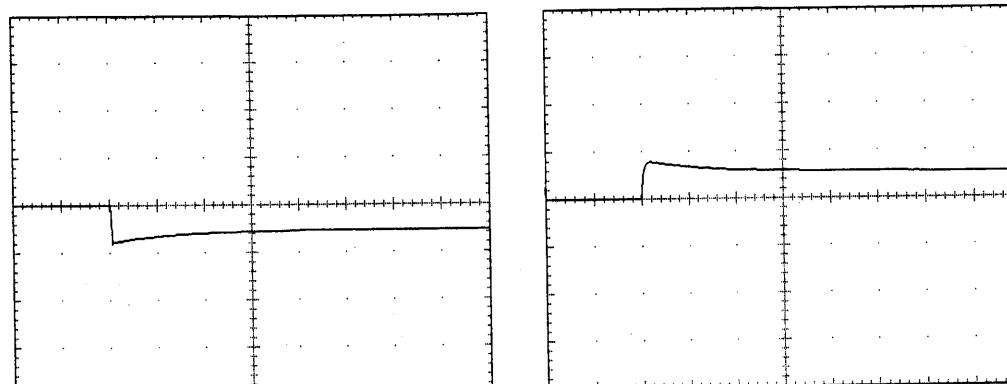


1 mS/div

COSSEL

Model	ZTW34815
Item	Dynamic Load Response 動的負荷変動
Object	-15V 0.1A

Temperature 25°C
Testing Circuitry Figure A

Input Volt. 48.0 V
Cycle 100 mS

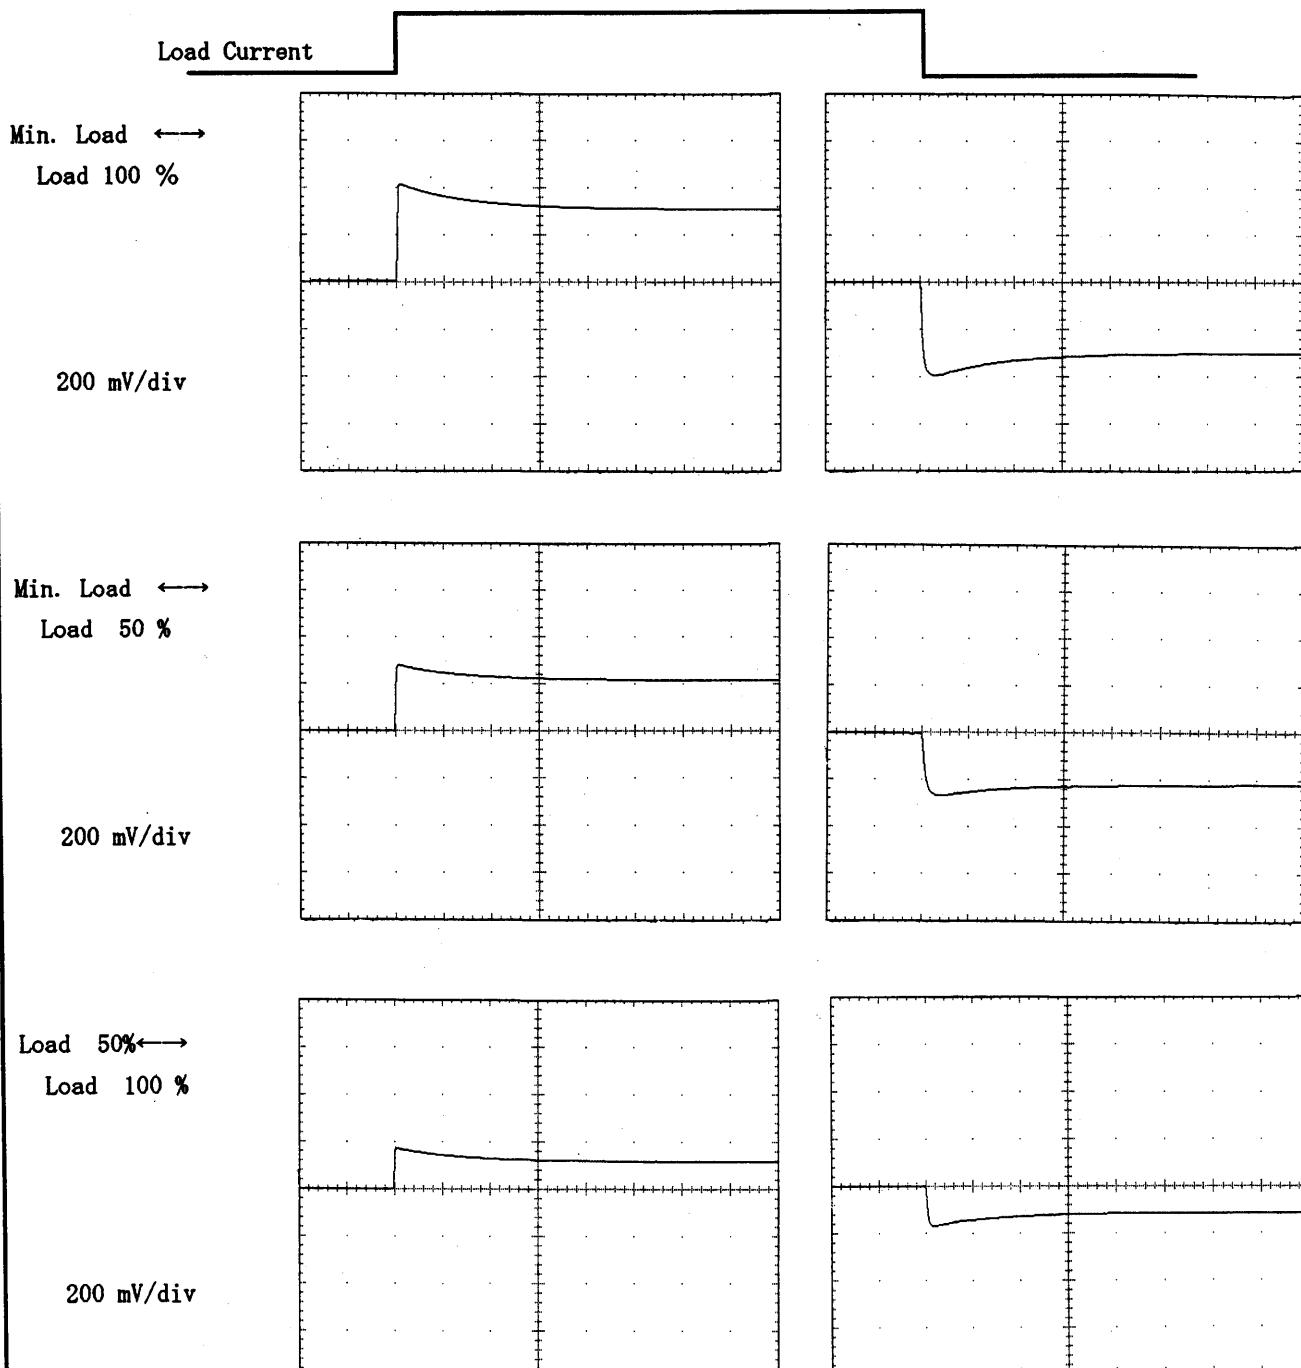

COSEL



Model ZTW34815

Item Rise and Fall Time 立上り、立下り時間

Object +15V 0.1A


Temperature 25°C
Testing Circuitry Figure A

1. Graph

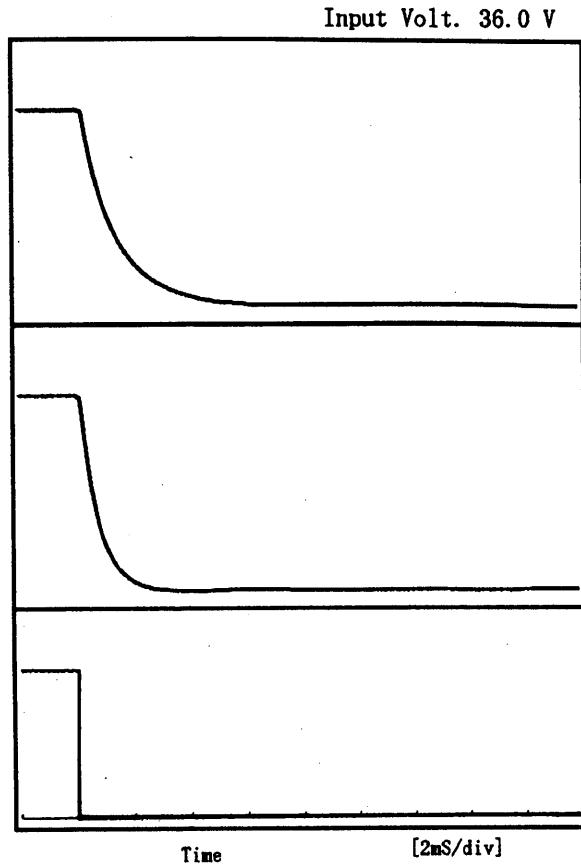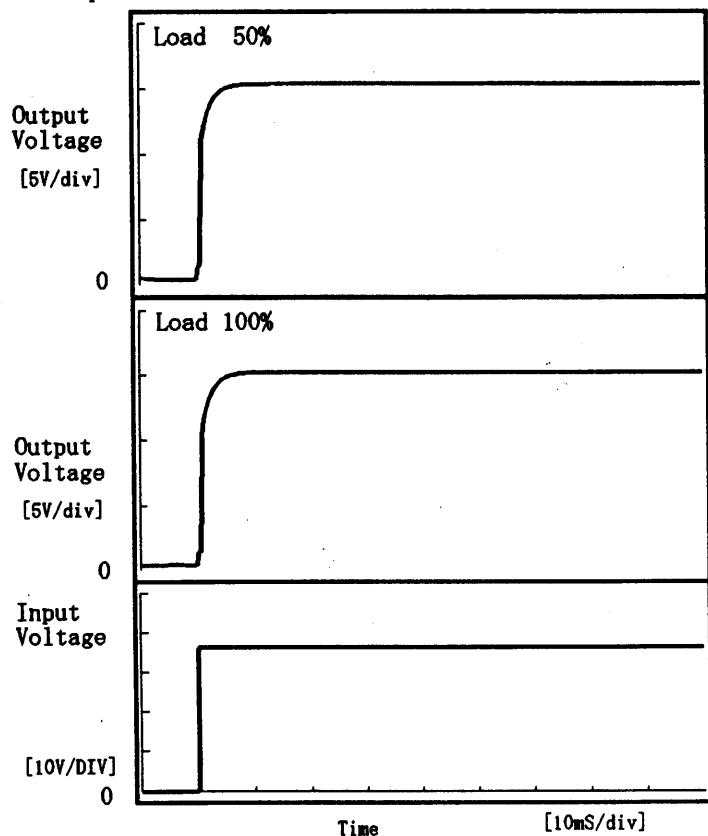

2. Values

Load \ Time	T _d	T _r	T _s	T _h	T _f
50 %	0.50	2.05	2.55	0.36	3.05
100 %	0.55	2.20	2.75	0.23	1.49

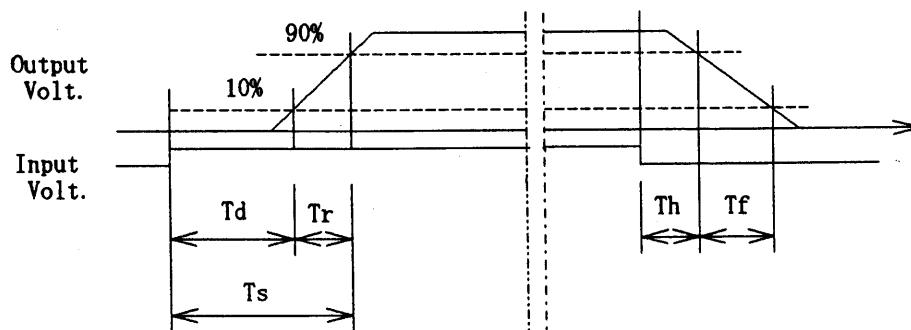

COSEL



Model ZTW34815

Item Rise and Fall Time 立上り、立下り時間

Object -15V 0.1A


Temperature Testing Circuitry 25°C Figure A

1. Graph

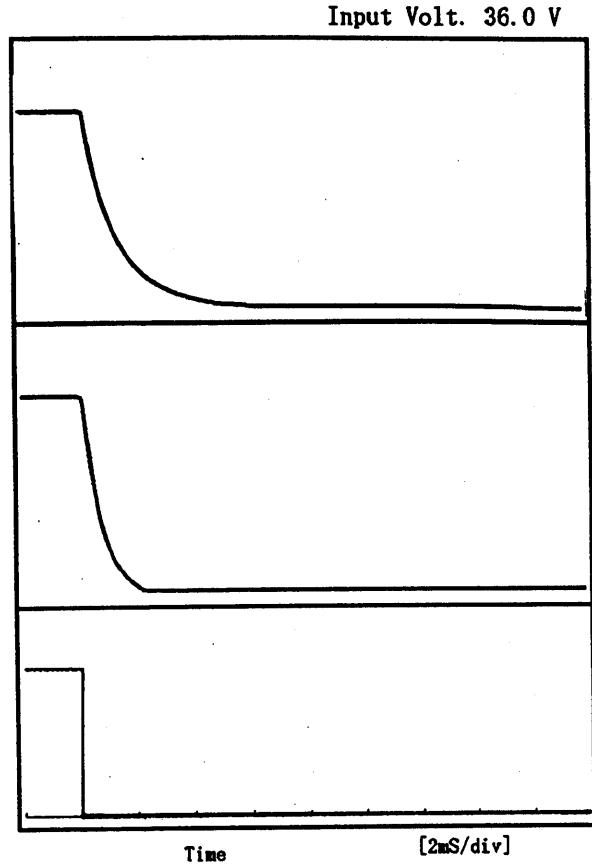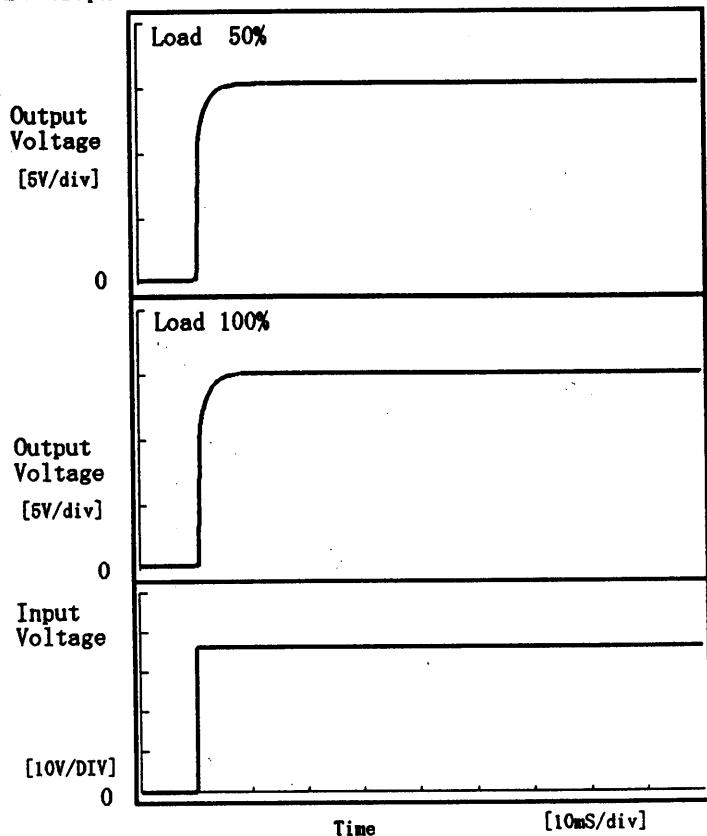

2. Values

Load	Time	T _d	T _r	T _s	T _h	T _f	[mS]
50 %		0.50	2.10	2.60	0.36	2.94	
100 %		0.55	2.25	2.80	0.23	1.38	

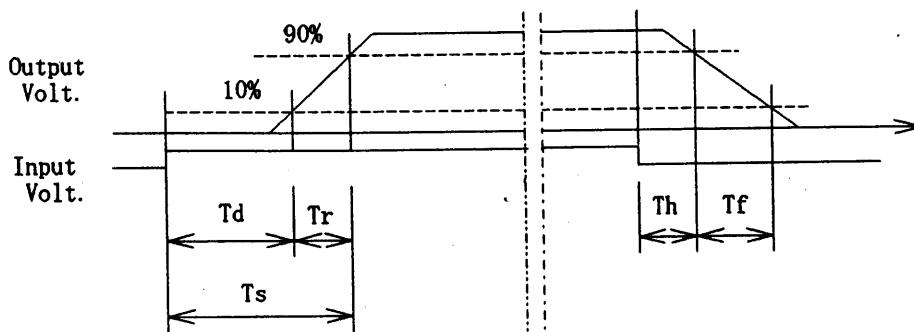

COSEL


Model ZTW34815

Item Ambient Temperature Drift
周囲温度変動

Object +15V0.1A

1. Graph

—△— Input Volt. 36.0V
—□— Input Volt. 48.0V
—○— Input Volt. 72.0V

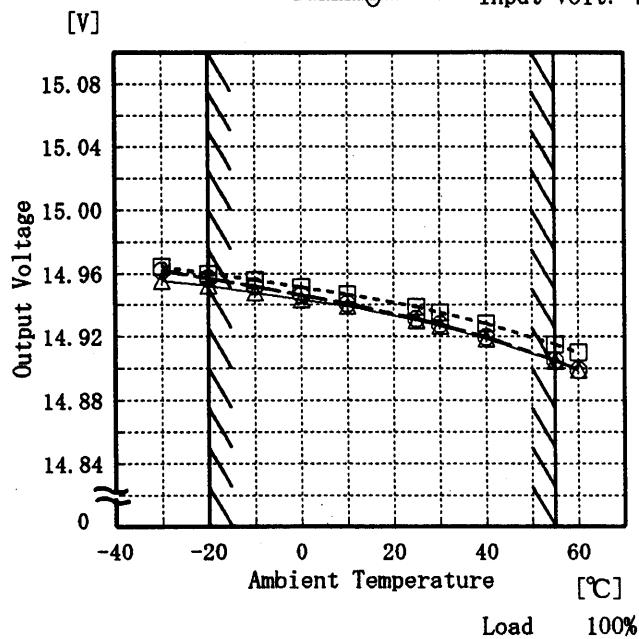


2. Values

Temperature [°C]	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
-30	14.955	14.964	14.962
-20	14.952	14.960	14.957
-10	14.948	14.956	14.951
0	14.943	14.951	14.946
10	14.939	14.947	14.941
25	14.930	14.938	14.931
30	14.927	14.935	14.928
40	14.919	14.928	14.919
55	14.905	14.915	14.905
60	14.899	14.910	14.899
—	—	—	—

Object -15V0.1A

1. Graph

—△— Input Volt. 36.0V
—□— Input Volt. 48.0V
—○— Input Volt. 72.0V

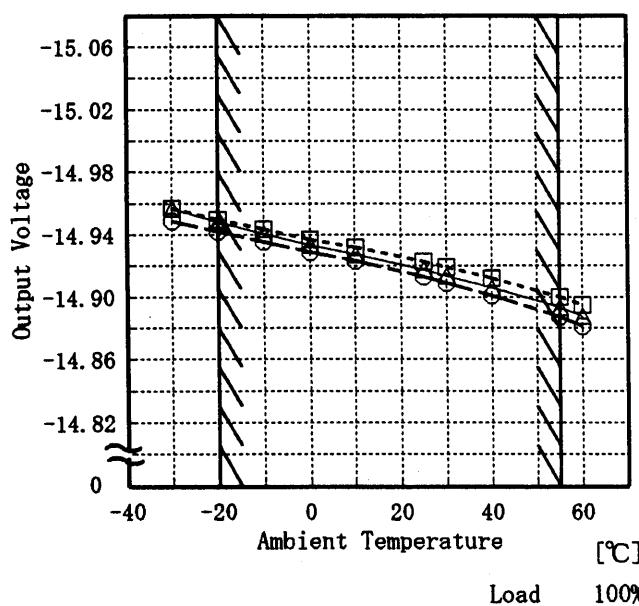

2. Values

Temperature [°C]	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
-30	-14.957	-14.957	-14.949
-20	-14.948	-14.950	-14.942
-10	-14.941	-14.943	-14.935
0	-14.933	-14.937	-14.929
10	-14.928	-14.932	-14.923
25	-14.918	-14.923	-14.913
30	-14.914	-14.919	-14.909
40	-14.906	-14.912	-14.901
55	-14.893	-14.900	-14.887
60	-14.888	-14.895	-14.881
—	—	—	—

Note: Slanted line shows the range of the rated ambient temperature.


(注)斜線は定格周囲温度範囲を示す。

COSEL

Model ZTW34815

Item Minimum Input Voltage for Regulated Output Voltage
最低レギュレーション電圧

Object +15V0.1A

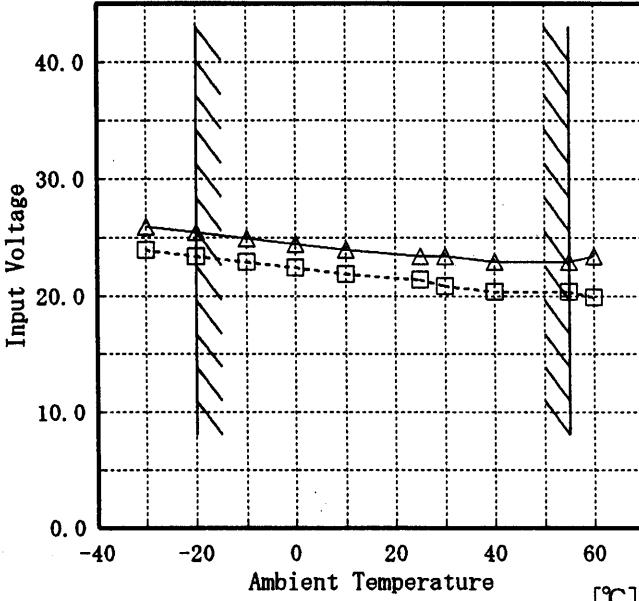
1. Graph
[V] 

Testing Circuitry Figure A

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Input Volt. [V]	Input Volt. [V]
-30	23.9	25.9
-20	23.4	25.4
-10	22.9	24.9
0	22.4	24.4
10	21.9	23.9
25	21.4	23.4
30	20.9	23.4
40	20.4	22.9
55	20.4	22.9
60	19.9	23.4
-	-	-

Object -15V0.1A

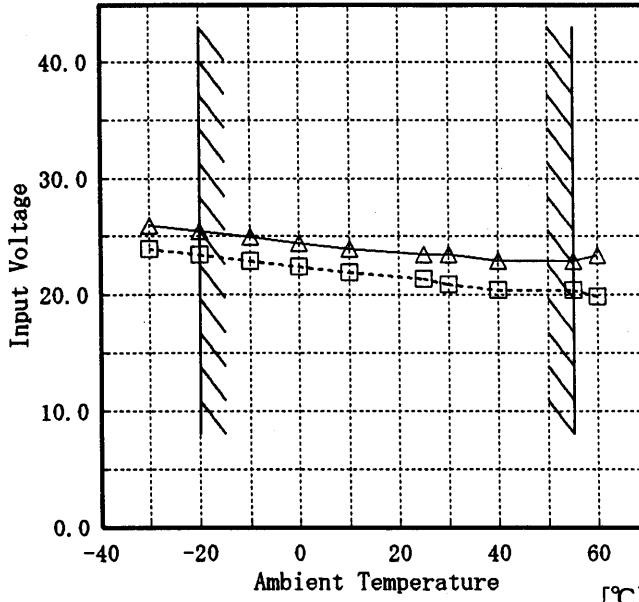
[V] 

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Input Volt. [V]	Input Volt. [V]
-30	23.9	25.9
-20	23.4	25.4
-10	22.9	24.9
0	22.4	24.4
10	21.9	23.9
25	21.4	23.4
30	20.9	23.4
40	20.4	22.9
55	20.4	22.9
60	19.9	23.4
-	-	-

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

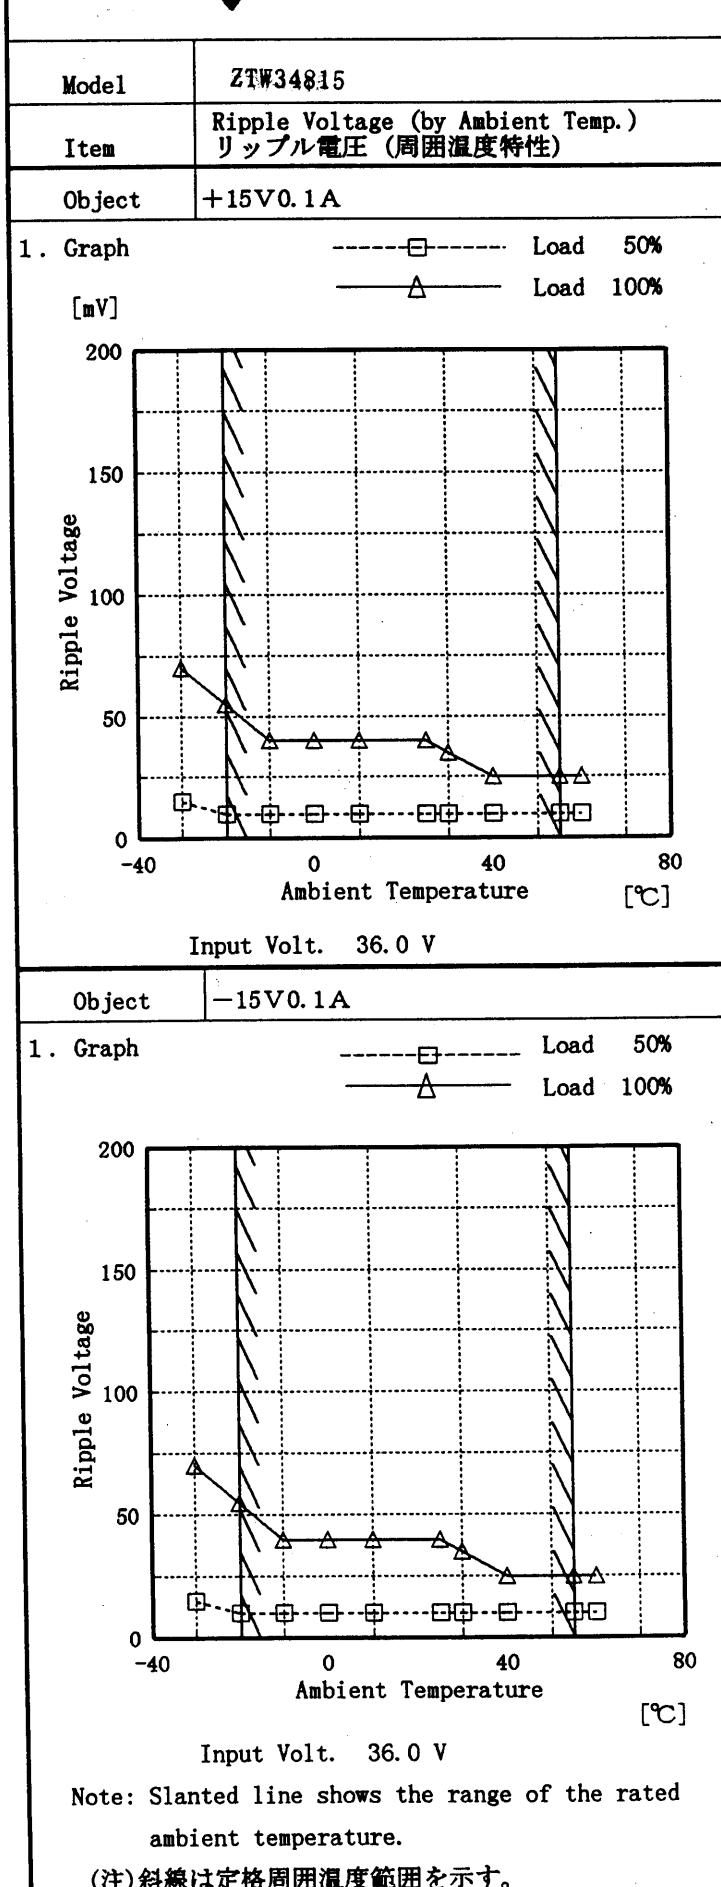COSEL

Testing Circuitry Figure A

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
-30	15	70
-20	10	55
-10	10	40
0	10	40
10	10	40
25	10	40
30	10	35
40	10	25
55	10	25
60	10	25
—	—	—

2. Values


Ambient Temp. [°C]	Load 50%	Load 100%
-30	15	80
-20	15	65
-10	15	50
0	10	40
10	10	30
25	10	30
30	10	30
40	10	25
55	10	25
60	10	25
—	—	—

COSEL

Model	ZTW34815
Item	Time Lapse Drift 経時ドリフト
Object	+15V0.1A

Temperature
Testing Circuitry 25 °C
Figure A

1. Graph

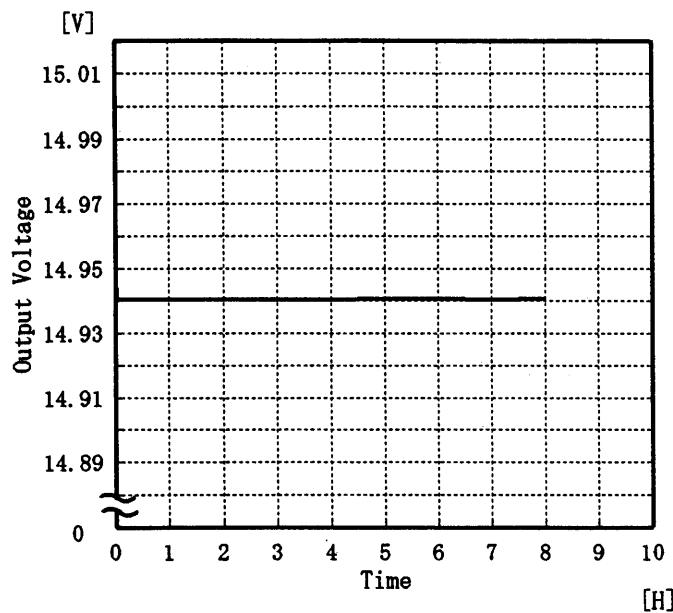


2. Values

Time since start [H]	Output Voltage [V]
0.0	14.948
0.5	14.941
1.0	14.941
2.0	14.941
3.0	14.941
4.0	14.941
5.0	14.941
6.0	14.941
7.0	14.941
8.0	14.941

Object	-15V0.1A
--------	----------

1. Graph

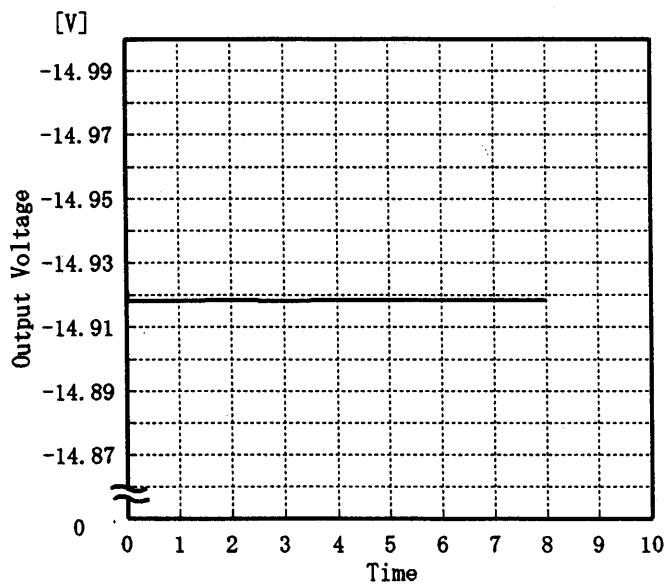

2. Values

Time since start [H]	Output Voltage [V]
0.0	-14.924
0.5	-14.918
1.0	-14.918
2.0	-14.918
3.0	-14.918
4.0	-14.919
5.0	-14.918
6.0	-14.919
7.0	-14.918
8.0	-14.919

COSEL

Model ZTW34815

Item Output Voltage Accuracy 定電圧精度

Testing Circuitry Figure A

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20~55 °C

Input Voltage : 36.0~72.0 V

Load Current (AVR 1) : 0.0~0.1 A

(AVR 2) : 0.0~0.1 A

* Output Voltage Accuracy = ±(Maximum of Output Voltage - Minimum of Output Voltage) / 2

$$* \text{Output Voltage Accuracy (Ration)} = \frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -20~55 °C

入力電圧 36.0~72.0 V

負荷電流 (AVR 1) 0.0~0.1 A

(AVR 2) 0.0~0.1 A

* 定電圧精度(変動値) = ±(出力電圧の最高値-出力電圧の最低値) / 2

$$* \text{定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

Object +15V0.1A

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	-20	48.0	0.1	14.958		
Minimum Voltage	25	36.0	0.0	14.617	±171	±1.2

Object -15V0.1A

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	-20	48.0	0.1	-14.949		
Minimum Voltage	55	36.0	0.0	-14.623	±163	±1.1



Model	ZTW34815		
Item	Condensation 結露特性	Testing Circuitry	Figure A
Object	+15V 0.1A		

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。

2. Values

Item	Data	Testing Conditions
Output Voltage [V]	14.834	Input Volt.: 48V, Load Current:0.1A
Line Regulation [mV]	9	Input Volt.: 36~72V, Load Current:0.1A
Load Regulation [mV]	340	Input Volt.: 48V, Load Current:0~0.1A



Model	ZTW34815		
Item	Condensation 結露特性	Testing Circuitry	Figure A
Object	-15V 0.1A		

1. Condensation test
 Testing procedure is as follows.
 ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
 ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
 ③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。

2. Values

Item	Data	Testing Conditions
Output Voltage [V]	-14.829	Input Volt.: 48V, Load Current: 0.1A
Line Regulation [mV]	6	Input Volt.: 36~72V, Load Current: 0.1A
Load Regulation [mV]	335	Input Volt.: 48V, Load Current: 0~0.1A

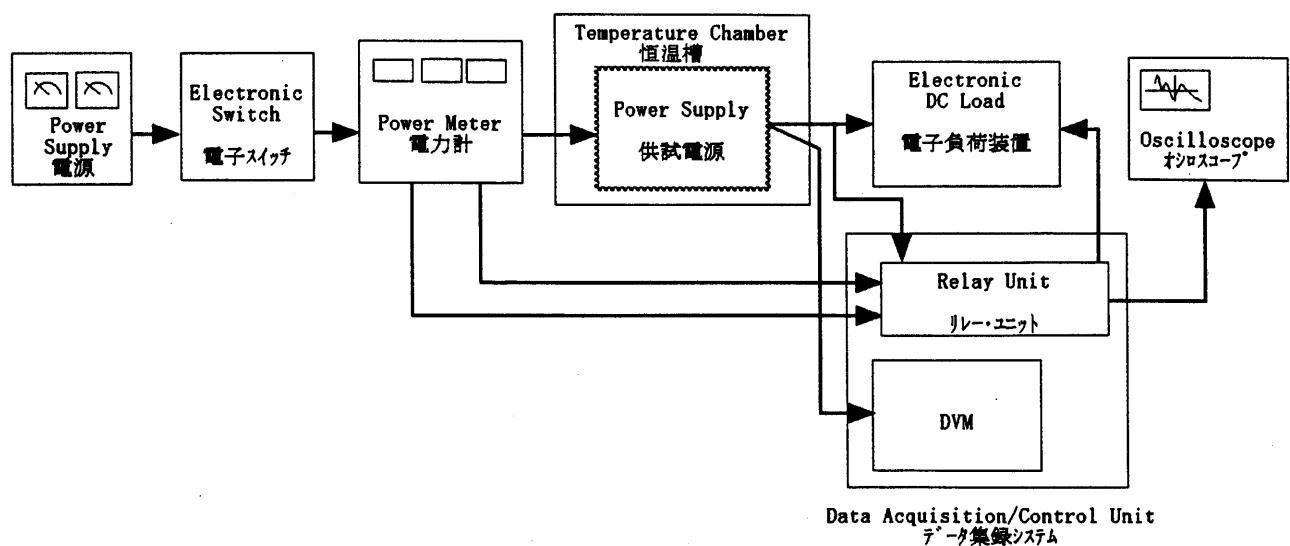


Figure A