


RADIATED EMISSION

Model Name : YAS1012E
 Model No. :
 Serial No. :
 Detector : PEAK
 Bands : 3
 Polarization : Hori. & Vert.
 Limit1: [EN 55022] Class B<3m>

Temperature : 25deg C
 Humidity : 50%
 Comment : AC 230V, LOAD 100%
 Date : 1999/1/11 20:19
 EMI Receiver(s) : R3261A

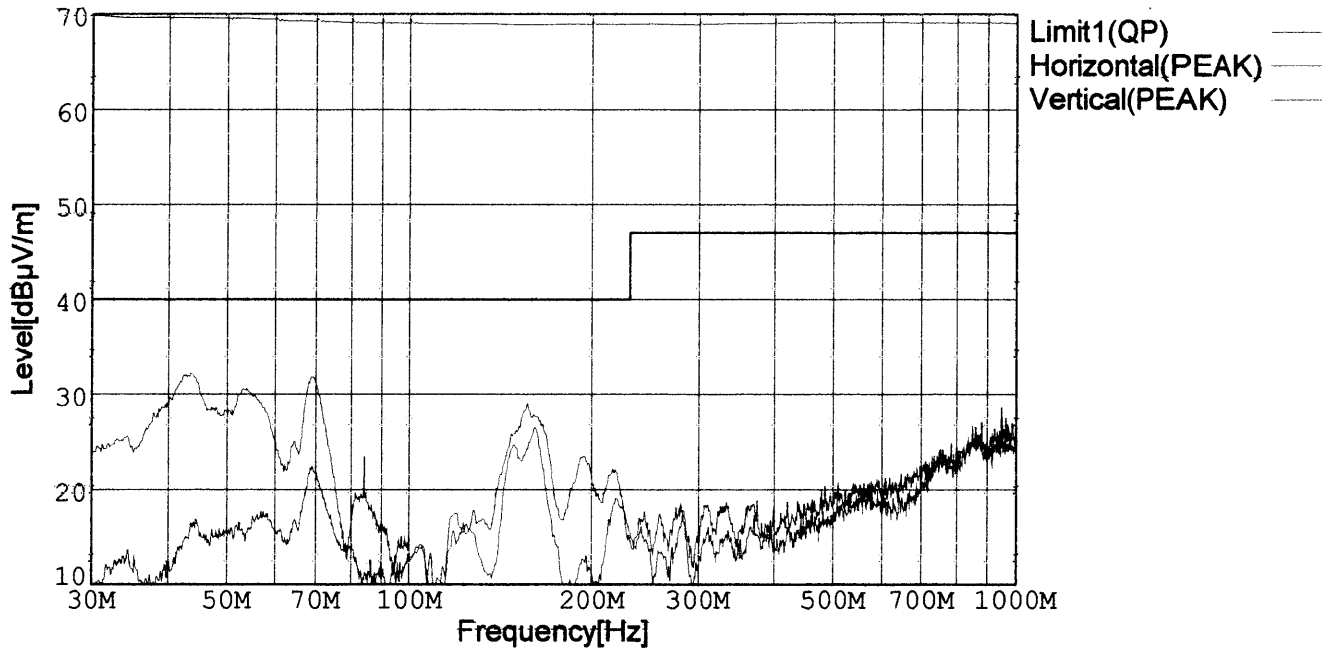


Frequency [MHz]	Meter Reading [dBµV]	Antenna Factor[dB]	Cable Loss[dB]	Level [dBµV/m]	Angle[°]	Height [cm]	Pola.	Limit [dBµV/m]	Margin [dB]
43.139	46.1	11.1	-25.3	31.9	120	101	Vert.	40.0	8.1
68.895	50.9	5.2	-23.6	32.5	216	108	Vert.	40.0	7.5

RADIATED EMISSION

Model Name : YAS1012E
 Model No. :
 Serial No. :
 Detector : QP
 Points : 2
 Polarization : Vertical

Temperature : 25deg C
 Humidity : 50%
 Comment : AC 230V, LOAD 100%
 Date : 1999/1/11 20:19
 EMI Receiver(s) : ESPC

Limit1: [EN 55022] Class B<3m>

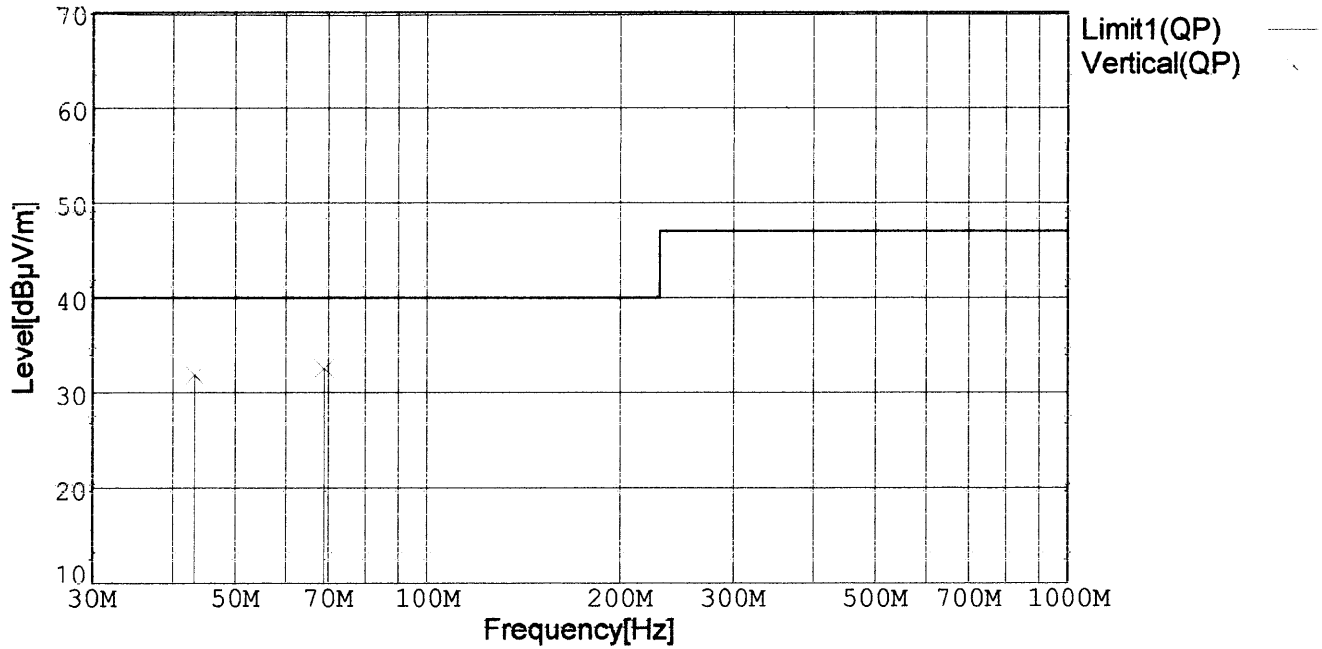


Frequency [MHz]	Meter Reading [dBµV]	Antenna Factor[dB]	Cable Loss[dB]	Level [dBµV/m]	Angle[°]	Height [cm]	Pola.	Limit [dBµV/m]	Margin [dB]
43.139	46.1	11.1	-25.3	31.9	120	101	Vert.	40.0	8.1
68.895	50.9	5.2	-23.6	32.5	216	108	Vert.	40.0	7.5

LINE CONDUCTION

Model Name : YAS1012E
 Model No. :
 Serial No. :
 Detector : PEAK
 Bands : 4
 Line Mode : VA/VB

Temperature : 25
 Humidity : 50%
 Comment : AC 230V LOAD 100%
 Date : 1999/1/11 19:28
 EMI Receiver(s) : R3261A

Limit1: [EN 55022] Class B(QP)
 Limit2: [EN 55022] Class B(Ave.)

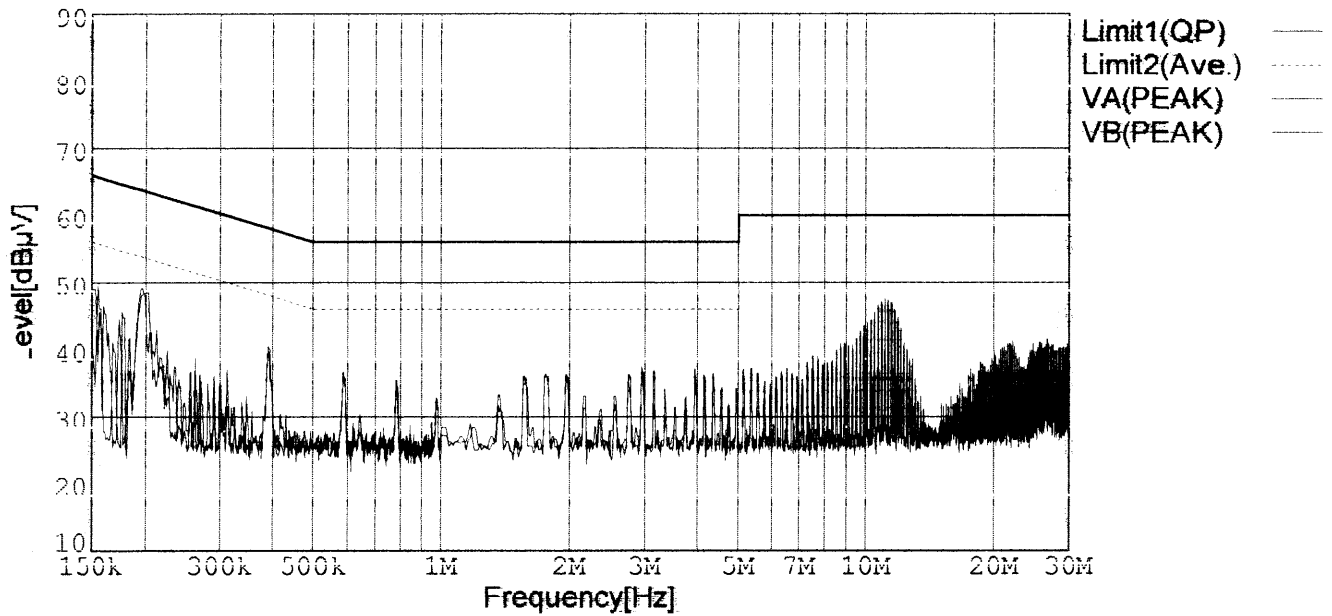


Frequency [MHz]	Meter Reading (QP) [dBµV]	Meter Reading (Ave.) [dBµV]	Factor [dB]	Level (QP) [dBµV]	Level (Ave.) [dBµV]	Line	Limit (QP) [dBµV]	Limit (Ave.) [dBµV]	Margin (QP)[dB]	Margin (Ave.) [dB]
0.1944	35.2	29.7	10.3	45.5	40.0	VA	63.9	53.9	18.3	13.9
11.2379	34.4	34.0	10.5	44.9	44.5	VA	60.0	50.0	15.1	5.5

LINE CONDUCTION

Model Name : YAS1012E
 Model No. :
 Serial No. :
 Detector : QP/Ave.
 Points : 2
 Line Mode : VA

Temperature : 25
 Humidity : 50%
 Comment : AC 230V LOAD 100%
 Date : 1999/1/11 19:28
 EMI Receiver(s) : ESPC

Limit1: [EN 55022] Class B(QP)
 Limit2: [EN 55022] Class B(Ave.)

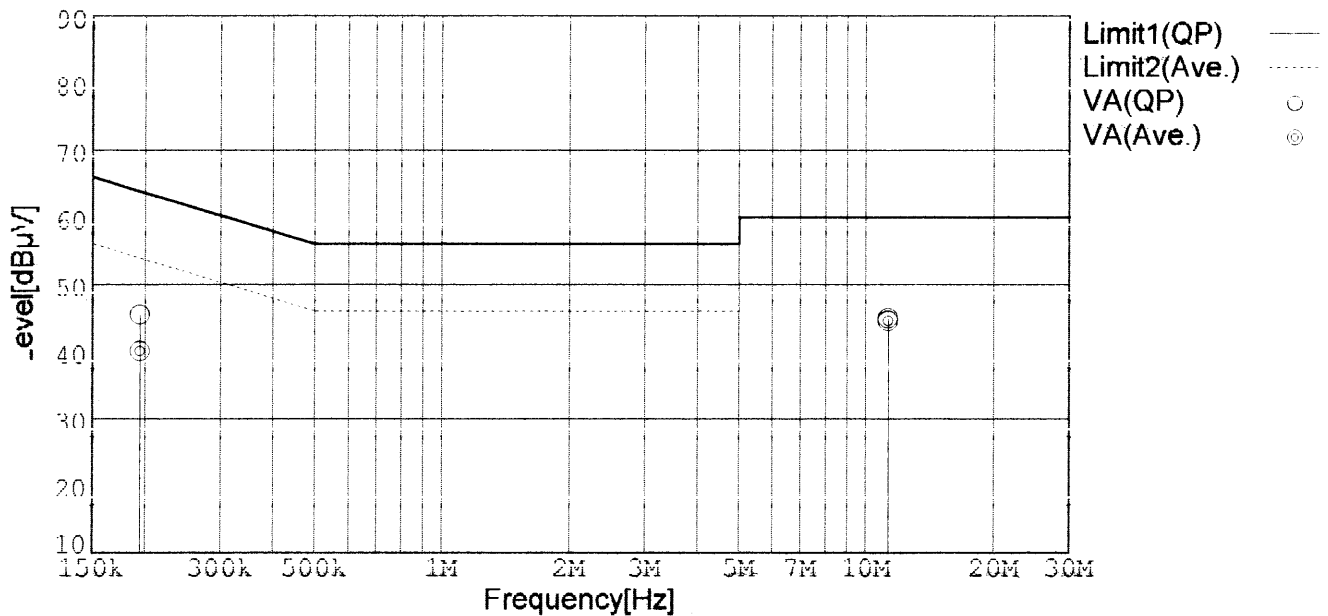

Frequency [MHz]	Meter Reading (QP) [dBµV]	Meter Reading (Ave.) [dBµV]	Factor [dB]	Level (QP) [dBµV]	Level (Ave.) [dBµV]	Line	Limit (QP) [dBµV]	Limit (Ave.) [dBµV]	Margin (QP)[dB]	Margin (Ave.) [dB]
0.1944	35.2	29.7	10.3	45.5	40.0	VA	63.9	53.9	18.3	13.9
11.2379	34.4	34.0	10.5	44.9	44.5	VA	60.0	50.0	15.1	5.5