

TEST DATA OF BRNS12

Regulated DC Power Supply
July 29, 2013

Approved by : Yoshimichi Hirokawa
Yoshimichi Hirokawa Design Manager

Prepared by : Yohei Urayama
Yohei Urayama Design Engineer

COSEL CO.,LTD.


CONTENTS

1. Input Current (by Input Voltage)	1
2. Input Current (by Load Current)	2
3. Input Power (by Load Current)	3
4. Efficiency (by Input Voltage)	4
5. Efficiency (by Load Current)	5
6. Line Regulation	6
7. Load Regulation	7
8. Dynamic Load Response	8
9. Ripple Voltage (by Load Current)	9
10. Ripple-Noise	10
11. Ripple Voltage (by Ambient Temperature)	11
12. Ambient Temperature Drift	12
13. Output Voltage Accuracy	13
14. Time Lapse Drift	14
15. Rise and Fall Time	15
16. Minimum Input Voltage for Regulated Output Voltage	16
17. Overcurrent Protection	17
18. Figure of Testing Circuitry	18


(Final Page 18)

Model	BRNS12	Temperature 25°C Testing Circuitry Figure A																																																																																	
Item	Input Current (by Input Voltage)																																																																																		
Object	_____	2.Values																																																																																	
1.Graph	_____	<p>—△— Load 100%</p> <p>- - □ - - Load 50%</p> <p>- - ○ - - Load 0%</p> <table border="1"> <caption>Data points estimated from Graph</caption> <thead> <tr> <th>Input Voltage [V]</th> <th>Load 0% [A]</th> <th>Load 50% [A]</th> <th>Load 100% [A]</th> </tr> </thead> <tbody> <tr><td>3.3</td><td>0.038</td><td>2.793</td><td>5.948</td></tr> <tr><td>4.0</td><td>0.038</td><td>1.977</td><td>4.131</td></tr> <tr><td>4.5</td><td>0.038</td><td>1.752</td><td>3.642</td></tr> <tr><td>5.0</td><td>0.039</td><td>1.576</td><td>3.224</td></tr> <tr><td>5.2</td><td>0.039</td><td>1.511</td><td>3.080</td></tr> <tr><td>6.0</td><td>0.038</td><td>1.319</td><td>2.716</td></tr> <tr><td>7.0</td><td>0.037</td><td>1.136</td><td>2.331</td></tr> <tr><td>8.0</td><td>0.037</td><td>0.999</td><td>2.044</td></tr> <tr><td>10.0</td><td>0.036</td><td>0.810</td><td>1.644</td></tr> <tr><td>12.0</td><td>0.036</td><td>0.685</td><td>1.380</td></tr> <tr><td>14.4</td><td>0.038</td><td>0.584</td><td>1.165</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Input Voltage [V]	Load 0% [A]	Load 50% [A]	Load 100% [A]	3.3	0.038	2.793	5.948	4.0	0.038	1.977	4.131	4.5	0.038	1.752	3.642	5.0	0.039	1.576	3.224	5.2	0.039	1.511	3.080	6.0	0.038	1.319	2.716	7.0	0.037	1.136	2.331	8.0	0.037	0.999	2.044	10.0	0.036	0.810	1.644	12.0	0.036	0.685	1.380	14.4	0.038	0.584	1.165	--	-	-	-																											
Input Voltage [V]	Load 0% [A]	Load 50% [A]	Load 100% [A]																																																																																
3.3	0.038	2.793	5.948																																																																																
4.0	0.038	1.977	4.131																																																																																
4.5	0.038	1.752	3.642																																																																																
5.0	0.039	1.576	3.224																																																																																
5.2	0.039	1.511	3.080																																																																																
6.0	0.038	1.319	2.716																																																																																
7.0	0.037	1.136	2.331																																																																																
8.0	0.037	0.999	2.044																																																																																
10.0	0.036	0.810	1.644																																																																																
12.0	0.036	0.685	1.380																																																																																
14.4	0.038	0.584	1.165																																																																																
--	-	-	-																																																																																
Input Current [A]	_____	<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>1.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>2.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>2.5</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>2.7</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>2.9</td><td>0.038</td><td>2.793</td><td>5.948</td></tr> <tr><td>3.3</td><td>0.038</td><td>2.420</td><td>4.979</td></tr> <tr><td>4.0</td><td>0.038</td><td>1.977</td><td>4.131</td></tr> <tr><td>4.5</td><td>0.038</td><td>1.752</td><td>3.642</td></tr> <tr><td>5.0</td><td>0.039</td><td>1.576</td><td>3.224</td></tr> <tr><td>5.2</td><td>0.039</td><td>1.511</td><td>3.080</td></tr> <tr><td>6.0</td><td>0.038</td><td>1.319</td><td>2.716</td></tr> <tr><td>7.0</td><td>0.037</td><td>1.136</td><td>2.331</td></tr> <tr><td>8.0</td><td>0.037</td><td>0.999</td><td>2.044</td></tr> <tr><td>10.0</td><td>0.036</td><td>0.810</td><td>1.644</td></tr> <tr><td>12.0</td><td>0.036</td><td>0.685</td><td>1.380</td></tr> <tr><td>14.4</td><td>0.038</td><td>0.584</td><td>1.165</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0.0	0.000	0.000	0.000	1.0	0.000	0.000	0.000	2.0	0.000	0.000	0.000	2.5	0.000	0.000	0.000	2.7	0.000	0.000	0.000	2.9	0.038	2.793	5.948	3.3	0.038	2.420	4.979	4.0	0.038	1.977	4.131	4.5	0.038	1.752	3.642	5.0	0.039	1.576	3.224	5.2	0.039	1.511	3.080	6.0	0.038	1.319	2.716	7.0	0.037	1.136	2.331	8.0	0.037	0.999	2.044	10.0	0.036	0.810	1.644	12.0	0.036	0.685	1.380	14.4	0.038	0.584	1.165	--	-	-	-
Input Voltage [V]	Input Current [A]																																																																																		
	Load 0%	Load 50%	Load 100%																																																																																
0.0	0.000	0.000	0.000																																																																																
1.0	0.000	0.000	0.000																																																																																
2.0	0.000	0.000	0.000																																																																																
2.5	0.000	0.000	0.000																																																																																
2.7	0.000	0.000	0.000																																																																																
2.9	0.038	2.793	5.948																																																																																
3.3	0.038	2.420	4.979																																																																																
4.0	0.038	1.977	4.131																																																																																
4.5	0.038	1.752	3.642																																																																																
5.0	0.039	1.576	3.224																																																																																
5.2	0.039	1.511	3.080																																																																																
6.0	0.038	1.319	2.716																																																																																
7.0	0.037	1.136	2.331																																																																																
8.0	0.037	0.999	2.044																																																																																
10.0	0.036	0.810	1.644																																																																																
12.0	0.036	0.685	1.380																																																																																
14.4	0.038	0.584	1.165																																																																																
--	-	-	-																																																																																
Note: Slanted line shows the range of the rated input voltage.	_____																																																																																		

COSEL

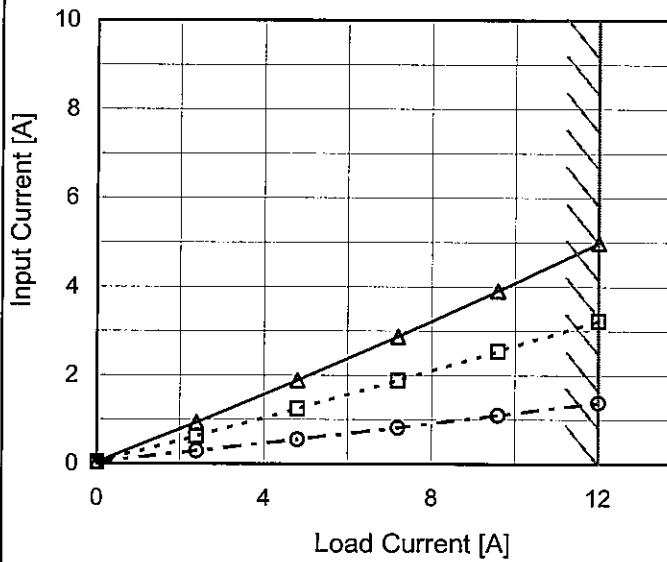Model	BRNS12	Temperature	25°C																																																			
Item	Input Current (by Load Current)	Testing Circuitry	Figure A																																																			
Object	—	—	—																																																			
1. Graph																																																						
—△— Input Volt. 3.3V - -□--- Input Volt. 5V - -○--- Input Volt. 12V																																																						
																																																						
Note: Slanted line shows the range of the rated load current.																																																						
2. Values																																																						
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 3.3[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 12[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.036</td><td>0.039</td><td>0.037</td></tr> <tr><td>2.4</td><td>0.929</td><td>0.624</td><td>0.289</td></tr> <tr><td>4.8</td><td>1.885</td><td>1.243</td><td>0.549</td></tr> <tr><td>7.2</td><td>2.870</td><td>1.880</td><td>0.816</td></tr> <tr><td>9.6</td><td>3.901</td><td>2.541</td><td>1.093</td></tr> <tr><td>12.0</td><td>4.979</td><td>3.224</td><td>1.380</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Load Current [A]	Input Current [A]			Input Volt. 3.3[V]	Input Volt. 5[V]	Input Volt. 12[V]	0.0	0.036	0.039	0.037	2.4	0.929	0.624	0.289	4.8	1.885	1.243	0.549	7.2	2.870	1.880	0.816	9.6	3.901	2.541	1.093	12.0	4.979	3.224	1.380	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Current [A]																																																					
	Input Volt. 3.3[V]	Input Volt. 5[V]	Input Volt. 12[V]																																																			
0.0	0.036	0.039	0.037																																																			
2.4	0.929	0.624	0.289																																																			
4.8	1.885	1.243	0.549																																																			
7.2	2.870	1.880	0.816																																																			
9.6	3.901	2.541	1.093																																																			
12.0	4.979	3.224	1.380																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			


COSEL

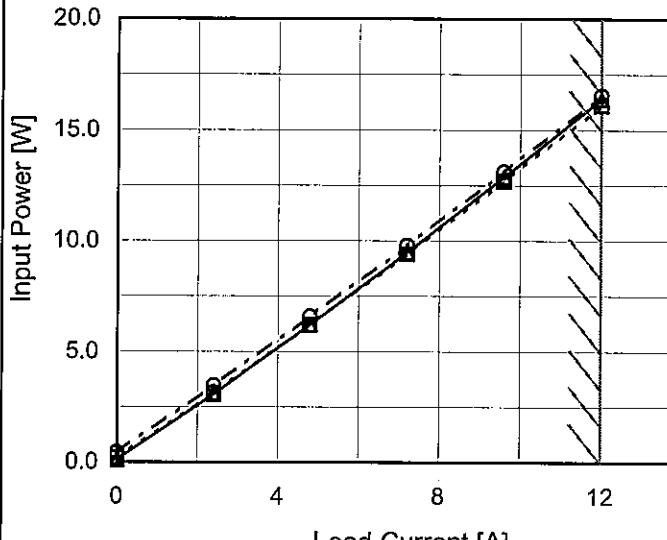Model	BRNS12	Temperature Testing Circuitry	25°C Figure A																																																			
Item	Input Power (by Load Current)																																																					
Object	_____																																																					
1.Graph	<p>—△— Input Volt. 3.3V - -□-- Input Volt. 5V - -○-- Input Volt. 12V</p>  <p>The graph plots Input Power [W] on the Y-axis (0.0 to 20.0) against Load Current [A] on the X-axis (0 to 12). Three curves are shown for input voltages of 3.3V, 5V, and 12V. A slanted line indicates the rated load current range.</p> <table border="1"> <thead> <tr> <th>Load Current [A]</th> <th>Input Power [W] (3.3V)</th> <th>Input Power [W] (5V)</th> <th>Input Power [W] (12V)</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.12</td><td>0.19</td><td>0.44</td></tr> <tr><td>2.4</td><td>3.06</td><td>3.12</td><td>3.47</td></tr> <tr><td>4.8</td><td>6.20</td><td>6.20</td><td>6.59</td></tr> <tr><td>7.2</td><td>9.47</td><td>9.39</td><td>9.79</td></tr> <tr><td>9.6</td><td>12.87</td><td>12.69</td><td>13.11</td></tr> <tr><td>12.0</td><td>16.40</td><td>16.11</td><td>16.55</td></tr> <tr><td>---</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>---</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>---</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>---</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>---</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Input Power [W] (3.3V)	Input Power [W] (5V)	Input Power [W] (12V)	0.0	0.12	0.19	0.44	2.4	3.06	3.12	3.47	4.8	6.20	6.20	6.59	7.2	9.47	9.39	9.79	9.6	12.87	12.69	13.11	12.0	16.40	16.11	16.55	---	-	-	-	---	-	-	-	---	-	-	-	---	-	-	-	---	-	-	-	2.Values				
Load Current [A]	Input Power [W] (3.3V)	Input Power [W] (5V)	Input Power [W] (12V)																																																			
0.0	0.12	0.19	0.44																																																			
2.4	3.06	3.12	3.47																																																			
4.8	6.20	6.20	6.59																																																			
7.2	9.47	9.39	9.79																																																			
9.6	12.87	12.69	13.11																																																			
12.0	16.40	16.11	16.55																																																			
---	-	-	-																																																			
---	-	-	-																																																			
---	-	-	-																																																			
---	-	-	-																																																			
---	-	-	-																																																			
			<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 3.3[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 12[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.12</td><td>0.19</td><td>0.44</td></tr> <tr><td>2.4</td><td>3.06</td><td>3.12</td><td>3.47</td></tr> <tr><td>4.8</td><td>6.20</td><td>6.20</td><td>6.59</td></tr> <tr><td>7.2</td><td>9.47</td><td>9.39</td><td>9.79</td></tr> <tr><td>9.6</td><td>12.87</td><td>12.69</td><td>13.11</td></tr> <tr><td>12.0</td><td>16.40</td><td>16.11</td><td>16.55</td></tr> <tr><td>---</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>---</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>---</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>---</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>---</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Input Power [W]			Input Volt. 3.3[V]	Input Volt. 5[V]	Input Volt. 12[V]	0.0	0.12	0.19	0.44	2.4	3.06	3.12	3.47	4.8	6.20	6.20	6.59	7.2	9.47	9.39	9.79	9.6	12.87	12.69	13.11	12.0	16.40	16.11	16.55	---	-	-	-	---	-	-	-	---	-	-	-	---	-	-	-	---	-	-	-
Load Current [A]	Input Power [W]																																																					
	Input Volt. 3.3[V]	Input Volt. 5[V]	Input Volt. 12[V]																																																			
0.0	0.12	0.19	0.44																																																			
2.4	3.06	3.12	3.47																																																			
4.8	6.20	6.20	6.59																																																			
7.2	9.47	9.39	9.79																																																			
9.6	12.87	12.69	13.11																																																			
12.0	16.40	16.11	16.55																																																			
---	-	-	-																																																			
---	-	-	-																																																			
---	-	-	-																																																			
---	-	-	-																																																			
---	-	-	-																																																			

Note: Slanted line shows the range of the rated load current.

Model	BRNS12
Item	Efficiency (by Input Voltage)
Object	—

1.Graph

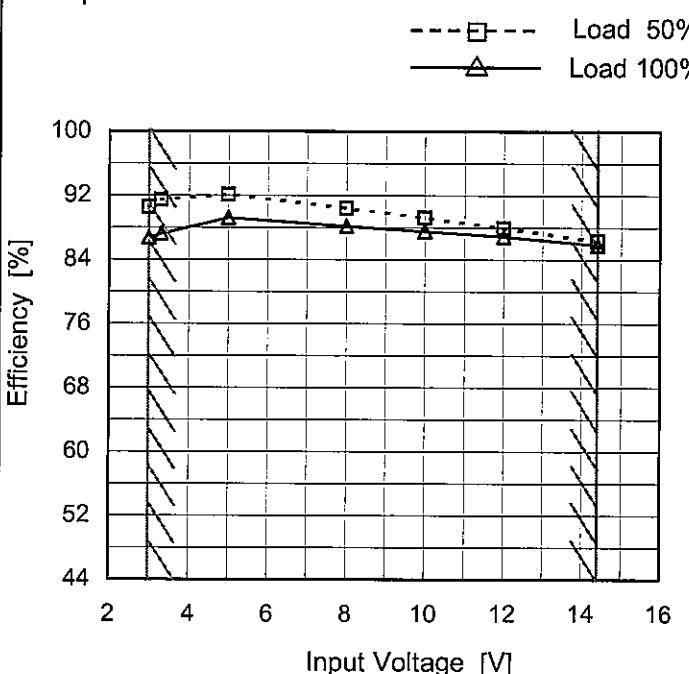

Note: Slanted line shows the range of the rated input voltage.

Temperature 25°C
Testing Circuitry Figure A

2.Values

Input Voltage [V]	Efficiency [%]	
	Load 50%	Load 100%
3.0	90.5	86.7
3.3	91.5	87.2
5.0	92.1	89.2
8.0	90.4	88.2
10.0	89.2	87.5
12.0	88.0	86.9
14.4	86.3	85.8
--	-	-
--	-	-

COSEL


Model BRNS12

Item Efficiency (by Load Current)

Object _____

1. Graph

—△— Input Volt. 3.3V
 - -□--- Input Volt. 5V
 - -○--- Input Volt. 12V

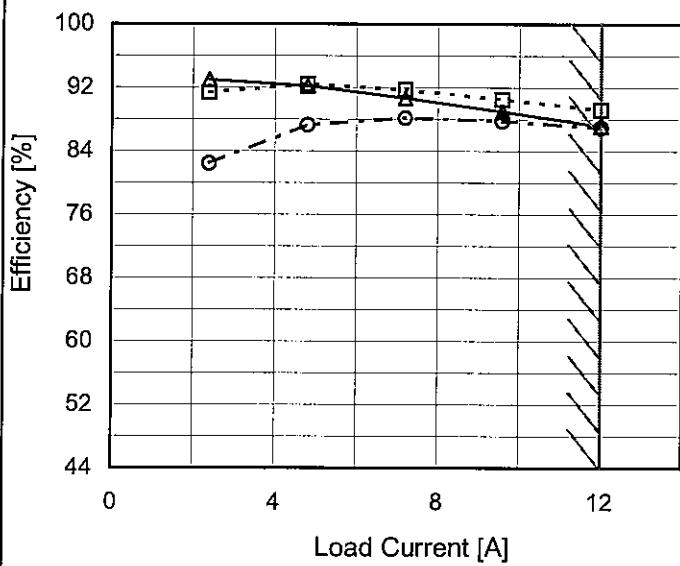

Note: Slanted line shows the range of the rated load current.

 Temperature 25°C
 Testing Circuitry Figure A

2. Values

Load Current [A]	Efficiency [%]		
	Input Volt. 3.3[V]	Input Volt. 5[V]	Input Volt. 12[V]
0.0	-	-	-
2.4	93.0	91.4	82.4
4.8	92.2	92.4	87.3
7.2	90.7	91.7	88.2
9.6	89.0	90.5	87.8
12.0	87.2	89.2	86.9
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

COSEL

Model BRNS12


Item Line Regulation

Object +1.2V12A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

---□--- Load 50%
 —△— Load 100%

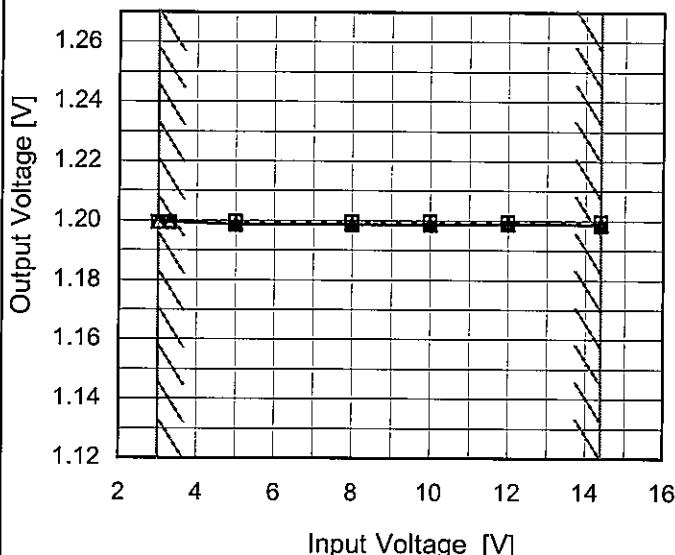


Note: Slanted line shows the range of the rated input voltage.

2. Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
3.0	1.199	1.200
3.3	1.199	1.200
5.0	1.200	1.199
8.0	1.200	1.199
10.0	1.200	1.199
12.0	1.200	1.199
14.4	1.200	1.199
—	-	-
—	-	-

COSEL

Model	BRNS12
Item	Load Regulation
Object	+1.2V12A

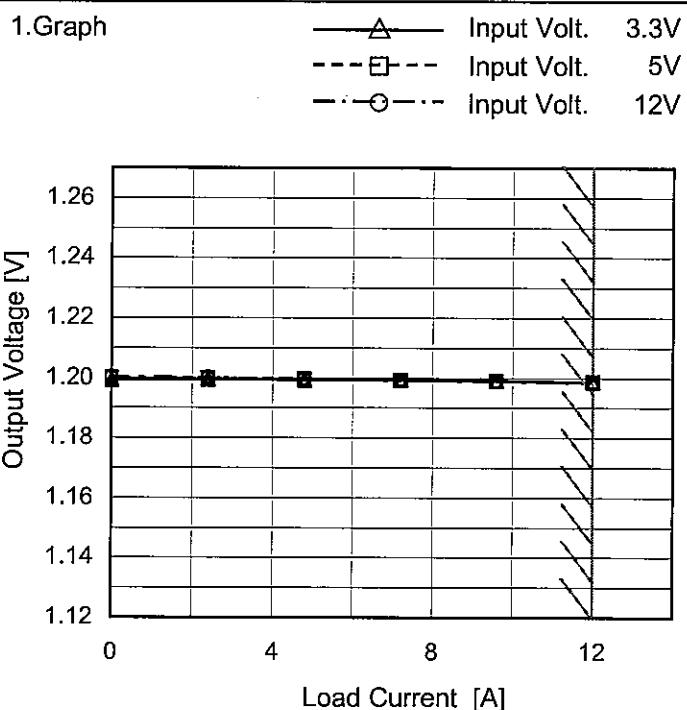


Note: Slanted line shows the range of the rated load current.

Temperature 25°C
Testing Circuitry Figure A

2.Values

Load Current [A]	Output Voltage [V]		
	Input Volt. 3.3[V]	Input Volt. 5[V]	Input Volt. 12[V]
0.0	1.199	1.200	1.200
2.4	1.199	1.200	1.200
4.8	1.199	1.199	1.200
7.2	1.199	1.199	1.199
9.6	1.199	1.199	1.199
12.0	1.199	1.199	1.199
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

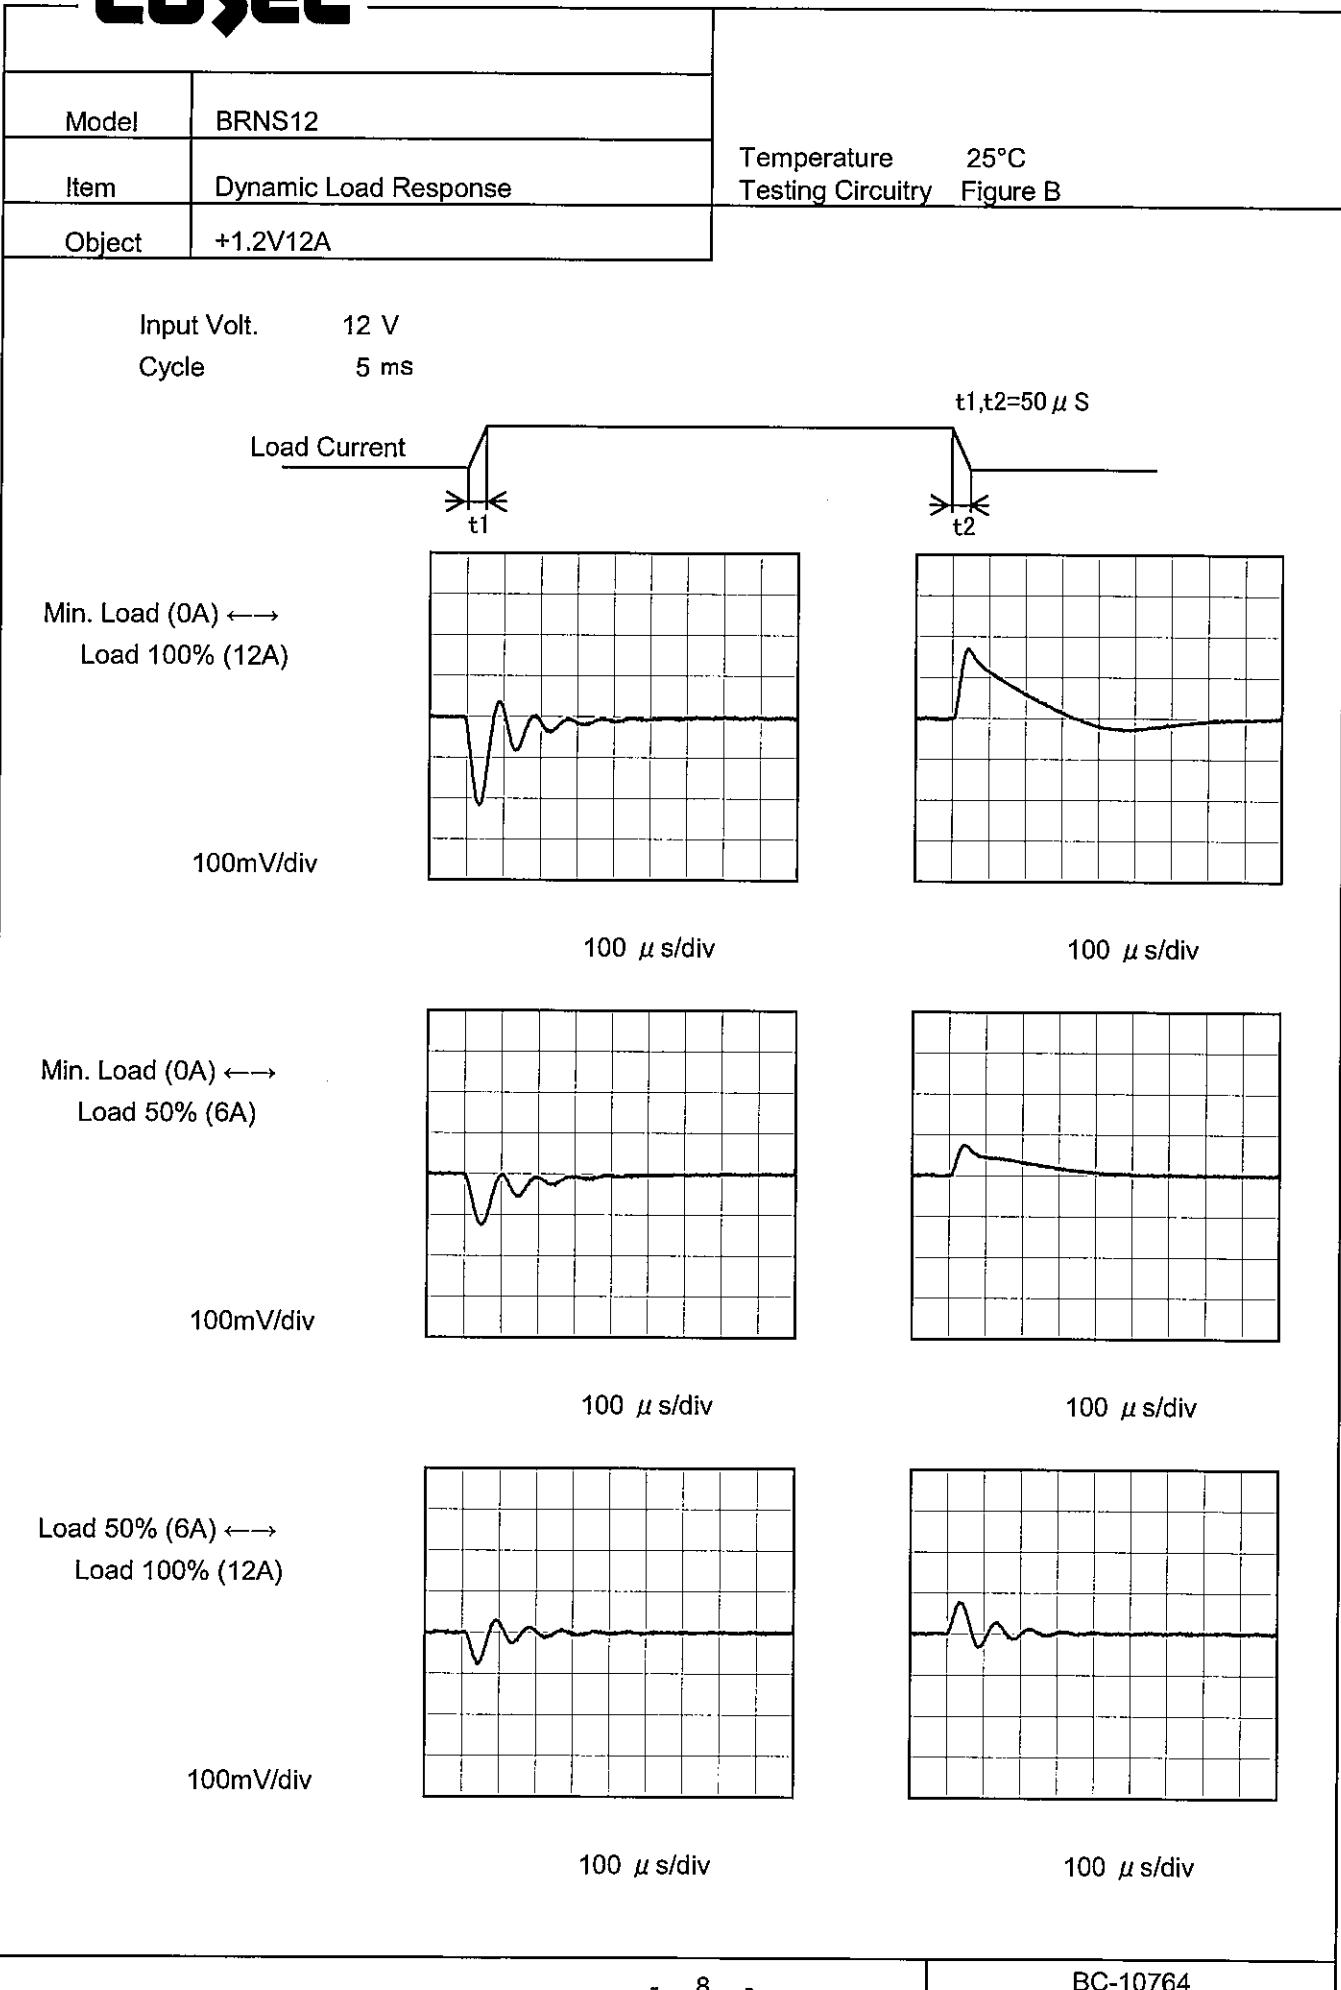COSEL


COSEL

Model	BRNS12
Item	Ripple Voltage (by Load Current)
Object	+1.2V12A

Temperature 25°C
 Testing Circuitry Figure C

1.Graph

—△— Input Volt. 3.3V
 -·○-- Input Volt. 12V

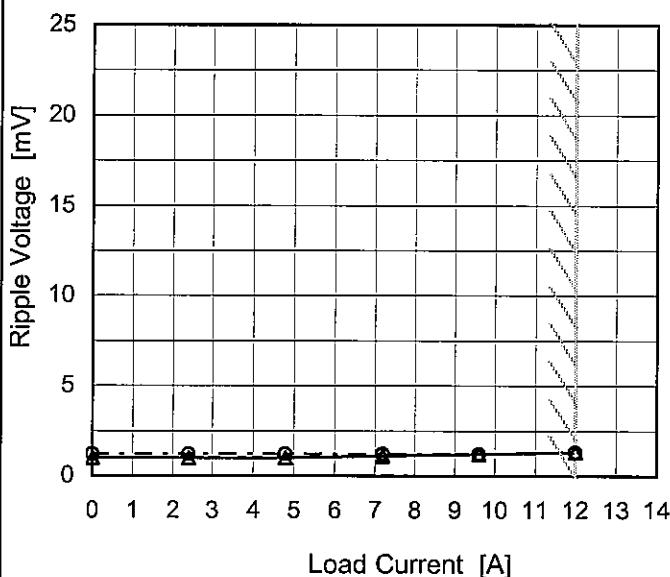

Measured by 20 MHz Oscilloscope.

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

2.Values

Load Current [A]	Ripple Voltage [mV]	
	Input Volt. 3.3 [V]	Input Volt. 12 [V]
0.0	1.0	1.2
2.4	1.0	1.2
4.8	1.0	1.2
7.2	1.1	1.2
9.6	1.2	1.2
12.0	1.3	1.3
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-

Ripple [mVp-p]

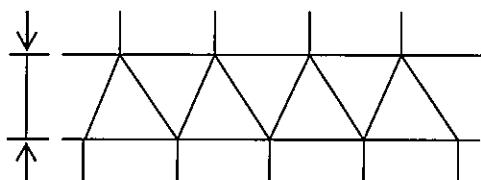



Fig.Complex Ripple Wave Form

COSEL

Model	BRNS12
Item	Ripple-Noise
Object	+1.2V12A

Temperature 25°C
Testing Circuitry Figure C

1.Graph

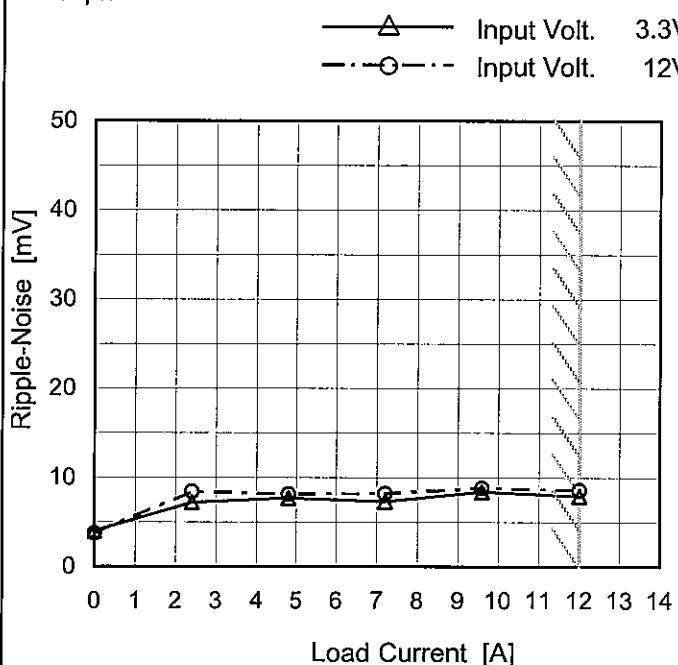

Measured by 20 MHz Oscilloscope.

Ripple-Noise is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

2.Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 3.3 [V]	Input Volt. 12 [V]
0.0	4.0	3.7
2.4	7.2	8.4
4.8	7.7	8.1
7.2	7.3	8.2
9.6	8.4	8.8
12.0	7.9	8.6
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-

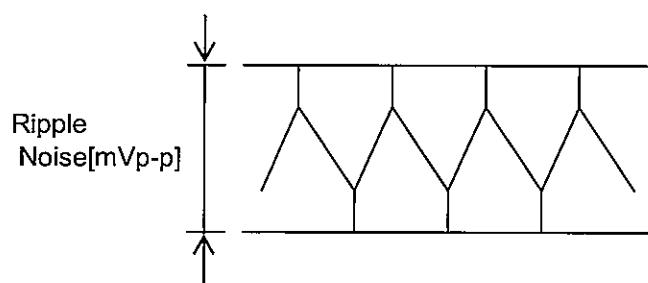
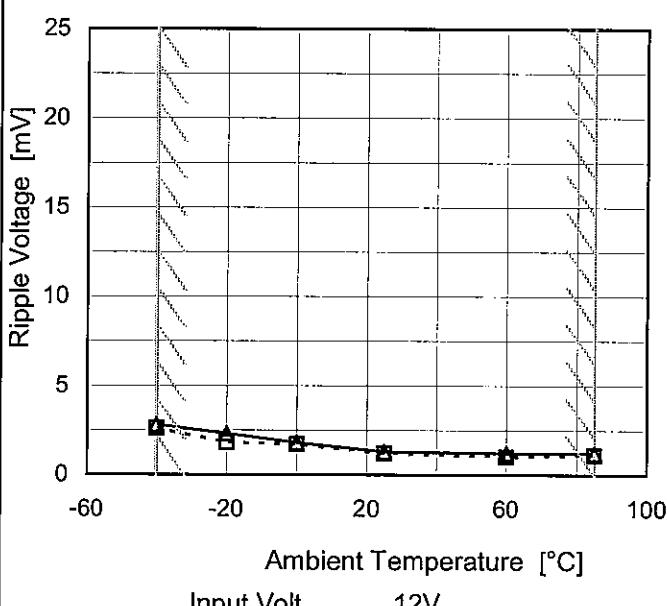
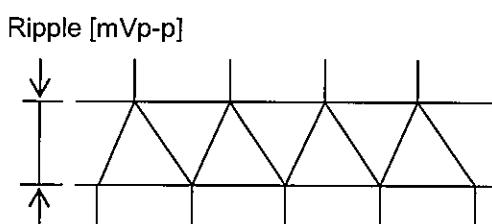



Fig.Complex Ripple Noise Wave Form

COSEL

Model	BRNS12	Testing Circuitry Figure C																																							
Item	Ripple Voltage (by Ambient Temp.)																																								
Object	+1.2V12A																																								
1.Graph			2.Values																																						
 Input Volt. 12V			<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr> <td>-40</td><td>2.6</td><td>2.8</td> </tr> <tr> <td>-20</td><td>1.8</td><td>2.3</td> </tr> <tr> <td>0</td><td>1.7</td><td>1.8</td> </tr> <tr> <td>25</td><td>1.2</td><td>1.3</td> </tr> <tr> <td>60</td><td>1.0</td><td>1.2</td> </tr> <tr> <td>85</td><td>1.1</td><td>1.2</td> </tr> <tr> <td>—</td><td>—</td><td>—</td> </tr> </tbody> </table>	Ambient Temperature [°C]	Ripple Voltage [mV]		Load 50%	Load 100%	-40	2.6	2.8	-20	1.8	2.3	0	1.7	1.8	25	1.2	1.3	60	1.0	1.2	85	1.1	1.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Ambient Temperature [°C]	Ripple Voltage [mV]																																								
	Load 50%	Load 100%																																							
-40	2.6	2.8																																							
-20	1.8	2.3																																							
0	1.7	1.8																																							
25	1.2	1.3																																							
60	1.0	1.2																																							
85	1.1	1.2																																							
—	—	—																																							
—	—	—																																							
—	—	—																																							
—	—	—																																							
—	—	—																																							
Measured by 20 MHz Oscilloscope. Note: Slanted line shows the range of the rated ambient temperature.																																									
 Fig.Complex Ripple Wave Form																																									

COSEL

Model	BRNS12
Item	Ambient Temperature Drift
Object	+1.2V12A

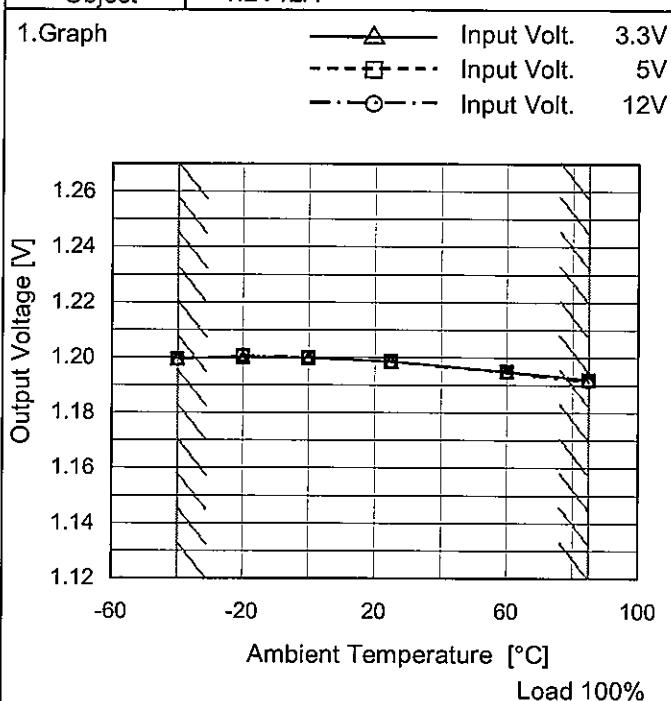

Testing Circuitry Figure A

2. Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 3.3[V]	Input Volt. 5[V]	Input Volt. 12[V]
-40	1.200	1.199	1.199
-20	1.200	1.200	1.201
0	1.200	1.200	1.200
25	1.199	1.199	1.199
60	1.195	1.195	1.195
85	1.192	1.192	1.192
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

Note: Slanted line shows the range of the rated ambient temperature.



Model	BRNS12	Testing Circuitry Figure A
Item	Output Voltage Accuracy	
Object	+1.2V12A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 85°C

Input Voltage : 3 - 14.4V

Load Current : 0 - 12A


* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

$$\text{* Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	-20	14.4	0	1.202	±5	±0.4
Minimum Voltage	85	14.4	12	1.192		

COSEL

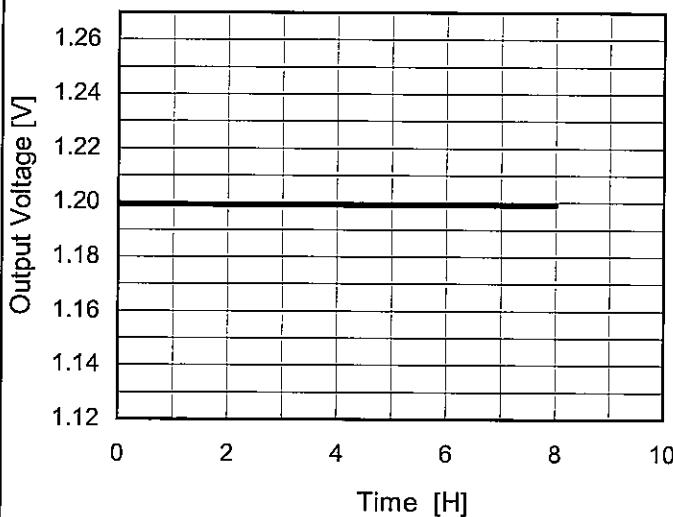Model	BRNS12	Temperature	25°C																						
Item	Time Lapse Drift	Testing Circuitry	Figure A																						
Object	+1.2V12A																								
1. Graph			2. Values																						
 <p>Output Voltage [V]</p> <p>Time [H]</p> <p>Input Volt. 12V Load 100%</p>			<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>1.200</td></tr> <tr><td>0.5</td><td>1.199</td></tr> <tr><td>1.0</td><td>1.199</td></tr> <tr><td>2.0</td><td>1.199</td></tr> <tr><td>3.0</td><td>1.199</td></tr> <tr><td>4.0</td><td>1.199</td></tr> <tr><td>5.0</td><td>1.199</td></tr> <tr><td>6.0</td><td>1.199</td></tr> <tr><td>7.0</td><td>1.199</td></tr> <tr><td>8.0</td><td>1.199</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	1.200	0.5	1.199	1.0	1.199	2.0	1.199	3.0	1.199	4.0	1.199	5.0	1.199	6.0	1.199	7.0	1.199	8.0	1.199
Time since start [H]	Output Voltage [V]																								
0.0	1.200																								
0.5	1.199																								
1.0	1.199																								
2.0	1.199																								
3.0	1.199																								
4.0	1.199																								
5.0	1.199																								
6.0	1.199																								
7.0	1.199																								
8.0	1.199																								

COSEL


Model BRNS12

Item Rise and Fall Time

Object +1.2V12A


Temperature 25°C
Testing Circuitry Figure A

1. Graph

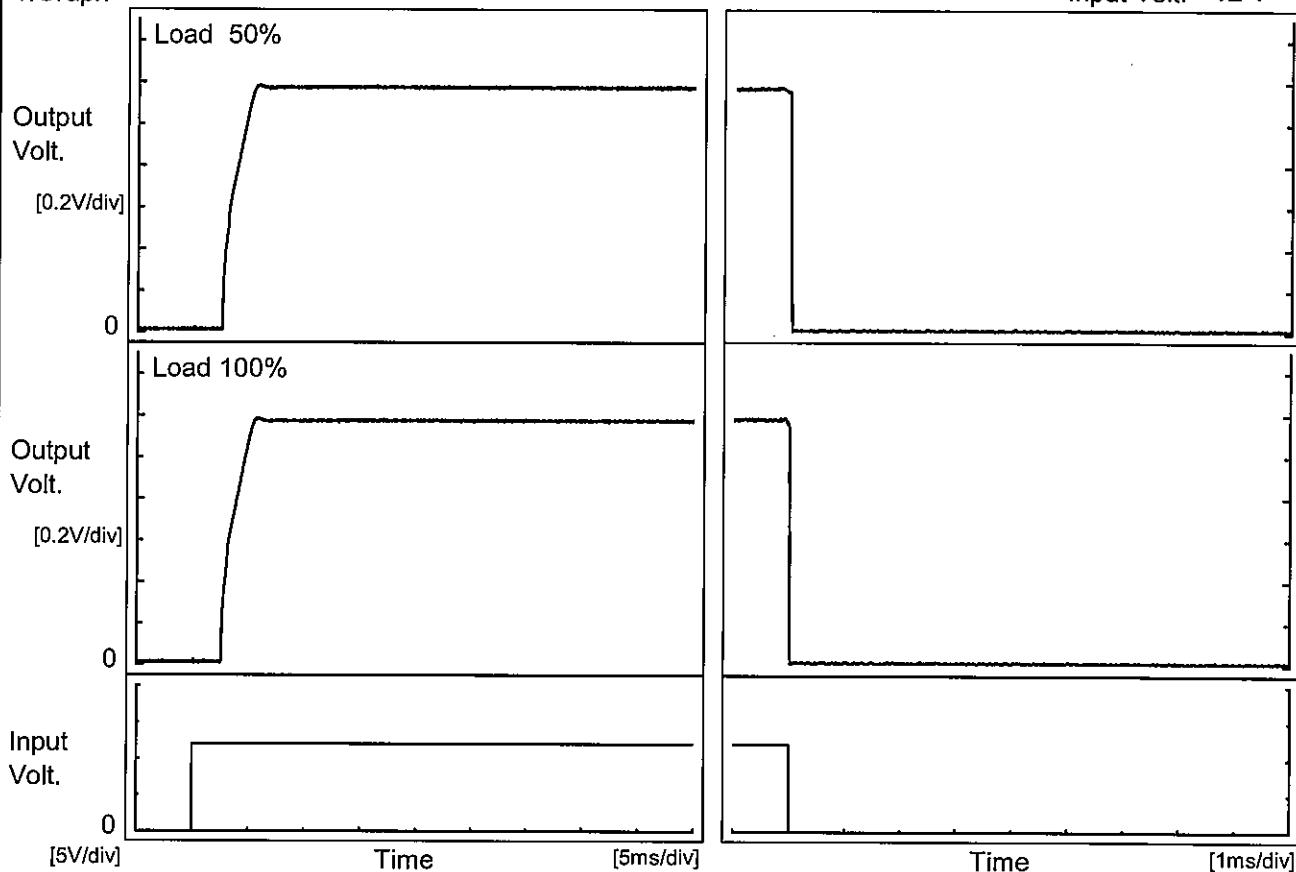

2. Values

Load	Time	Td	Tr	Ts	Th	Tf	[ms]
50 %		2.6	2.4	5.0	0.0	0.0	
100 %		2.6	2.4	5.0	0.0	0.0	

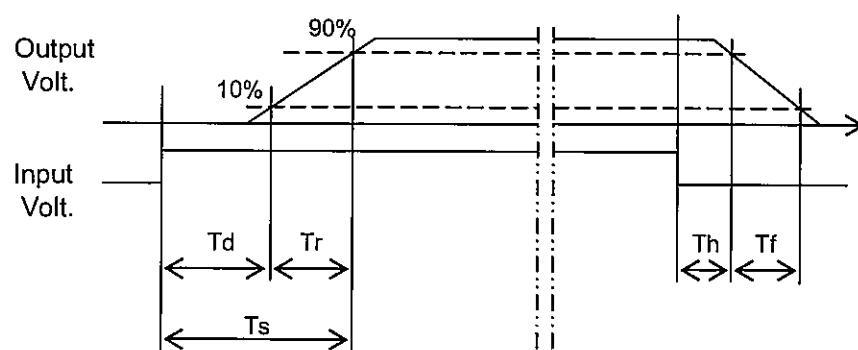


Model	BRNS12
Item	Minimum Input Voltage for Regulated Output Voltage
Object	+1.2V12A

Testing Circuitry Figure A

1. Graph

---□--- Load 50%
—△— Load 100%

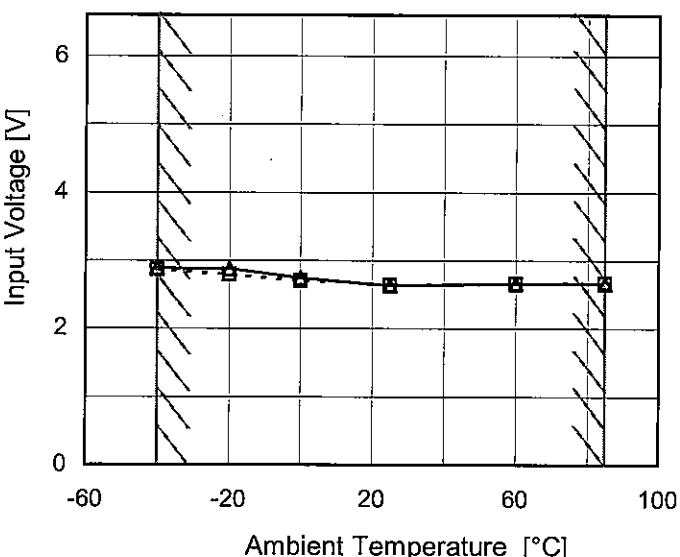

2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-40	2.87	2.89
-20	2.80	2.88
0	2.72	2.75
25	2.64	2.64
60	2.66	2.66
85	2.67	2.67
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-

Note: Slanted line shows the range of the rated ambient temperature.

COSEL

Model	BRNS12	Temperature 25°C Testing Circuitry Figure A																																																									
Item	Overcurrent Protection																																																										
Object	+1.2V12A																																																										
1. Graph																																																											
<p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Input Volt. 3.3V</p> <p>Input Volt. 5V</p> <p>Input Volt. 12V</p>																																																											
<p>Note: Slanted line shows the range of the rated load current.</p> <p>Intermittent operation occurs when overcurrent protection is activated.</p>																																																											
2. Values																																																											
<table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 3.3[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 12[V]</th> </tr> </thead> <tbody> <tr><td>1.20</td><td>15.60</td><td>15.31</td><td>14.89</td></tr> <tr><td>1.14</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>1.08</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.96</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.84</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.72</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.60</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.48</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.36</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.24</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.12</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.00</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>					Output Voltage [V]	Load Current [A]			Input Volt. 3.3[V]	Input Volt. 5[V]	Input Volt. 12[V]	1.20	15.60	15.31	14.89	1.14	-	-	-	1.08	-	-	-	0.96	-	-	-	0.84	-	-	-	0.72	-	-	-	0.60	-	-	-	0.48	-	-	-	0.36	-	-	-	0.24	-	-	-	0.12	-	-	-	0.00	-	-	-
Output Voltage [V]	Load Current [A]																																																										
	Input Volt. 3.3[V]	Input Volt. 5[V]	Input Volt. 12[V]																																																								
1.20	15.60	15.31	14.89																																																								
1.14	-	-	-																																																								
1.08	-	-	-																																																								
0.96	-	-	-																																																								
0.84	-	-	-																																																								
0.72	-	-	-																																																								
0.60	-	-	-																																																								
0.48	-	-	-																																																								
0.36	-	-	-																																																								
0.24	-	-	-																																																								
0.12	-	-	-																																																								
0.00	-	-	-																																																								

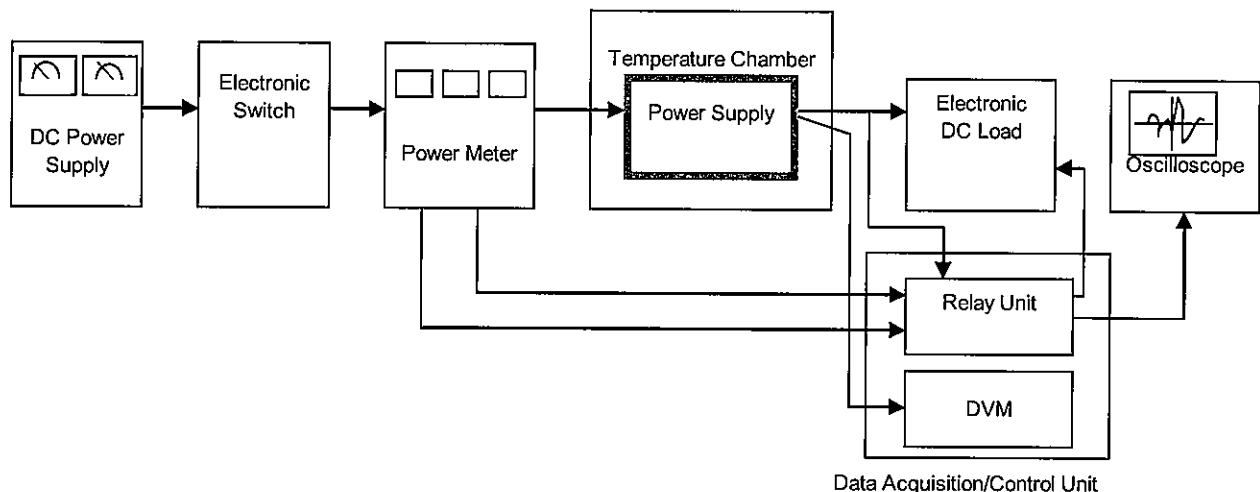


Figure A

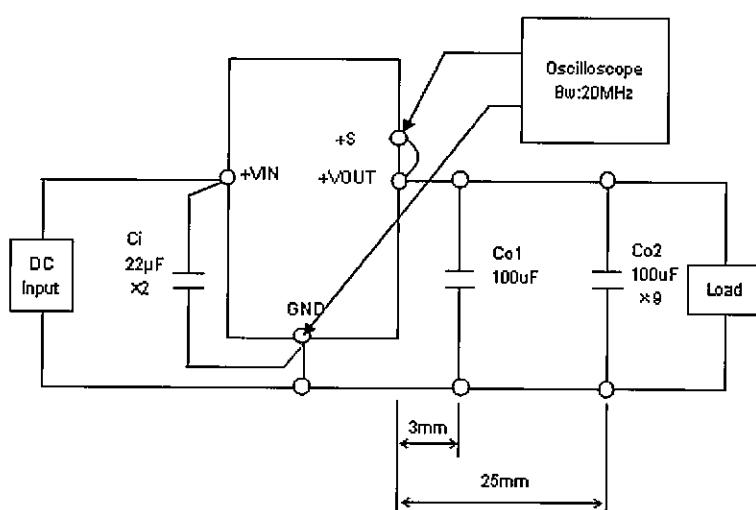


Figure B

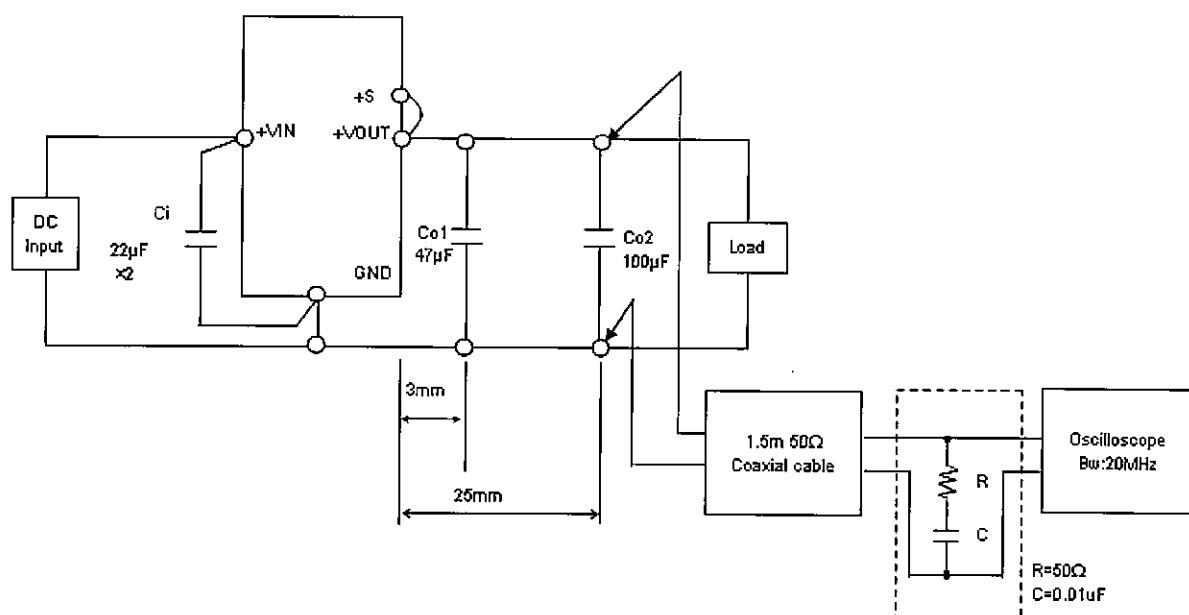


Figure C